


FIGURE 2(d) – EMI SHIELDED BACKSHELL – STRAIGHT CABLE OUTLET

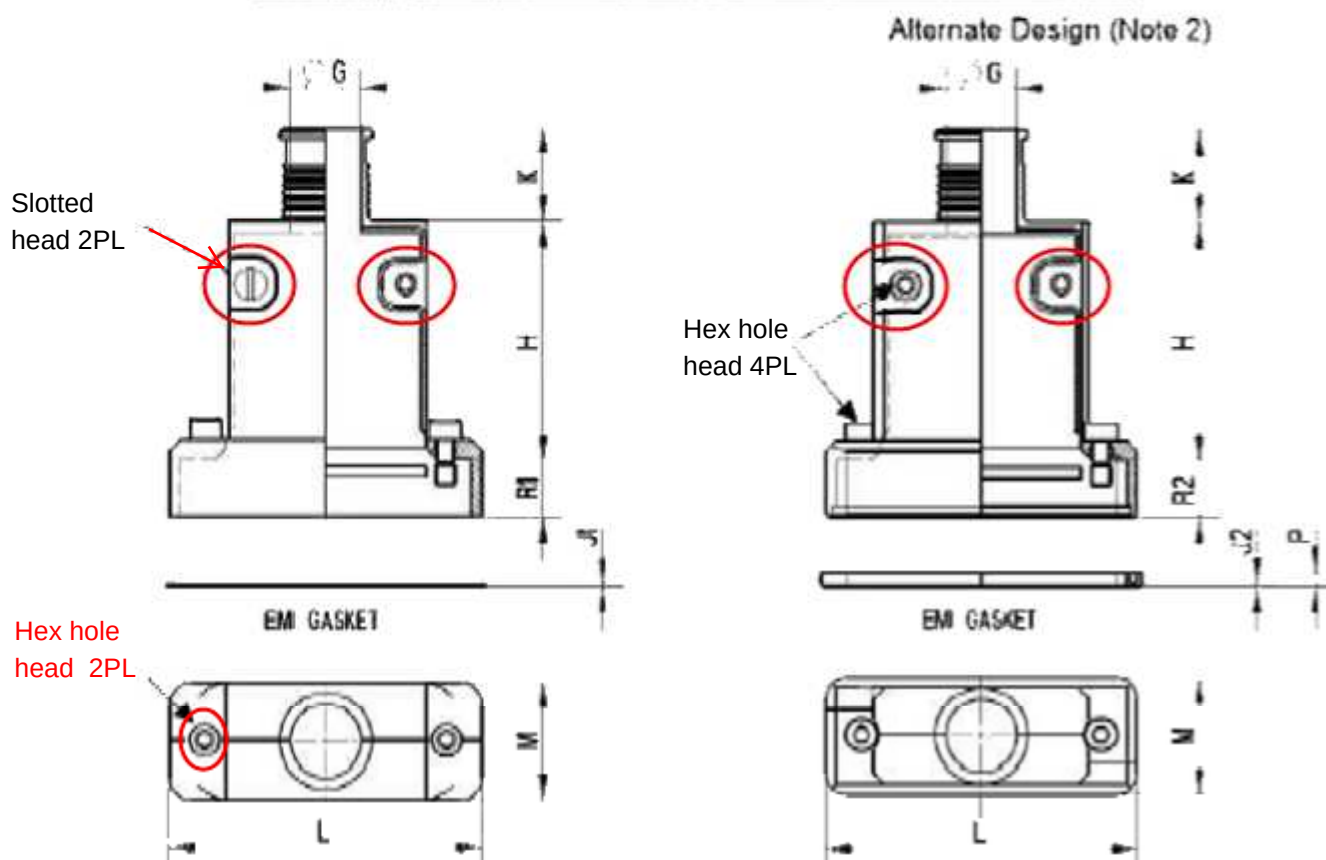

Shell Size	Variant		ØG		H MAX.	J1	J2		K	M		P MAX
	FRONT MOUNT	REAR MOUNT	MIN	MAX			MIN	MAX		MIN	MAX	
E	15	20	6.48	6.98	33.02	0.51	0.55	0.65	12.7	15.73	16.23	2.2
A	16	21	9.65	10.15	33.02	0.51	0.55	0.65	12.7	15.73	16.23	2.2
B	17	22	10.29	10.79	38.61	0.51	0.55	0.65	12.7	15.73	16.23	2.2
C	18	23	10.29	10.79	38.61	0.51	0.55	0.65	12.7	15.73	16.23	2.2
D	19	24	13.08	13.58	38.61	0.51	0.55	0.65	12.7	18.45	19.04	2.2
F	74	75	15.15	15.65	38.61	-	0.55	0.65	12.7	20.55	21.05	2.2

Shell Size	Variant		L		R1				R2			
	FRONT MOUNT	REAR MOUNT	MIN	MAX	FRONT MOUNT		REAR MOUNT		FRONT MOUNT		REAR MOUNT	
					MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
E	15	20	34.48	35.28	7.61	7.87	6.19	6.45	7.75	7.8	5.25	5.3
A	16	21	43.11	43.61	7.61	7.87	6.19	6.45	7.75	7.8	5.25	5.3
B	17	22	57	57.5	7.61	7.87	6.19	6.45	7.75	7.8	5.25	5.3
C	18	23	73.28	73.78	7.61	7.87	6.19	6.45	7.75	7.8	5.25	5.3
D	19	24	70.89	71.39	7.61	7.87	6.19	6.45	7.75	7.8	5.25	5.3
F	74	75	73.25	73.75	-	-	-	-	7.75	7.8	5.25	5.3

NOTES:

- All dimensions are in millimetres
- For Shell Sizes E, A, B, C and D, EMI Shielded Backshells are available with an 'Alternate' (characteristic code 'A') design. See Para. 4.5.3.2.