


FIGURE 2(d) – EMI SHIELDED BACKSHELL – STRAIGHT CABLE OUTLET

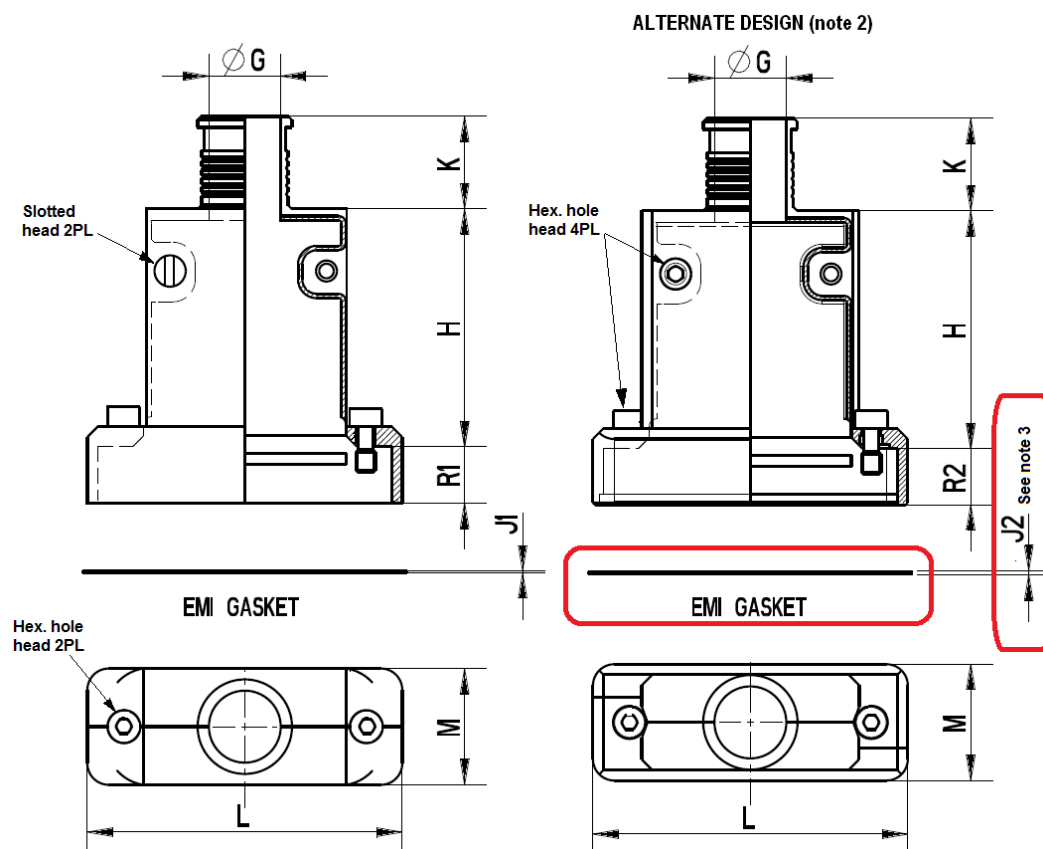

Shell Size	Variant		ØG		H MAX.	J1	K	M	
	FRONT MOUNT	REAR MOUNT	MIN	MAX				MIN	MAX
E	15	20	6.48	6.98	33.02	0.51	12.7	15.73	16.23
A	16	21	9.65	10.15	33.02	0.51	12.7	15.73	16.23
B	17	22	10.29	10.79	38.61	0.51	12.7	15.73	16.23
C	18	23	10.29	10.79	38.61	0.51	12.7	15.73	16.23
D	19	24	13.08	13.58	38.61	0.51	12.7	18.45	19.04
F	74	75	15.15	15.65	38.61	-	12.7	20.55	21.05

Deleted columns J2 and P in table

Shell Size	Variant		L		R1				R2			
	FRONT MOUNT	REAR MOUNT	MIN	MAX	FRONT MOUNT		REAR MOUNT		FRONT MOUNT		REAR MOUNT	
					MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
E	15	20	34.48	35.28	7.61	7.87	6.19	6.45	8.35	8.4	5.43	5.48
A	16	21	43.11	43.61	7.61	7.87	6.19	6.45	8.35	8.4	5.43	5.48
B	17	22	57	57.5	7.61	7.87	6.19	6.45	8.35	8.4	5.43	5.48
C	18	23	73.28	73.78	7.61	7.87	6.19	6.45	8.35	8.4	5.43	5.48
D	19	24	70.89	71.39	7.61	7.87	6.19	6.45	8.35	8.4	5.43	5.48
F	74	75	73.25	73.75	-	-	-	-	8.35	8.4	5.43	5.48

NOTES:

- All dimensions are in millimetres.
- For Shell Sizes E, A, B, C and D, EMI Shielded Backshells are available with an 'Alternate' (characteristic code 'A') design. See Para. 4.5.3.2.
- Alternate design Variants 15 to 19 and 74 (Front Mount) are delivered with 1 EMI Gasket :
J2 = 0,55 min. / 0,65 max. for panel thickness 0,77 min. / 1,98 max.
Alternate design Variants 20 to 24 and 75 (Rear Mount) are delivered with 3 EMI Gaskets :
J2 = 0,55 min. / 0,65 max. for panel thickness 1,55 min. / 1,98 max.
J2 = 0,95 min. / 1,05 max. for panel thickness 1,16 min. / 1,55 max.
J2 = 1,35 min. / 1,45 max. for panel thickness 0,77 min. / 1,16 max.