



FIGURE 2(J) – FEMALE SCREW LOCK ASSEMBLY (all dimensions in millimetres)
MATED SPACING BETWEEN SHELL FRONT SURFACES

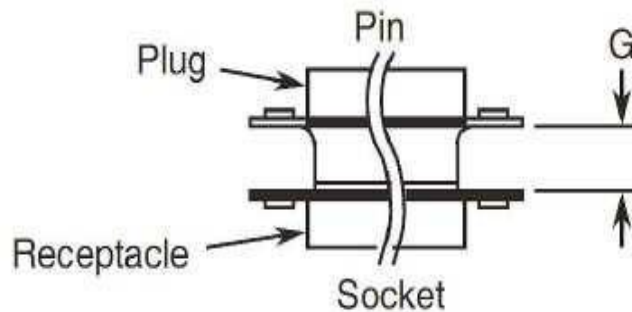

FEMALE SCREW LOCK ASSEMBLY (Variants 81 and 82)

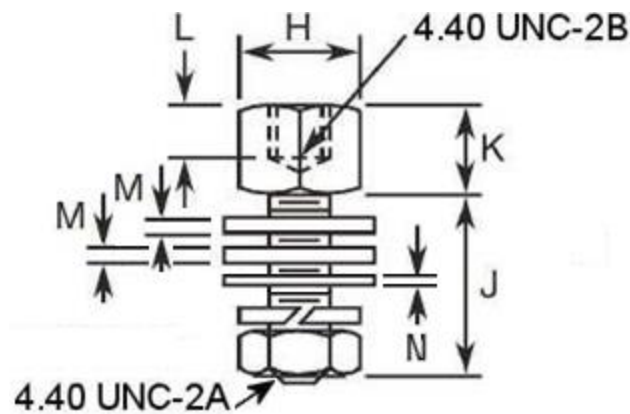

Dimension	Min.	Max.	Notes
G	6.35	7.11	1
	6.12	6.88	2
H	4.52	4.62	-
J	7.8	8.04	-
K	4.8	4.9	-
L	3.18	-	-
M	0.78	0.82	3
N	0.38	0.42	3

NOTES:

- For shell sizes E and A.
- For shell sizes B, C and D
- The spacing between the reference planes of 2 mated connectors shall be adjusted by the use of 3 washers maximum so the spacing is equal to dimension G.
 - Front mounting : Use 2 washers with M thickness
 - Rear mounting panel thickness 1.55 min. / 1.98 max. : No washer is required
 - Rear mounting panel thickness 1.16 min / 1.55 max. : Use 1 washer with N thickness
 - Rear mounting panel thickness 0.77 min. / 1.16 max. : Use 1 washer with M thickness