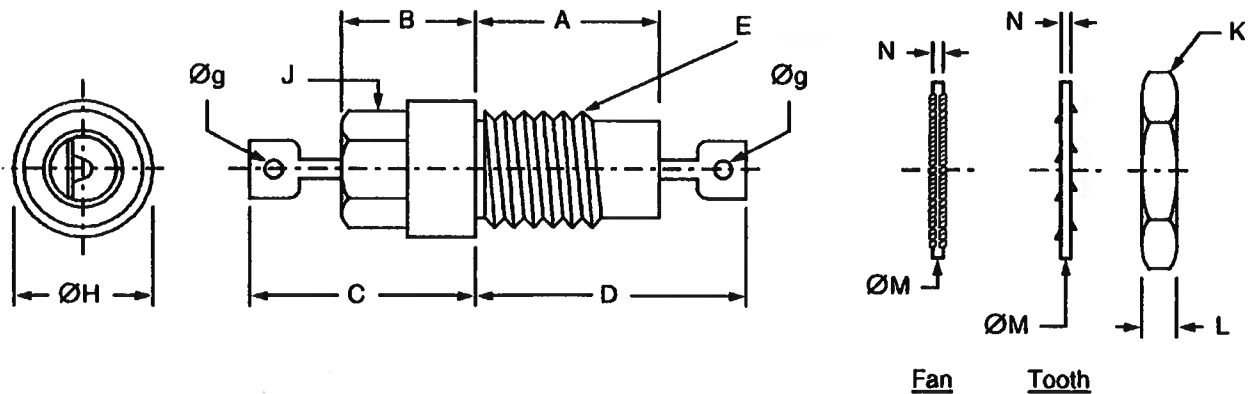
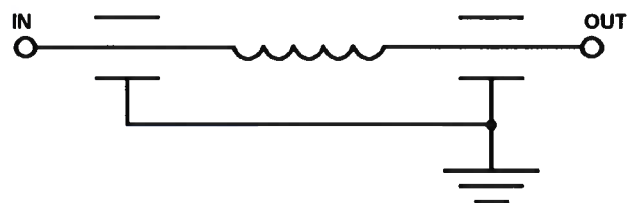


FIGURE 2 – PHYSICAL DIMENSIONS


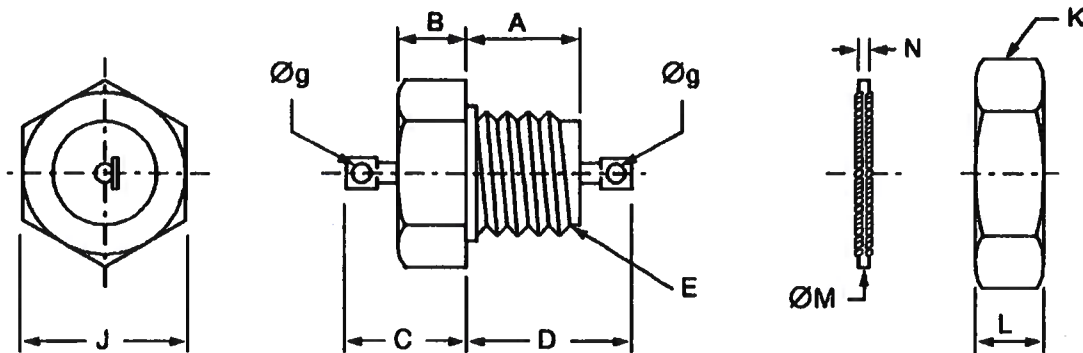
Symbol	Variants 01 to 07		Variants 08 to 14		Notes
	Millimetres		Millimetres		
	Min	Max	Min	Max	
A	10.4	10.6	10.4	10.6	
B	6.9	7.1	6.9	7.1	
C	-	11.5	-	11.5	1, 2
D	-	15	-	15	1, 2
E	See Table 1(a)		See Table 1(a)		Thread
Øg	1.50		1.50		
ØH	6.9	7.1	6.9	7.1	
J	4.9	5	4.9	5	
K	-	7	-	8	Across flats
L	-	3	-	2.5	
ØM	-	10.2 (a)	-	9.4	
N	-	0.6 (b)	-	0.4 (c)	

NOTES

- Lead finish shall commence not more than 1.5mm from encapsulant.
- The terminals are defined as rigid.

FIGURE 3 - FUNCTIONAL DIAGRAM


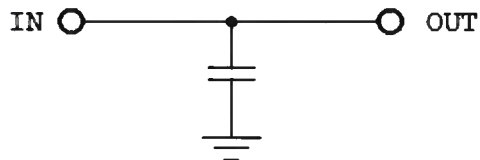
(a): 10.2 becomes 10.4
 (b): 0.6 // 1.4
 (c): 0.4 // 1.3

FIGURE 2 – PHYSICAL DIMENSIONS


Symbol	Variants 01 to 03		Variants 04 to 06		Notes
	Millimetres		Millimetres		
	Min	Max	Min	Max	
A	6.9	7.1	6.9	7.1	
B	4.9	5.1	4.9	5.1	
C	7	9	7	9	1, 2
D	9	11	9	11	1, 2
E	See Table 1(a)		See Table 1(a)		Thread
Øg	1.50		1.50		
J	-	6	-	6	
K	-	7	-	8	Across flats
L	-	3	-	2.5	
ØM	-	10.2 (a)	-	9.4	3
N	-	0.6 (b)	-	0.4 (c)	3

NOTES

- Lead finish shall commence not more than 1.5mm from encapsulant.
- The terminals are defined as rigid.
- Internal fan lock-washer.

FIGURE 3 - FUNCTIONAL DIAGRAM


(a): 10.2 becomes 10.4

(b): 0.6 // 1.4


(c): 0.4 // 1.3

Symbol	Case Size 1		Case Size 2		Case Size 3		Notes
	Millimetres		Millimetres		Millimetres		
	Min	Max	Min	Max	Min	Max	
A	10.4	10.6	6.9	7.1	7.9	8.1	
B	6.9	7.1	4.9	5.1	3.9	4.1	
C	-	12	-	10	-	9	1, 2
D	-	20	-	20	-	23	1, 2
E	See Table 1(a)		See Table 1(a)		See Table 1(a)		Thread
F	0.72	0.88	0.72	0.88	0.72	0.88	
ØG	1	1.2	1	1.2	1	1.2	3
ØH	6.9	7.1	-	-	6.9	7.1	
J	4.9	5	5.9	6	4.9	5	
K	-	8	-	8	-	8	Variants 01 to 14
	-	7	-	7	-	7	Variants 15 to 28
L	-	2.5	-	2.5	-	2.5	Variants 01 to 14
	-	3	-	3	-	3	Variants 15 to 28
ØM	-	9.4	-	9.4	-	9.4	Variants 01 to 14
	-	10.2(a)	-	10.2(a)	-	10.2(a)	Variants 15 to 28
N	-	0.4(b)	-	0.4(b)	-	0.4(b)	Variants 01 to 14
	-	0.6(c)	-	0.6(c)	-	0.6(c)	Variants 15 to 28


NOTES

- Lead finish shall commence not more than 1.5mm from encapsulant.
- The terminals are defined as rigid.
- Applicable only to Variants 08 to 14 and 22 to 28.

FIGURE 3 - FUNCTIONAL DIAGRAM

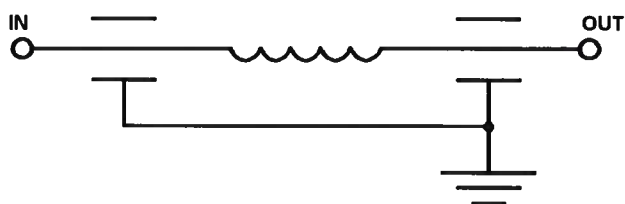


(a): 10.2 becomes 10.4
 (b): 0.6 // 1.4
 (c): 0.4 // 1.3

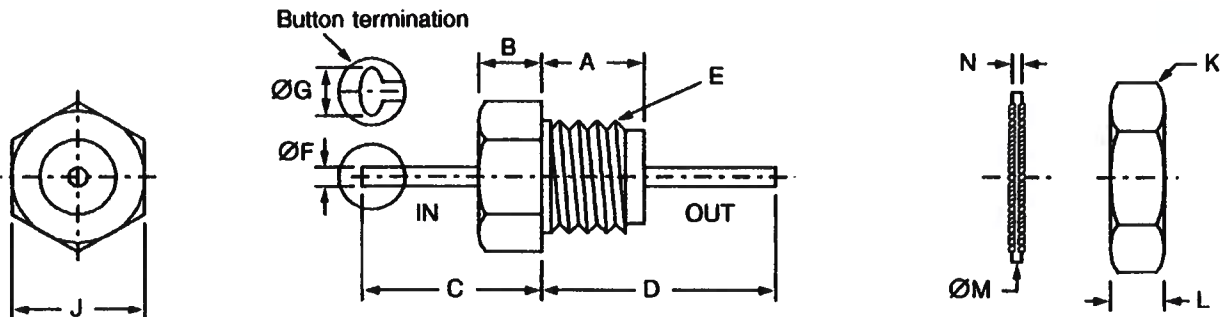FIGURE 2 – PHYSICAL DIMENSIONS


Symbol	Variants 01 to 06		Variants 07 to 12		Notes
	Millimetres		Millimetres		
	Min	Max	Min	Max	
A	6.9	7.1	6.9	7.1	
B	4.9	5.1	4.9	5.1	
C	10	12	10	12	
D	18	20	18	20	
E	See Table 1(a)		See Table 1(a)		Thread
ØF	0.72	0.88	0.72	0.88	1, 2
ØG	1	1.2	1	1.2	3
J	-	6	-	6	
K	-	7	-	8	Across flats
L	-	3	-	2.5	
ØM	-	10.2(a)	-	9.4	4
N	-	0.6(b)	-	0.4(c)	4

NOTES

1. Lead finish shall commence not more than 1.5mm from encapsulant.
2. The terminals are defined as rigid.
3. Applicable only to Variants 04 to 06 and 10 to 12.
4. Internal fan lock-washer.

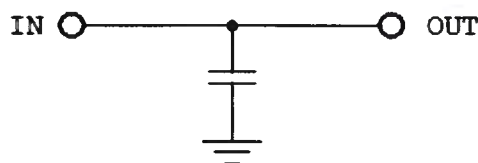FIGURE 3 - FUNCTIONAL DIAGRAM


(a): 10.2 becomes 10.4

(b) 0.6 // 1.4

(c) 0.4 // 1.3