


FIGURE 2 - PHYSICAL DIMENSIONS

FIGURE 2(a) – BACKSHELL - LIGHTWEIGHT TOP CIRCULAR ENTRY

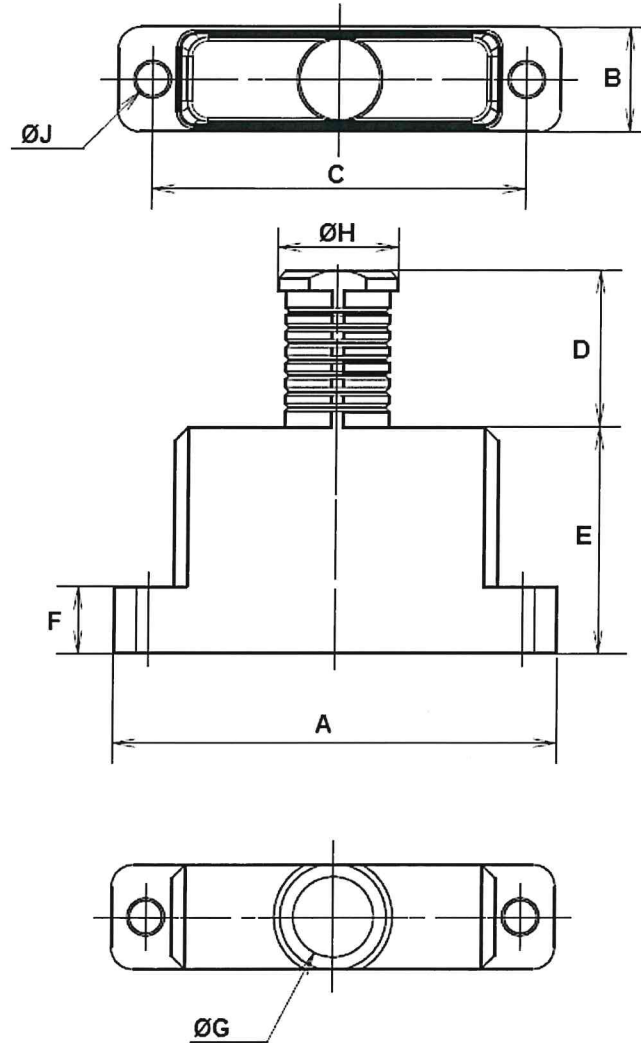


Shell Size	A Max	B Max	C		D Typ	E Typ	F Typ	ØG		ØH Max	ØJ	
			Min	Max				Min	Max		Min	Max
9	19.94	7.82	14.22	14.48	11.7	10	5	5.8	6.2	9.2	2.35	2.45
15	23.75	7.82	18.03	18.29	11.7	12	5	5.8	6.2	9.2	2.35	2.45
21	27.56	7.82	21.84	22.1	11.7	14	5	5.8	6.2	9.2	2.35	2.45
25	30.1	7.82	24.38	24.64	11.7	16	5	5.8	6.2	9.2	2.35	2.45
31	33.91	7.82	28.19	28.45	11.7	17	5	5.8	6.2	9.2	2.35	2.45
37	37.72	7.82	32	32.26	11.7	18	5	5.8	6.2	9.2	2.35	2.45
51	36.45	8.92	30.73	30.99	11.7	19	5	6.8	7.2	10.2	2.35	2.45
69	44.07	8.92	38.35	38.61	11.9	19.7	5	6.95	7.05	8.7	2.23	2.39
100	55.12	10.74	45.59	45.85	11.9	21.3	5	8.25	8.35	10.5	3.73	3.86

NOTES:

- All dimensions are in millimetres.

6.8/7.2
8.1/8.5
11.5
10.2
27/10/20

FIGURE 2(b) – BACKSHELL - LIGHTWEIGHT TOP ELLIPTICAL ENTRY

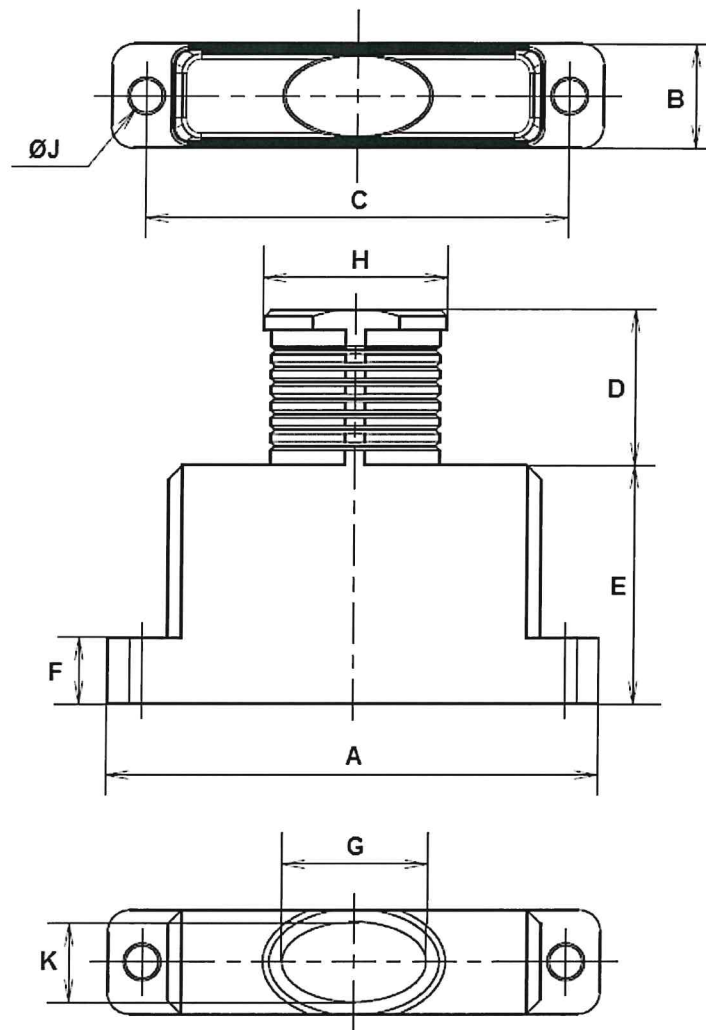

Shell Size	A Max	B Max	C		D Typ	E Typ	F Typ	G		H Max	ØJ		K	
			Min	Max				Min	Max		Min	Max	Min	Max
9	19.94	7.82	14.22	14.48	11.7	10	5	7.7	8.1	11.1	2.35	2.45	5.8	6.2
15	23.75	7.82	18.03	18.29	11.7	12	5	10.5	10.9	13.9	2.35	2.45	5.8	6.2
21	27.56	7.82	21.84	22.1	11.7	14	5	14.8	15.2	18.2	2.35	2.45	5.8	6.2
25	30.1	7.82	24.38	24.64	11.7	16	5	17.3	17.7	20.7	2.35	2.45	5.8	6.2
31	33.91	7.82	28.19	28.45	11.7	17	5	20.6	21	24	2.35	2.45	5.8	6.2
37	37.72	7.82	32	32.26	11.7	18	5	24.4	24.8	27.8	2.35	2.45	5.8	6.2
51	36.45	8.92	30.73	30.99	11.7	19	5	23.2	23.6	26.6	2.35	2.45	6.8	7.2
69	44.07	8.92	38.35	38.61	11.9	19.7	5	24.8	25	28.02	2.23	2.39	7.15	7.25
100	55.12	10.74	45.59	45.85	11.9	21.3	5	25.9	26.1	29.12	3.73	3.86	8.25	8.35

NOTES:

1. All dimensions are in millimetres.

25.8 26.2

25.20


29.20

28.10

[Signature]

27/10/20

FIGURE 2(c) – BACKSHELL - LIGHTWEIGHT 45° CIRCULAR ENTRY

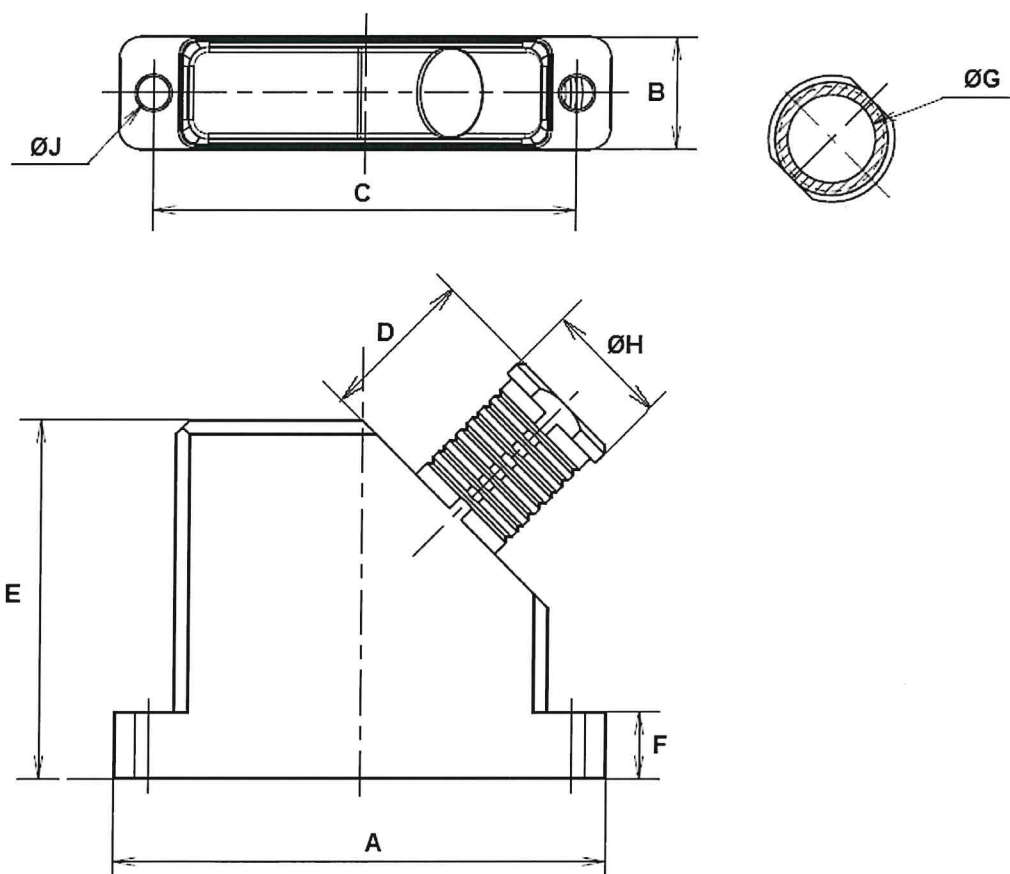

Shell Size	A Max	B Max	C		D Typ	E Typ	F Typ	ØG		ØH Max	ØJ	
			Min	Max				Min	Max		Min	Max
9	19.94	7.82	14.22	14.48	11.7	21	5	5.1	5.5	8.5	2.35	2.45
15	23.75	7.82	18.03	18.29	11.7	23	5	5.8	6.2	9.2	2.35	2.45
21	27.56	7.82	21.84	22.1	11.7	24	5	5.8	6.2	9.2	2.35	2.45
25	30.1	7.82	24.38	24.64	11.7	27	5	5.8	6.2	9.2	2.35	2.45
31	33.91	7.82	28.19	28.45	11.7	28	5	5.8	6.2	9.2	2.35	2.45
37	37.72	7.82	32	32.26	11.7	29	5	5.8	6.2	9.2	2.35	2.45
51	36.45	8.92	30.73	30.99	11.7	30	5	6.8	7.2	10.2	2.35	2.45
69	44.07	8.92	38.35	38.61	11.9	25.4	5	6.95	7.05	8.7	2.23	2.39
100	55.12	10.74	45.59	45.85	11.9	27.4	5	8.25	8.35	10.5	3.73	3.86

NOTES:

1. All dimensions are in millimetres.


6.8/7.2

8.1/8.5

11.5

10.2

27/10/20

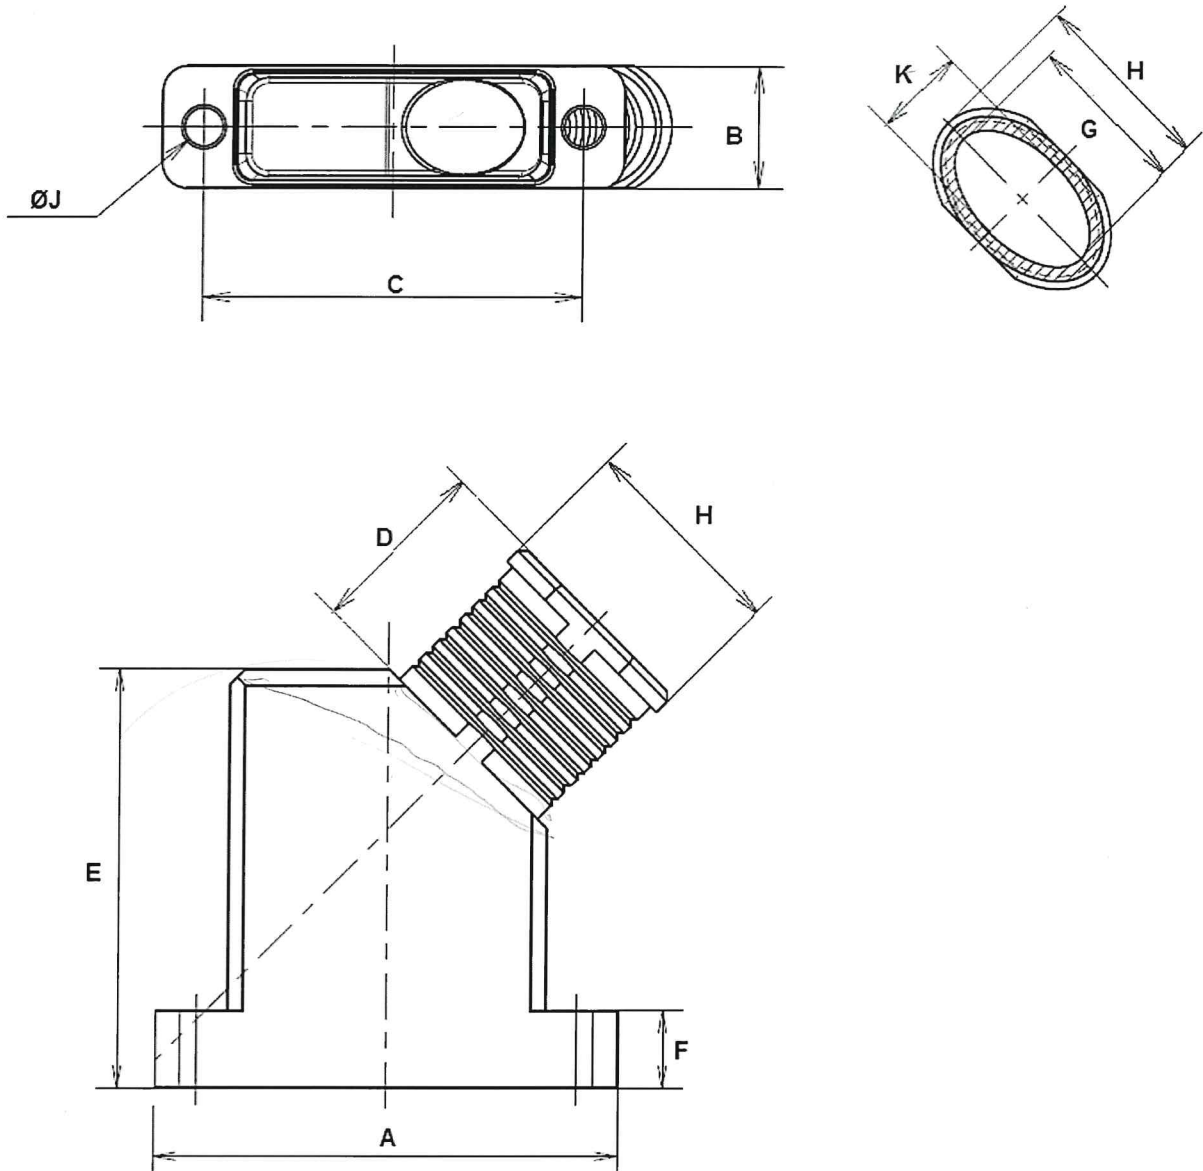FIGURE 2(d) – BACKSHELL - LIGHTWEIGHT 45° ELLIPTICAL ENTRY


Shell Size	A Max	B Max	C		D Typ	E Typ	F Typ	G		H Max	ØJ		K	
			Min	Max				Min	Max		Min	Max	Min	Max
9	19.94	7.82	14.22	14.48	11.7	21	5	4.8	5.2	8.2	2.35	2.45	5.8	6.2
15	23.75	7.82	18.03	18.29	11.7	23	5	7.3	7.7	10.7	2.35	2.45	5.8	6.2
21	27.56	7.82	21.84	22.1	11.7	24	5	9.3	9.7	12.7	2.35	2.45	5.8	6.2
25	30.1	7.82	24.38	24.64	11.7	27	5	10.6	11	14	2.35	2.45	5.8	6.2
31	33.91	7.82	28.19	28.45	11.7	28	5	12.3	12.7	15.7	2.35	2.45	5.8	6.2
37	37.72	7.82	32	32.26	11.7	29	5	14.8	15.2	18.2	2.35	2.45	5.8	6.2
51	36.45	8.92	30.73	30.99	11.7	30	5	16.8	17.2	20.2	2.35	2.45	6.8	7.2
69	44.07	8.92	38.35	38.61	11.9	35.9	5	24.8	25	28.02	2.23	2.39	7.15	7.25
100	55.12	10.74	45.59	45.85	11.9	36.9	5	25.9	26.1	29.12	3.73	3.86	8.25	8.35

NOTES:

- All dimensions are in millimetres.

25.8
 26.2
 25.20
 28.10
 29.20
 27/10/20