DOCUMENT CHANGE REQUEST

DCR number 154	Changes required for: General	Originator: S Thacker
Date: 2005/03/30	Date sent: 2005/03/30	Organisation: ESA/ESTEC
Status: IMPLEMENTED		

Title:	Transistors Low Power NPN, based on type 2N2484		
Number:	5201/001	Issue:	2

Other documents affected:

Page:

Total re-write

Paragraph:

Total re-write

Original wording:

Proposed wording:

Total reformat of this Detail Specification (the first in the range of various ESCC Detail Specifications for discrete semiconductor components under Generic Specification No.5000) as part of the ongoing conversion to the ESCC format. See below for summary of changes and attached Issue 3 Draft A of the specification.

note: known support for active procurement against this specification includes the following Manufacturers:
STM/F (ESCC QPL listed with qualified Variants 01, 02, 04, 05)
SEMELAB/UK (not ESCC qualified but willing to support procurement of Variant 01)

Summary of changes to the current format, layout and content is as follows:

1. Rewording and restructure of various sections and paragraphs of the specification plus other editorial changes based on the layout and editorial content of other Detail Specifications already converted to ESCC format.

2. Deletion of any redundant paragraphs and information, e.g.: Test Circuit, mechanical paragraph.

3. Para 1.7 High Temperature Test Precautions requirements moved to be a note to the Maximums Ratings table.

4. Deletion of obsolete lead finish D7 / Variant 03 from the available range (not supported by STM or SEMELAB).

5. Figure 1 Parameter Derating Requirements moved to be a note to the Maximum Ratings table.

6. Para 4.3.2 Weight requirements moved to Component Type Variants table.

DOCUMENT CHANGE REQUEST

DCR number 154	Changes required for: General	Originator: S Thacker
Date: 2005/03/30	Date sent: 2005/03/30	Organisation: ESA/ESTEC
Status: IMPLEMENTED		

7. Para 4.4.1 Case requirements for Variants 01 & 02 corrected to reflect a TO-18 metal can.

8. Delete requirement for marking of the testing level letter from the ESCC Component Number as per latest ESCC No. 21700.

9. Table 2 symbol "ICBO" corrected to be "IEBO".

10. Table 2 parameter "High Frequency Current Gain 1 & 2": name corrected to be "High Frequency Small Signal Current Gain 1 & 2". Mil-Std-750 Test method corrected to be 3306 (was 3206).

11. Table 2 symbol "hoc" corrected to be "hoe".

12. Table 2 Wide Band noise: symbol amended & Mil-Std-750 Test method 3246 added.

13. Table 2 Spot noise figure: symbols amended (e.g. NF1 (was NFN1));bandwidth condition for NFN3 (NF3) corrected to be "f + or - 10%" (was 2Hz).

14. Table 2: Replace LTPD7 sample for AC parameters tests (designated by "Note 2") by an equivalent fixed sample of 32 components with 0 failures (or 100%).

15. Table 3 (High & Low Temp Electrical's): change 100% inspection to be a sample of 5 components with 0 failures (or 100%) (in line with new generic 5000 issue 2 draft F).

16. Table 4: Absolute limits from table 2 have been added for information.

17. Appendix A for STM: para 4.2.2 corrected to delete reference to "para 9.12" as this inspection is a specific in-process requirement to check die-attachment per the STM procedure. STM Procedure number corrected to be 0076637 (was 0011828)

18. Appendix A for STM: Addition of note about wafer level pilot lot testing in that AC characteristics during screening may be considered guaranteed but not tested. Note STM is an ESCC QPL listed manufacturer and this device is ESCC qualified; accordingly there is an ESCC approved PID for this device. This amendment is considered technically acceptable on this basis.

Justification:

Justification (see also change details for each item above):

1. Part of the ongoing activity of conversion of cover-sheeted ESA/SCC specifications to the ESCC format.

2. To make the format and presentation consistent with the various other ESCC Detail Specifications already converted to ESCC format (e.g. 54HCMOS and CMOS 4000B series of ESCC IC specifications).

DOCUMENT CHANGE REQUEST

DCR number 154	Changes required for: General	Originator: S Thacker
Date: 2005/03/30	Date sent: 2005/03/30	Organisation: ESA/ESTEC
Status: IMPLEMENTED		

3. To make the content consistent with the proposed ESCC format Generic Specification No.5000 issue 2 draft F (currently under review with ESCC).

4. To incorporate specific deviations requested by manufacturer STM within appendix A which are considered technically acceptable (based on the ESCC approved PID for this and other ESCC qualified components manufactured by STM).

5. Update manufacturers' current products availability.

6. To make corrections to several technical errors in the previous issue

Attachments:

5201001.pdf, null

Modifications:

N/A

Approval signature:



Date signed:

2005-03-30

Pages 1 to 15

TRANSISTORS, LOW POWER, NPN

BASED ON TYPE 2N2484

ESCC Detail Specification No. 5201/001

Issue 3 - Draft A	January 2005

Document Custodian: European Space Agency - see https://escies.org

LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2005. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

– copied in whole, in any medium, without alteration or modification.
– copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

DOCUMENTATION CHANGE NOTICE

(Refer to https://escies.org for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
TBD	Specification up issued to incorporate editorial and technical changes per DCR.

TABLE OF CONTENTS

1.	**GENERAL**	**5**
1.1	Scope	5
1.2	Applicable Documents	5
1.3	Terms, Definitions, Abbreviations, Symbols and Units	5
1.4	The ESCC Component Number and Component Type Variants	5
1.4.1	The ESCC Component Number	5
1.4.2	Component Type Variants	5
1.5	Maximum Ratings	5
1.6	Physical Dimensions and Terminal Identification	7
1.6.1	Metal Can Package (TO-18) - 3 lead	7
1.6.2	Chip Carrier Package (CCP) - 3 terminal	8
1.7	Functional Diagram	9
1.8	Materials and Finishes	9
2.	**REQUIREMENTS**	**9**
2.1	General	9
2.1.1	Deviations from the Generic Specification	9
2.2	Marking	9
2.3	Terminal Strength	10
2.4	Electrical Measurements at Room, High and Low Temperatures	10
2.4.1	Room Temperature Electrical Measurements	10
2.4.2	High and Low Temperatures Electrical Measurements	12
2.5	Parameter Drift Values	13
2.6	Intermediate and End-Point Electrical Measurements	13
2.7	Power Burn-in Conditions	14
2.8	Operating Life Conditions	14
APPENDIX ‘A’		15

1. GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics and test and inspection data for the component type variants and/or the range of components specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

1.2 APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:

(a) ESCC Generic Specification No. 5000
(b) MIL-STD-750, Test Methods and Procedures for Semiconductor Devices

1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. 21300 shall apply.

1.4 THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS

1.4.1 The ESCC Component Number

The ESCC Component Number shall be constituted as follows:

Example: 520100101

- Detail Specification Reference: 5201001
- Component Type Variant Number: 01 (as required)

1.4.2 Component Type Variants

The component type variants applicable to this specification are as follows:

Variant Number	Based on Type	Case	Lead/Terminal Material and/or Finish	Weight max g
01	2N2484	TO-18	D2	0.4
02	2N2484	TO-18	D3 or D4	0.4
04	2N2484	CCP	2	0.06
05	2N2484	CCP	4	0.06

The lead/terminal material and/or finish shall be in accordance with the requirements of ESCC Basic Specification No. 23500.

1.5 MAXIMUM RATINGS

The maximum ratings shall not be exceeded at any time during use or storage.

Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the ESCC Generic Specification.


Characteristics	Symbols	Maximum Ratings	Unit	Remarks
Collector-Base Voltage	V_{CBO}	60	V	Over entire operating temperature range
Collector-Emitter Voltage	V_{CEO}	60	V	
Emitter-Base Voltage	V_{EBO}	6	V	
Collector Current (Continuous)	I_C	50	mA	-
Power Dissipation For TO-18 and CCP	P_{tot1}	0.36	W	At $T_{amb} \leq +25^{\circ}C$ Note 1
For CCP	P_{tot2}	0.73 (Note 2)	W	
For TO-18	P_{tot3}	1.2	W	At $T_{case} \leq +25^{\circ}C$ Note 1
Operating Temperature Range	T_{op}	-65 to +200	^{o}C	Note 3
Storage Temperature Range	T_{stg}	-65 to + 200	^{o}C	Note 3
Soldering Temperature For TO-18 For CCP	T_{sol}	+260 +245	^{o}C	Note 4 Note 5

NOTES:

1. For T_{amb} or $T_{case} > +25^{\circ}C$, derate linearly to 0W at $+200^{\circ}C$.
2. When mounted on a 15 x 15 x 0.6mm ceramic substrate.
3. For Variants with tin-lead plating or hot solder dip lead finish all testing performed at $T_{amb} > +125^{\circ}C$ shall be carried out in a 100% inert atmosphere.
4. Duration 10 seconds maximum at a distance of not less than 1.5mm from the device body and the same lead shall not be resoldered until 3 minutes have elapsed.
5. Duration 5 seconds maximum and the same terminal shall not be resoldered until 3 minutes have elapsed.

1.6 PHYSICAL DIMENSIONS AND TERMINAL IDENTIFICATION

1.6.1 Metal Can Package (TO-18) - 3 lead

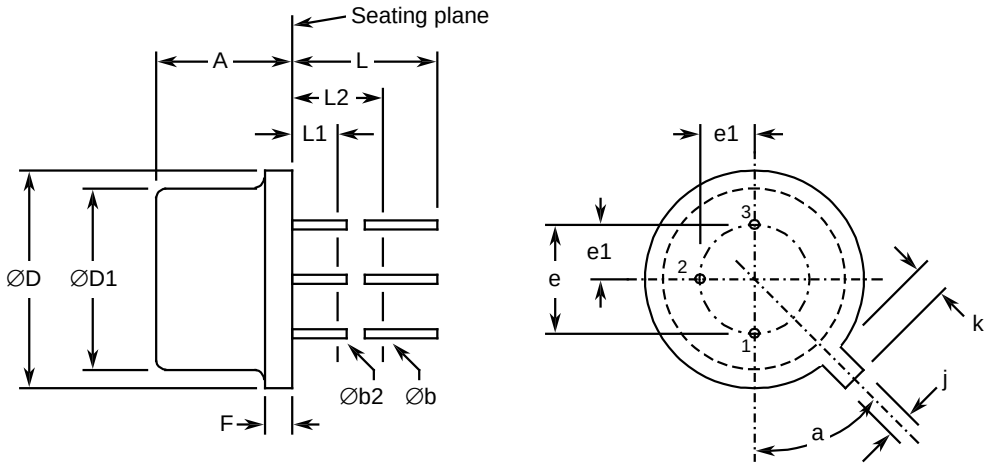


Symbols	Dimensions mm		Notes
	Min	Max	
A	4.32	5.33	
Øb	0.406	0.533	1
Øb2	0.406	0.483	1
ØD	5.31	5.84	
ØD1	4.52	4.95	
e	2.54 TYPICAL		2
e1	1.27 TYPICAL		2
F	-	0.762	
j	0.914	1.17	
k	0.711	1.22	3
L	12.7	-	1
L1	-	1.27	1
L2	6.35	-	1
a	45° TYPICAL		4

NOTES:

1. (Three leads) Øb2 applies between L1 and L2. Øb applies between L2 and 12.7mm from the seating plane. Diameter is uncontrolled within L1 and beyond12.7mm from the seating plane.
2. Leads having maximum diameter 0.483mm measured in the gauging plane 1.37(+0.025,-0)mm below the seating plane of the device shall be within 0.178mm of their true position relative to a

maximum-width-tab.
3. Measured from the maximum diameter of the actual device.
4. Tab centreline.


1.6.2 Chip Carrier Package (CCP) - 3 terminal

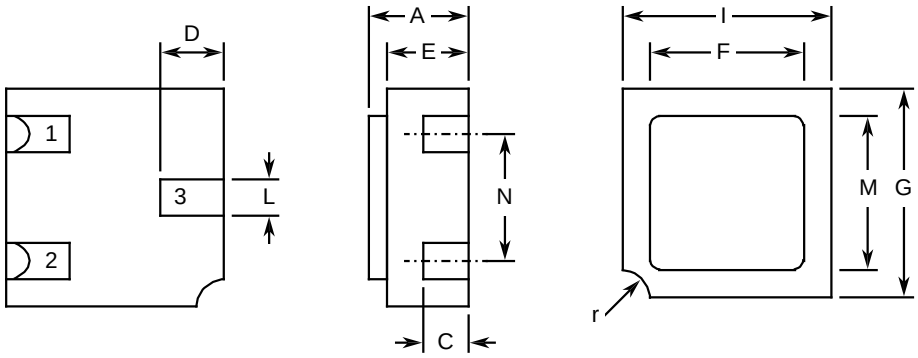

Symbols	Dimensions mm		Notes
	Min	Max	
A	1.15	1.5	
C	0.45	0.56	1
D	0.6	0.91	1
E	0.91	1.12	
F	1.9	2.15	
G	2.9	3.25	
I	2.4	2.85	
L	0.4	0.6	1
M	2.4	2.65	
N	1.8	2	
r	0.3 TYPICAL		

NOTES:
1. The three terminals have the same dimensions.

1.7 FUNCTIONAL DIAGRAM



1. Emitter.
2. Base.
3. Collector.

NOTES:

1. For TO-18, the collector is internally connected to the case.

1.8 MATERIALS AND FINISHES

Materials and finishes shall be as follows:

a) Case
For the metal can package the case shall be hermetically sealed and have a metal body with hard glass seals.

For the chip carrier package the case shall be hermetically sealed and have a ceramic body with a Kovar lid.

b) Leads/Terminals
As specified in Component Type Variants.

2. REQUIREMENTS

2.1 GENERAL

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component's reliability, are listed in the appendices attached to this specification.

2.1.1 Deviations from the Generic Specification

(a) Deviation from Screening Tests - Chart F3
High Temperature Reverse Bias Burn-in and the subsequent Final Measurements for HTRB shall be omitted.

2.2 MARKING

The marking shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and

as follows.

The information to be marked on the component shall be:

(a) Terminal identification.
(b) The ESCC qualified components symbol (for ESCC qualified components only).
(c) The ESCC Component Number.
(d) Traceability information.

2.3 TERMINAL STRENGTH

The test conditions for terminal strength, tested as specified in the ESCC Generic Specification, shall be as follows:

For TO-18, Test Condition: E, lead fatigue.

2.4 ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES

Electrical measurements shall be performed at room, high and low temperatures.

2.4.1 Room Temperature Electrical Measurements

The measurements shall be performed at T_{amb}=+22 ±3^{o}C.

Characteristics	Symbols	MIL-STD-750 Test Method	Test Conditions	Limits		Units
				Min	Max	
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	3001	I_C = 10µA	60	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	3011	I_C = 10mA Note 1	60	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	3026	I_E = 10µA	6	-	V
Collector-Base Cut-off Current	I_{CBO}	3036	V_{CB} = 45V	-	10	nA
Emitter-Base Cut-off Current	I_{EBO}	3061	V_{EB} = 5V	-	10	nA
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	3071	I_C=1mA I_B=0.1mA Note 1	-	350	mV
Forward Current Transfer Ratio	h_{FE1}	3076	V_{CE}=5V ; I_C = 1µA	30	-	-
	h_{FE2}	3076	V_{CE}=5V ; I_C = 10µA	100	500	-
	h_{FE3}	3076	V_{CE}=5V ; I_C = 100µA	175	550	-
	h_{FE4}	3076	V_{CE}=5V ; I_C = 1mA	250	650	-
	h_{FE5}	3076	V_{CE}=5V ; I_C = 10mA Note 1	-	800	-
High Frequency Small Signal Current Gain	h_{fe1}	3306	V_{CE}=5V, I_C=50µA f=5MHz Note 2	3	-	–
	h_{fe2}	3306	V_{CE}=5V, I_C=500µA f=30MHz Note 2	2	-	-
Small Signal Current Gain	h_{fe3}	3206	V_{CE}=5V, I_C=1mA f=1kHz Note 2	150	900	-
Output Capacitance	C_{obo}	3236	V_{CB}=5V, I_E=0A f=1MHz Note 2	-	6	pF
Input Capacitance	C_{ibo}	3240	V_{EB}=500mV I_C=0A f=1MHz Note 2	-	6	pF

Characteristics	Symbols	MIL-STD-750 Test Method	Test Conditions	Limits		Units
				Min	Max	
Small Signal Input Impedance	h_{ie}	3201	V_{CE}=5V, I_C=1mA f=1kHz Note 2	3.5	24	kΩ
Small Signal Output Admittance	h_{oe}	3216	V_{CE}=5V, I_C=1mA f=1kHz Note 2	-	40	µmho
Small Signal Reverse Voltage Transfer Ratio	h_{re}	3211	V_{CE}=5V, I_C=1mA f=1kHz Note 2	-	$8x10^{-4}$	-
Wide-Band Noise Figure	NF_W	3246	f=10Hz to 10kHz V_{CE}=5V, I_C=10µA R_S=10kΩ Note 2	-	3	dB
Spot Noise Figure	 NF1 NF2 NF3	3246	V_{CE}=5V, I_C=10µA R_S=10kΩ BW=f ±10% f=100Hz f=1kHz f=10kHz Note 2	 - - -	 10 3 2	dB

NOTES:

1. Pulse measurement: Pulse Width ≤ 300µs, Duty Cycle ≤ 1%
2. For AC characteristics read and record measurements shall be performed on a sample of 32 components with 0 failures allowed. Alternatively a 100% inspection may be performed.

2.4.2 High and Low Temperatures Electrical Measurements

Characteristics	Symbols	MIL-STD-883 Test Method	Test Conditions Note 1	Limits		Units
				Min	Max	
Collector-Base Cut-off Current	I_{CBO}	3036	T_{amb}=+150(+0-5)˚C V_{CB}=45V	-	10	µA
Forward Current Transfer Ratio 2	h_{FE2}	3076	T_{amb}=-55(+5-0)˚C V_{CE}=5V I_C=10µA	20	-	-

NOTES:

1. Read and record measurements shall be performed on a sample of 5 components with 0 failures allowed. Alternatively a 100% inspection may be performed.

2.5 PARAMETER DRIFT VALUES

Unless otherwise specified, the measurements shall be performed at T_{amb}=+22 ±3°C.

The test methods and test conditions shall be as per the corresponding test defined in Room Temperature Electrical Measurements.

The drift values (Δ) shall not be exceeded for each characteristic specified. The corresponding absolute limit values for each characteristic shall not be exceeded.

Characteristics	Symbols	Limits			Units
		Drift Value Δ	Absolute		
			Min	Max	
Collector-Base Cut-off Current	I_{CBO}	±5 or (1) ±100%	-	10	nA
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	±30 or (1) ±15%	-	350	mV
Forward Current Transfer Ratio 4	h_{FE4}	±15%	250	650	-

NOTES:

1. Whichever is the greater referred to the initial value.

2.6 INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at T_{amb}=+22 ±3°C.

The test methods and test conditions shall be as per the corresponding test defined in Room Temperature Electrical Measurements .

The limit values for each characteristic shall not be exceeded.

Characteristics	Symbols	Limits		Units
		Min	Max	
Collector-Base Cut-off Current	I_{CBO}	-	10	nA
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	-	350	mV
Forward Current Transfer Ratio 4	h_{FE4}	250	650	-

2.7 POWER BURN-IN CONDITIONS

Characteristics	Symbols	Limits	Units
Ambient Temperature	T_{amb}	+20 to +50	^{o}C
Power Dissipation	P_{tot}	As per Maximum Ratings P_{tot} derated at the chosen T_{amb}	W
Collector-Base Voltage	V_{CB}	27	V

2.8 OPERATING LIFE CONDITIONS

The conditions shall be as specified for Power Burn-in.

APPENDIX 'A'

AGREED DEVIATIONS FOR STMICROELECTRONICS (F)

<table>
<tr><th>ITEMS AFFECTED</th><th>DESCRIPTION OF DEVIATIONS</th></tr>
<tr><td>Deviations from Production Control-Chart F2</td><td>Special In-process Control Internal Visual Inspection.
For CCP packages the criteria specified for voids in the fillet and minimum die mounting material around the visible die perimeter for die mounting defects may be omitted providing that a radiographic inspection to verify the die-attach process is performed on a sample basis in accordance with STMicroelectronics procedure 0076637.</td></tr>
<tr><td>Deviations from Room Temperature Electrical Measurements</td><td>All AC characteristics (Room Temperature Electrical Measurement Note 2) may be considered guaranteed but not tested if successful pilot lot testing has been performed on the wafer lot which includes AC characteristic measurements per the Detail Specification.

A summary of the pilot lot testing shall be provided if required by the Purchase Order.

Characteristics h_{fe1}, and C_{ibo}, shall be as follows:
<table>
<tr><th rowspan="2">Characteristics</th><th rowspan="2">Symbols</th><th rowspan="2">MIL-STD-750 Test Method</th><th rowspan="2">Test Conditions</th><th colspan="2">Limits</th><th rowspan="2">Units</th></tr>
<tr><th>Min.</th><th>Max.</th></tr>
<tr><td>High Frequency Small Signal Current Gain 1</td><td>h_{fe1}</td><td>3306</td><td>V_{CE}=5V
I_C=50µA
f=5MHz
Note 2</td><td>1</td><td>-</td><td>-</td></tr>
<tr><td>Input Capacitance</td><td>C_{ibo}</td><td>3240</td><td>V_{EB}=500mV
I_C=0A
f=1MHz
Note 2</td><td>-</td><td>15</td><td>pF</td></tr>
</table>
</td></tr>
</table>