




DOCUMENT CHANGE REQUEST



DCR number 312		Changes required for: General		Originator: Jude Neylon	
Date: 2007/01/16		Date sent: 2007/01/16		Organisation: Enterprise Ireland	
Status: IMPLEMENTED					
Title:		Thermistors (thermally Sensitive Resistors) Range 2000 to 100000 Ohms at +25C with a			
Number:		4006/014	Issue:	4	
Other documents affected:					
Page:					
Pages: 6,7,8,10,12 Paragraphs: Table 1(a); Table 1(b); Table of Figure 2; 4.2.2; Table 2.					
Paragraph:					
Pages: 6,7,8,10,12 Paragraphs: Table 1(a); Table 1(b); Table of Figure 2; 4.2.2; Table 2.					
Original wording:					
Proposed wording:					
SEE ATTACHED PAGES					
Justification:					
SEE ATTACHED PAGES					

Attachments:
DCR-Var_91011_(3).DOC, DCR312markup.pdf, DCR312att.pdf, null
Modifications:
<p>The following additional changes are included in this DCR, as incorporated into the attached mark-up specification 4006/014 Issue 5 Draft B:</p> <p>a) Page 1 Titles & Para 1.1 Scope: Amend description to reflect the changes in the range (i.e. 2000 to 15000 ohm) and also include the based on type part numbers for the 4 valid variants 08 to 11: "G15K4D489" etc.</p> <p>b) Table 1(a), Table 1(b) note 3, Figure 2, Para 4.3.2, Para 4.4.2, Para 4.5.2, Table 2: Delete obsolete variants 01, 02, 03, 04, 05, 06 from the table and all references throughout the specification.</p> <p>c) Table 1(a): Change in column 3: "NOM" to read "RZ"</p> <p>d) Table 1(a), Table 1(b), Figure 2, Para 4.3.2, Table 5, Table 6: Remove any irrelevant trailing zeros from values & limits throughout the specification (e.g. "10.00%" becomes "10%")</p> <p>e) Table 2, Table 6 Change symbol "Ri" to be "RI"</p> <p>f) Appendix A for Betatherm All deviations applicable to variant 08 (to testing level B) shall also apply to Variants 09, 10, 11</p> <p>-----</p> <p>Justification</p> <p>a), c), d), e), Editorial changes for the purposes of consistency and clarification.</p> <p>b) Betatherm have confirmed that variants 01 to 06 are obsolete and are no longer supported for procurement (Variants 08 to 11 are supported). Accordingly without any manufacturer support they should be removed from the specification.</p> <p>f) Betatherm has a single process using the same materials that is applicable to all variants 08 to 11; hence the deviations already approved for Variant 08 (ref. DCR119 & 181) should also be applied to the new variants 09, 10, 11.</p>
Approval signature:

Date signed:
2007-01-16



DOCUMENT CHANGE REQUEST

TO BE COMPLETED BY ORIGINATOR

Originator (1) Jude Neylon	Originator signature (2) 	NSA or ESA representative signature (3) 	Change request No. (4)
Affiliation Betatherm Ireland Ltd.	Date: 19 December 2006	Date: 20 December 2006	Page 1 of [3] (5)

DOCUMENT AFFECTED

Doc. No. (6) 4006/014	Status (7) Issue 4	Title (8) THERMISTORS (THERMALLY SENSITIVE RESISTORS), NCT, RANGE 2 000 TO 100 000 OHMS AT + 25°C WITH A TEMPERATURE RANGE OF - 60 TO + 160 °C	Other documents affected (10) NONE
Paragraph(s) and page(s) affected (9) Pages: 6,7,8,10,12 Paragraphs: Table 1(a); Table 1(b); Table of Figure 2; 4.2.2; Table 2.			

PROPOSED WORDING OF CHANGE

(11)

SEE ATTACHED PAGES

Continuation sheet(s) attached: ☒ Yes ☐ No

JUSTIFICATION

(12)

SEE ATTACHED PAGES

Continuation sheet(s) attached: ☒ Yes ☐ No

Changes required for:

Procurement (project)

☒

Qualification

☐

MRB decision

☐

(13)

General Improvement of Spec.

☐

Other

☐

RESERVED FOR USE BY SCC SECRETARIAT

Date of registration	Order of priority for Appr. / Impl.: 1 (high) 2 (medium) 3 (low)
Attachments	Qualification status: Qualified In process of qualification

RESERVED FOR USE BY APPROVING AUTHORITY

Approved <input type="checkbox"/> Yes <input type="checkbox"/> No Priority <input type="checkbox"/>	Date and signature	Reference to SCCG decision
---	---------------------------	-----------------------------------

Approved wording, if different from box 11 or reason for rejection

(14)

Continuation sheet(s) attached: ☐ Yes ☐ No



DOCUMENT CHANGE REQUEST

CONTINUATION SHEET FOR BOX []

Change request No.)

Page 2 of [3]

CHANGE:

Page 6 Table 1(a) Add variants 09, 10 and 11 to Table, giving resistance values and appropriate resistance tolerances at temperatures - 60; - 40; -20; 0; +25; +50; +70; +100; +125; degrees C. The insertion is as follows:

VARIANT	BASED ON TYPE	R _Z	RESISTANCE/TEMPERATURE CHARACTERISTICS (NOTE 3)										
			-60 °C	-40 °C	-20 °C	0 °C	+25 °C	+50 °C	+70 °C	+100 °C	+125 °C	+140 °C	+160 °C
09	G10K4D453	NOM (Ω)	847284	239768	78930	29490	10000	3893	1990	817.2	426.0	---	---
		TOL (+%)	7.0	3.0	2.6	2.0	2.0	1.7	1.6	3.0	3.5	---	---
10	G2K7D411	NOM (Ω)	----	43362	14658	5650	2000.0	815.0	432.0	187.40	102.00	---	---
		TOL (+%)	---	2.90	2.54	1.57	1.34	1.17	1.05	0.90	1.13	---	---
11	G4K7D421	NOM (Ω)	----	86724	29316	11300	4000	1630.0	864.0	374.80	204.00	--	--
		TOL (+%)	----	2.90	2.54	1.57	1.34	1.17	1.05	0.90	1.13	---	--

JUSTIFICATION:

New variant 09 has been developed from old customer specifications to meet demand and is a 10,000 ohm device. Construction is "similar" to the newly qualified variant 08; with the improved glass tubing, the 26 AWG wire and the assembly as described in the current PID Iss. 7. There are two changes, in the physical dimensions, from that of Variant 08 – dimensions A and C – which are documented in this DCR.

Variants 10 is electrically similar to variant 01. The differences are that construction is similar to the newly qualified variant 08; with the improved glass tubing, the 26 AWG wire and the assembly as described in the current PID Iss. 7.

Variant 11 is electrically similar over the combined temperature range of variants 02 and 03. The differences, from Variants 02 and 03, are that construction is similar to the newly qualified variant 08; with the improved glass tubing, the 26 AWG wire and the assembly as described in the current PID Iss. 7.

CHANGE:

Page 7 Table 1(b) Change Note 3 **from** " – 40 °C for Variants 01 to 05 and – 60 °C for Variant 06 and 08 to the Maximum Operating Temperature specified in Column 4 of Table 1(a)" **to** " – 40 °C for Variants 01, 02, 03, 04, 05 ,10 and 11 and – 60 °C for Variants 06, 08 and 09 to the Maximum Operating Temperature specified in Column 4 of Table 1(a)"

JUSTIFICATION:

Includes new Variants 09,10 and 11

CHANGE: Change Table of Figure 2 **from**

SYMBOL	MILLIMETRES			
	VARIANTS 01 - 05		VARIANT 06,08	
	MIN	MAX	MIN	MAX
A	280.00	330.00	356.00	406.00
B	6.10	6.60	6.10	6.60
C	-	2.80	-	2.40
D	-	9.80	-	9.80
E	0.33	0.48	0.33	0.48
F	-	50.00	-	50.00
G	50.00	80.00	50.00	80.00



DOCUMENT CHANGE REQUEST

CONTINUATION SHEET FOR BOX []

Change request No.)

Page 3 of [3]

To

SYMBOL	MILLIMETRES					
	VARIANT 01, 02, 03, 04, 05, 10, 11		VARIANT 06, 08		VARIANT 09	
	MIN	MAX	MIN	MAX	MIN	MAX
A	280.00	330.00	356.00	406.00	500.00	550.00
B	6.10	6.60	6.10	6.60	6.10	6.60
C	-	2.80	-	2.40	-	2.80
D	-	9.80	-	9.80	-	9.80
E	0.33	0.48	0.33	0.48	0.33	0.48
F	-	50.00	-	50.00	-	50.00
G	50.00	80.00	50.00	80.00	50.00	80.00

JUSTIFICATION:

Includes new Variant 09, 10 and 11. The new lead length, for Variant 09, is set according to customer demand. Dimension C, for Variant 09, is at the maximum value for Variants with the exception of Variants 06 and 08.

CHANGE:

Page 10, Paragraph 4.4.2 change from "The lead material shall be in accordance with ESCC Detail Specification No. 3901/012 Variant 04 with the exception of Variant 06 and 08, which shall be in accordance with ESCC Detail Specification No. 3901/012 Variant 03" to "The lead material shall be in accordance with ESCC Detail Specification No. 3901/012 Variant 04 with the exception of Variants 06, 08 ,09,10 and 11 which shall be in accordance with ESCC Detail Specification No. 3901/012 Variant 03"

JUSTIFICATION:

Includes new Variant 09, 10, and 11.

CHANGE:

Page 12, Table 2, No. 3 change from

3	Thermal Time Constant Variants 01-05 Variant 06 , 08	KH	Para. 9.3.1.3 $T_{amb} = +25 \pm 1^{\circ}\text{C}$ In Still Air Note 3	- -	40 25	sec.
---	--	----	--	--------	----------	------

to

3	Thermal Time Constant Variants 01-05 Variants 06 ,08. Variants 09, 10, 11	KH	Para. 9.3.1.3 $T_{amb} = +25 \pm 1^{\circ}\text{C}$ In Still Air Note 3	- - -	40 25 40	sec.
---	--	----	--	-------------	----------------	------

JUSTIFICATION:

Includes new Variant 09, 10, and 11.

MARK-UP for DCR312
(also DCR333 & DCR337)

plus extra changes from
DCR181

plus addition changes 09/7/7
agreed with Betatherm.



Pages 1 to 17

THERMISTORS

(THERMALLY SENSITIVE RESISTORS), NTC,

15000

RANGE 2000 TO ~~10000~~ OHMS AT +25 °C WITH

A TEMPERATURE RANGE OF -60 to +160 °C

ESCC Detail Specification No. 4006/014

BASED ON TYPE ~~G15K4D489~~, G15K4D489
G10K4D453, G2K7D411, G4K7D421


ISSUE ⁵ ~~A~~ (Draft B)

July 2005

July 2007



Document Custodian: European Space Agency - see <https://escies.org>

	ESCC Detail Specification No. 4006/014		PAGE i ISSUE 4
---	---	--	------------------------


LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © ²⁰⁰⁷~~2005~~. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole in any medium without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

	ESCC Detail Specification No. 4006/014		PAGE 2 ISSUE 4
---	---	--	-----------------------

DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
181 312,333, 337	Specification upissued to incorporate editorial and technical changes per DCR.




	ESCC Detail Specification No. 4006/014	PAGE 3 ISSUE 4
---	---	-------------------

TABLE OF CONTENTS

	<u>Page</u>
1. <u>GENERAL</u>	5
1.1 Scope	5
1.2 Component Type Variants	5
1.3 Maximum Ratings	5
1.4 Parameter Derating Information	5
1.5 Physical Dimensions	5
1.6 Functional Diagram	5
2. <u>APPLICABLE DOCUMENTS</u>	5
3. <u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u>	5
4. <u>REQUIREMENTS</u>	9
4.1 General	9
4.2 Deviations from Generic Specification	9
4.2.1 Deviations from Special In-process Controls	9
4.2.2 Deviations from Final Production Tests	9
4.2.3 Deviations from Burn-in and Electrical Measurements	9
4.2.4 Deviations from Qualification Tests	9
4.2.5 Deviations from Lot Acceptance Tests	9
4.3 Mechanical Requirements	9
4.3.1 Dimension Check	9
4.3.2 Weight	9
4.3.3 Terminal Strength	10
4.4 Materials and Finishes	10
4.4.1 Case	10
4.4.2 Lead Material and Finish	10
4.5 Marking	10
4.5.1 General	10
4.5.2 The ESCC Component Number	10
4.5.3 Traceability Information	10
4.6 Electrical Measurements	11
4.6.1 Electrical Measurements at Room Temperature	11
4.6.2 Electrical Measurements at High and Low Temperatures	11
4.6.3 Circuits for Electrical Measurements	11
4.7 Burn-in Tests	11
4.7.1 Parameter Drift Values	11
4.7.2 Conditions for Burn-in	11
4.7.3 Electrical Circuits for Burn-in	11
4.8 Environmental and Endurance Tests	14
4.8.1 Measurements and Inspections on Completion of Environmental Tests	14
4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests	14
4.8.3 Measurements and Inspections on Completion of Endurance Tests	14
4.8.4 Conditions for Operating Life Tests	14
4.8.5 Electrical Circuits for Operating Life Tests	14

	ESCC Detail Specification No. 4006/014		PAGE 4 ISSUE 4
---	---	--	-------------------

		<u>Page</u>
<u>TABLES</u>		
1(a)	Type Variants	6
1(b)	Maximum Ratings	7
2	Electrical Measurements at Room Temperature - DC Parameters	12
3	Electrical Measurements at High and Low Temperatures	12
4	Parameter Drift Values	13
5	Conditions for Burn-in and Operating Life Tests	13
6	Measurements and Inspections on Completion of Environmental Tests and at Intermediate Points and on Completion of Endurance Testing	15
<u>FIGURES</u>		
1	Parameter Derating Information	7
2	Physical Dimensions	8
3	Functional Diagram	8
4	Circuits for Electrical Measurements	12
5	Electrical Circuit for Burn-in and Operating Life Tests	13
<u>APPENDICES (Applicable to specific Manufacturers only)</u>		
'A'	Agreed Deviations for Betatherm (Ireland)	17

	ESCC Detail Specification No. 4006/014	PAGE 5 ISSUE 4
---	---	-------------------

1. GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics, test and inspection data for Thermistors, Thermally Sensitive Resistors, NTC, Range ²⁰⁰⁰ ~~2000~~ to ¹⁵⁰⁰⁰ ~~100 000~~ Ohms at +25°C with a Temperature Range of -60 to +160 °C. It shall be read in conjunction with ESCC Generic Specification No. 4006, the requirements of which are supplemented herein.

1.2 COMPONENT TYPE VARIANTS

based on type ~~G2K7D411~~, G15K4D489, G10K4D453,
G2K7D411, G4K7D421.

Variants of the basic type thermistors specified herein, which are also covered by this specification, are given in Table 1(a).

1.3 MAXIMUM RATINGS

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the thermistors specified herein, are as scheduled in Table 1(b).

1.4 PARAMETER DERATING INFORMATION (FIGURE 1)

Not applicable.

1.5 PHYSICAL DIMENSIONS

The physical dimensions of the thermistors specified herein are shown in Figure 2.

1.6 FUNCTIONAL DIAGRAM

The functional diagram for the thermistors specified herein is shown in Figure 3.

2. APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESCC Generic Specification No. 4006, Thermistors (Resistors, Thermally Sensitive).
- (b) IEC 60410, Sampling Procedures and Tables for Inspection by Attributes.
- (c) MIL-STD-202, Test Methods for Electronic and Electrical Component Parts.

3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. 21300 shall apply. In addition, the following symbols are used:-

- NTC =Negative Temperature Coefficient.
- R_Z =Zero Power Resistance.



ESCC Detail Specification
No. 4006/014

PAGE 6

ISSUE 4


TABLE 1(a) - TYPE VARIANTS

(1) VARIANT	(2) BASED ON TYPE	(3) R _Z (Note 1)	RESISTANCE/TEMPERATURE CHARACTERISTICS (Note 2)												(4)
			-60°C	-40°C	-20°C	0°C	+25°C	+50°C	+70°C	+100°C	+125°C	+140°C	+160°C		
01	G2K7D110	NOM. (Ω) TOL. (±%)	- -	43362 2.90	14658 2.54	5650 1.57	2000.0 1.34	815.0 1.17	432.0 1.05	187.40 0.90	102.00 1.13	- -	- -	-	
02	G4K7D108	NOM. (Ω) TOL. (±%)	- -	- -	29316 2.54	11300 1.57	4000 1.34	1630.0 1.17	864.0 1.05	374.80 0.90	204.00 1.13	- -	- -	-	
03	G4K7D114	NOM. (Ω) TOL. (±%)	- -	86724 2.90	29316 2.54	11300 1.57	4000 1.34	1630.0 1.17	864.0 1.05	- -	- -	- -	- -	-	
04	G15K4D112	NOM. (Ω) TOL. (±%)	- -	- -	- -	44235 1.62	15680 1.41	5840 1.24	2985.0 1.12	1226.0 0.97	639.0 1.23	447.00 1.15	287.70 1.06	-	
05	G100K6D116	NOM. (Ω) TOL. (±%)	- -	- -	- -	- -	100000 1.11	- -	- -	5574 1.11	2642.4 1.41	1756.3 1.32	1059.0 1.21	-	
06	G15K4D393	NOM. (Ω) TOL. (±%)	1342000 10.0%	371300 6.3%	120100 3.35	44420 1.5%	15000 1.01	5855 1.03	3009.0 1.05	1259.0 1.01	659.8 1.02	465.50 1.02	302.40 1.02	-	
08	G15K4D489	NOM. (Ω) TOL. (±%)	1342000 10.0%	371300 6.3%	120100 3.35	44420 1.5%	15000 1.01	5855 1.03	3009.0 1.05	1250.0 1.01	659.8 1.02	465.50 1.02	302.40 1.02	-	

NOTES

- For test purposes, when zero power is dissipated and the ambient temperature is held as specified, the value is referred to as R_Z (Zero Power Resistance).
- The reference resistance is specified at +25°C.

Add new variants 09, 10, 11 * attached

**ESCC**

DOCUMENT CHANGE REQUEST

CONTINUATION SHEET FOR BOX []

Change request No.)

Page 2 of [3]

CHANGE:

Page 6 Table 1(a) Add variants 09, 10 and 11 to Table, giving resistance values and appropriate resistance tolerances at temperatures - 60; - 40; - 20; 0; +25; +50; +70; +100; +125; degrees C. The insertion is as follows:

VARIANT	BASED ON TYPE	R ₂	RESISTANCE/TEMPERATURE CHARACTERISTICS (NOTE 3)											
			-60 °C	-40 °C	-20 °C	0 °C	+25 °C	+50 °C	+70 °C	+100 °C	+125 °C	+140 °C	+160 °C	
09	G10K4D453	NOM (Ω)	847284	239768	78930	29490	10000	3893	1990	817.2	426.0	—	—	
		TOL (+%)	7.5	3.5	2.6	2.5	2.5	1.7	1.6	3.5	3.5	—	—	
10	G2K7D411	NOM (Ω)	—	43362	14658	5650	2000.0	815.0	432.0	187.40	102.00	—	—	
		TOL (+%)	—	2.9	2.54	1.57	1.34	1.17	1.05	0.9	1.13	—	—	
11	G4K7D421	NOM (Ω)	—	86724	29316	11300	4000	1630.0	864.0	374.80	204.00	—	—	
		TOL (+%)	—	2.9	2.54	1.57	1.34	1.17	1.05	0.9	1.13	—	—	

JUSTIFICATION:

New variant 09 has been developed from old customer specifications to meet demand and is a 10,000 ohm device. Construction is "similar" to the newly qualified variant 08; with the improved glass tubing, the 26 AWG wire and the assembly as described in the current PID Iss. 7. There are two changes, in the physical dimensions, from that of Variant 08 - dimensions A and C - which are documented in this DCR.

Variant 10 is electrically similar to variant 01. The differences are that construction is similar to the newly qualified variant 08; with the improved glass tubing, the 26 AWG wire and the assembly as described in the current PID Iss. 7.

Variant 11 is electrically similar over the combined temperature range of variants 02 and 03. The differences, from Variants 02 and 03, are that construction is similar to the newly qualified variant 08; with the improved glass tubing, the 26 AWG wire and the assembly as described in the current PID Iss. 7.

CHANGE:

Page 7 Table 1(b) Change Note 3 from " - 40 °C for Variants 01 to 05 and - 60 °C for Variant 06 and 08 to the Maximum Operating Temperature specified in Column 4 of Table 1(a)" to " - 40 °C for Variants 01, 02, 03, 04, 05, 10 and 11 and - 60 °C for Variants 06, 08 and 09 to the Maximum Operating Temperature specified in Column 4 of Table 1(a)"

JUSTIFICATION:

Includes new Variants 09, 10 and 11

CHANGE:

Change Table of Figure 2 from

SYMBOL	MILLIMETRES			
	VARIANTS 01 - 05		VARIANT 06, 08	
	MIN	MAX	MIN	MAX
A	280.00	330.00	356.00	406.00
B	6.10	6.60	6.10	6.60
C	-	2.80	-	2.40
D	-	9.80	-	9.80
E	0.33	0.48	0.33	0.48
F	-	50.00	-	50.00
G	50.00	80.00	50.00	80.00


	ESCC Detail Specification No. 4006/014		PAGE 7 ISSUE 4
---	---	--	-------------------

TABLE 1(b) - MAXIMUM RATINGS

No.	CHARACTERISTICS	SYMBOL	MAXIMUM RATINGS	UNIT	REMARKS
1	Power Dissipation	P_D	24	mW	Note 1
2	Operating Temperature Range	T_{op}	Note 2	°C	
3	Storage Temperature Range	T_{stg}	Note 3	°C	
4	Soldering Temperature	T_{sol}	+245	°C	Note 4


NOTES

- Never to be exceeded in the temperature measurement mode. The thermistors specified herein shall not be used in the self-heat mode.
- See Column 4 of Table 1(a).
- 40°C for Variants ~~04 to 05~~ ^{10,11} and -60°C for Variants ~~06 and 09~~ ^{08,09} to the Maximum Operating Temperature specified in Column 4 of Table 1(a)
- Duration 10 seconds maximum at a distance of not less than 10mm from the device body and the same lead shall not be resoldered until 3 minutes have elapsed.

FIGURE 1 - PARAMETER DERATING INFORMATION

Not applicable.

FIGURE 2 - PHYSICAL DIMENSIONS

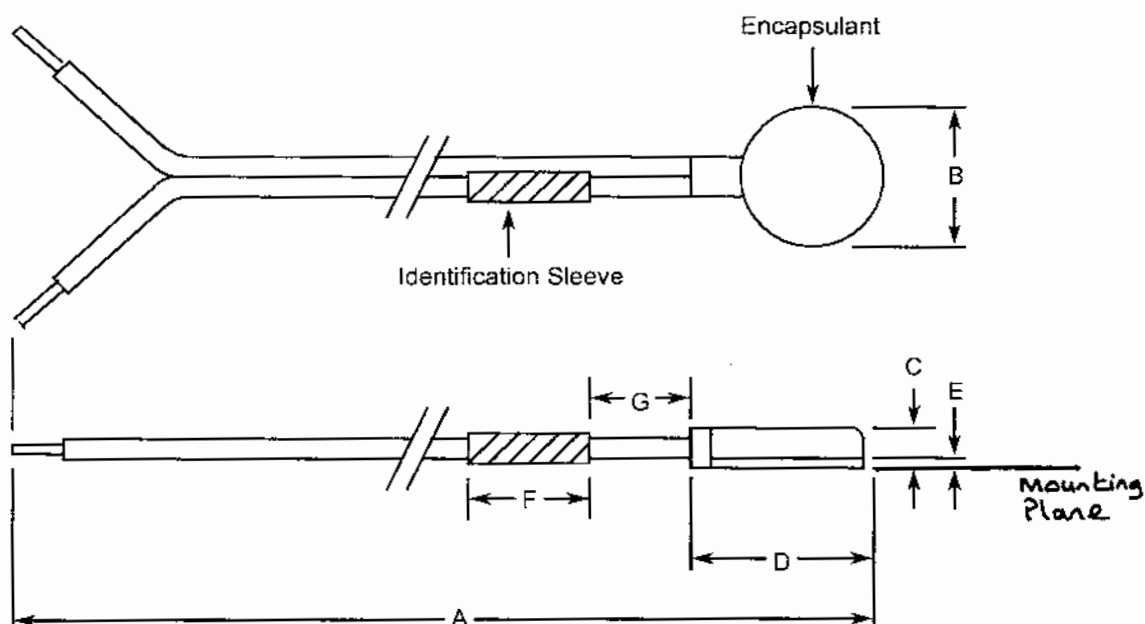


SYMBOL	MILLIMETRES					
	VARIANTS 10,11		VARIANT 08		VARIANT 09	
	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
A	280 00	330 00	356 00	406 00	500	550
B	6.1 0	6.6 0	6.1 0	6.6 0	6.1	6.6
C	-	2.8 0	-	2.4 0	-	2.8
D	-	9.8 0	-	9.8 0	-	9.8
E	0.33	0.48	0.33	0.48	0.33	0.48
F	-	50 00	-	50 00	-	50
G	50 00	80 00	50 00	80 00	50	80

NOTES


- The leads shall not be bent, or the means of fastening them cause bending in any direction from the plane of the thermistor fastening disc within a distance of 15mm from the centre of the thermistor.

- Within dimension D (housing/crimp) no part of the housing or leads shall protrude below the mounting plane by more than 0.13mm.

FIGURE 3 - FUNCTIONAL DIAGRAM



(CR 337)

	ESCC Detail Specification No. 4006/014	PAGE 9 ISSUE 4
---	---	-------------------

4. REQUIREMENTS

4.1 GENERAL

The complete requirements for procurement of the thermistors specified herein are stated in this specification and ESCC Generic Specification No. 4006 for Thermistors (Resistors, Thermally Sensitive). Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION

4.2.1 Deviations from Special In-process Controls

None.

4.2.2 Deviations from Final Production Tests (Chart II)

(a) Thermal Shock: Test Condition 'C' except that the maximum temperature shall be the maximum operating temperature specified in Column 4 of Table 1(a) of this Specification.

4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)

None.

4.2.4 Deviations from Qualification Tests (Chart IV)

(a) Thermal Shock: Test Condition 'C' except that the maximum temperature shall be the maximum operating temperature specified in Column 4 of Table 1(a) of this Specification.

(b) Para. 9.3.1.2, Dissipation Constant: Not applicable.

(c) Para. 9.15, Short Time Overload: Not applicable.

(d) Para. 9.17, High Temperature Storage: Not applicable.

4.2.5 Deviations from Lot Acceptance Tests (Chart V)

(a) Thermal Shock: Test Condition 'C' except that the maximum temperature shall be the maximum operating temperature specified in Column 4 of Table 1(a) of this Specification.


4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the thermistors specified herein shall be verified in accordance with the requirements set out in Para. 9.4 of ESCC Generic Specification No. 4006 and they shall conform to those shown in Figure 2 of this specification.

4.3.2 Weight

The maximum weight of the thermistors specified herein shall be 4.0 grammes, with the exception of Variant ~~4006~~ 08, whose maximum weight shall be 2.3 grammes.

	ESCC Detail Specification No. 4006/014		PAGE 10 ISSUE 4
---	---	--	--------------------

4.3.3 Terminal Strength

The requirements for terminal strength testing are specified in Para. 9.13 of ESCC Generic Specification No. 4006. The test conditions shall be as follows:-

Applied Force: 4.45 (+1.1 -0)N.

Duration: 5 seconds.

4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the thermistors specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

4.4.1 Case

The housing shall be aluminium filled with a black epoxy encapsulant.

4.4.2 Lead Material and Finish

The lead material shall be in accordance with ESCC Detail Specification No. 3901/012 Variant ~~04~~ ⁰³ with the exception of Variants 06 and 08, which shall be in accordance with ESCC Detail Specification No. 3901/012 Variant 05. One lead shall carry an identification sleeve which shall carry all part marking specified in Para. 4.5.

4.5 MARKING

4.5.1 General

The marking of all components delivered to this specification shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and the following paragraphs. When the component is too small to accommodate all of the marking specified, as much as space permits shall be marked and the marking information, in full, shall accompany the component in its primary package.


The information to be marked and the order of precedence, shall be as follows:-

- (a) The ESA Symbol, for qualified components only.
- (b) The ESCC Component Number.
- (c) Traceability Information.

4.5.2 The ESCC Component Number


The ESCC Component Number shall be constituted and marked as follows:

Detail Specification Number _____
Type Variant (see Table 1(a)) _____
Testing Level (B or C, as applicable) _____



4.5.3 Traceability Information

Each component shall be marked in respect of traceability information in accordance with the requirements of ESCC Basic Specification No. 21700.

	ESCC Detail Specification No. 4006/014		PAGE 11 ISSUE 4
---	---	--	------------------------

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured at room temperature are scheduled in Table 2. Unless otherwise specified, the measurements shall be performed at $T_{amb}=+25\pm0.01\text{ }^{\circ}\text{C}$.

4.6.2 Electrical Measurements at High and Low Temperatures

The parameters to be measured at high and low temperatures are scheduled in Table 3. The temperature tolerance shall be $\pm0.01\text{ }^{\circ}\text{C}$.

4.6.3 Circuits for Electrical Measurements (Figure 4)

Not applicable.

4.7 BURN-IN TESTS

4.7.1 Parameter Drift Values

The parameter drift values applicable to burn-in are specified in Table 4 of this specification. Unless otherwise stated, measurements shall be performed at $T_{amb}=+25\pm0.01^{\circ}\text{C}$. The parameter drift values (Δ) applicable to the parameters scheduled, shall not be exceeded. In addition to these drift value requirements for a given parameter, the appropriate limit value specified in Table 2 shall not be exceeded.

4.7.2 Conditions for Burn-in

The requirements for burn-in are specified in Section 7 of ESCC Generic Specification No. 4006. The conditions for burn-in shall be as specified in Table 5 of this specification.

4.7.3 Electrical Circuits for Burn-in (Figure 5)

Not applicable.


	ESCC Detail Specification No. 4006/014	PAGE 12 ISSUE 4
---	---	--------------------

TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE - DC PARAMETERS

No.	CHARACTERISTICS	SYMBOL	ESCC 4006 TEST METHOD AND CONDITIONS	LIMITS		UNIT
				MIN.	MAX.	
1	Zero Power Resistance	R _Z	Para. 9.3.1.1	Note 1		Ω
2	Insulation Resistance	R_I R _I	Para. 9.3.1.4 T _{amb} =+25±1°C Note 2	100	-	MΩ
3	Thermal Time Constant Variants 01-05, 09, 10, 11 Variant 08 08	KH	Para. 9.3.1.3 T _{amb} =+25±1°C In Still Air Note 3	- -	40 25	sec.

NOTES

1. See Column 4 of Table 1(a) for resistance values.
2. If more than 20 devices have to be measured, the test shall be performed on a sample basis in accordance with Level II, Single Sampling Plan for Normal Inspection, AQL=1.0 of IEC 60410.
3. Test to be performed on 10 samples during Chart II only.

TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES

No.	CHARACTERISTICS	SYMBOL	ESCC 4006 TEST METHOD AND CONDITIONS	LIMITS		UNIT
				MIN.	MAX.	
1	Zero Power Resistance	R _Z	Para. 9.3.1.1 At each specified temperature, over operating range	Note 1		Ω

NOTES

1. See Column 4 of Table 1(a) for resistance values.

FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS

Not applicable.


	ESCC Detail Specification No. 4006/014	PAGE 13 ISSUE 4
---	---	------------------------

TABLE 4 - PARAMETER DRIFT VALUES

No.	CHARACTERISTICS	SYMBOL	METHODS AND TEST CONDITIONS	CHANGE LIMITS (Δ)	UNIT
1	Zero Power Resistance Change	$\frac{\Delta R_Z}{R_Z}$	As per Table 2	±0.2	%

TABLE 5 - CONDITIONS FOR BURN-IN AND OPERATING LIFE TESTS


No.	CHARACTERISTICS	SYMBOL	CONDITIONS	UNIT
1	Ambient Temperature	T_{amb}	Note 1 Note 2	°C
2	Power Dissipation	P_D	2	mW

NOTES

1. Maximum Operating Temperature specified in Column 4 of Table 1(a).
2. The Temperature Tolerance = (+0 -3) °C.

FIGURE 5 - ELECTRICAL CIRCUIT FOR BURN-IN AND OPERATING LIFE TESTS

Not applicable.

	ESCC Detail Specification No. 4006/014	PAGE 14 ISSUE 4
---	---	--------------------

4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESCC GENERIC SPECIFICATION No. 4006)

4.8.1 Measurements and Inspections on Completion of Environmental Tests

The parameters to be measured and inspections to be performed on completion of environmental tests are scheduled in Table 2. Unless otherwise stated, the measurements shall be performed at $T_{amb}=+25\pm0.01$ °C.

4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests

The parameters to be measured and inspections to be performed at intermediate points during endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb}=+25\pm0.01$ °C.

4.8.3 Measurements and Inspections on Completion of Endurance Tests


The parameters to be measured and inspections to be performed on completion of endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb}=+25\pm0.01$ °C.

4.8.4 Conditions for Operating Life Tests (Part of Endurance Testing)

The requirements for operating life testing are specified in Section 9 of ESCC Generic Specification No. 4006. The conditions for operating life testing shall be as specified in Table 5 for the burn-in test.

4.8.5 Electrical Circuits for Operating Life Tests

Not applicable.

	ESCC Detail Specification No. 4006/014	PAGE 15 ISSUE 4
---	---	--------------------

**TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL TESTS
AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING**

No.	ESCC GENERIC SPEC. No. 4006		MEASUREMENTS AND INSPECTIONS		SYMBOL	LIMITS		UNIT
	ENVIRONMENTAL AND ENDURANCE TESTS (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN.	MAX.	
01	Thermal Shock	Para. 9.2 (2)	-	-	-	-	-	-
02	Thermal Time Constant	Para. 9.3.1.3 In Still Air	Initial Measurements Zero Power Resistance Final Measurements Thermal Time Constant	Para. 9.3.1.3(c) Para. 9.3.1.3(f)	R _Z KH	Record Values Table 2 Item 3		Ω
03	External Visual Inspection	Para. 9.5	ESCC 20500	-	-	-	-	-
04	Shock (Specified Pulse)	Para. 9.7	Initial Measurements Zero Power Resistance During Shock Intermittent Contact After Shock Zero Power Resistance Change Visual Examination	Table 2 Item 1 No Open or Short Circuiting Table 2 Item 1 No evidence of damage	R _Z - ΔR _Z /R _Z -	Table 2 Item 1 - -2%	- +2%	- %
05	Vibration	Para. 9.8	Initial Measurements Zero Power Resistance During Vibration Intermittent Contact After Vibration Zero Power Resistance Change Visual Examination	Table 2 Item 1 No Open or Short Circuiting Table 2 Item 1 No evidence of damage	R _Z - ΔR _Z /R _Z -	Table 2 Item 1 - -2%	- +2%	- %
06	Immersion	Para. 9.9	Visual Examination	No evidence of damage	-	-	-	-
07	Dielectric Withstanding Voltage	Para. 9.10	During Test Visual Examination After Test Visual Examination	No evidence of breakdown or flashover No evidence of damage, arcing or breakdown	- -	- -	- -	- -
08	Resistance to Soldering Heat	Para. 9.11	After Test Zero Power Resistance Visual Examination	After a recovery period of 24±4 hrs Table 2 Item 1 No evidence of damage	R _Z -	Table 2 Item 1 -	- -	- -
09	Moisture Resistance	Para. 9.12	Initial Measurements Zero Power Resistance Final Measurements Zero Power Resistance Change Insulation Resistance	Not less than 1.5 hrs after removal from drying oven Table 2 Item 1 Within 24 hrs of removal from 1.5 to 3.5 hr conditioning Table 2 Item 1 Table 2 Item 2	R _Z ΔR _Z /R _Z R ₂	Table 2 Item 1 -2%	- +2%	- % MΩ

NOTES

- The tests in this Table refer to either Chart IV or V and shall be used as applicable.
- Thermal Shock Test Method and conditions shall use the deviation of this specification as applicable.



	ESCC Detail Specification No. 4006/014	PAGE 16 ISSUE 4
---	---	--------------------

TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING (CONT'D)

No.	ESCC GENERIC SPEC. No. 4006		MEASUREMENTS AND INSPECTIONS		SYMBOL	LIMITS		UNIT
	ENVIRONMENTAL AND ENDURANCE TESTS (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN.	MAX.	
10	Terminal Strength	Para. 9.13	Initial Measurements Zero Power Resistance Final Measurements Zero Power Resistance Change Visual Examination	Table 2 Item 1 Table 2 Item 1 No evidence of damage	R_Z $\Delta R_Z/R_Z$ -	Table 2 Item 1 -2.0 -	+2.0 -	% -
11	Operating Life	Para. 9.14	Initial Measurements Zero Power Resistance Intermediate Measurements Zero Power Resistance Change Insulation Resistance Final Measurements Zero Power Resistance Change Insulation Resistance	Table 2 Item 1 Table 2 Item 1 Table 2 Item 2 Table 2 Item 1 Table 2 Item 2	R_Z $\Delta R_Z/R_Z$ R_I $\Delta R_Z/R_Z$ R_I	Table 2 Item 1 -1.0 100 -1.0 100	+1.0 - +1.0 -	% MΩ % MΩ
12	Low Temperature Storage	Para. 9.16	Initial Measurements Zero Power Resistance Final Measurements Zero Power Resistance Change Visual Examination	Table 2 Item 1 Table 2 Item 1 No evidence of damage	R_Z $\Delta R_Z/R_Z$ -	Table 2 Item 1 -2.0 -	+2.0 -	% -
13	Solderability	Para. 9.18	-	-	-	-	-	-
14	Permanence of Marking	Para. 9.20	ESCC 24800	-	-	-	-	-

NOTES

1. The tests in this Table refer to either Chart IV or V and shall be used as applicable.

	ESCC Detail Specification No. 4006/014	PAGE 17 ISSUE 4
---	---	--------------------

APPENDIX 'A'

Page 1 of 1

AGREED DEVIATIONS FOR BETATHERM (IRELAND)

ITEMS AFFECTED	DESCRIPTION OF DEVIATIONS
Para. 4.2.2 Deviations from Final Production Tests Variant 08 to Testing Level B only	<u>Variants 08, 09, 10, 11</u> Para. 9.2 Thermal Shock For Variant 08 to Testing Level B, Parameter Drift Value Measurements in accordance with Para. 9.3.2 (and Para. 4.7.1 of the Detail Specification) shall be performed immediately before and after Thermal Shock. <u>Variants 08, 09, 10, 11</u>
Para. 4.2.3 Deviations from Burn-in and Electrical Measurements Variant 08 to Testing Level B only	<u>Variants 08, 09, 10, 11</u> Para. 7.4/7.4.1 Check for Lot Failure / Lot Failure During 100% Testing For Variant 08 to Testing Level B, all Parameter Drift or Limit Failures during Parameter Drift Value Measurements performed after Thermal Shock during Final Production Tests shall be included in the Check for Lot Failure Percent Defective Allowable calculation. This Percent Defective shall be referenced against the quantity of components submitted to Burn-in and Electrical Measurements plus any Parameter Drift or Limit failures during Parameter Drift Value Measurements performed after Thermal Shock. <u>Variants 08, 09, 10, 11</u>
Para. 4.2.5 Deviations from Lot Acceptance Tests Variant 08 only	<u>Variants 08, 09, 10, 11</u> Para. 9.14.2 Operating Life during Lot Acceptance Testing For Variant 08 , amend (f), Data Points, to be as follows: Measurements at intermediate and end points in accordance with Table 6 of the Detail Specification at 0, 250, 500, 750 and 1000 \pm 48 hours.
	Para. 9.6 Radiographic Inspection Inspection shall be with a single view such that the component's mounting plane is seated on the X-ray film holder.

(Dcr333)