



DOCUMENT CHANGE REQUEST

DCR number 396

Changes required for: N/A

Originator: Samuel SAVIN

Date: 2008/02/28

Date sent: 2008/02/28

Organisation: CNES

Status: IMPLEMENTED

Title: Diodes, Power Rectifier, High Efficiency Fast Recovery , based on Type BYV 54-200

Number: 5103/031

Issue: 3

Other documents affected:

Page:

Paragraph 1.4.2, page 5
Paragraph 1.5, page 6
Paragraph 1.8, page 7
Paragraph 2.4.1, page 9
Paragraph 2.4.2, page 9
Paragraph 2.4.3, page 9
Paragraph 2.5, page 10
Paragraph 2.6, page 10

Paragraph:

Paragraph 1.4.2, page 5
Paragraph 1.5, page 6
Paragraph 1.8, page 7
Paragraph 2.4.1, page 9
Paragraph 2.4.2, page 9
Paragraph 2.4.3, page 9
Paragraph 2.5, page 10
Paragraph 2.6, page 10

Original wording:

Proposed wording:

See attached document

Justification:

New variant 02 (hot solder dip) introduction with TO254 package for European customers need.
New variant 03 (gold finish) and 04 (hot solder dip) introduction with TO254AA low ohmic package for European customers need.

Paragraph 1.5 MAXIMUM RATINGS correction error of note 3 for variant 01 and 02 (see explanation on attached document) and new derating added for variant 03 and 04 in the note 3.



DOCUMENT CHANGE REQUEST

DCR number 396

Changes required for: N/A

Originator: Samuel SAVIN

Date: 2008/02/28

Date sent: 2008/02/28

Organisation: CNES

Status: IMPLEMENTED

Attachments:

DCR396markup.pdf, DCR396att.pdf, null

Modifications:

DCR details are replaced by the following as discussed and agreed with the Manufacturer ST:

Pages affected:

5, 6, 7, 9, 10, 11

Paras affected:

1.4.2, 1.5, 1.6, 1.7, 1.8, 2.4.1, 2.4.2, 2.4.3, 2.5, 2.6, 2.7, 2.8

Proposed Wording of Change

See attached hand mark-up for full details.

Summary of changes:

- Addition of new variants 02 to 05, new lead material & finishes and new low-ohmic package.
- Io derating in Para 1.5, Maximum Ratings, amended for variant 01 (and defined for all new variants).
- Forward Voltage limits defined for the new variants in all tables.
- Forward Voltage limit in Para 2.6, Intermediate and End-Point Electrical Measurements, amended for variant 01 and Vf2 is added with applicable limits.

Justification

- Introduction of new variants 02 to 05 for European customer.
- Io derating for variant 01 (& 02, 03) is amended in order to correct a previous calculation error:
$$\text{Max power derating} = T_j - (I_o \times V_f \times R_{th(j-c)}) = 150 - (40 \times 1.5 \times 1) = 90^\circ\text{C (not } 110^\circ\text{C)}$$
- Forward Voltage in Para 2.6 for variant 01 (& 02, 03) is amended to correct a previous typographic error.

Approval signature:

Date signed:

2008-02-28

1.4.2 Component Type Variants

Variant Number	Based on Type	Case	Description	Lead Material and Finish	Weight Max g
01	BYV54-200	TO254	Single diode	H9	10
02	BYV54-200	TO254	Single diode	H4	10
03	BYV54-200	TO254AA	Single diode	S9	10
04	BYV54-200	TO254AA	Single diode	S4	10

Justification :

Variant 02: new variant introduction with TO254 package for European customer

Variant 03: new variant introduction with TO254AA low ohmic package for European customer

Variant 04: new variant introduction with TO254AA low ohmic package for European customer

1.5 MAXIMUM RATINGS

NOTES

3. At $T_{case} > +90^{\circ}C$, derate linearly to 0A at $+150^{\circ}C$ for variant 01 and variant 02.

At $T_{case} > +99^{\circ}C$, derate linearly to 0A at $+150^{\circ}C$ for variant 03 and 04.

Justification :

For variant 01 and 02

Calcul of the derating is wrong:

For max rating 40A we have used f_{max} at 30A instead of 40A with I_0 max at 30A.

The right calculation is:

for I_0 max 40A, V_f max = 1.5V (issued from ST data characterization).

Formula applied:

Max power derating = $T_j - (I_o \times V_f \times R_{th(j-c)}) = 150 - (40 \times 1.5 \times 1) = 90^{\circ}C$

The new limit for the derating is $90^{\circ}C$


For variant 03 and 04

Max power derating = $T_j - (I_o \times V_f \times R_{th(j-c)}) = 150 - (40 \times 1.26 \times 1) = 99^{\circ}C$

1.8 FUNCTIONAL DIAGRAM


Variant 01 and variant 02

Terminal 1 : Cathode
Terminal 2 : N.C.
Terminal 3 : Anode



Variant 03 and 04

Terminal 1 : Cathode
Terminal 2 : Anode
Terminal 3 : Anode



Justification :

Variant 02: new variant introduction with TO254 package for European customer

Variant 03: new variant introduction with TO254AA low ohmic package for European customer

Variant 04: new variant introduction with TO254AA low ohmic package for European customer

2.4.1 ROOM TEMPERATURE ELECTRICAL MEASUREMENTS

CHARACTERISTICS	SYMBOL	MIL-STD-750 TEST METHOD	TEST CONDITIONS Note 5	LIMITS		UNIT
				MIN.	MAX.	
Forward Voltage	V _{F1}	4011	Pulse Method I _F = 20 A, Note 1 Variant 01 and 02 Variant 03 and 04	-	1.1 0.95	V
	V _{F2}	4011	Pulse Method I _F = 30 A, Note 1 Variant 01 and 02 Variant 03 and 04	-	1.3 1.1	V

Justification :

Variant 02: new variant introduction with TO254 package for European customer

Variant 03: new variant introduction with TO254AA low ohmic package for European customer

Variant 04: new variant introduction with TO254AA low ohmic package for European customer

2.4.2 HIGH AND LOW TEMPERATURES ELECTRICAL MEASUREMENTS

CHARACTERISTICS	SYMBOL	MIL-STD-750 TEST METHOD	TEST CONDITIONS Note 4 and 5	LIMITS		UNIT
				MIN.	MAX.	
Forward Voltage	V _{F1}	4011	T _{case} =+125(+0 -5)°C Pulse Method I _F = 20 A, Note 1 Variant 01 and 02 Variant 03 and 04	-	1 0.85	V
			T _{case} =-55(+5 -0)°C Pulse Method I _F = 20 A, Note 1 Variant 01 and 02 Variant 03 and 04		1.3 1.15	V
	V _{F2}	4011	T _{case} =+125(+0 -5)°C Pulse Method I _F = 30 A, Note 1 Variant 01 and 02 Variant 03 and 04	-	1.1 1	V

Justification :

Variant 02: new variant introduction with TO254 package for European customer

Variant 03: new variant introduction with TO254AA low ohmic package for European customer

Variant 04: new variant introduction with TO254AA low ohmic package for European customer

2.4.3 Notes to Electrical Measurements Tables

note 5 added: For Variant 03 and 04 measurement done when pin 2 and 3 tied together.

Justification :

Variant 02: new variant introduction with TO254 package for European customer

Variant 03: new variant introduction with TO254AA low ohmic package for European customer

Variant 04: new variant introduction with TO254AA low ohmic package for European customer

2.5 PARAMETER DRIFT VALUES

note 2 added: For Variant 03 and 04 measurement done when pin 2 and 3 tied together.

Justification :

Variant 03: new variant introduction with TO254AA low ohmic package for European customer

Variant 04: new variant introduction with TO254AA low ohmic package for European customer

2.6 INTERMEDIATE AND END-POINTS ELECTRICAL MEASUREMENTS

CHARACTERISTICS	SYMBOL	LIMITS		UNITS
		MIN.	MAX.	
Forward Voltage 1 Variant 01 and 02 Variant 03 and 04	V _{F1}	-	1.1 0.95	V

note 1 added: For Variant 03 and 04 measurement done when pin 2 and 3 tied together.

Justification :

Variant 02: new variant introduction with TO254 package for European customer

Variant 03: new variant introduction with TO254AA low ohmic package for European customer

Variant 04: new variant introduction with TO254AA low ohmic package for European customer



Pages 1 to 12

**DIODES, POWER RECTIFIER, HIGH EFFICIENCY, FAST
RECOVERY**

BASED ON TYPE BYV54-200

ESCC Detail Specification No. 5103/031

*

4	July 2008
Issue 3	April 2007



Document Custodian: European Space Agency - see <https://escies.org>



LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © ²⁰⁰⁸~~2007~~. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.



DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
287	Specification up issued to incorporate editorial and technical changes per DCR.

396

**TABLE OF CONTENTS**

<u>1.</u>	<u>GENERAL</u>	<u>5</u>
1.1	Scope	5
1.2	Applicable Documents	5
1.3	Terms, Definitions, Abbreviations, Symbols and Units	5
1.4	The ESCC Component Number and Component Type Variants	5
1.4.1	The ESCC Component Number	5
1.4.2	Component Type Variants	5
1.5	Maximum Ratings	5
1.6	Handling Precautions	6
1.7	Physical Dimensions and Terminal Identification	6
1.8	Functional Diagram	7
1.9	Materials and Finishes	7
<u>2.</u>	<u>REQUIREMENTS</u>	<u>8</u>
2.1	General	8
2.1.1	Deviations from the Generic Specification	8
2.1.1.1	Deviations from Qualification and Periodic Tests - Chart F4	8
2.2	Marking	8
2.3	Terminal Strength	8
2.4	Electrical Measurements at Room, High and Low Temperatures	8
2.4.1	Room Temperature Electrical Measurements	8
2.4.2	High and Low Temperatures Electrical Measurements	9
2.4.3	Notes to Electrical Measurement Tables	9
2.5	Parameter Drift Values	10
2.6	Intermediate and End-Point Electrical Measurements	10
2.7	High Temperature Reverse Bias Burn-in Conditions	10
2.8	Power Burn-in Conditions	11
2.9	Operating Life Conditions	11
APPENDIX 'A'		12

1. GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics and test and inspection data for the component type variants and/or the range of components specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

1.2 APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. 5000
- (b) MIL-STD-750, Test Methods and Procedures for Semiconductor Devices

1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. 21300 shall apply.

1.4 THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS

1.4.1 The ESCC Component Number

The ESCC Component Number shall be constituted as follows:

Example: 510303101

- Detail Specification Reference: 5103031
- Component Type Variant Number: 01 (as required)

1.4.2 Component Type Variants

The component type variants applicable to this specification are as follows:

Variant Number	Based on Type	Case	Description	Lead Material and Finish	Weight max g
01	BYV54-200	TO-254	Single diode	H9	10

The lead material and finish shall be in accordance with the requirements of ESCC Basic Specification No. 23500.

1.5 MAXIMUM RATINGS

The maximum ratings shall not be exceeded at any time during use or storage.

Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the ESCC Generic Specification.

Characteristics	Symbols	Maximum Ratings	Unit	Remarks
Forward Surge Current	I_{FSM}	400	A	Note 1
Repetitive Peak Reverse Voltage	V_{RRM}	200	V	Note 2

*
(Add variants
02 to 05
see attached)

Thacker, Steve

*

Para 1.4.2 Component Type Variants

Variant Number	Based on Type	Case	Description	Lead Material and Finish	Weight Max g
01	BYV54-200	TO-254	Single diode	H9	10
02	BYV54-200	TO-254	Single diode	H14	10
03	BYV54-200	TO-254	Single diode	H4	10
04	BYV54-200	TO-254AA	Single diode-Low Ohmic Package	S14	10
05	BYV54-200	TO-254AA	Single diode-Low Ohmic Package	S4	10

Characteristics	Symbols	Maximum Ratings	Unit	Remarks
Average Output Rectified Current	I_O	40	A	50% Duty Cycle Note 3
RMS Forward Current	$I_{F(rms)}$	60	A	
Operating Temperature Range (Case Temperature)	T_{op}	-55 to +150	°C	Note 4
Junction Temperature	T_j	+150	°C	
Storage Temperature Range	T_{stg}	-55 to +150	°C	Note 4
Soldering Temperature	T_{sol}	+260	°C	Note 5
Thermal Resistance, Junction to Case	$R_{th(j-c)}$	1	°C/W	Note 6

NOTES:

- Sinusoidal pulse of 10ms duration.
- Pulsed, duration 5ms, $f = 50\text{Hz}$.
- At $T_{case} > +110^\circ\text{C}$, derate linearly to 0A at $+150^\circ\text{C}$. for Variants 01, 02, 03
At $T_{case} > +99^\circ\text{C}$, derate linearly to 0A at $+150^\circ\text{C}$ for Variants 04, 05
- For Variants with hot solder dip lead finish, all testing performed at $T_{amb} > +125^\circ\text{C}$ shall be carried out in a 100% inert atmosphere.
- Duration 10 seconds maximum at a distance of not less than 1.5mm from the device body and the same lead shall not be resoldered until 3 minutes have elapsed.
- Package mounted on an infinite heatsink.

and TO-254AA packages

1.6


HANDLING PRECAUTIONS

The TO-254 package contains Beryllium Oxide (BeO) and therefore must not be ground, machined, sandblasted or subjected to any mechanical operation which will produce dust. The case must not be subjected to any chemical process (e.g. etching) which will produce fumes.

1.7

PHYSICAL DIMENSIONS AND TERMINAL IDENTIFICATION

Metal Flange Mount Package (TO-254) - 3 lead

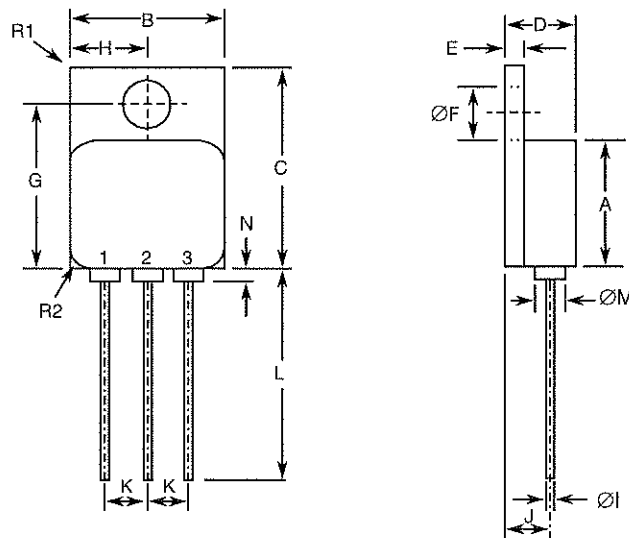

Symbols	Dimensions mm		Notes
	Min	Max	
A	13.59	13.84	
B	13.59	13.84	
C	20.07	20.32	
D	6.3	6.7	
E	1	1.35	
ØF	3.5	3.9	
G	16.89	17.4	
H	6.86 BSC		
ØI	0.89	1.14	2
J	3.81 BSC		
K	3.81 BSC		
L	12.95	14.5	
ØM	3.05 Typical		2
N	-	0.71	2
R1	-	1	3
R2	1.65 Typical		4

NOTES:


1. The terminal identification is specified by the components geometry. See Functional Diagram for the terminal connections.
2. 3 places.
3. Radius of heatsink flange corner, 4 places.
4. Radius of body corner, 4 places.

1.8

FUNCTIONAL DIAGRAM

Variants 01, 02, 03.

Terminal 1: Cathode
Terminal 2: Not connected
Terminal 3: Anode



NOTES:

1. The case is not connected to any lead.

1.9

MATERIALS AND FINISHES

Materials and finishes shall be as follows:

a) Case

The case shall be hermetically sealed and have a metal body. The leads pass through ceramic eyelets brazed into the frame and the lid shall be welded.


** Add new figure - see attached)*

Para 1.8

*

Terminal 1: Cathode
Terminal 2: Anode
Terminal 3: Anode

Variants 04, 05

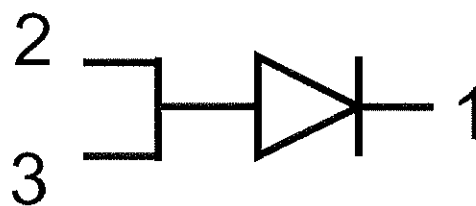

- b) Leads
As specified in Component Type Variants.

2. REQUIREMENTS

2.1 GENERAL

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component's reliability, are listed in the appendices attached to this specification.

2.1.1 Deviations from the Generic Specification

2.1.1.1 *Deviations from Qualification and Periodic Tests - Chart F4*

- (a) Constant Acceleration is not applicable.

2.2 MARKING

The marking shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and as follows.

The information to be marked on the component shall be:

- (a) The ESCC qualified components symbol (for ESCC qualified components only).
- (b) The ESCC Component Number.
- (c) Traceability information.
- (d) Warning sign for Beryllium Oxide.

2.3 TERMINAL STRENGTH

The test conditions for Terminal Strength, tested as specified in the ESCC Generic Specification, shall be as follows:

Test Condition: A, tension, with an applied force of 10N for a duration of 10s.

2.4 ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES

Electrical measurements shall be performed at room, high and low temperatures.

Consolidated notes are given after the Tables.

2.4.1 Room Temperature Electrical Measurements

The measurements shall be performed at $T_{amb}=+22 \pm 3^{\circ}\text{C}$.

Characteristics	Symbols	MIL-STD-750 Test Method	Test Conditions (Note 1)	Limits		Units
				Min	Max	
Reverse Current	I_R	4016	DC Method $V_R = 200V$	-	50	μA
Forward Voltage	V_{F1}	4011	Pulse Method $I_F = 20A$, Note 12	-	1.1 0.95	V
	V_{F2}	4011	Pulse Method $I_F = 30A$, Note 12	-	1.3 1.1	V
Breakdown Voltage	$V_{(BR)}$	4021	$I_R = 100\mu A$	200	-	V
Capacitance	C	4001	$V_R = 10V$ $f = 1MHz$	-	400	pF
Reverse Recovery Time	t_{rr}	4031	Test Condition A $I_F = 1A$ $V_R = 30V$ $di_F/dt = -50A/\mu s$	-	60	ns
Thermal Impedance, Junction to Case	$Z_{th(j-c)}$	3101	$I_H = 15V$ to 40A $t_H = 50ms$ $I_M = 50mA$ $t_{md} = 100\mu s$ Note 23	(Calculate ΔV_F , see Note 3) 4		$^{\circ}C/W$

2.4.2 High and Low Temperatures Electrical Measurements

Characteristics	Symbols	MIL-STD-750 Test Method	Test Conditions (Notes 1, 5)	Limits		Units
				Min	Max	
Reverse Current	I_R	4016	$T_{case} = +125(+0 -5)^{\circ}C$ DC Method $V_R = 200V$	-	40	mA
Forward Voltage	V_{F1}	4011	$T_{case} = +125(+0 -5)^{\circ}C$ Pulse Method $I_F = 20A$, Note 12	-	1 0.85	V
			$T_{case} = -55(+5 -0)^{\circ}C$ Pulse Method $I_F = 20A$, Note 12	-	1.3 1.15	V
	V_{F2}	4011	$T_{case} = +125(+0 -5)^{\circ}C$ Pulse Method $I_F = 30A$, Note 12	-	1.1 1	V

2.4.3 Notes to Electrical Measurement Tables

2. Pulsed Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.
3. Performed only during Screening Tests Parameter Drift Values (Initial Measurements), go-no-go.
4. The limits for ΔV_F shall be defined by the manufacturer on every lot in accordance with MIL-STD-750 Method 3101 and shall guarantee the $R_{th(j-c)}$ limits specified in Maximum Ratings.
5. Read and record measurements shall be performed on a sample of 5 components with 0 failures
1. For Variants 04, 05 testing shall be performed with both anode terminals 2 and 3 tied together

Thacker, Steve

Para 2.4.1 Room Temperature Electrical Measurements

Characteristics	Symbols	MIL-STD-750 Test Method	Test Conditions (Note 1)	Limits		Units
				Min	Max	
Forward Voltage 1	V _{F1}	4011	Pulse Method I _F = 20 A, Note 2 Variants 01, 02, 03 Variants 04, 05	-	1.1 0.95	V
Forward Voltage 2	V _{F2}	4011	Pulse Method I _F = 30 A, Note 2 Variant 01 to 03 Variant 04 and 05	-	1.3 1.1	V

Para 2.4.2 High and Low Temperature Electrical Measurements

Characteristics	Symbols	MIL-STD-750 Test Method	Test Conditions (Notes 1, 5)	Limits		Units
				Min	Max	
Forward Voltage 1	V _{F1}	4011	T _{case} = +125(+0 -5)°C Pulse Method I _F = 20 A, Note 2 Variants 01, 02, 03 Variants 04, 05	-	1 0.85	V
			T _{case} = -55(+5 -0)°C Pulse Method I _F = 20 A, Note 2 Variants 01, 02, 03 Variants 04, 05		1.3 1.15	V
Forward Voltage 2	V _{F2}	4011	T _{case} = +125(+0 -5)°C Pulse Method I _F = 30 A, Note 2 Variants 01, 02, 03 Variants 04, 05	-	1.1 1	V

allowed. Alternatively a 100% inspection may be performed.

2.5

PARAMETER DRIFT VALUES

Unless otherwise specified, the measurements shall be performed at $T_{amb}=+22 \pm 3^{\circ}\text{C}$.

The test methods and test conditions shall be as per the corresponding test defined in Room Temperature Electrical Measurements.

The drift values (Δ) shall not be exceeded for each characteristic specified. The corresponding absolute limit values for each characteristic shall not be exceeded.

Characteristics	Symbols	Limits			Units
		Drift Value Δ	Absolute		
			Min	Max	
Reverse Current	I_R	± 6 or (1) $\pm 100\%$	-	50	μA
Forward Voltage 1	V_{F1}	± 0.07	-	1.1	V

NOTES:

1. Whichever is the greater referred to the initial value.

2.6

INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at $T_{amb}=+22 \pm 3^{\circ}\text{C}$.

The test methods and test conditions shall be as per the corresponding test defined in Room Temperature Electrical Measurements . The limit values for each characteristic shall not be exceeded.

Characteristics	Symbols	Limits		Units
		Min	Max	
Reverse Current	I_R	-	50	μA
Forward Voltage 1	V_{F1}	-	1.1	V
	V_{F2}	*	*	*

2.7

HIGH TEMPERATURE REVERSE BIAS BURN-IN CONDITIONS

Characteristics	Symbols	Limits	Units
Ambient Temperature	T_{amb}	+150 (+0 -5)	$^{\circ}\text{C}$
Reverse Voltage	V_R	160	V
Duration	t	≥ 48	hours

NOTES:

1. For Variants 04, 05 testing shall be performed with both anode terminals 2 and 3 tied together.

Thacker, Steve

Para 2.5 PARAMETER DRIFT VALUES

Characteristics	Symbols	Limits			Units
		Drift Value Δ	Absolute		
			Min	Max	
Forward Voltage 1 Variants 01, 02, 03 Variants 04, 05	V _{F1}	± 0.07	-	1.1 0.95	V

Para 2.6 INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Characteristics	Symbols	Limits		Units
		Min	Max	
Forward Voltage 1 Variants 01, 02, 03 Variants 04, 05	V _{F1}	-	1.1 0.95	V
Forward Voltage 2 Variants 01, 02, 03 Variants 04, 05	V _{F2}	-	1.3 1.1	V

2.8 POWER BURN-IN CONDITIONS

Characteristics	Symbols	Test Conditions	Units
Case Temperature	T_{case}	+125 \pm 15, Note 1	$^{\circ}\text{C}$
Junction Temperature	T_j	+150 (+0 -5)	$^{\circ}\text{C}$
Average Output Rectified Current	I_O	≥ 10 , Note 1	A

NOTES:

1. The case temperature and/or output current may be adjusted, within their given limit ranges, to attain the specified junction temperature.
2. For Variants 04, 05 testing shall be performed with both anode terminals 2 and 3 tied together.

2.9 OPERATING LIFE CONDITIONS

The conditions shall be as specified for Power Burn-in.



APPENDIX 'A'

AGREED DEVIATIONS FOR STMICROELECTRONICS (F)

ITEMS AFFECTED	DESCRIPTION OF DEVIATIONS
Deviations from Production Control- Chart F2	Special In-process Control Internal Visual Inspection. Wedge bonds equal to 1.1 wire diameters are acceptable for bonding with a V-Groove tool.