



Pages 1 to 22

RELAYS, ELECTROMAGNETIC, NON-LATCHING

28Vdc, 10A, 2PDT

ESCC Detail Specification No. 3601/001

ISSUE 2

September 2004



Document Custodian: European Space Agency - see <https://escies.org>

| | | | |
|--|---|--|-------------------|
|  | ESCC Detail Specification No. 3601/001 | | PAGE i ISSUE 2 |
|--|---|--|-------------------|

LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2004. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole in any medium without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.



DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

| DCR No. | CHANGE DESCRIPTION |
|---------|--|
| 130 | Specification upissued to incorporate technical and editorial changes per DCR. |



TABLE OF CONTENTS

| | <u>Page</u> |
|---|-------------|
| 1. <u>GENERAL</u> | 5 |
| 1.1 Scope | 5 |
| 1.2 Component Type Variants | 5 |
| 1.3 Maximum Ratings | 5 |
| 1.4 Parameter Derating Information | 5 |
| 1.5 Physical Dimensions | 5 |
| 1.6 Circuit Schematic | 5 |
| 2. <u>APPLICABLE DOCUMENTS</u> | 5 |
| 3. <u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u> | 5 |
| 4. <u>REQUIREMENTS</u> | 14 |
| 4.1 General | 14 |
| 4.2 Deviations from Generic Specification | 14 |
| 4.2.1 Deviations from Special In-process Controls | 14 |
| 4.2.2 Deviations from Final Production Tests | 14 |
| 4.2.3 Deviations from Screening Tests | 14 |
| 4.2.4 Deviations from Qualification Tests | 14 |
| 4.2.5 Deviations from Lot Acceptance Tests | 14 |
| 4.3 Mechanical Requirements | 15 |
| 4.3.1 Dimension Check | 15 |
| 4.3.2 Weight | 15 |
| 4.3.3 Terminal Strength | 15 |
| 4.4 Materials and Finishes | 15 |
| 4.4.1 Case | 15 |
| 4.4.2 Terminal Material and Finish | 15 |
| 4.5 Marking | 15 |
| 4.5.1 General | 15 |
| 4.5.2 Terminal Identification | 15 |
| 4.5.3 The ESCC Component Number | 16 |
| 4.5.4 Electrical Characteristics | 16 |
| 4.5.5 Traceability Information | 16 |
| 4.6 Electrical Measurements | 16 |
| 4.6.1 Electrical Measurements at Room Temperature | 16 |
| 4.6.2 Electrical Measurements at High and Low Temperatures | 16 |
| 4.6.3 Circuits for Electrical Measurements | 16 |
| 4.7 Screening | 16 |
| 4.7.1 Miss Test | 16 |
| 4.7.2 Conditions for Screening | 16 |
| 4.7.3 Electrical Circuits for Screening | 16 |
| 4.8 Environmental and Endurance Tests | 20 |
| 4.8.1 Measurements and Inspections on Completion of Environmental Tests | 20 |
| 4.8.2 Measurements and Inspections during Endurance Tests | 20 |
| 4.8.3 Measurements and Inspections on Completion of Endurance Tests | 20 |
| 4.8.4 Conditions for Operating Life Tests | 20 |
| 4.8.5 Electrical Circuits for Operating Life Tests | 20 |



Page

TABLES

| | | |
|------|---|----|
| 1(a) | Type Variants | 6 |
| 1(b) | Maximum Ratings | 6 |
| 2 | Electrical Measurements at Room Temperature | 17 |
| 3 | Electrical Measurements at High and Low Temperatures | 18 |
| 4 | Measurements during Screening | 19 |
| 5(a) | Conditions for Screening | 19 |
| 5(b) | Conditions for Operating Life Test | 19 |
| 6 | Measurements and Inspections on Completion of Environmental Tests and at Intermediate Points and on Completion of Endurance Testing | 21 |

FIGURES

| | | |
|------|--|-----|
| 1 | Not applicable | N/A |
| 2 | Physical Dimensions | 7 |
| 3 | Circuit Schematic | 13 |
| 4 | Circuits for Electrical Measurements | N/A |
| 5(a) | Electrical Circuits for Screening | N/A |
| 5(b) | Electrical Circuits for Operating Life Tests | N/A |

APPENDICES (Applicable to specific Manufacturers only)

None.



1. **GENERAL**

1.1 **SCOPE**

This specification details the ratings, physical and electrical characteristics, test and inspection data for a Relay, Electromagnetic, Non-Latching, 28Vdc, 10A, 2PDT. It shall be read in conjunction with ESCC Generic Specification No. 3601, the requirements of which are supplemented herein.

1.2 **COMPONENT TYPE VARIANTS**

Variants of the basic type relays specified herein, which are also covered by this specification, are given in Table 1(a).

1.3 **MAXIMUM RATINGS**

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the relays specified herein, are as scheduled in Table 1(b).

1.4 **PARAMETER DERATING INFORMATION (FIGURE 1)**

Not applicable.

1.5 **PHYSICAL DIMENSIONS**

The physical dimensions of the relays specified herein are shown in Figure 2.

1.6 **CIRCUIT SCHEMATIC**

The circuit schematic, showing lead identification etc. for the relays specified herein, is shown in Figure 3.

2. **APPLICABLE DOCUMENTS**

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESCC Generic Specification No. 3601 for Relays, Electromagnetic, Non-Latching.
- (b) MIL-STD-202 Test Methods for Electronic and Electrical Component Parts.

3. **TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS**

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. 21300 shall apply.

TABLE 1(a) - TYPE VARIANTS

| VARIANT | DESCRIPTION | FIGURE |
|---------|--|--------|
| 01 | Relay with Plug-in Terminals and Plain Case | 2(a) |
| 02 | Relay with Solderable Hook-end Terminals and Plain Case | 2(b) |
| 03 | Relay with Plug-in Terminals and Horizontal Flange Mount | 2(c) |
| 04 | Relay with Solderable Hook-end Terminals and Horizontal Flange Mount | 2(d) |
| 05 | Relay with Plug-in Terminals and Vertical Flange Mount | 2(e) |
| 06 | Relay with Solderable Hook-end Terminals and Vertical Flange Mount | 2(f) |

TABLE 1(b) - MAXIMUM RATINGS


| No. | CHARACTERISTICS | SYMBOL | MAXIMUM RATING | UNIT | REMARKS |
|-----|--|-------------|--|-------------|--------------------------------|
| 1 | Rated Coil Voltage:- 28V 12V 6V | V_{CR} | 28 12 6.0 | Vdc | |
| 2 | Coil Voltage Range:- 28V 12V 6V | V_{CR} | 26.5 to 32 11 to 14.8 5.5 to 7.3 | Vdc | |
| 3 | Rated Contact Current Resistive Load | I_{CR} | 10 | A | 28Vdc resistive Note 1 |
| 4 | Overload Current Resistive | I_{overl} | 40 | A | 28Vdc resistive See Table 6 |
| 5 | Rated Contact Current Inductive Load | I_{CL} | 8.0 | A | 28Vdc inductive Note 1 |
| 6 | Contact Resistance | R_C | 15 | $m\Omega$ | |
| 7 | High Temperature | T_{amb} | + 125 | $^{\circ}C$ | |
| 8 | Low Temperature | T_{amb} | - 65 | $^{\circ}C$ | |
| 9 | Soldering Temperature | T_{sol} | + 260 | $^{\circ}C$ | Note 2 |

NOTES

1. Relays should not be used in change-over mode where the potential difference between stationary contacts is greater than 10V and the switched current is greater than 0.1A.
2. Duration 10 seconds maximum at a distance of not less than 3.0mm from the device body and the same terminal shall not be resoldered until 3 minutes have elapsed.

FIGURE 2 - PHYSICAL DIMENSIONS


FIGURE 2(a) - VARIANT 01, RELAY WITH PLUG-IN TERMINALS AND PLAIN CASE

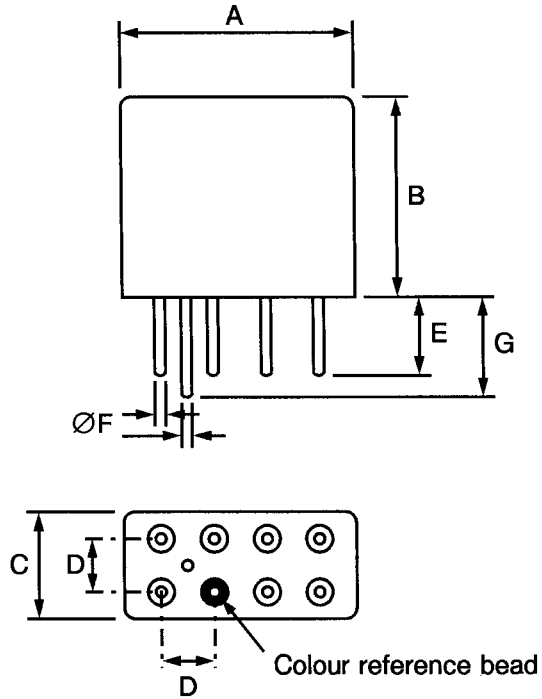

| SYMBOL | MILLIMETRES | |
|--------|-------------|-------|
| | MIN. | MAX. |
| A | - | 26.00 |
| B | - | 25.70 |
| C | - | 13.30 |
| D | 4.98 | 5.18 |
| E | 6.70 | 7.10 |
| ØF | 1.55 | 1.80 |
| G | 7.40 | 7.90 |

FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)


FIGURE 2(b) - VARIANT 02, RELAY WITH SOLDERABLE HOOK-END TERMINALS AND PLAIN CASE

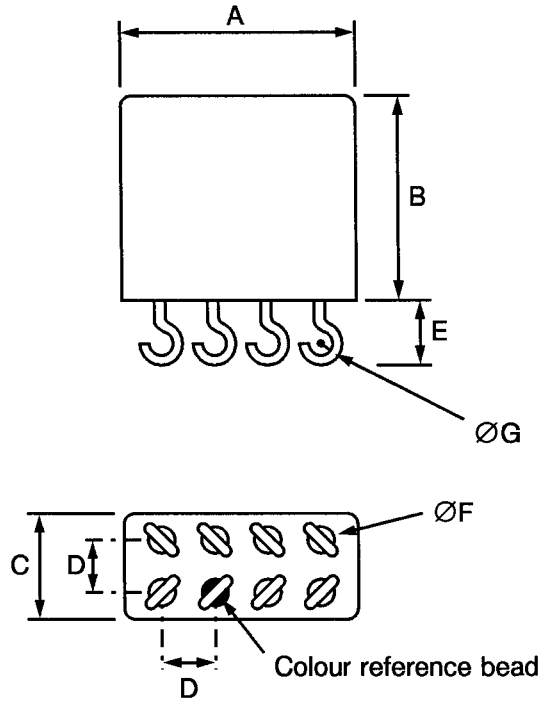

| SYMBOL | MILLIMETRES | |
|--------|-------------|-------|
| | MIN. | MAX. |
| A | - | 26.00 |
| B | - | 25.70 |
| C | - | 13.30 |
| D | 4.80 | 5.20 |
| E | - | 8.00 |
| ØF | 1.55 | - |
| ØG | 1.75 | 2.25 |

FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)


FIGURE 2(c) - VARIANT 03, RELAY WITH PLUG-IN TERMINALS AND HORIZONTAL FLANGE MOUNT

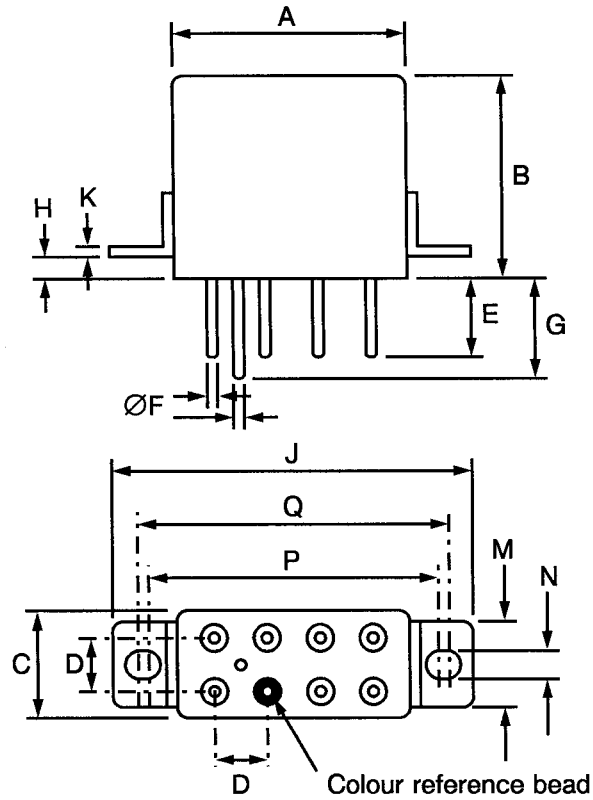

| SYMBOL | MILLIMETRES | |
|--------|-------------|-------|
| | MIN. | MAX. |
| A | - | 26.00 |
| B | - | 25.70 |
| C | - | 13.30 |
| D | 4.98 | 5.18 |
| E | 6.70 | 7.10 |
| ØF | 1.55 | 1.80 |
| G | 7.40 | 7.90 |
| H | 3.80 | 4.20 |
| J | - | 43.60 |
| K | 0.90 | 1.10 |
| M | 11.50 | 13.30 |
| N | 3.70 | 3.90 |
| P | 35.20 | 35.50 |
| Q | 36.60 | 36.90 |

FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)


FIGURE 2(d) - VARIANT 04, RELAY WITH SOLDERABLE HOOK-END TERMINALS AND HORIZONTAL FLANGE MOUNT

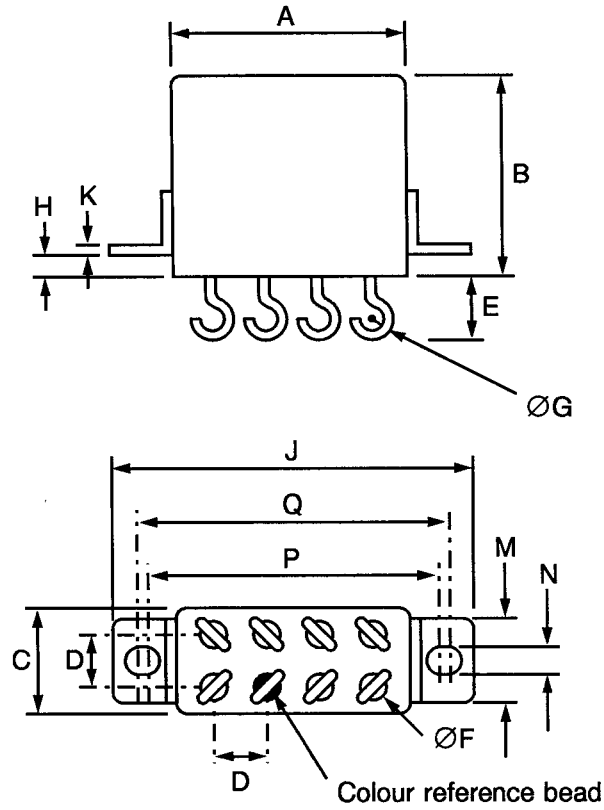

| SYMBOL | MILLIMETRES | |
|--------|-------------|-------|
| | MIN. | MAX. |
| A | - | 26.00 |
| B | - | 25.70 |
| C | - | 13.30 |
| D | 4.80 | 5.20 |
| E | - | 8.00 |
| ØF | 1.55 | 1.80 |
| ØG | 1.75 | 2.25 |
| H | 3.80 | 4.20 |
| J | - | 43.60 |
| K | 0.90 | 1.10 |
| M | 11.50 | 13.30 |
| N | 3.70 | 3.90 |
| P | 35.20 | 35.50 |
| Q | 36.60 | 36.90 |

FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)


FIGURE 2(e) - VARIANT 05, RELAY WITH PLUG-IN TERMINALS AND VERTICAL FLANGE MOUNT

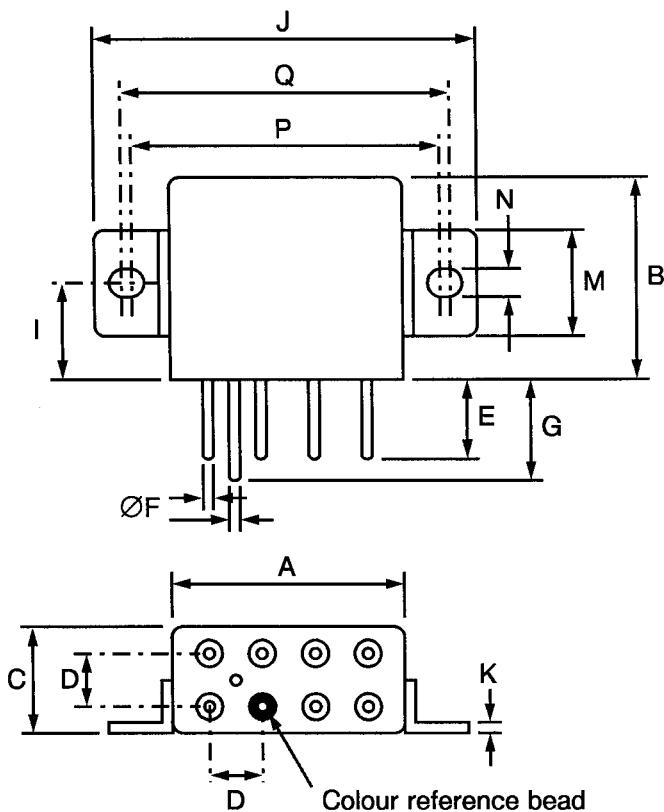

| SYMBOL | MILLIMETRES | |
|--------|-------------|-------|
| | MIN. | MAX. |
| A | - | 26.00 |
| B | - | 25.70 |
| C | - | 13.30 |
| D | 4.98 | 5.18 |
| E | 6.70 | 7.10 |
| ØF | 1.55 | 1.80 |
| G | 7.40 | 7.90 |
| I | 12.50 | 12.90 |
| J | - | 43.60 |
| K | 0.90 | 1.10 |
| M | 11.50 | 13.30 |
| N | 3.70 | 3.90 |
| P | 35.20 | 35.50 |
| Q | 36.60 | 36.90 |


FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2(f) - VARIANT 06, RELAY WITH SOLDERABLE HOOK-END TERMINALS AND VERTICAL FLANGE MOUNT

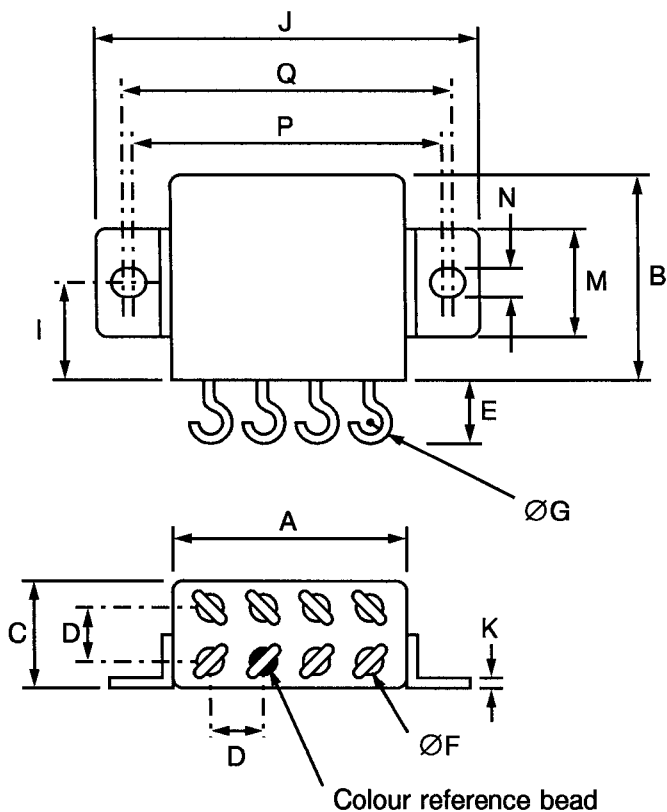

| SYMBOL | MILLIMETRES | |
|--------|-------------|-------|
| | MIN. | MAX. |
| A | - | 26.00 |
| B | - | 25.70 |
| C | - | 13.30 |
| D | 4.80 | 5.20 |
| E | - | 8.00 |
| ØF | 1.55 | - |
| ØG | 1.75 | 2.25 |
| I | 12.50 | 12.90 |
| J | - | 43.60 |
| K | 0.90 | 1.10 |
| M | 11.50 | 13.30 |
| N | 3.70 | 3.90 |
| P | 35.20 | 35.50 |
| Q | 36.60 | 36.90 |

FIGURE 3 - CIRCUIT SCHEMATIC

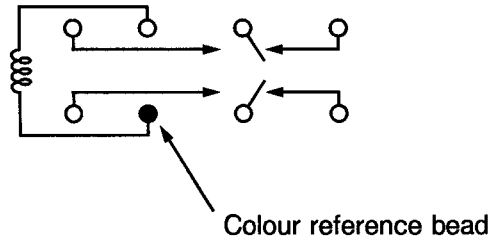

4. REQUIREMENTS

4.1 GENERAL

The complete requirements for procurement of the relays specified herein shall be as stated in this specification and ESCC Generic Specification No. 3601 for Relays, Electromagnetic Non-Latching. Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION

4.2.1 Deviations from Special In-process Controls

None.

4.2.2 Deviations from Final Production Tests (Chart II)

None.

4.2.3 Deviations from Screening Tests (Chart III)

(a) Para. 9.6, Vibration Scan: Frequency Range: 10 - 3000 Hz.

4.2.4 Deviations from Qualification Tests (Chart IV)

(a) Para. 9.10, Vibration: Frequency Range: 10 - 3000 Hz.

(b) Para. 9.11, Mechanical Shock: Test Condition: 200g, 6.0ms, 1/2 sinewave.

(c) Para. 9.12, Overload: Separate tests shall be performed for N/O and N/C contacts.

4.2.5 Deviations from Lot Acceptance Tests (Chart V)

(a) Para. 9.10, Vibration: Frequency Range: 10 - 3000 Hz.

(b) Para. 9.11, Mechanical Shock: Test Condition: 200g, 6.0ms, 1/2 sinewave.

(c) Para. 9.12, Overload: Separate tests shall be performed for N/O and N/C contacts.

4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the relays specified herein shall be verified in accordance with the requirements set out in Para. 9.23 of ESCC Generic Specification No. 3601 and shall conform to those shown in Figure 2.

4.3.2 Weight

The maximum weight of the relays specified herein shall be 41 grammes.

4.3.3 Terminal Strength

The requirements for terminal strength testing are specified in Section 9 of ESCC Generic Specification No. 3601. The test conditions shall be as follows:-

Pull Test

Applied Force: 50 Newtons.

4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the relays specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

4.4.1 Case

Copper nickel, welded construction, Sn/Pb plated. Neither electro-deposited tin nor any paint shall be used.

4.4.2 Terminal Material and Finish

The terminal material shall be Type 'H' with Type '4' finish in accordance with the requirements of ESCC Basic Specification No. 23500.

4.5 MARKING

4.5.1 General

The marking of components delivered to this specification shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and the following paragraphs. When the component is too small to accommodate all of the marking specified, as much as space permits shall be marked and the marking information, in full, shall accompany the component in its primary package.

The information to be marked and the order of precedence, shall be as follows:-

- (a) Terminal Identification.
- (b) The ESCC Component Number.
- (c) Electrical Characteristics.
- (d) Traceability Information.

4.5.2 Terminal Identification

Terminal identification shall be marked on the relay in accordance with Figure 3.

4.5.3 The ESCC Component Number

Each component shall bear the ESCC Component Number which shall be constituted and marked as follows:

Detail Specification Number _____ 360100102B
Type Variant (see Table 1(a)) _____
Testing Level _____

4.5.4 Electrical Characteristics

The electrical characteristic to be marked is the rated coil voltage. The information shall be constituted and marked as follows:-

| Coil Voltage | Coil Resistance | Code |
|--------------|-----------------|------|
| 28Vdc | 320Ω | 28V |
| 12Vdc | 80Ω | 12V |
| 6.0Vdc | 20Ω | 6V |

4.5.5 Traceability Information

Each component shall be marked in respect of traceability information as defined in ESCC Basic Specification No. 21700.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured at room temperature are scheduled in Table 2. Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.6.2 Electrical Measurements at High and Low Temperatures

The parameters to be measured at high and low temperatures are scheduled in Table 3.

4.6.3 Circuits for Electrical Measurements (Figure 4)

Not applicable.

4.7 SCREENING

4.7.1 Miss Test

During the miss test, the contact resistance shall be continuously monitored and shall not exceed the values specified in Table 4 of this specification.

4.7.2 Conditions for Screening

The requirements for screening are specified in Section 7 of ESCC Generic Specification No. 3601. The conditions for screening shall be as specified in Table 5(a) of this specification.

4.7.3 Electrical Circuits for Screening (Figure 5(a))

Not applicable.

TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE

| No. | CHARACTERISTICS | SYMBOL | ESCC 3601 TEST METHOD | TEST CONDITION | LIMITS | | UNIT |
|-----|--|--------|--------------------------|----------------------------|--------------------|--------------------|------------|
| | | | | | MIN. | MAX. | |
| 1 | Pick-up Voltage:- 28V 12V 6V | U_C | Para. 9.3.1 | Para. 9.3.1 | - - - | 13.5 6.5 3.2 | V |
| 2 | Drop-out Voltage:- 28V 12V 6V | U_d | Para. 9.3.2 | Para. 9.3.2 | 2.3 0.75 0.4 | 5.5 3.3 1.6 | V |
| 3 | Operate Time | t_C | Para. 9.3.4 | Para. 9.3.4 | - | 10 | ms |
| 4 | Release Time | t_d | Para. 9.3.4 | Para. 9.3.4 | - | 10 | ms |
| 5 | Bounce Time | t_b | Para. 9.3.4 | Para. 9.3.4 | - | 1.0 | ms |
| 6 | Insulation Resistance | R_i | Para. 9.3.7 | Para. 9.3.7 At 500Vdc | 100 | - | M Ω |
| 7 | Voltage Proof | VP | Para. 9.3.6 | Para. 9.3.6 Note 1 | 1250 | - | Vrms |
| 8 | Contact Voltage Drop | V_d | Para. 9.3.3 | Para. 9.3.3 d.c. Method | - | 150 | mV |
| 9 | Coil Resistance:- 28V 12V 6V | R_B | Para. 9.3.5 | Para. 9.3.5 | 290 72 18 | 350 88 22 | Ω |

NOTES

1. 1000V between coil and case.

TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES

| No. | CHARACTERISTICS | SYMBOL | ESCC 3601 TEST METHOD | TEST CONDITION | LIMITS | | UNIT |
|-----|--|--------|--------------------------|------------------------------------|--------------------|--------------------|------|
| | | | | | MIN. | MAX. | |
| 1 | Pick-up Voltage:- 28V 12V 6V | U_C | Para. 9.3.1 | Para. 9.3.1 | - - - | 19.8 9.9 5.0 | V |
| 2 | Drop-out Voltage:- 28V 12V 6V | U_d | Para. 9.3.2 | Para. 9.3.2 | 1.5 0.5 0.25 | 7.0 4.5 2.3 | V |
| 3 | Operate Time | t_C | Para. 9.3.4 | Para. 9.3.4 | - | 10 | ms |
| 4 | Release Time | t_d | Para. 9.3.4 | Para. 9.3.4 | - | 10 | ms |
| 5 | Bounce Time | t_b | Para. 9.3.4 | Para. 9.3.4 | - | 1.0 | ms |
| 6 | Insulation Resistance | R_i | Para. 9.3.7 | Para. 9.3.7 At 500Vdc Note 1 | 50 | - | MΩ |

NOTES

1. This measurement shall be made only at the high temperature condition.

FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS

Not applicable.

TABLE 4 - MEASUREMENTS DURING SCREENING

| No. | CHARACTERISTICS | SYMBOL | ESCC 3601 TEST METHOD | TEST CONDITIONS | MAXIMUM LIMIT | UNIT |
|-----|-------------------------------|--------|-----------------------|-----------------|---------------|----------|
| 10 | Miss Test, Contact Resistance | R_C | Para. 9.8 | Para. 9.8 | 100 | Ω |

TABLE 5(a) - CONDITIONS FOR SCREENING

| No. | CHARACTERISTICS | SYMBOL | CONDITION | UNIT |
|-----|--------------------------|-----------|----------------|-------------|
| 1 | Ambient High Temperature | T_{amb} | + 125(+ 0 - 3) | $^{\circ}C$ |
| 2 | Ambient Low Temperature | T_{amb} | - 65(+ 3 - 0) | $^{\circ}C$ |
| 3 | Ambient Room Temperature | T_{amb} | + 22 \pm 3 | $^{\circ}C$ |

TABLE 5(b) - CONDITIONS FOR OPERATING LIFE TEST

| No. | CHARACTERISTICS | SYMBOL | CONDITION | UNIT |
|-----|-------------------------|-----------|----------------|-------------|
| 1 | Ambient Temperature | T_{amb} | + 125(+ 0 - 3) | $^{\circ}C$ |
| 2 | Contact Load, Resistive | V I | 28 10 | Vdc Adc |

FIGURE 5(a) - ELECTRICAL CIRCUITS FOR SCREENING

Not applicable.

FIGURE 5(b) - ELECTRICAL CIRCUITS FOR OPERATING LIFE TESTS

Not applicable.



4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESCC GENERIC SPECIFICATION No. 3601)

4.8.1 Measurements and Inspections on Completion of Environmental Tests

The parameters to be measured and inspections to be performed on completion of environmental tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.8.2 Measurements and Inspections during Endurance Tests

The parameters to be measured and inspections to be performed during endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.8.3 Measurements and Inspections on Completion of Endurance Tests

The parameters to be measured and inspections to be performed on completion of endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.8.4 Conditions for Operating Life Tests (Part of Endurance Testing)

The requirements for operating life testing are specified in Section 9 of ESCC Generic Specification No. 3601. The conditions for operating life testing shall be as specified in Table 5(b) of this specification.

4.8.5 Electrical Circuits for Operating Life Tests (Figure 5(b))

Not applicable.



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING

| No. | ESCC GENERIC SPEC. NO. 3601 | | MEASUREMENTS AND INSPECTIONS | | SYMBOL | LIMITS | | UNIT |
|-----|---------------------------------------|--|---|--|---|--|----------------------------|---------------|
| | ENVIRONMENTAL AND ENDURANCE TESTS (1) | TEST METHOD AND CONDITIONS | IDENTIFICATION | CONDITIONS | | MIN. | MAX. | |
| 01 | Vibration | Para. 9.10 and Para. 4.2.4 of this spec. | Measurements during Test Contact Monitoring Final Measurements Visual Examination | ESCC 3601 Para. 9.10 - | - - | - - | - - | - - |
| 02 | Mechanical Shock | Para. 9.11 and Para. 4.2.4 of this spec. | Measurements during Test Contact Monitoring Final Measurements Electrical Measurements Visual Examination | ESCC 3601 Para. 9.11 Table 2 Items 7-8-1-2 - | - - | - Table 2 - | - - | - - |
| 03 | Overload | Para. 9.12 and Table 1(b) Item 4 and Para. 4.2.4 of this spec. | Measurements during Test Contact Voltage Drop Final Measurements Fuse Continuity Contact Voltage Drop Insulation Resistance Voltage Proof (all Points) Electrical Measurements | ESCC 3601 Para. 9.12.2 - Table 2 Item 8 Table 2 Item 6 Table 2 Item 7 Table 2 Items 1-2-3-4-5-9 | V _d - V _d R _i VP | Para. 9.12.2 Continuity - 175 50 - 1000 - Table 2 | mV mV MΩ Vrms | |
| 04 | Thermal Shock | Para. 9.13 | During 5th Cycle Electrical Measurements at + 125°C Electrical Measurements at - 65°C Final Measurements Visual Examination Voltage Proof (all Points) | In Conditioning Chamber Table 3 Items 1-2-3-4-7 Table 3 Items 1-2-3-4 - Table 2 Item 7 | - - VP | Table 3 Table 3 - Table 2 | - - | - Vrms |
| 05 | Salt Spray | Para. 9.14 | Final Measurements Visual Examination Electrical Measurements Voltage Proof (all Points) | - Table 2 Items 1-2-3-4-5-6-8-9 Table 2 Item 7 | - - VP | - Table 2 Table 2 | - - | - Vrms |
| 06 | Intermediate Current | Para. 9.16 | Measurements during Test Contact Voltage Drop Final Measurements Insulation Resistance Voltage Proof (all Points) Electrical Measurements Contact Voltage Drop | ESCC 3601 Para. 9.16.2 Table 2 Item 6 Table 2 Item 7 Table 2 Items 1-2-3-4-5-9 ESCC 3601 Para. 9.16.2 | V _d R _i VP V _d | Para. 9.16.2 50 - Table 2 Table 2 | mV MΩ Vrms | |
| 07 | Terminal Strength | Para. 9.17 and Para. 4.3.3 of this spec. | Visual Examination | ESCC 3601 Para. 9.17.3 | - | - | - | - |

NOTES

1. The tests in this table refer to either Chart IV or V and shall be used as applicable.



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING (CONT'D)

| No. | ESCC GENERIC SPEC. NO. 3601 | | MEASUREMENTS AND INSPECTIONS | | SYMBOL | LIMITS | | UNIT |
|-----|---------------------------------------|--|---|---|-------------------------------------|---|--|------|
| | ENVIRONMENTAL AND ENDURANCE TESTS (1) | TEST METHOD AND CONDITIONS | IDENTIFICATION | CONDITIONS | | MIN. | MAX. | |
| 08 | Resistance to Soldering Heat | Para. 9.18 | Electrical Measurements | Table 2 Items 1-2-6-8-9 | | Table 2 | | |
| 09 | Operating Life Resistive | Para's 9.19, 9.19.1 and Table 5(b) of this spec. | Measurements during Test Contact Voltage Drop Final Measurements Fuse Continuity Contact Voltage Drop Insulation Resistance Voltage Proof (all Points) Electrical Measurements | ESCC 3601 Para. 9.19.1 - Table 2 Item 8 Table 2 Item 6 Table 2 Item 7 Table 2 Items 1-2-3-4-5-9 | V_d - V_d Ri VP | Para. 9.19.1 Continuity - 175 50 - 1000 - Table 2 | mV mV MΩ Vrms | |
| 10 | Inductive Life | Para. 9.19.3 and Table 1(b) Item 5 of this spec. | Measurements during Test Contact Voltage Drop Final Measurements Fuse Continuity Contact Voltage Drop Insulation Resistance Voltage Proof (all Points) Electrical Measurements | ESCC 3601 Para. 9.19.1 - Table 2 Item 8 Table 2 Item 6 Table 2 Item 7 Table 2 Items 1-2-3-4-5-9 | V_d - V_d Ri VP | Para. 9.19.1 Continuity - 175 50 - 1000 - Table 2 | mV mV MΩ Vrms | |
| 11 | Mechanical Life | Para. 9.19.4 | Final Measurements Contact Voltage Drop Electrical Measurements | Table 2 Item 8 Table 2 Items 1-2-3-4-5-9 | | - 175 Table 2 | mV | |
| 12 | Coil Life | Para. 9.20 | Initial Measurements Electrical Measurements After 100 hours Electrical Measurements at -65°C At 250, 500, 750 hours Electrical Measurements During Last Cycle Electrical Measurements at +125°C Electrical Measurements at -65°C Final Measurements Electrical Measurements Visual Examination | Table 2 Items 8-9 Table 2 Item 8 Table 3 Items 3-4 Table 2 Items 8-9 Table 3 Items 1-2 Table 3 Items 1-2 Table 2 Items 3 to 9 | | Table 2 Table 2 Table 3 Table 2 Table 3 Table 3 Table 2 | - - | |

NOTES

1. The tests in this table refer to either Chart IV or V and shall be used as applicable.