



**CAPACITORS, FIXED, D.C. SELF-HEALING,
METALLISED POLYESTER FILM DIELECTRIC,
BASED ON TYPE MKT**

ESCC Detail Specification No. 3006/019

**ISSUE 1
October 2002**



	ESCC Detail Specification		PAGE ii ISSUE 1
---	---------------------------	--	--------------------

LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2002. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole in any medium without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.






europaean space agency
agence spatiale européenne

Pages 1 to 16

**CAPACITORS, FIXED, D.C. SELF-HEALING,
METALLISED POLYESTER FILM DIELECTRIC,
BASED ON TYPE MKT
ESA/SCC Detail Specification No. 3006/019**



**space components
coordination group**

Issue/Rev.	Date	Approved by	
		SCCG Chairman	ESA Director General or his Deputy
Issue 1	July 1997		
Revision 'A'	July 1998		



SCC

ESA/SCC Detail Specification
No. 3006/019

Rev. 'A'

PAGE 2

ISSUE 1

DOCUMENTATION CHANGE NOTICE

Rev. Letter	Rev. Date	Reference	CHANGE Item	Approved DCR No.
		P1. Cover page		None
		P2. DCN		None
		P8. Figure 2	: In the Table, Symbol 'C' corrected to 'L'	221479
		P9. Para. 4.2.4	: Deviation "(c)" added	221479
		P10. Para. 4.2.5	: Deviation "(c)" added	221479
		P14. Table 5	: No. 2, Condition amended	221479
		P16. Table 6	: No. 11, Test Methods and Conditions expanded , In Conditions, During Tests, U _R amended	221479



TABLE OF CONTENTS

	<u>Page</u>
1. <u>GENERAL</u>	5
1.1 Scope	5
1.2 Range of Components	5
1.3 Maximum Ratings	5
1.4 Parameter Derating Information	5
1.5 Physical Dimensions	5
1.6 Functional Diagram	5
2. <u>APPLICABLE DOCUMENTS</u>	9
3. <u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u>	9
4. <u>REQUIREMENTS</u>	9
4.1 General	9
4.2 Deviations from Generic Specification	9
4.2.1 Deviations from Special In-process Controls	9
4.2.2 Deviations from Final Production Tests	9
4.2.3 Deviations from Burn-in and Electrical Measurements	9
4.2.4 Deviations from Qualification Tests	9
4.2.5 Deviations from Lot Acceptance Tests	10
4.3 Mechanical Requirements	10
4.3.1 Dimension Check	10
4.3.2 Weight	10
4.3.3 Robustness of Terminations	10
4.4 Materials and Finishes	10
4.4.1 Case	10
4.4.2 Lead Material and Finish	10
4.5 Marking	10
4.5.1 General	10
4.5.2 Lead Identification	11
4.5.3 The SCC Component Number	11
4.5.4 Electrical Characteristics and Ratings	11
4.5.5 Traceability Information	12
4.6 Electrical Measurements	12
4.6.1 Electrical Measurements at Room Temperature	12
4.6.2 Electrical Measurements at High and Low Temperatures	12
4.6.3 Circuits for Electrical Measurements	12
4.7 Burn-in Tests	12
4.7.1 Parameter Drift Values	12
4.7.2 Conditions for Burn-in	12
4.7.3 Electrical Circuits for Burn-in	12
4.8 Environmental and Endurance Tests	14
4.8.1 Measurements and Inspections on Completion of Environmental Tests	14
4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests	14
4.8.3 Measurements and Inspections on Completion of Endurance Tests	14
4.8.4 Conditions for Operating Life Tests	14
4.8.5 Electrical Circuits for Operating Life Tests	14

TABLES

1(a)	Range of Components	6
1(b)	Maximum Ratings	8
2	Electrical Measurements at Room Temperature	13
3	Electrical Measurements at High and Low Temperatures	13
4	Parameter Drift Values	14
5	Conditions for Burn-in and Operating Life Tests	14
6	Measurements and Inspections on Completion of Environmental Tests and at Intermediate Points and on Completion of Endurance Testing	15

FIGURES

1	Parameter Derating Information	5
2	Physical Dimensions	8
3	Functional Diagram	8
4	Circuits for Electrical Measurements	14
5	Electrical Circuit for Burn-in and Operating Life Tests	N/A

APPENDICES (Applicable to specific Manufacturers only)

None.



1. **GENERAL**

1.1 **SCOPE**

This specification details the ratings, physical and electrical characteristics, test and inspection data for Capacitors, Fixed, Metallised, Polyester Film Dielectric, based on Type MKT. It shall be read in conjunction with ESA/SCC Generic Specification No. 3006, the requirements of which are supplemented herein.

1.2 **RANGE OF COMPONENTS**

The range of capacitors covered by this specification is scheduled in Table 1(a).

1.3 **MAXIMUM RATINGS**

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the capacitors specified herein, are scheduled in Table 1(b).

1.4 **PARAMETER DERATING INFORMATION**

The parameter derating information applicable to the capacitors specified herein is shown in Figure 1.


1.5 **PHYSICAL DIMENSIONS**

The physical dimensions of the capacitors specified herein are shown in Figure 2.

1.6 **FUNCTIONAL DIAGRAM**

The functional diagram for the capacitors specified herein is shown in Figure 3.

FIGURE 1 - PARAMETER DERATING INFORMATION

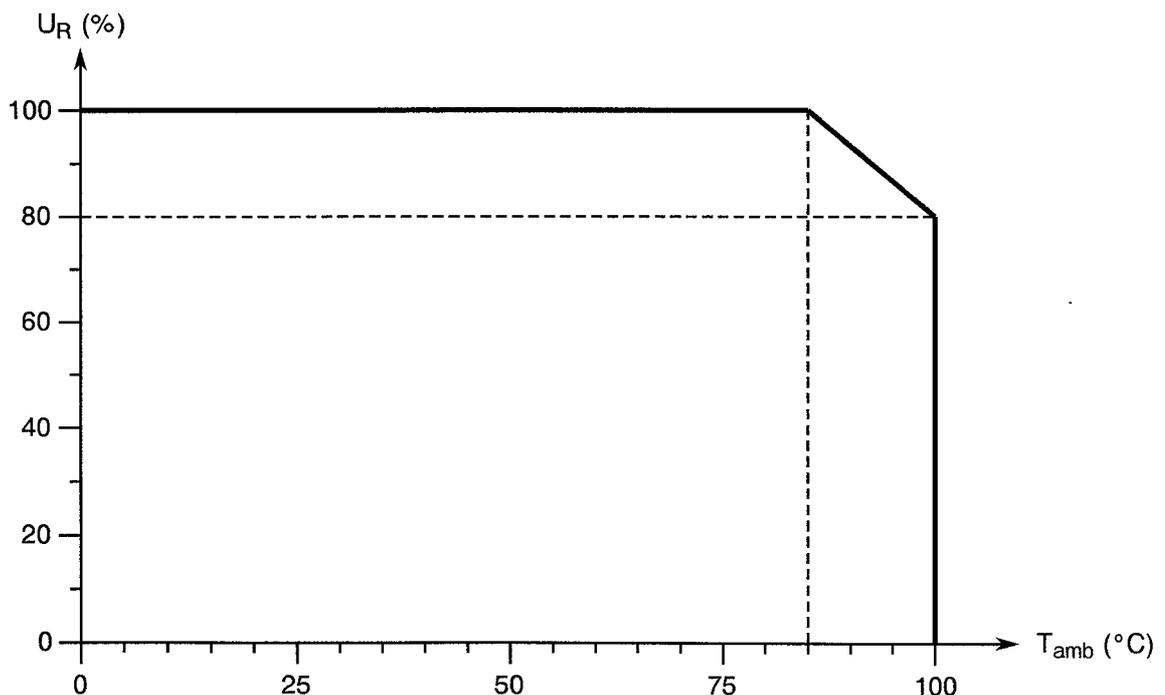

Rated Voltage versus Ambient Temperature

**TABLE 1(a) - RANGE OF COMPONENTS**

(1) Item No.	(2) Capacitance Value (C) (μ F)	(3) d.c. Rated Voltage (U _R) (V)	(4) Dimensions (mm)		(5) Weight (g)
			\varnothing A Max.	B Max.	
01	0.47	50	7.4	18.5	1.6
02	0.68	50	7.4	18.5	1.6
03	1.0	50	8.4	18.5	2.2
04	1.0	50	9.4	18.5	2.6
05	1.5	50	9.4	18.5	2.6
06	2.2	50	9.4	21	2.6
07	3.3	50	10.7	21	2.9
08	4.7	50	10.7	21	2.9
09	6.8	50	12.7	21	4.1
10	10	50	13.7	21	6.0
11	0.10	100	7.4	18.5	1.6
12	0.15	100	7.4	18.5	1.6
13	0.22	100	8.4	18.5	2.2
14	0.33	100	8.4	18.5	2.2
15	0.47	100	8.4	18.5	2.2
16	0.68	100	8.4	18.5	2.2
17	1.0	100	8.4	21	2.5
18	1.5	100	8.4	21	2.5
19	2.2	100	9.4	21	2.9
20	3.3	100	10.7	21	3.3
21	4.7	100	11.7	21	3.6
22	6.8	100	10.7	34	5.4
23	10	100	12.7	34	8.0
24	22	100	15.7	34	11
25	47	100	21.7	34	23
26	100	100	29.7	34	30
27	0.10	160	7.4	18.5	2.2
28	0.15	160	7.4	18.5	2.2
29	0.22	160	8.4	18.5	2.6
30	0.33	160	8.4	18.5	2.6
31	0.47	160	8.4	21	2.9
32	0.68	160	9.4	21	3.6
33	1.0	160	10.7	21	4.8
34	1.5	160	11.7	21	5.1
35	2.2	160	12.7	21	5.8
36	3.3	160	11.7	34	9.5
37	4.7	160	12.7	34	11
38	6.8	160	14.7	34	17
39	10	160	16.7	34	19

NOTES

1. The capacitors have tolerances of $\pm 5.0\%$, $\pm 10\%$ and $\pm 20\%$ for all values.

**TABLE 1(a) - RANGE OF COMPONENTS (CONT'D)**

(1) Item No.	(2) Capacitance Value (C) (μ F)	(3) d.c. Rated Voltage (U_R) (V)	(4) Dimensions (mm)		(5) Weight (g)
			\varnothing A Max.	B Max.	
40	0.10	250	8.4	18.5	2.2
41	0.15	250	8.4	18.5	2.2
42	0.22	250	9.4	18.5	2.6
43	0.33	250	9.4	21	3.3
44	0.47	250	9.4	21	3.3
45	0.68	250	10.7	21	4.1
46	1.0	250	11.7	21	4.7
47	1.5	250	13.7	21	5.8
48	2.2	250	15.7	21	6.3
49	3.3	250	14.7	34	11
50	4.7	250	16.7	34	14
51	6.8	250	18.7	34	20
52	10	250	21.7	34	30
53	0.033	630	8.4	18.5	2.2
54	0.047	630	9.4	18.5	2.8
55	0.068	630	8.4	21	2.6
56	0.10	630	9.4	21	2.8
57	0.15	630	10.7	21	2.9
58	0.22	630	11.7	21	3.6
59	0.33	630	13.7	21	5.8
60	0.47	630	15.7	21	6.0
61	0.68	630	13.7	34	9.0
62	1.0	630	15.7	34	11
63	1.5	630	18.7	34	14.5
64	2.2	630	21.7	34	19
65	3.3	630	25.7	34	25
66	4.7	630	29.7	34	30
67	0.22	630	12.7	18.5	3.8
68	0.47	630	12.7	25	4.8

NOTES

1. The capacitors have tolerances of $\pm 5.0\%$, $\pm 10\%$ and $\pm 20\%$ for all values.

TABLE 1(b) - MAXIMUM RATINGS


No.	Characteristics	Symbol	Maximum Ratings	Unit	Remarks
1	Rated Voltage d.c.	U_R	See Table 1(a)	V	Note 1
2	Rated Voltage a.c. (50/60 Hz)	U_A	35% of U_R	Vrms	
3	Operating Temperature Range	T_{op}	- 55 to + 100	°C	T_{amb}
4	Storage Temperature Range	T_{stg}	- 55 to + 100	°C	
5	Soldering Temperature	T_{sol}	+ 260	°C	Note 2

NOTES

1. At $T_{amb} \leq +85^\circ\text{C}$. For derating at $T_{amb} > +85^\circ\text{C}$, see Figure 1.
2. Duration 5 seconds maximum at a distance of not less than 6.0mm from the case and the same lead shall not be resoldered until 3 minutes have elapsed.

FIGURE 2 - PHYSICAL DIMENSIONS


Symbol	Millimetres		Remarks
	Min.	Max.	
$\varnothing A$	Note 1		
B	Note 1		
D	-	1.50	
$\varnothing E$	0.59	0.65	Note 2
$\varnothing E$	0.75	0.88	Note 3
$\varnothing E$	0.95	1.05	Note 4
L	35.00	45.00	

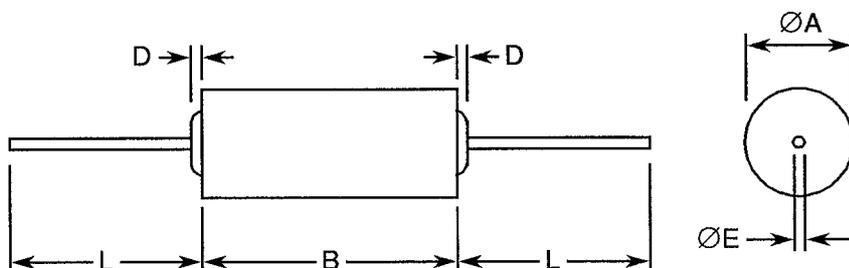

NOTES

1. See Table 1(a) for dimensions.
2. For $\varnothing A < 8.5\text{mm}$.
3. For $8.5\text{mm} \leq \varnothing A \leq 15\text{mm}$.
4. For $\varnothing A > 15\text{mm}$.

FIGURE 3 - FUNCTIONAL DIAGRAM



**2. APPLICABLE DOCUMENTS**

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESA/SCC Generic Specification No. 3006 for Capacitors, Fixed, Metallised Plastic Dielectric, Hermetically Sealed in Metal Cases.
- (b) MIL-C-87217, Capacitors, Fixed, Supermetallised Film Dielectric, D.C. for Low Energy.

3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESA/SCC Basic Specification No. 21300 shall apply.

4. REQUIREMENTS**4.1 GENERAL**

The complete requirements for procurement of the capacitors specified herein are stated in this specification and ESA/SCC Generic Specification No. 3006 for Capacitors, Fixed, Film Dielectric. Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESA/SCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION**4.2.1 Deviations from Special In-process Controls**

None.

4.2.2 Deviations from Final Production Tests (Chart II)

- (a) Para. 9.2, Seal Test : Not applicable.

4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)

- (a) Para. 9.2, Seal Test : Not applicable.

4.2.4 Deviations from Qualification Tests (Chart IV)

- (a) Para. 9.2, Seal Test : Not applicable.
- (b) A Voltage Ramp Test shall be performed on 10 additional components in accordance with MIL- C-87217, Para. 4.7.4. Test Conditions shall be as follows:-
 - Maximum Temperature : + 90°C.
 - Minimum Temperature : - 50°C.
 - Voltage Ramp : Test voltage: 0 to 30V.
Charge time: 2V/minute.

During the test, Leakage Current is to be measured with limits as defined below. No failures are allowed.

Rated Voltage (V)	Leakage Current Limits	
	C ≤ 1.0μF	C > 1.0μF
630	0.05μA	0.05μA x C(μF)
≤ 250	0.5μA	0.5μA x C(μF)

- (c) Para. 9.16, Operating Life : Shall be performed at 1.25U_R.

		<p style="text-align: center;">ESA/SCC Detail Specification No. 3006/019</p>	<p style="text-align: center;">Rev. 'A'</p>	<p>PAGE 10 ISSUE 1</p>
---	---	--	---	----------------------------

4.2.5 Deviations from Lot Acceptance Tests (Chart V)

- (a) Para. 9.2, Seal Test : Not applicable.
- (b) The Voltage Ramp Test specified in Para. 4.2.4(b) shall be performed.
- (c) Para. 9.16, Operating Life : Shall be performed at $1.25U_R$.

4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the capacitors specified herein shall be checked. They shall conform to those shown in Figure 2 and Table 1(a).

4.3.2 Weight

The maximum weight of the capacitors specified herein shall be as specified in Table 1(a).

4.3.3 Robustness of Terminations

The requirements for robustness of terminations are specified in Section 9 of ESA/SCC Generic Specification No. 3006. The test conditions shall be as follows:-

Test Condition: U_a , Tensile.
Applied Force: 10 Newtons.
Duration: 5 to 10 seconds.

4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the capacitors specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

4.4.1 Case

Aluminium tube : End seals : epoxy resin.
: Sleeve : polyolefin.

4.4.2 Lead Material and Finish

The lead material shall be Type 'A' in accordance with the requirements of ESA/SCC Basic Specification No. 23500. The finish shall be Sn95Pb5.

4.5 MARKING

4.5.1 General

The marking of all components delivered to this specification shall be in accordance with the requirements of ESA/SCC Basic Specification No. 21700 and the following paragraphs. When the component is too small to accommodate all of the marking specified, as much as space permits shall be marked and the marking information, in full, shall accompany the component in its primary package.

The information to be marked and the order of precedence, shall be as follows:-

- (a) Lead Identification.
- (b) The SCC Component Number.
- (c) Electrical Characteristics and Ratings.
- (d) Traceability Information.




4.5.2 Lead Identification

Not applicable.

4.5.3 The SCC Component Number

The SCC Component Number shall be constituted and marked as follows:-

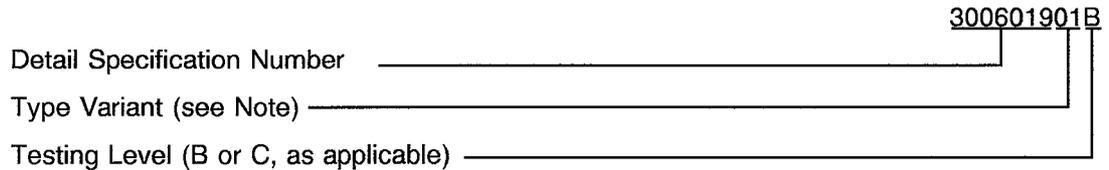

N.B.


Marking of the Type Variant Number is mandatory. No further reference to type variants is made in this specification.

4.5.4 Electrical Characteristics and Ratings

The electrical characteristics and ratings to be marked in the following order of precedence are:-

- (a) Capacitance Value.
- (b) Tolerance.
- (c) Rated Voltage.

The information shall be constituted and marked as follows:-

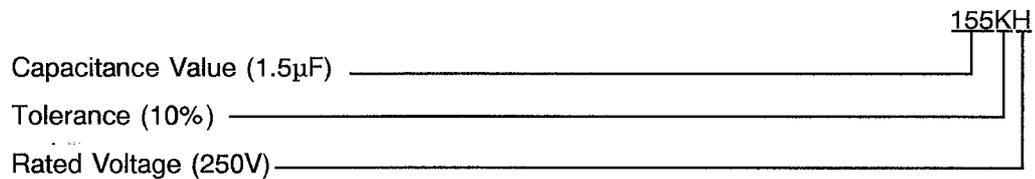

4.5.4.1 Capacitance Values

Capacitance values shall be coded as follows. The unit quantity for marking shall be picofarads.

Numerical Value	Code
XX10 ³	XX3
XX10 ⁴	XX4
XX10 ⁵	XX5
XX10 ⁶	XX6
XX10 ⁷	XX7

4.5.4.2 Tolerances

The tolerances on capacitance values shall be indicated by the letter code specified hereafter.

Tolerance (± %)	Code Letter
5.0	J
10	K
20	M



4.5.4.3 Rated Voltage

The rated voltage shall be indicated by the code letters specified hereafter.

Rated Voltage (V)	Code Letter
50	C
100	E
160	F
250	H
630	Z

4.5.5 Traceability Information

Traceability information shall be marked in accordance with the requirements of ESA/SCC Basic Specification No. 21700.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured at room temperature are scheduled in Table 2. Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.6.2 Electrical Measurements at High and Low Temperatures

The parameters to be measured at high and low temperatures are scheduled in Table 3.

4.6.3 Circuits for Electrical Measurements

Not applicable.

4.7 BURN-IN TESTS

4.7.1 Parameter Drift Values

The parameter drift values applicable to burn-in are specified in Table 4 of this specification. Unless otherwise stated, measurements shall be performed at $T_{amb} = +22 \pm 3$ °C. The parameter drift values (Δ) applicable to the parameters scheduled shall not be exceeded. In addition to these drift value requirements for a given parameter, the appropriate limit value specified in Table 2 shall not be exceeded.

4.7.2 Conditions for Burn-in

The requirements for burn-in are specified in Section 7 of ESA/SCC Generic Specification No. 3006. The conditions for burn-in shall be as specified in Table 5 of this specification. On completion of burn-in, a recovery period of 24 ± 2 hours is necessary before the end-measurements.

4.7.3 Electrical Circuits for Burn-in (Figure 5)

Not applicable.

**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE**

No.	Characteristics	Symbol	ESA/SCC 3006 Test Method	Test Condition	Limits		Unit
					Min.	Max.	
1	Capacitance	C	Para. 9.6.1.2	Test frequency: 1.0kHz	See Table 1(a) (Note 1)		μF
2	Tangent of Loss Angle	Tg δ	Para. 9.6.1.3	Test frequency: 1.0kHz	-	10	10^{-3}
3	Insulation Resistance Terminal to Terminal	R _i	Para. 9.6.1.4	C \leq 0.33 μF C > 0.33 μF	15 5000	- -	G Ω sec.
4	Insulation Resistance Terminals to Case	R _{iB}	Para. 9.6.1.4		15	-	G Ω
5	Voltage Proof Terminal to Terminal	VP	Para. 9.6.1.1		1.6 U _R (2)	-	V
6	Voltage Proof Terminals to Case	VP _B	Para. 9.6.1.1		2.0 U _R (2)	-	V

NOTES

- ± Ordered Tolerance.
- For U_R, see Column 3 of Table 1(a). For VP_B, minimum 200V.

TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES

No.	Characteristics	Symbol	ESA/SCC 3006 Test Method	Test Condition (Note 1)	Limits		Unit
					Min.	Max.	
1(a)	Capacitance Change	$\frac{\Delta C}{C}$	Para. 9.6.1.2	T _{amb} = -55°C Test frequency: 1.0kHz	-	- 15 (2)	%
1(b)	Capacitance Change	$\frac{\Delta C}{C}$	Para. 9.6.1.2	T _{amb} = +100°C Test frequency: 1.0kHz	-	+ 8.0 (2)	%

NOTES

- These measurements shall be performed on a sample basis (see Para. 7.4.2 of ESA/SCC Generic Specification No. 3006). AQL: 1.0%.
- Related to value recorded at T_{amb} = +22°C.

FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS

Not applicable.

TABLE 4 - PARAMETER DRIFT VALUES

No.	Characteristics	Symbol	Spec. and/or Test Method	Test Conditions	Change Limits (Δ)	Unit
1	Capacitance Change	$\frac{\Delta C}{C}$	As per Table 2	As per Table 2	± 3.0	%

TABLE 5 - CONDITIONS FOR BURN-IN AND OPERATING LIFE TESTS

No.	Characteristic	Symbol	Condition	Unit
1	Ambient Temperature	T_{amb}	+ 85(+0 – 5)	°C
2	Test Voltage	V_T	1.25 U_R (Note 1)	V

NOTES

- See Column 3 of Table 1(a)

FIGURE 5 - ELECTRICAL CIRCUIT FOR BURN-IN AND OPERATING LIFE TESTS

Not applicable.

4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESA/SCC BASIC SPECIFICATION No. 3006)

4.8.1 Measurements and Inspections on Completion of Environmental Tests

The parameters to be measured and inspections to be performed on completion of environmental tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests

The parameters to be measured and inspections to be performed at intermediate points during endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.8.3 Measurements and Inspections on Completion of Endurance Tests

The parameters to be measured and inspections to be performed on completion of endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.8.4 Conditions for Operating Life Tests (Part of Endurance Testing)

The requirements for operating life testing are specified in Section 9 of ESA/SCC Generic Specification No. 3006. The conditions for operating life testing shall be as specified in Table 5 for the burn-in test.

4.8.5 Electrical Circuits for Operating Life Tests (Figure 5)

Not applicable.



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING

NO.	ESA/SCC GENERIC SPEC. NO. 3006		MEASUREMENTS AND INSPECTIONS		SYMBOL	LIMITS		UNIT
	ENVIRONMENTAL AND ENDURANCE TESTS (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN.	MAX.	
01	Seal Test (Hermetically Sealed)	Para. 9.2	Not applicable					
02	Rapid Change of Temperature	Para. 9.3.2	Initial Measurements Capacitance Final Measurements Visual Examination Capacitance Change Tangent of Loss Angle	Table 2 Item 1 After recovery of 24 ± 2 hours No damage Table 2 Item 1 Table 2 Item 2	C ΔC/C Tgd	Record values - 5.0 -	+ 15 + 5.0	% 10 ⁻³
03	Corrosion (Hermetically Sealed)	Para. 9.8, Half without sleeving (2)	Not applicable					
04	Robustness of Terminations	Para. 9.9 and Para. 4.3.3 of this spec.	Final Measurements Visual Examination	No damage	-	-	-	
05	Resistance to Soldering Heat	Para. 9.10	Initial Measurements Capacitance Final Measurements Insulation Resistance Capacitance Change Tangent of Loss Angle	Table 2 Item 1 After recovery of 1 to 2 hrs Table 2 Item 3 Table 2 Item 1 Table 2 Item 2	C Ri ΔC/C Tgd	Record values Table 2 - 5.0 -	- + 15 Table 2	%
06	Solderability	Para. 9.11 Method 3	Final Measurements Visual Examination	IEC No. 68-2-20 Para. 4.6.4, 4.7.4 or 4.9.3	-	-	-	
07	Vibration	Para. 9.12	Measurements during Tests During Last Cycle Final Measurements Visual Examination	50% U _R (3) applied No intermittent contacts > 0.5ms or Open or Short Circuits No evidence of damage	- - -	- - -	- - -	
08	Shock or Bump	Para. 9.13	Measurements during Tests During Last Cycle Final Measurements Visual Examination	50% U _R (3) applied No intermittent contacts > 0.5ms or Open or Short Circuits No evidence of damage, breakdown, arcing or fractures	- - -	- - -	- - -	

NOTES

1. The tests in this Table refer to either Chart IV or V and shall be used as applicable.
2. If applicable
3. For U_R, see Column 3 of Table 1(a). For VP_B, minimum 200V.
4. Greater than 50% of the value given in Table 2.



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING (CONT'D)

NO.	ESA/SCC GENERIC SPEC. NO. 3006		MEASUREMENTS AND INSPECTIONS		SYMBOL	LIMITS		UNIT
	ENVIRONMENTAL AND ENDURANCE TESTS (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN.	MAX.	
09	Climatic Sequence	Para. 9.14	Initial Measurements Capacitance	Table 2 Item 1	C	Record values		
			Final Measurements	After recovery of 24 hrs max.	-	-	-	
			Visual Examination	No evidence of corrosion or unwrapping or mechanical damage to the sleeve	-	-	-	
			Voltage Proof (2)	ESA/SCC No. 3006 Para. 9.6.1.1	VP _S	4.0	-	kV
			Insulation Resistance (2)	ESA/SCC No. 3006 Para. 9.6.1.4	Ri _S	10	-	GΩ
			Voltage Proof	After removal of sleeve (2) Table 2 Item 5	VP	2.0U _R (3)	-	
			Voltage Proof	Table 2 Item 6	VP _B	2.0U _R (3)	-	
			Insulation Resistance	Table 2 Item 3	Ri	150	-	MΩ sec.
			Insulation Resistance Capacitance Change Tangent of Loss Angle	Table 2 Item 4 Table 2 Item 1 Table 2 Item 2	Ri _B ΔC/C Tgd	5.0 -5.0 -	-	GΩ % 10 ⁻³
10	Temperature Coefficient	Para. 9.15	Final Measurements Capacitance Change	ESA/SCC No. 3006 Para. 9.15 Table 3 Item 1(a) Table 3 Item 1(b)	ΔC/C ΔC/C	- -	-15 +6.0	% %
11	Operating Life	Para. 9.16 and Paras. 4.2.4 and 4.2.5 of this spec.	Initial Measurements Capacitance	Table 2 Item 1 1.25U _R (3)	C	Record values		
			During Tests	After recovery of 24 ± 2 hours	ΔC/C	-5.0	+15	%
			Intermediate Measurements Capacitance Change	Table 2 Item 1	ΔC/C	-5.0	+15	%
			Final Measurements Capacitance Change Tangent of Loss Angle	After removal of sleeves (2) and after 24 hrs recovery Table 2 Item 1 Table 2 Item 2	ΔC/C Tgd	-5.0 -	+15 +5.0	% 10 ⁻³
			Insulation Resistance Insulation Resistance	Table 2 Item 3 Table 2 Item 4	Ri Ri _B	Note 4 5.0	- -	GΩ GΩ
12	Permanence of Marking	Para. 9.17	Final Measurements Visual Examination	No corrosion or obliteration of marking	-	-	-	

NOTES: See Page 15.