



Pages 1 to 39


**CONNECTORS AND SAVERS, ELECTRICAL,  
RECTANGULAR, NON-REMOVABLE PCB CONTACTS,  
BASED ON TYPE MHD**

**ESCC Detail Specification No. 3401/065**

**ISSUE 2  
December 2006**



Document Custodian: European Space Agency - see <https://escies.org>

	ESCC Detail Specification No. 3401/065		PAGE i ISSUE 2
---	---	--	-------------------

### LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2006. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.


This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole in any medium without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

**DOCUMENTATION CHANGE NOTICE**


(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
222	Specification upissued to incorporate technical and editorial changes per DCR.

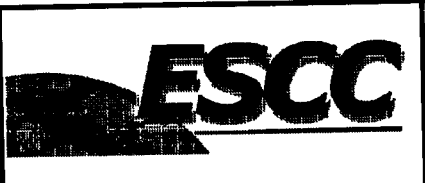	<p style="text-align: center;">ESCC Detail Specification No. 3401/065</p>	<p>PAGE 3 ISSUE 2</p>
---	---	---------------------------

**TABLE OF CONTENTS**

	<u>Page</u>
<b>1. <u>GENERAL</u></b>	<b>5</b>
1.1 Scope	5
1.2 Range of Components	5
1.3 Maximum Ratings	5
1.4 Parameter Derating Information	5
1.5 Physical Dimensions	5
<b>2. <u>APPLICABLE DOCUMENTS</u></b>	<b>5</b>
<b>3. <u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u></b>	<b>5</b>
<b>4. <u>REQUIREMENTS</u></b>	<b>31</b>
4.1 General	31
4.2 Deviations from Generic Specification	31
4.2.1 Deviations from Special In-process Controls	31
4.2.2 Deviations from Final Production Tests	31
4.2.3 Deviations from Burn-in and Electrical Measurements	31
4.2.4 Deviations from Qualification Tests	31
4.2.5 Deviations from Lot Acceptance Tests	31
4.3 Mechanical Requirements	32
4.3.1 Dimension Check	32
4.3.2 Weight	32
4.3.3 Contact Capability	32
4.3.4 Contact Retention (In Insert)	32
4.3.5 Mating and Unmating Forces	32
4.3.6 Insert Retention (In Shell)	32
4.3.7 Jackscrew Retention	32
4.3.8 Contact Insertion and Withdrawal Forces	32
4.3.9 Engagement and Separation Forces	33
4.3.10 Oversize Pin Exclusion	33
4.3.11 Probe Damage	33
4.3.12 Solderability	33
4.4 Materials and Finishes	33
4.4.1 Shells	33
4.4.2 Inserts	33
4.4.3 Contacts	33
4.4.4 Contact Retaining Clip	34
4.4.5 Guiding and Locking Devices	34
4.4.6 Magnetism Level	34
4.5 Marking	34
4.5.1 General	34
4.5.2 Contact Position	34
4.5.3 The ESCC Component Number	34
4.5.4 Characteristics	35
4.5.5 Traceability Information	35
4.6 Electrical Measurements	35
4.6.1 Electrical Measurements at Room Temperature	35
4.6.2 Electrical Measurements at High and Low Temperatures	35
4.6.3 Circuits for Electrical Measurements	35
4.7 Burn-in and Electrical Measurements	35

	<p style="text-align: center;">ESCC Detail Specification No. 3401/065</p>	<p>PAGE 4 ISSUE 2</p>
---	---	---------------------------

		<u>Page</u>
4.8	Environmental and Endurance Tests	36
4.8.1	Measurements and Inspections on Completion of Environmental Tests	36
4.8.2	Measurements and Inspections at Intermediate Points during Endurance Tests	36
4.8.3	Measurements and Inspections on Completion of Endurance Tests	36
4.8.4	Conditions for Operating Life Tests	36
4.8.5	Electrical Circuit for Operating Life Tests	36
4.8.6	Conditions for High Temperature Storage Test	36

**TABLES**


1(a)	Range of Components	6
1(b)	Maximum Ratings	7
2	Electrical Measurements at Room Temperature	37
3	Not Applicable	N/A
4	Not Applicable	N/A
5	Not Applicable	N/A
6	Measurements and Inspections on Completion of Environmental and Endurance Testing	38

**FIGURES**

1	Parameter Derating Information	7
2(a)	Inserts: Plugs and Receptacles	8
2(b)	Guiding and Locking Devices	24
2(c)	Contact Mounting Configurations	27

**APPENDICES (Applicable to specific Manufacturers only)**

None.

	<p style="text-align: center;">ESCC Detail Specification No. 3401/065</p>	<p>PAGE 5 ISSUE 2</p>
---	---	---------------------------

**1. GENERAL**

**1.1 SCOPE**

This specification details the ratings, physical and electrical characteristics, test and inspection data for Connectors and Savers, Electrical, Rectangular, Non-removable PCB Contacts, based on Type MHD. It shall be read in conjunction with:

- ESCC Generic Specification No. 3401, Connectors, Electrical, Non-Filtered, Circular and Rectangular,

the requirements of which are supplemented herein.

**1.2 RANGE OF COMPONENTS**

The different configurations of the connectors specified herein and guiding and locking devices, which are also covered by this specification are given in Table 1(a).

**1.3 MAXIMUM RATINGS**

The maximum ratings applicable to the connectors specified herein, which shall not be exceeded at any time during use or storage, are scheduled in Table 1(b).

**1.4 PARAMETER DERATING INFORMATION**

The applicable derating information for the connectors specified herein is shown in Figure 1.

**1.5 PHYSICAL DIMENSIONS**

The physical dimensions of the connectors, plugs and receptacles, guiding and locking devices specified herein, and the contact mounting configurations, are shown in Figures 2(a), 2(b) and 2(c).

**2. APPLICABLE DOCUMENTS**

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESCC Generic Specification No. 3401, Connectors, Electrical, Non-Filtered, Circular and Rectangular

**3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS**

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. 21300 shall apply.

**TABLE 1(a) - RANGE OF COMPONENTS**

NUMBER OF CONTACTS

NO. OF CONTACTS (Note 1)	MAX. WEIGHT (2) (g)		MAX. ENGAGEMENT FORCE (N.max)	SEPARATION FORCE (N)	
	PLUG	RECEPTACLE		N.min	N.max
52	10.7	7.2	36.4	2.6	36.4
100	16.4	13.1	70	5.0	70
152	25.7	20.1	106.4	7.6	106.4
200	32.5	25.9	140	10	140
252	44.1	33	176.4	12.6	176.4
300	48.5	38.8	210	15	210
352	57.2	43.2	246.4	17.6	246.4
400	64.5	49.2	280	20	280

**NOTES**

1. See Figure 2(a).
2. Weights with contacts and without accessories.

CONTACT TYPES

CONTACT CODES	CONTACT TYPES
10	Through board solder - 90° for PCB thickness: 1.44 - 1.76 mm
11	Through board solder - 90° for PCB thickness: 1.98 - 2.42 mm
12	Through board solder - 90° for PCB thickness: 2.88 - 3.52 mm
30	Through board solder - straight for PCB thickness: 2.16 - 2.64 mm
31	Through board solder - straight for PCB thickness: 2.88 - 3.52 mm
43	Surface mount for PCB thickness: 2.16 - 2.64 mm (Centred PCB)
45	Surface mount for PCB thickness: 1.44 - 2.40 mm (Off-centre PCB)
47	Surface mount for PCB thickness: 2.16 - 2.64 mm (Off-centre PCB)
91	Contact for connector saver male - female

**NOTES**

1. See Figure 2(c).

GUIDING AND LOCKING DEVICES

GUIDING AND LOCKING DEVICES CODE	MOUNTING ON	MAX. WEIGHT (g)
110	Plug	0.55
111	Plug	1.35
121	Receptacle	0.65
124	Receptacle	1.50
134	Receptacle	1.30
201	Saver Receptacle	-

**NOTES**

1. See Figure 2(b).


**TABLE 1(b) - MAXIMUM RATINGS**

No.	CHARACTERISTIC	SYMBOL	MAXIMUM RATING	UNIT	REMARKS
1	Working Voltage Sea Level	V	200	Vrms	Note 1
2	Rated Current	$I_R$	2.0	A	
3	Operating Temperature Range	$T_{op}$	- 55 to + 125	°C	$T_{amb}$
4	Storage Temperature Range	$T_{stg}$	- 55 to + 125	°C	
5	Soldering Temperature	$T_{sol}$	+ 260	°C	Note 2

**NOTES**

1. Between contacts and shell.
2. Duration 10 seconds maximum and the same contact shall not be resoldered until 3 minutes have elapsed.

**FIGURE 1 - PARAMETER DERATING INFORMATION**

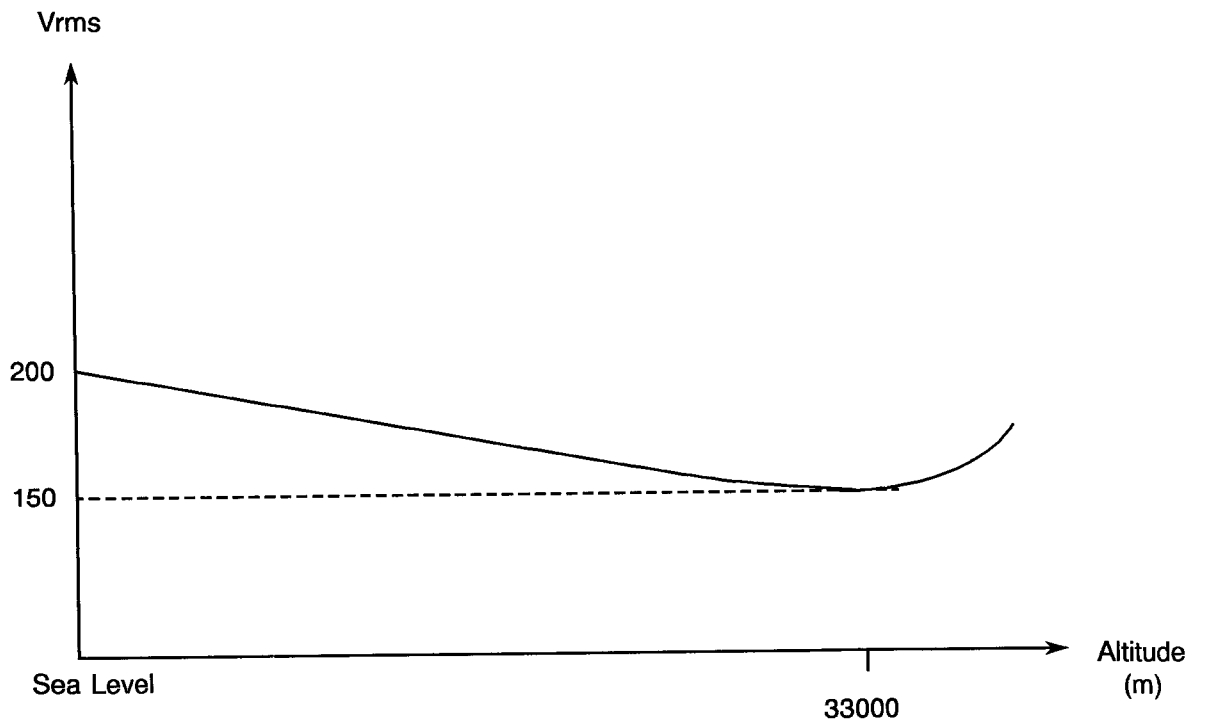


Working Voltage versus Altitude



**FIGURE 2 - PHYSICAL DIMENSIONS**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES**

**RECEPTACLE, 52 CONTACTS**

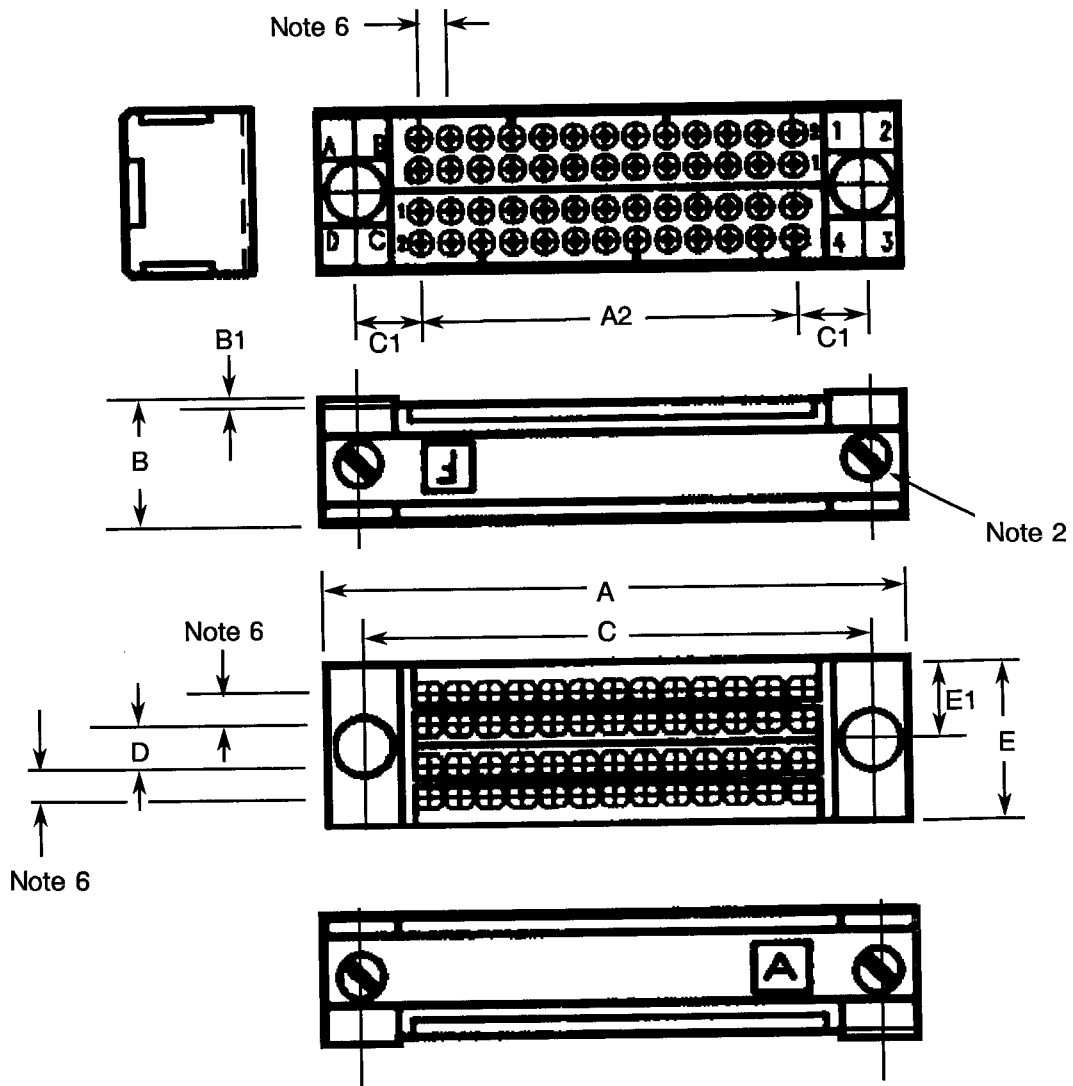

Symbol/ Dim. (1)	<u>A</u>	<u>A2</u>	B	B1	<u>C</u>	<u>C1</u>	<u>D</u>	E	<u>E1</u>
MIN.	35.1	22.66	7.75	0.3	30.65	3.77	2.34	9.9	4.90
MAX.	35.4	23.06	8.05	0.6	30.95	4.17	2.74	10.1	5.10


**NOTES**

1. All dimensions are in millimetres.
2. Torque : 10N.cm.
3. Underlined dimensions, in table, are critical to ensure intermateability.
4. The front of the insert shall be marked with the minimum marking shown.
5. Orientation of labelling of contacts and guiding devices is not a true representation.
6. Pitch : 1.905mm.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES (CONT.)**

**RECEPTACLE, 100 CONTACTS**

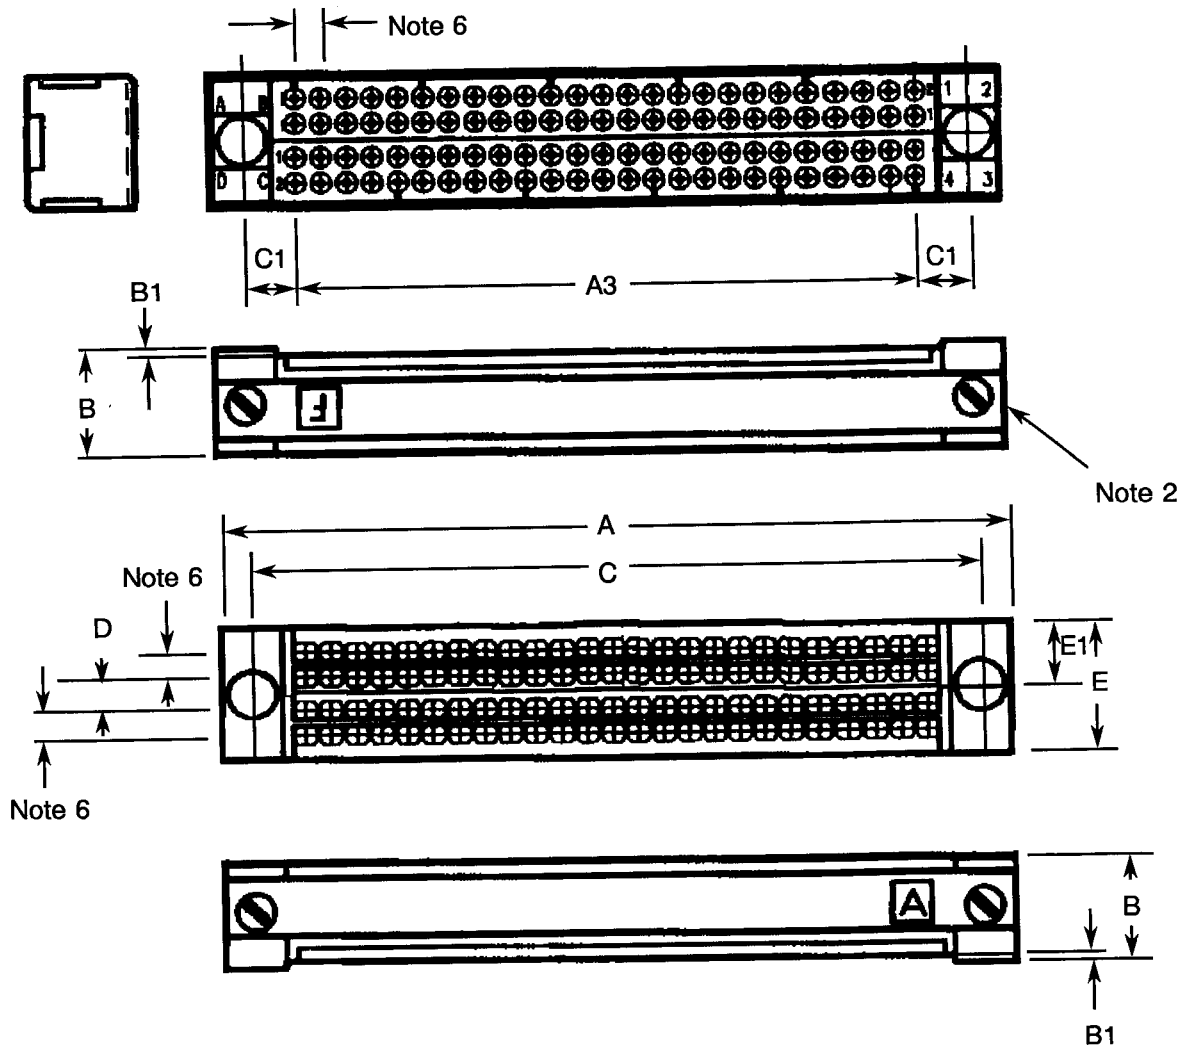

Symbol/ Dim. (1)	A	<u>A3</u>	B	B1	<u>C</u>	<u>C1</u>	D	E	<u>E1</u>
MIN.	57.9	45.52	7.75	0.3	53.51	3.77	2.34	9.9	4.90
MAX.	58.2	45.92	8.05	0.6	53.81	4.17	2.74	10.1	5.10


**NOTES**

1. All dimensions are in millimetres.
2. Torque : 10N.cm.
3. Underlined dimensions, in table, are critical to ensure intermateability.
4. The front of the insert shall be marked with the minimum marking shown.
5. Orientation of labelling of contacts and guiding devices is not a true representation.
6. Pitch : 1.905mm.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES (CONT.)**

RECEPTACLE, 152 CONTACTS

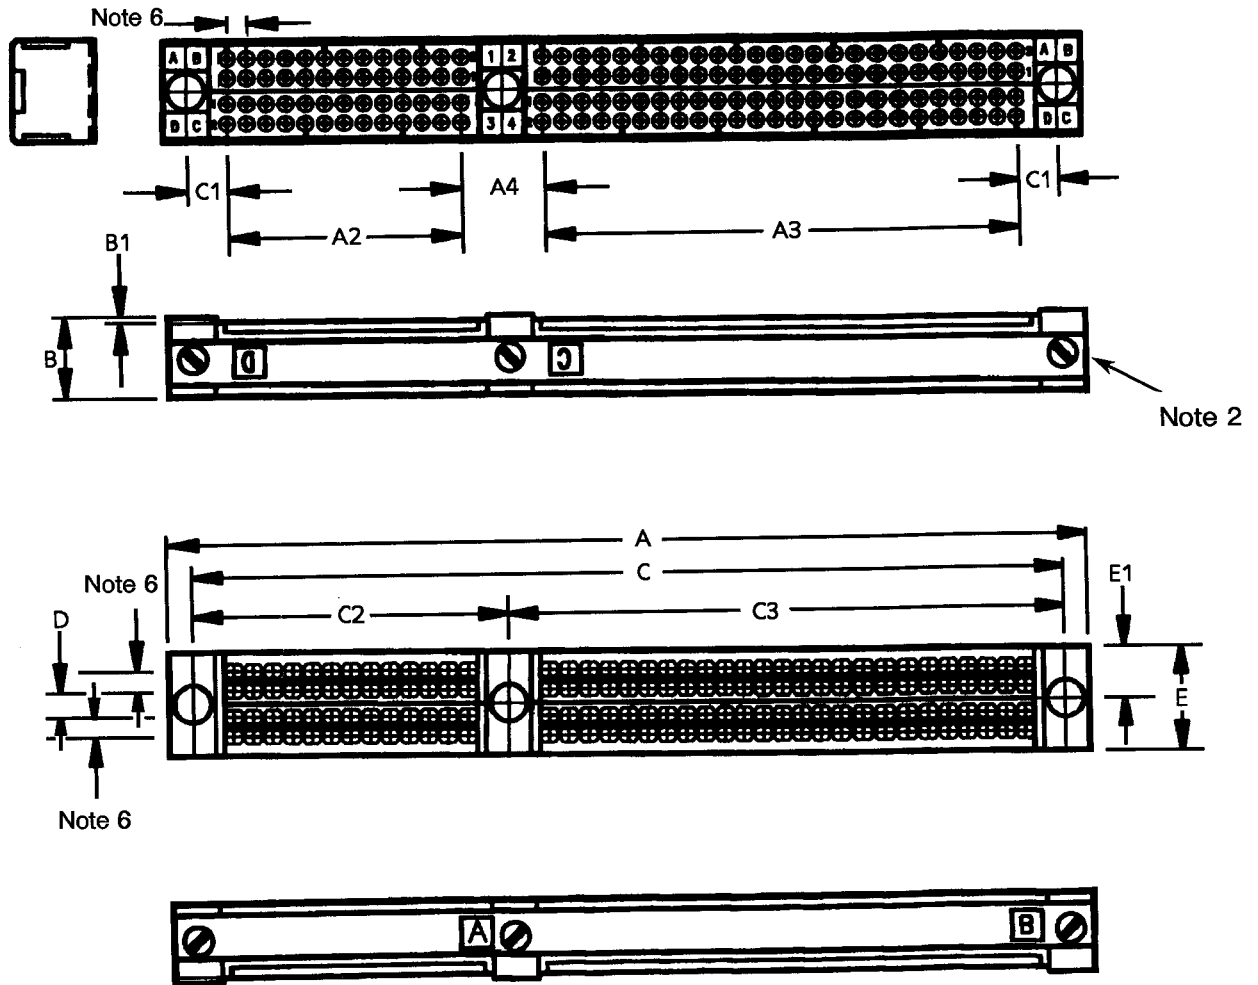

Symbol/ Dim. (1)	A	<u>A2</u>	<u>A3</u>	<u>A4</u>	B	B1	<u>C</u>	<u>C1</u>	<u>C2</u>	<u>C3</u>	<u>D</u>	E	<u>E1</u>
MIN.	88.8	22.66	45.52	7.74	7.75	0.3	84.3	3.77	30.65	53.51	2.34	9.9	4.90
MAX.	89.1	23.06	45.92	8.14	8.05	0.6	84.6	4.17	30.95	53.81	2.74	10.1	5.10


**NOTES**

1. All dimensions are in millimetres.
2. Torque : 10N.cm.
3. Underlined dimensions, in table, are critical to ensure intermateability.
4. The front of the insert shall be marked with the minimum marking shown.
5. Orientation of labelling of contacts and guiding devices is not a true representation.
6. Pitch : 1.905mm.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES (CONT.)**

**RECEPTACLE, 200 CONTACTS**

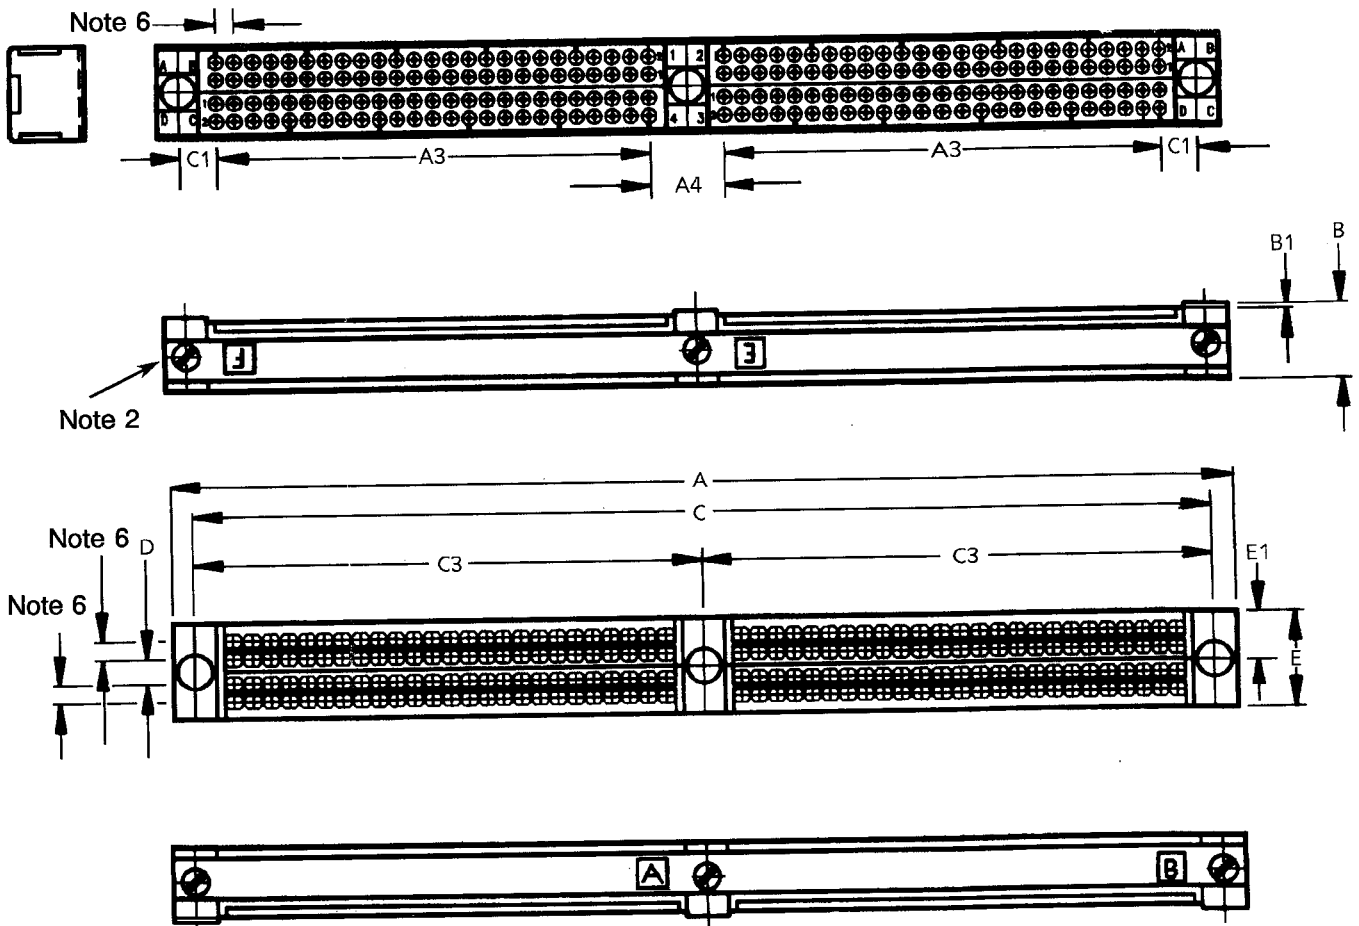

Symbol/ Dim. (1)	A	<u>A3</u>	<u>A4</u>	B	B1	<u>C</u>	<u>C1</u>	<u>C3</u>	<u>D</u>	E	<u>E1</u>
MIN.	111.6	45.52	7.74	7.75	0.3	107.16	3.77	53.51	2.34	9.9	4.90
MAX.	111.9	45.92	8.14	8.05	0.6	107.46	4.17	53.81	2.74	10.1	5.10


**NOTES**

1. All dimensions are in millimetres.
2. Torque : 10N.cm.
3. Underlined dimensions, in table, are critical to ensure intermateability.
4. The front of the insert shall be marked with the minimum marking shown.
5. Orientation of labelling of contacts and guiding devices is not a true representation.
6. Pitch : 1.905mm.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES (CONT.)**

RECEPTACLE, 252 CONTACTS

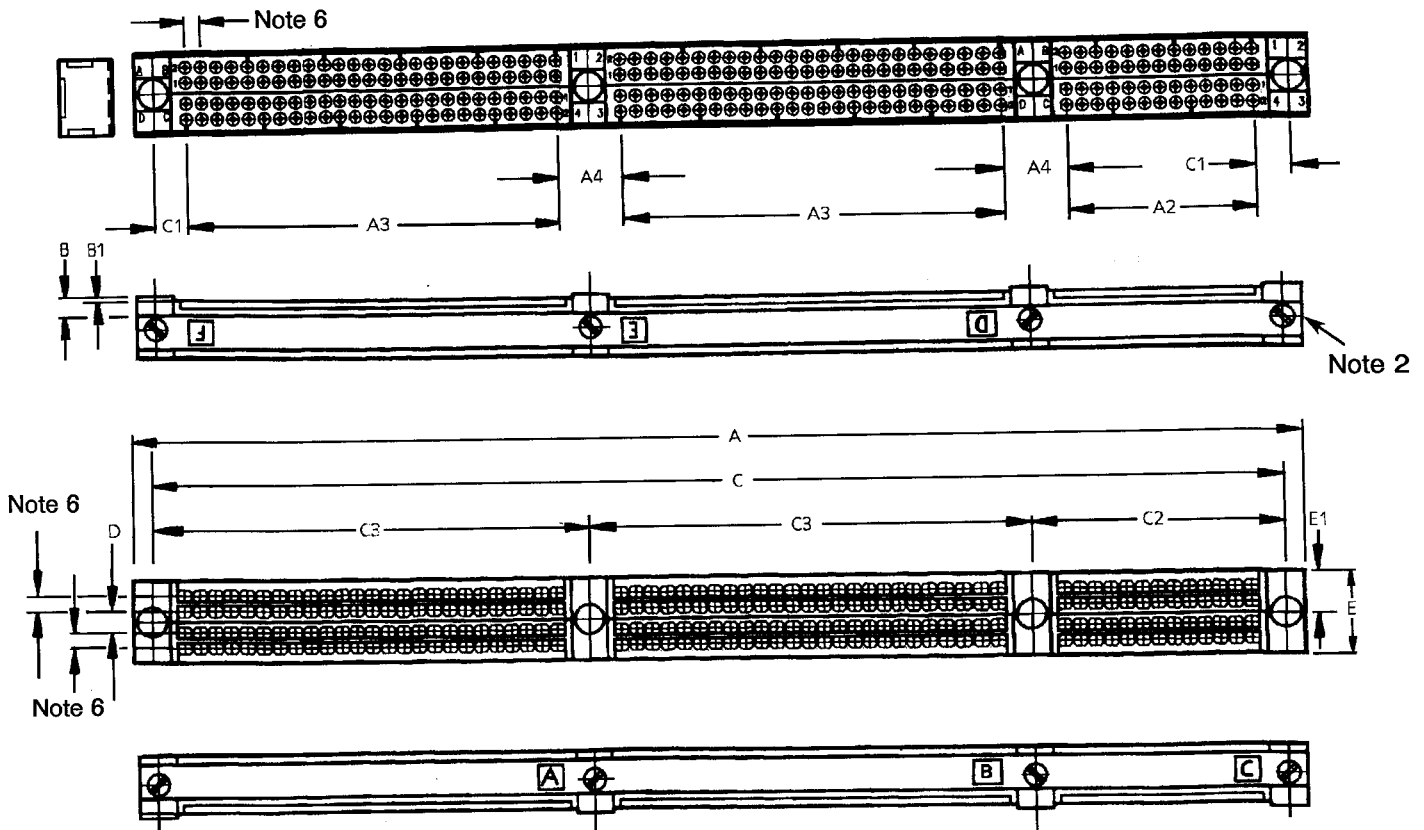

Symbol/ Dim. (1)	<u>A</u>	<u>A2</u>	<u>A3</u>	<u>A4</u>	B	B1	<u>C</u>	<u>C1</u>	<u>C2</u>	<u>C3</u>	<u>D</u>	E	<u>E1</u>
MIN.	142.5	22.66	45.52	7.74	7.75	0.3	137.96	3.77	30.65	53.51	2.34	9.9	4.90
MAX.	142.8	23.06	45.92	8.14	8.05	0.6	138.26	4.17	30.95	53.81	2.74	10.1	5.10


**NOTES**

1. All dimensions are in millimetres.
2. Torque : 10N.cm.
3. Underlined dimensions, in table, are critical to ensure intermateability.
4. The front of the insert shall be marked with the minimum marking shown.
5. Orientation of labelling of contacts and guiding devices is not a true representation.
6. Pitch : 1.905mm.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES (CONT.)**

**RECEPTACLE, 300 CONTACTS**

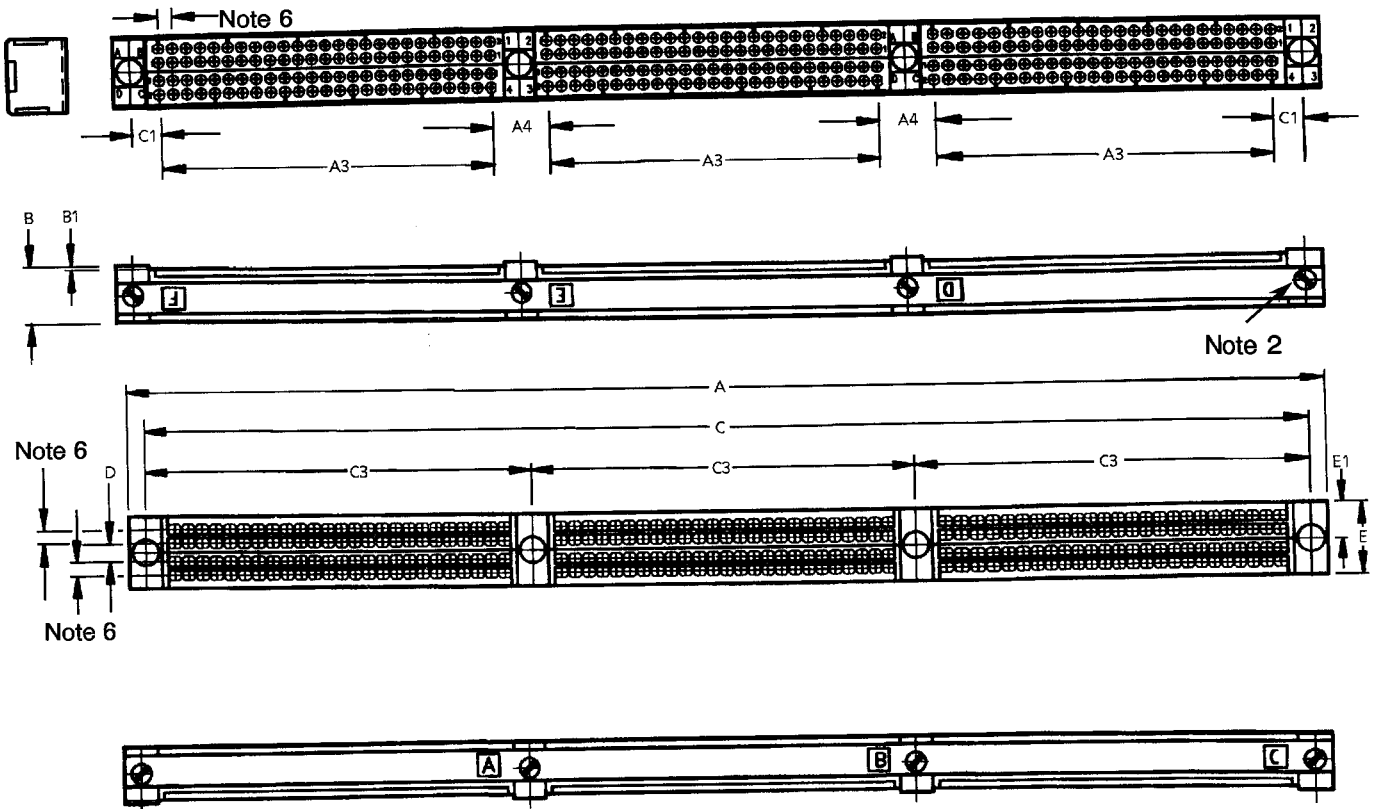

Symbol/ Dim. (1)	<u>A</u>	<u>A3</u>	<u>A4</u>	B	B1	<u>C</u>	<u>C1</u>	<u>C3</u>	<u>D</u>	E	<u>E1</u>
MIN.	165.3	45.52	7.74	7.75	0.3	160.82	3.77	53.51	2.34	9.9	4.90
MAX.	165.6	45.92	8.14	8.05	0.6	161.12	4.17	53.81	2.74	10.1	5.10


**NOTES**

1. All dimensions are in millimetres.
2. Torque : 10N.cm.
3. Underlined dimensions, in table, are critical to ensure intermateability.
4. The front of the insert shall be marked with the minimum marking shown.
5. Orientation of labelling of contacts and guiding devices is not a true representation.
6. Pitch : 1.905mm.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES (CONT.)**

**RECEPTACLE, 352 CONTACTS**

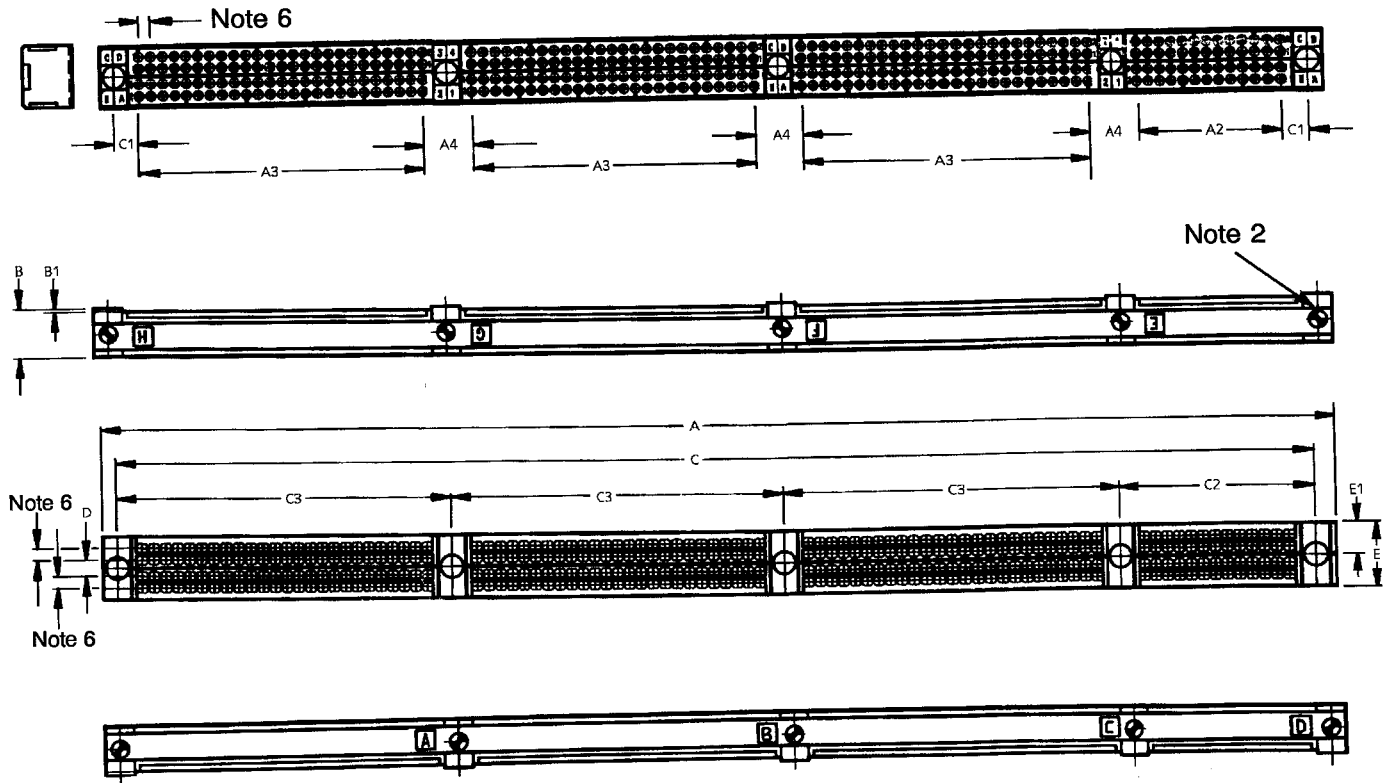

Symbol/ Dim. (1)	A	<u>A2</u>	<u>A3</u>	<u>A4</u>	B	B1	<u>C</u>	<u>C1</u>	<u>C2</u>	<u>C3</u>	<u>D</u>	E	<u>E1</u>
MIN.	196.2	22.66	45.52	7.74	7.75	0.3	191.62	3.77	30.65	53.51	2.34	9.9	4.90
MAX.	196.8	23.06	45.92	8.14	8.05	0.6	191.92	4.17	30.95	53.81	2.74	10.1	5.10


**NOTES**

- All dimensions are in millimetres.
- Torque : 10N.cm.
- Underlined dimensions, in table, are critical to ensure intermateability.
- The front of the insert shall be marked with the minimum marking shown.
- Orientation of labelling of contacts and guiding devices is not a true representation.
- Pitch : 1.905mm.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES (CONT.)**

**RECEPTACLE, 400 CONTACTS**

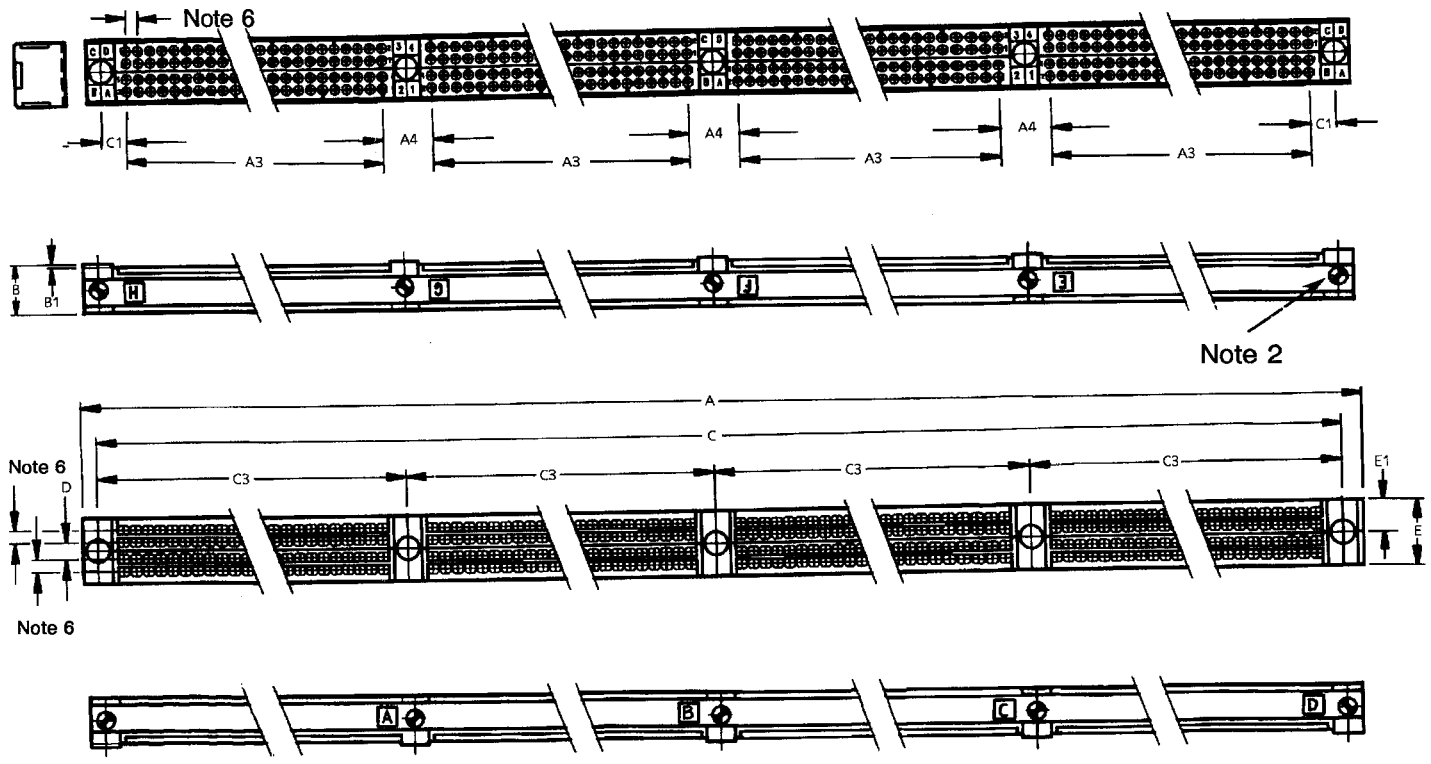

Symbol/ Dim. (1)	A	<u>A3</u>	<u>A4</u>	B	B1	<u>C</u>	<u>C1</u>	<u>C3</u>	D	E	<u>E1</u>
MIN.	219	45.52	7.74	7.75	0.3	214.48	3.77	53.51	2.34	9.9	4.90
MAX.	219.3	45.92	8.14	8.05	0.6	214.78	4.17	53.81	2.74	10.1	5.10

**NOTES**


1. All dimensions are in millimetres.
2. Torque : 10N.cm.
3. Underlined dimensions, in table, are critical to ensure intermateability.
4. The front of the insert shall be marked with the minimum marking shown.
5. Orientation of labelling of contacts and guiding devices is not a true representation.
6. Pitch : 1.905mm.



**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES (CONT.)**

**PLUG, 52 CONTACTS**

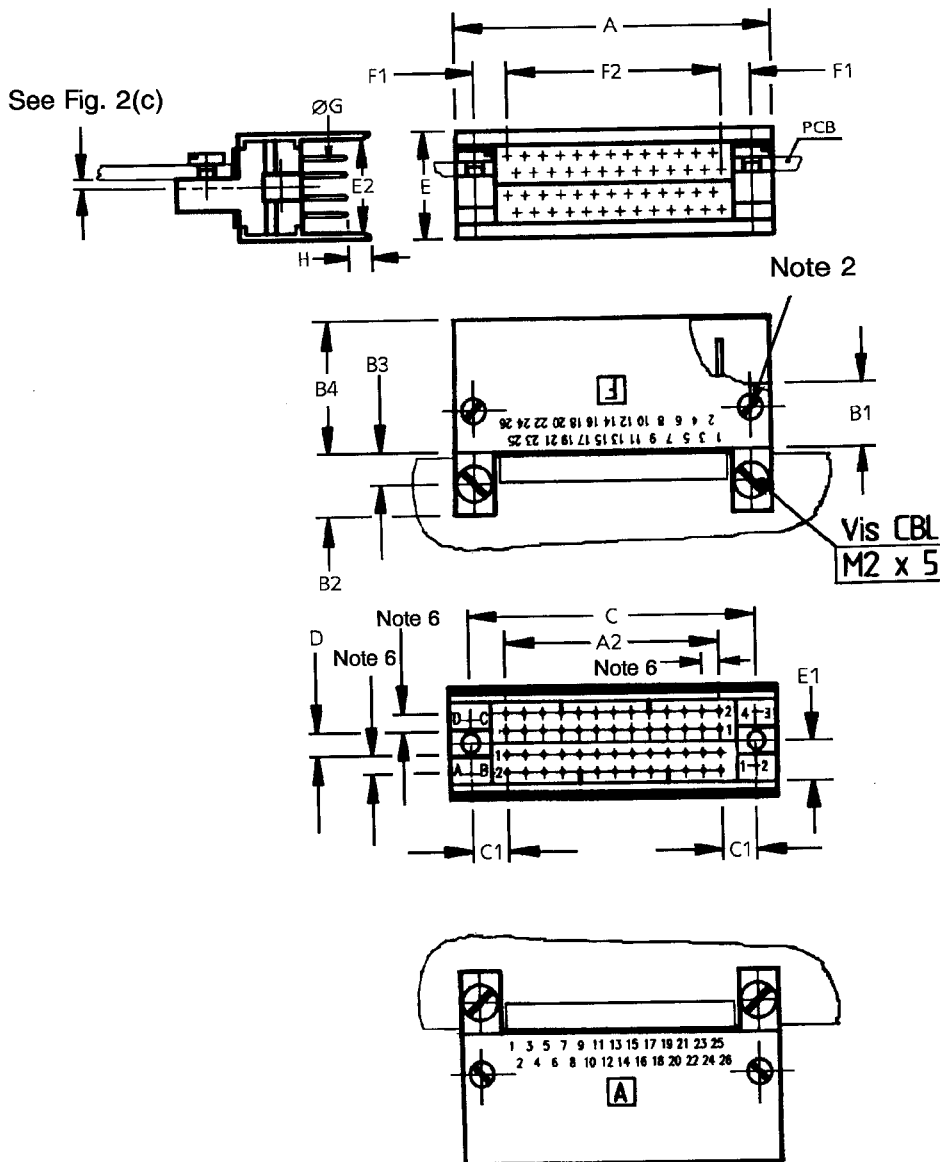


Symbol/ Dim. (1)	A	<u>A2</u>	B1	B2	B3	B4	<u>C</u>	<u>C1</u>	<u>D</u>	E	E1	E2	<u>F1</u>	<u>F2</u>	ØG	H
MIN.	35.1	22.66	7.0	-	3.5	14.3	30.65	3.77	2.34	-	5.05	10.20	3.29	23.61	0.42	2.0
MAX.	35.4	23.06	7.2	7.4	3.6	14.6	30.95	4.17	2.74	12	5.25	10.45	3.69	24.01	0.44	3.0

**NOTES**

1. All dimensions are in millimetres.
2. Torque : 10N.cm.
3. Underlined dimensions, in table, are critical to ensure intermateability.
4. The front of the insert shall be marked with the minimum marking shown.
5. Orientation of labelling of contacts and guiding devices is not a true representation.
6. Pitch : 1.905mm.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES (CONT.)**

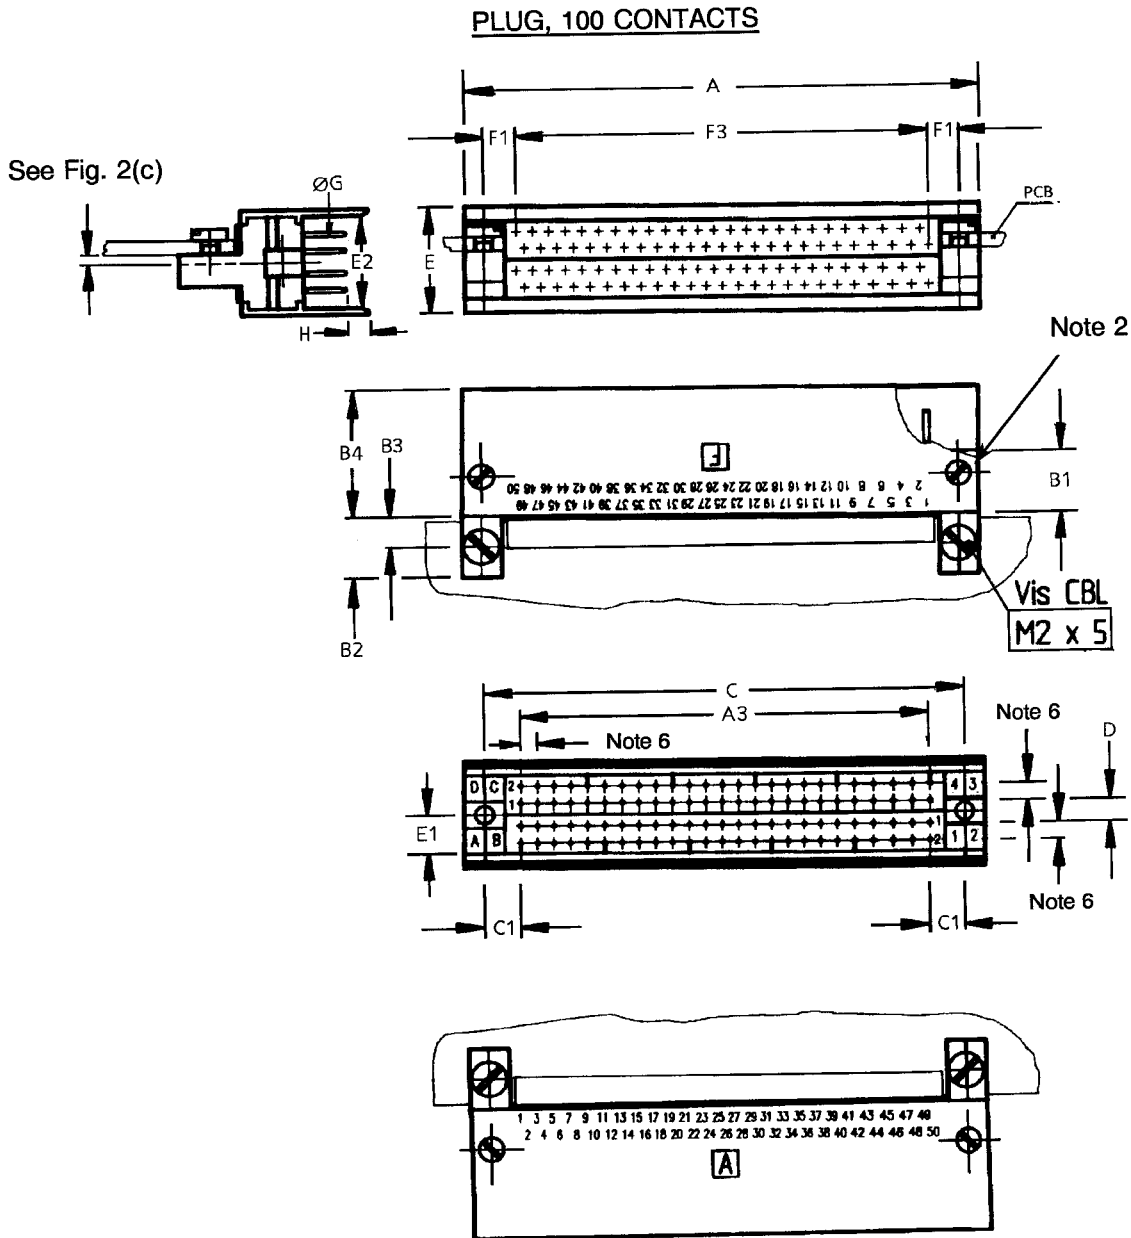

Symbol/ Dim. (1)	A	<u>A3</u>	B1	B2	B3	B4	<u>C</u>	<u>C1</u>	<u>D</u>	E	E1	E2	<u>F1</u>	<u>F3</u>	ØG	H
MIN.	57.9	45.52	7.0	-	3.5	14.3	53.51	3.77	2.34	-	5.05	10.20	3.29	46.47	0.42	2.0
MAX.	58.2	45.92	7.2	7.4	3.6	14.6	53.81	4.17	2.74	12	5.25	10.45	3.69	46.87	0.44	3.0


**NOTES**

1. All dimensions are in millimetres.
2. Torque : 10N.cm.
3. Underlined dimensions, in table, are critical to ensure intermateability.
4. The front of the insert shall be marked with the minimum marking shown.
5. Orientation of labelling of contacts and guiding devices is not a true representation.
6. Pitch : 1.905mm.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES (CONT.)**

**PLUG, 152 CONTACTS**

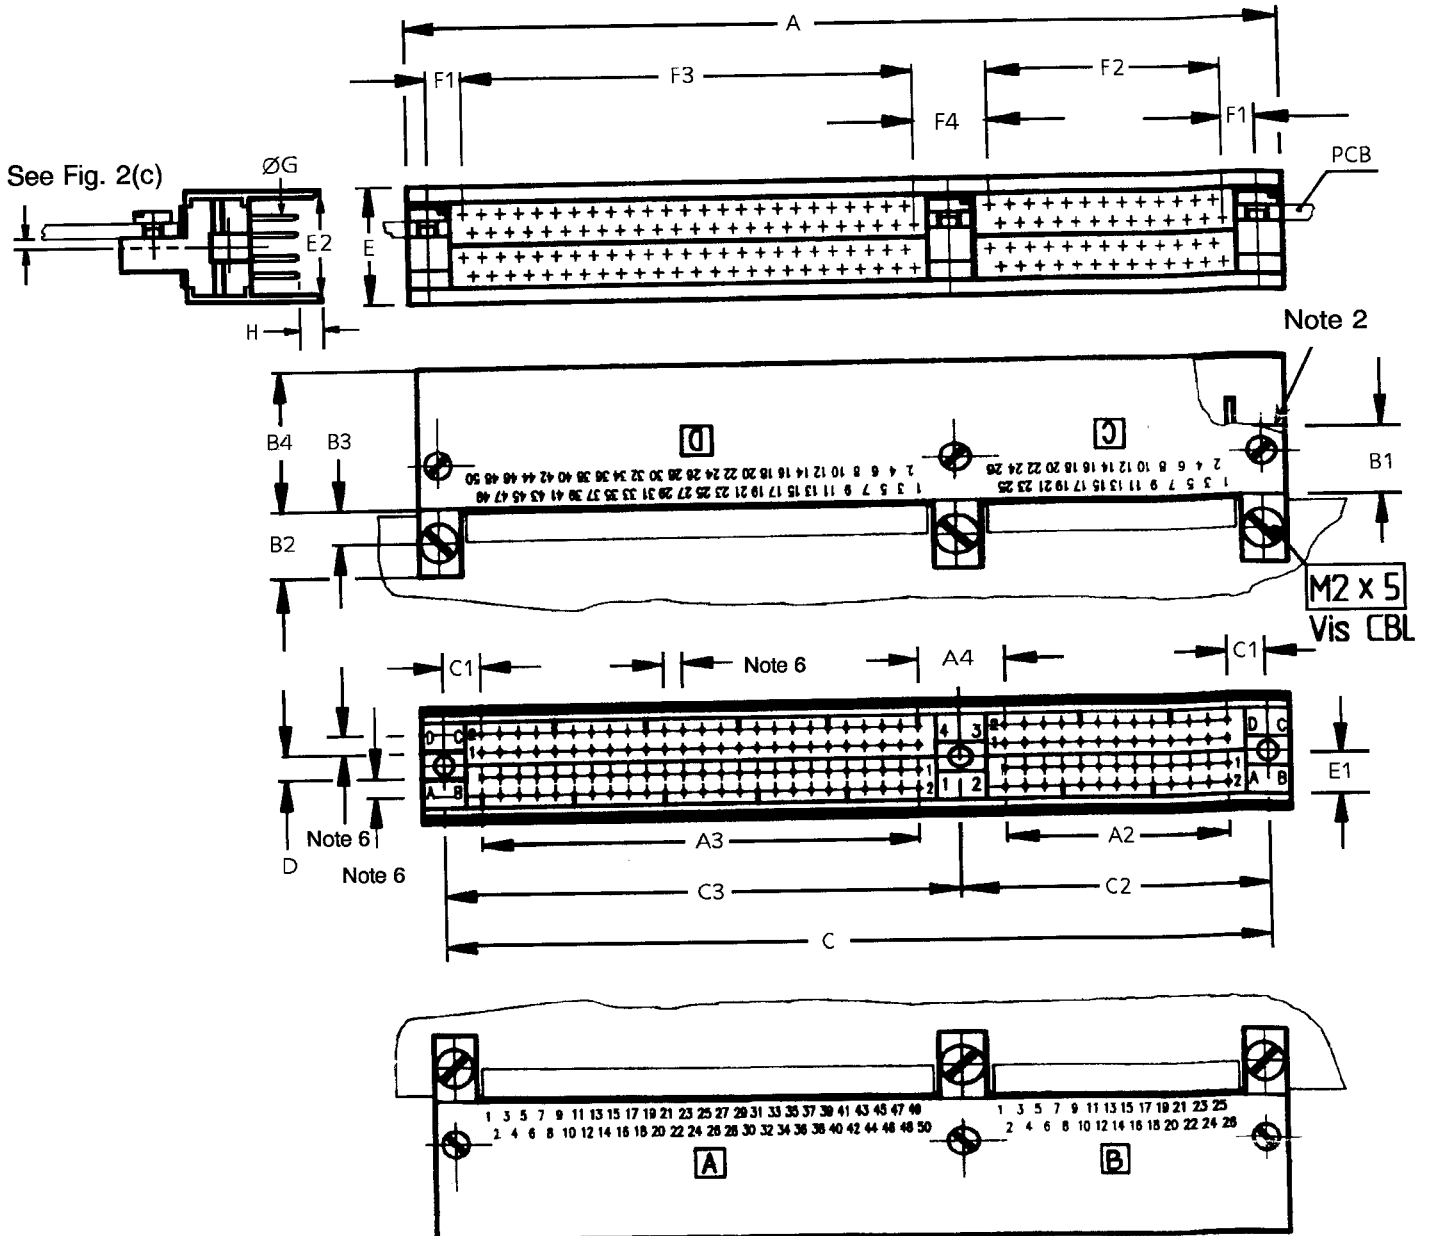

Symbol/ Dim. (1)	A	<u>A2</u>	<u>A3</u>	<u>A4</u>	B1	B2	B3	B4	<u>C</u>	<u>C1</u>	<u>C2</u>	<u>C3</u>	<u>D</u>	E	E1	E2	<u>F1</u>	<u>F2</u>	<u>F3</u>	<u>F4</u>	ØG	H
MIN.	88.8	22.66	45.52	7.74	7.0	-	3.5	14.3	84.305	3.77	30.65	53.51	2.34	-	5.05	10.20	3.29	23.61	46.47	6.79	0.42	2.0
MAX.	89.1	23.06	45.92	8.14	7.2	7.4	3.6	14.6	84.605	4.17	30.95	53.81	2.74	12	5.25	10.45	3.69	24.01	46.87	7.19	0.44	3.0


**NOTES**

1. All dimensions are in millimetres.
2. Torque : 10N.cm.
3. Underlined dimensions, in table, are critical to ensure intermateability.
4. The front of the insert shall be marked with the minimum marking shown.
5. Orientation of labelling of contacts and guiding devices is not a true representation.
6. Pitch : 1.905mm.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES (CONT.)**

**PLUG, 200 CONTACTS**

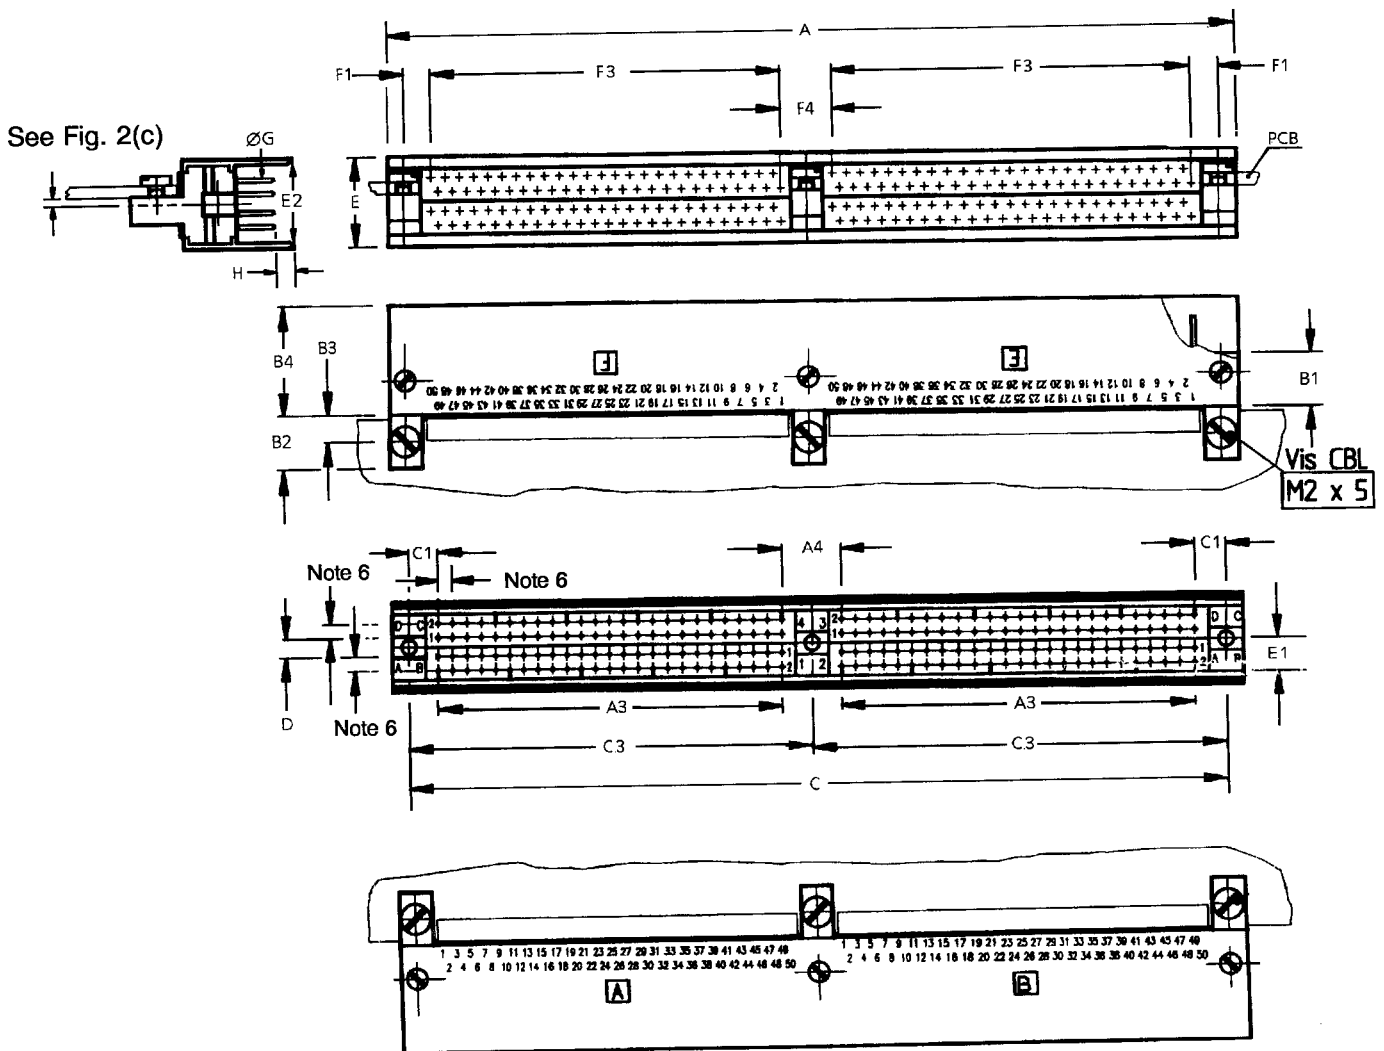

Symbol / Dim. (1)	A	<u>A3</u>	<u>A4</u>	B1	B2	B3	B4	<u>C</u>	<u>C1</u>	<u>C3</u>	<u>D</u>	E	E1	E2	F1	F3	F4	ØG	H
MIN.	111.6	45.52	7.74	7.0	-	3.5	14.3	107.17	3.77	53.51	2.34	-	5.05	10.20	3.29	46.47	6.79	0.42	2.0
MAX.	111.9	45.92	8.14	7.2	7.4	3.6	14.6	107.47	4.17	53.81	2.74	12	5.25	10.45	3.69	46.87	7.19	0.44	3.0


**NOTES**

- All dimensions are in millimetres.
- Torque : 10N.cm.
- Underlined dimensions, in table, are critical to ensure intermateability.
- The front of the insert shall be marked with the minimum marking shown.
- Orientation of labelling of contacts and guiding devices is not a true representation.
- Pitch : 1.905mm.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES (CONT.)**

**PLUG, 252 CONTACTS**

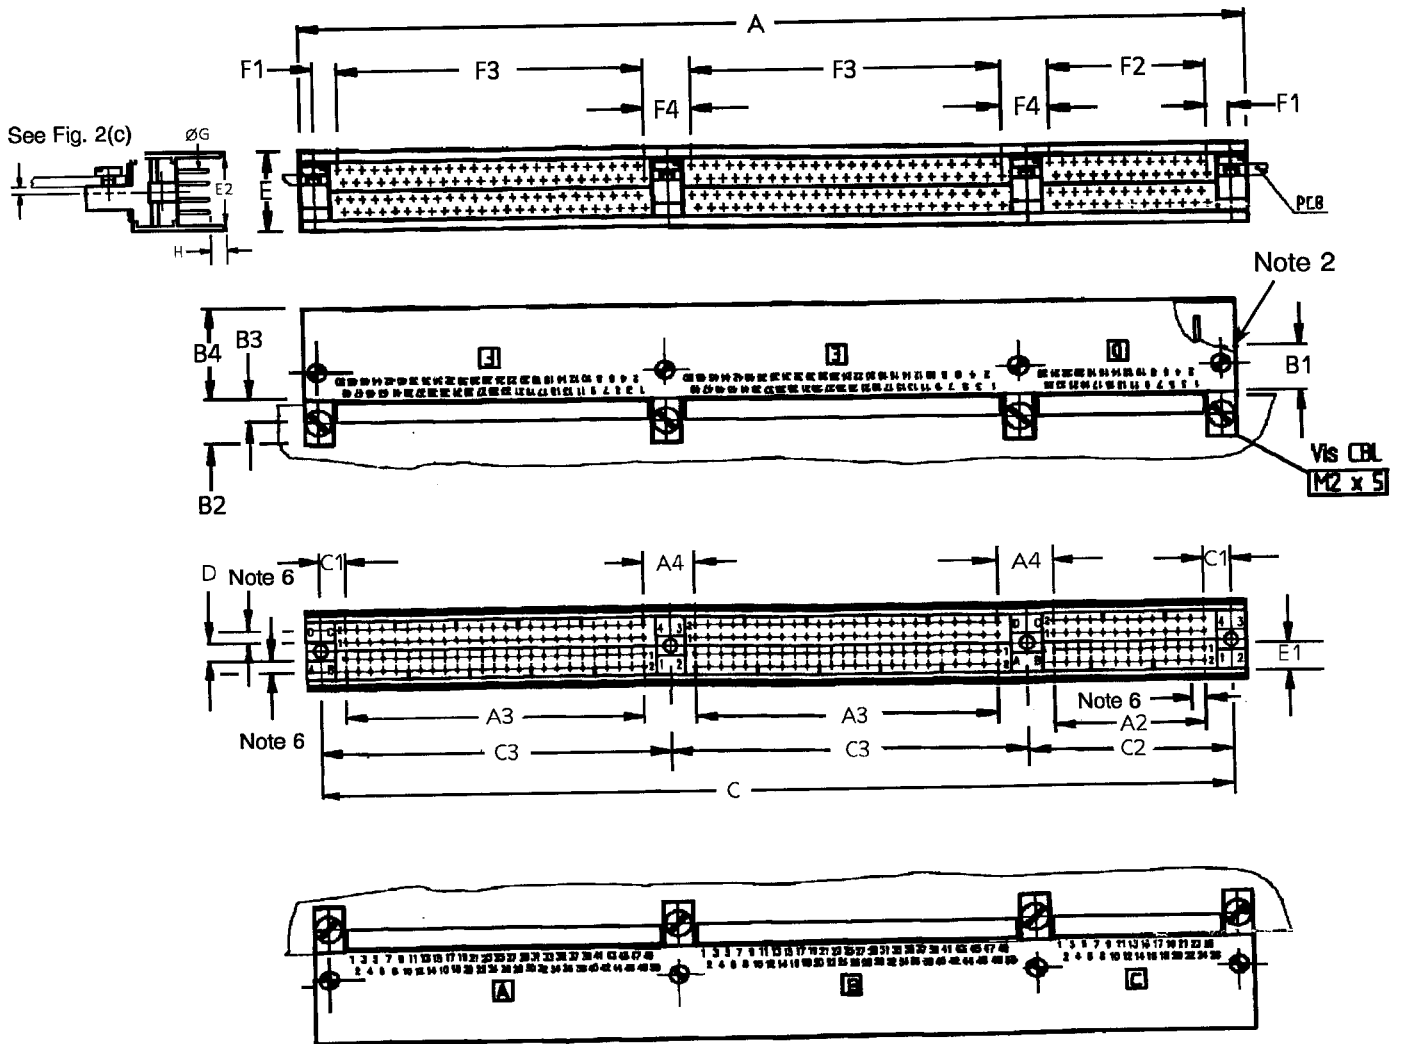

Symbol / Dim. (1)	A	<u>A2</u>	<u>A3</u>	<u>A4</u>	B1	B2	B3	B4	<u>C</u>	<u>C1</u>	<u>C2</u>	<u>C3</u>	D	E	E1	E2	<u>F1</u>	<u>F2</u>	<u>F3</u>	<u>F4</u>	ØG	H
MIN.	142.5	22.66	45.52	7.74	7.0	-	3.5	14.3	137.96	3.77	30.65	53.51	2.34	-	5.05	10.20	3.29	23.61	46.47	6.79	0.42	2.0
MAX.	142.8	23.06	45.92	8.14	7.2	7.4	3.6	14.6	138.26	4.17	30.95	53.81	2.74	12	5.25	10.45	3.69	24.01	46.87	7.19	0.44	3.0


**NOTES**

1. All dimensions are in millimetres.
2. Torque : 10N.cm.
3. Underlined dimensions, in table, are critical to ensure intermateability.
4. The front of the insert shall be marked with the minimum marking shown.
5. Orientation of labelling of contacts and guiding devices is not a true representation.
6. Pitch : 1.905mm.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES (CONT.)**

**PLUG, 300 CONTACTS**

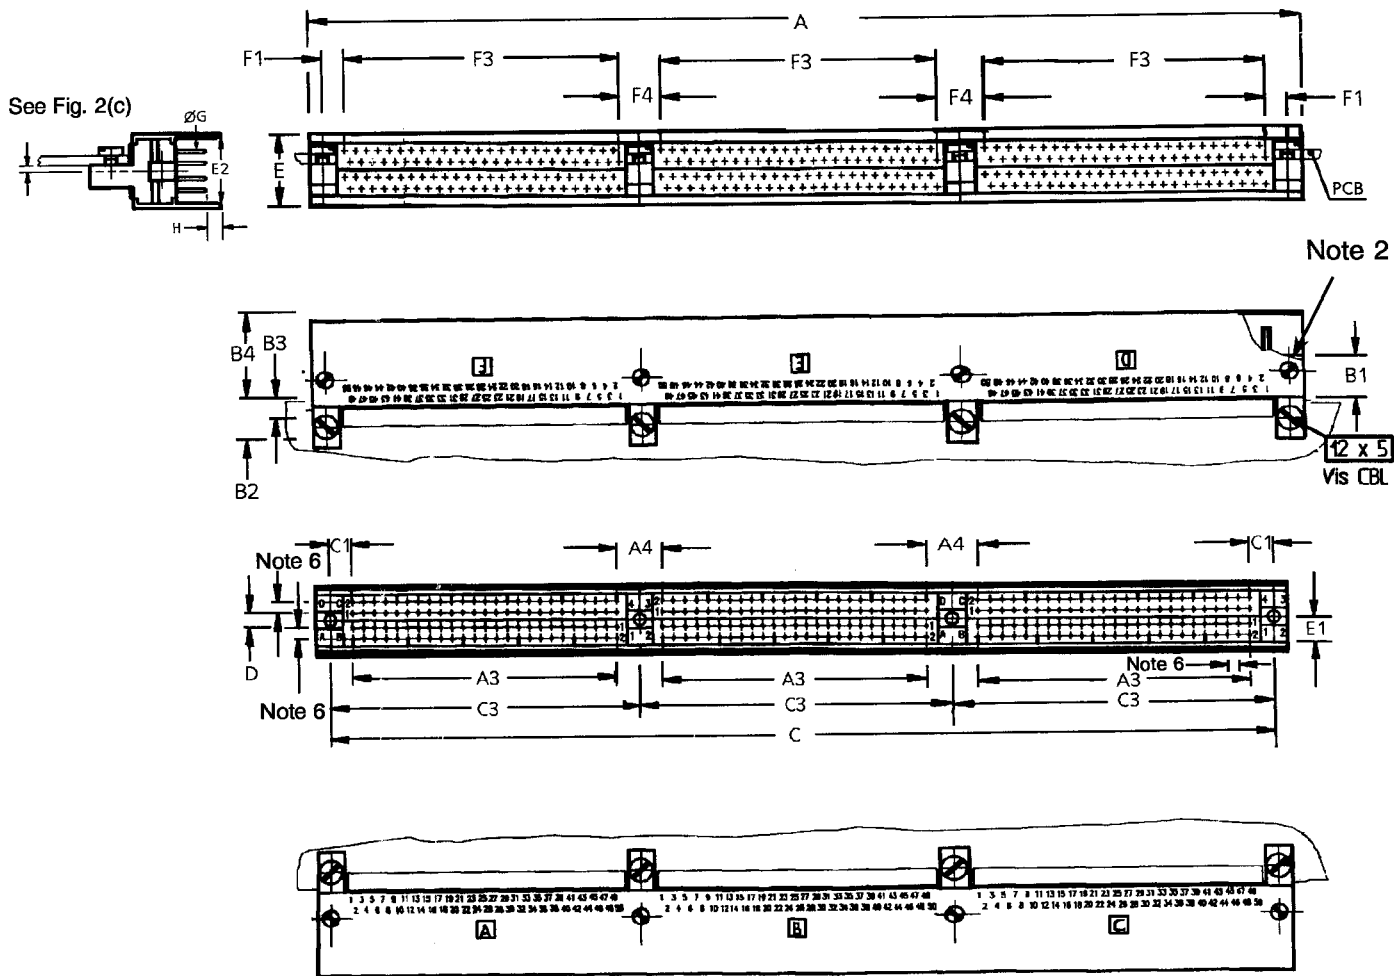

Symbol / Dim. (1)	A	<u>A3</u>	<u>A4</u>	B1	B2	B3	B4	<u>C</u>	<u>C1</u>	<u>C3</u>	D	E	E1	E2	<u>F1</u>	<u>F3</u>	<u>F4</u>	ØG	H
MIN.	165.3	45.52	7.74	7.0	-	3.5	14.3	160.82	3.77	53.51	2.34	-	5.05	10.20	3.29	46.47	6.79	0.42	2.0
MAX.	165.6	45.92	8.14	7.2	7.4	3.6	14.6	161.12	4.17	53.81	2.74	12	5.25	10.45	3.69	46.87	7.19	0.44	3.0


**NOTES**

1. All dimensions are in millimetres.
2. Torque : 10N.cm.
3. Underlined dimensions, in table, are critical to ensure intermateability.
4. The front of the insert shall be marked with the minimum marking shown.
5. Orientation of labelling of contacts and guiding devices is not a true representation.
6. Pitch : 1.905mm.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES (CONT.)**

**PLUG, 352 CONTACTS**

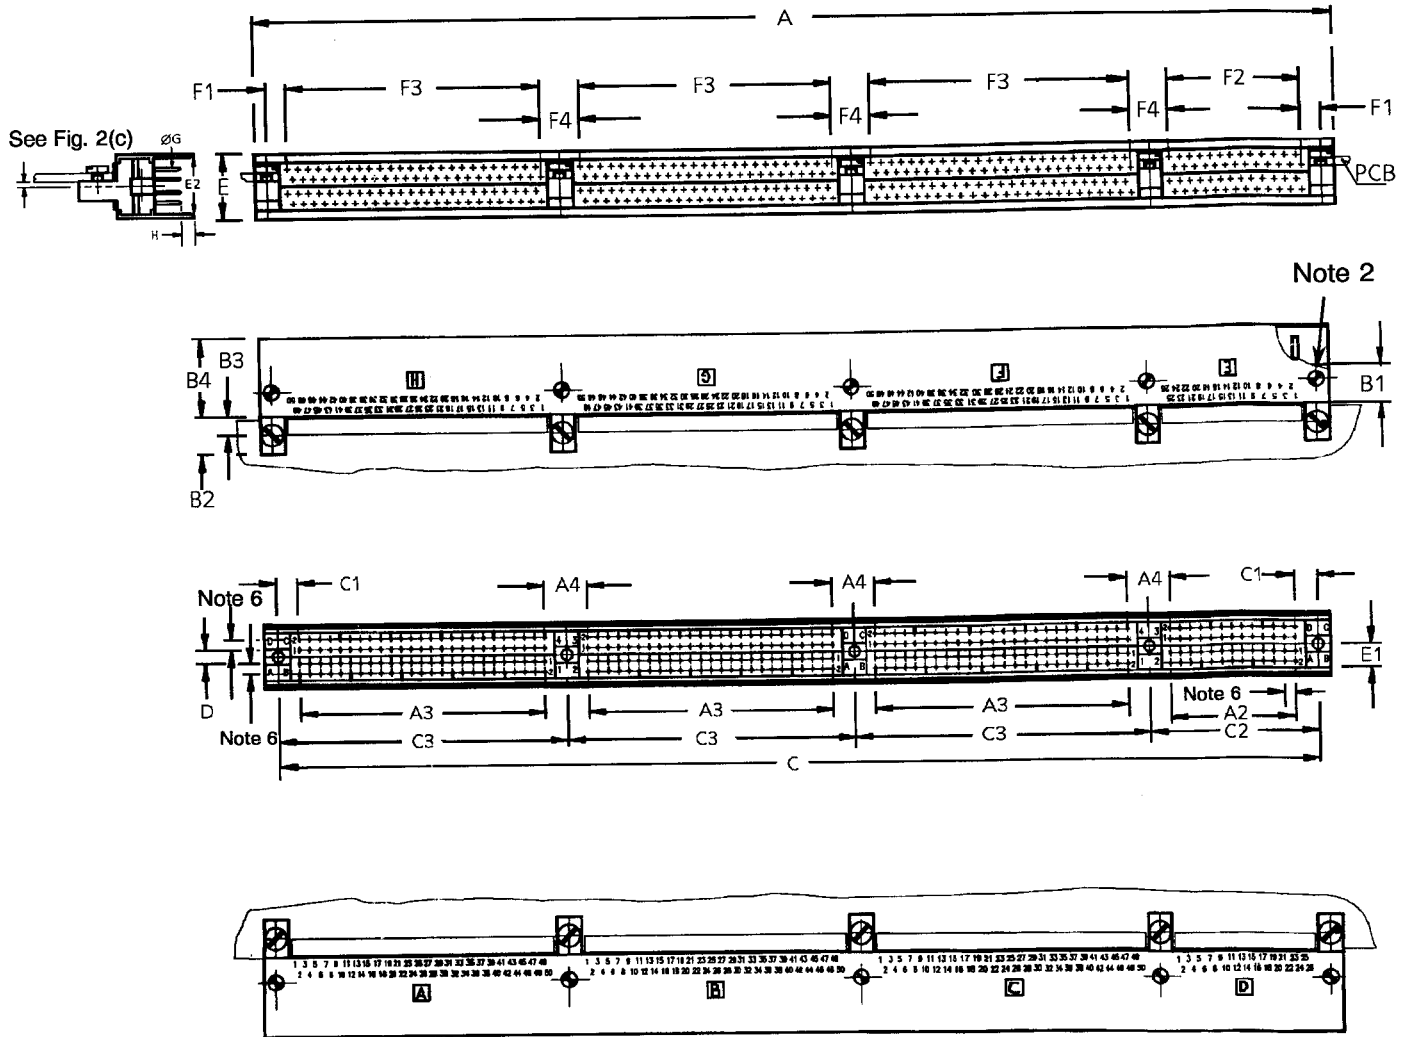

Symbol/ Dim. (1)	A	<u>A2</u>	<u>A3</u>	<u>A4</u>	B1	B2	B3	B4	<u>C</u>	<u>C1</u>	<u>C2</u>	<u>C3</u>	<u>D</u>	E	E1	E2	<u>F1</u>	<u>F2</u>	<u>F3</u>	<u>F4</u>	ØG	H
MIN.	196.2	22.66	45.52	7.74	7.0	-	3.5	14.3	191.62	3.77	30.65	53.51	2.34	-	5.05	10.20	3.29	23.61	46.47	6.79	0.42	2.0
MAX.	196.5	23.06	45.92	8.14	7.2	7.4	3.6	14.6	191.92	4.17	30.95	53.81	2.74	12	5.25	10.45	3.69	24.01	46.87	7.19	0.44	3.0


**NOTES**

1. All dimensions are in millimetres.
2. Torque : 10N.cm.
3. Underlined dimensions, in table, are critical to ensure intermateability.
4. The front of the insert shall be marked with the minimum marking shown.
5. Orientation of labelling of contacts and guiding devices is not a true representation.
6. Pitch : 1.905mm.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(a) - INSERTS: PLUGS AND RECEPTACLES (CONT.)**

**PLUG, 400 CONTACTS**

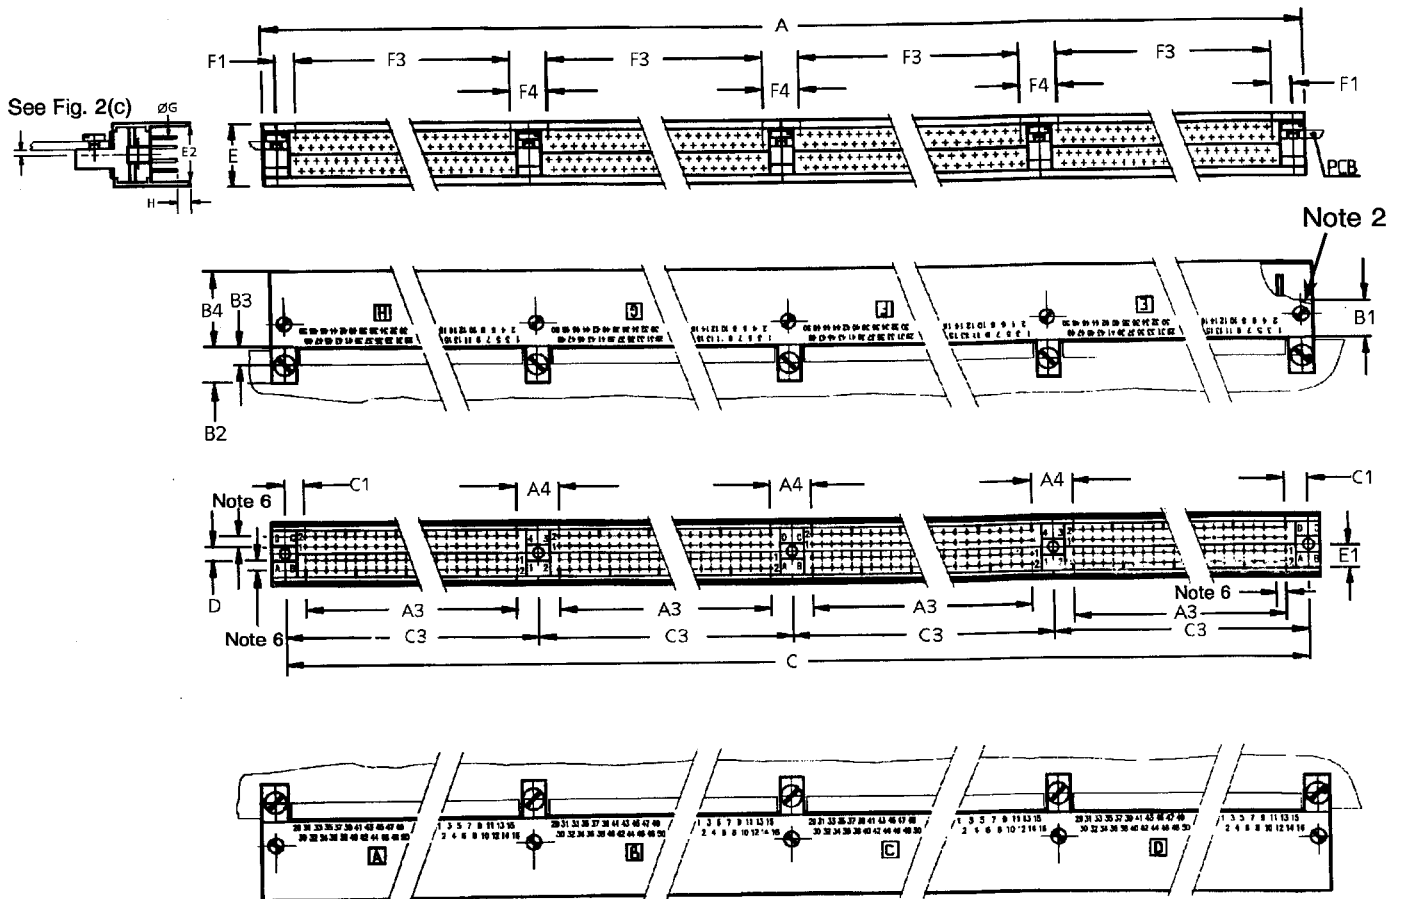

Symbol / Dim. (1)	A	<u>A3</u>	<u>A4</u>	B1	B2	B3	B4	<u>C</u>	<u>C1</u>	<u>C3</u>	D	E	E1	E2	<u>F1</u>	<u>F3</u>	<u>F4</u>	ØG	H
MIN.	219	45.52	7.74	7.0	-	3.5	14.3	214.48	3.77	53.51	2.34	-	5.05	10.20	3.29	46.47	6.79	0.42	2.0
MAX.	219.3	45.92	8.14	7.2	7.4	3.6	14.6	214.78	4.17	53.81	2.74	12	5.25	10.45	3.69	46.87	7.19	0.44	3.0

**NOTES**


1. All dimensions are in millimetres.
2. Torque : 10N.cm.
3. Underlined dimensions, in table, are critical to ensure intermateability.
4. The front of the insert shall be marked with the minimum marking shown.
5. Orientation of labelling of contacts and guiding devices is not a true representation.
6. Pitch : 1.905mm.



**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(b) - GUIDING AND LOCKING DEVICES**

CODE 110

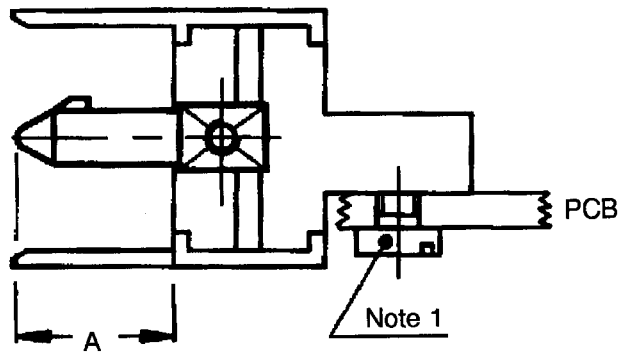


SYMBOL	MILLIMETRES	
	MIN.	MAX.
A	7.00	7.35

**NOTES**

1. Torque 15N.cm.

CODE 111

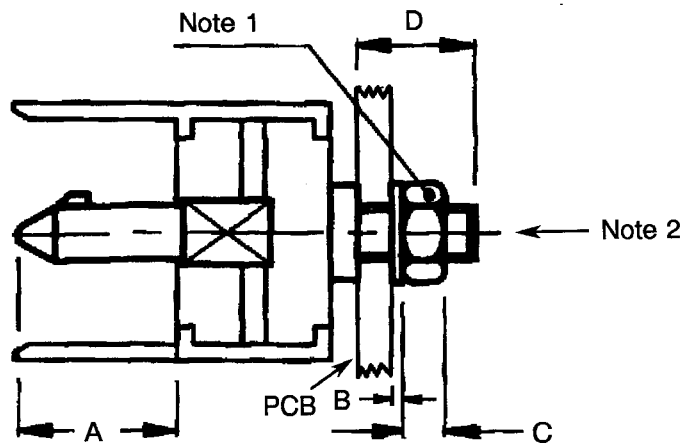

SYMBOL	MILLIMETRES	
	MIN.	MAX.
A	7.00	7.35
B	0.45	0.55
C	1.90	2.10
D	-	5.50

**NOTES**


1. Torque 25N.cm.
2. M2.50.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(b) - GUIDING AND LOCKING DEVICES (CONT.)**

CODE 121

SYMBOL	MILLIMETRES	
	MIN.	MAX.
B	0.45	0.55
C	1.90	2.10
D	-	5.50

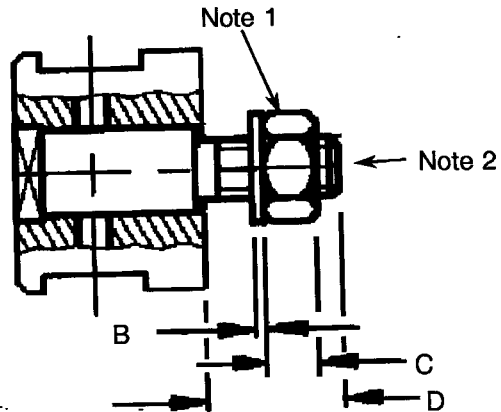


**NOTES**

1. Torque 25N.cm.
2. M2.50.

CODES 124 AND 134

SYMBOL	MILLIMETRES		NOTES
	MIN.	MAX.	
D	-	7.00	
∅E	2.45	2.55	
F	-	6.00	Code 124
F	-	6.60	Code 134
G	2.60	2.70	

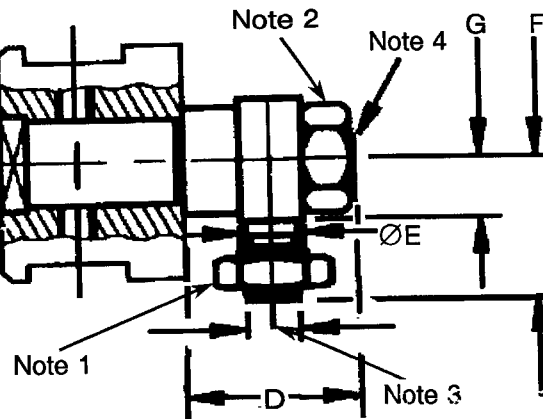


**NOTES**

1. Torque 15N.cm.
2. Torque 25N.cm.
3. M2.00.
4. M2.50.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(b) - GUIDING AND LOCKING DEVICES (CONT.)**

CODE 201

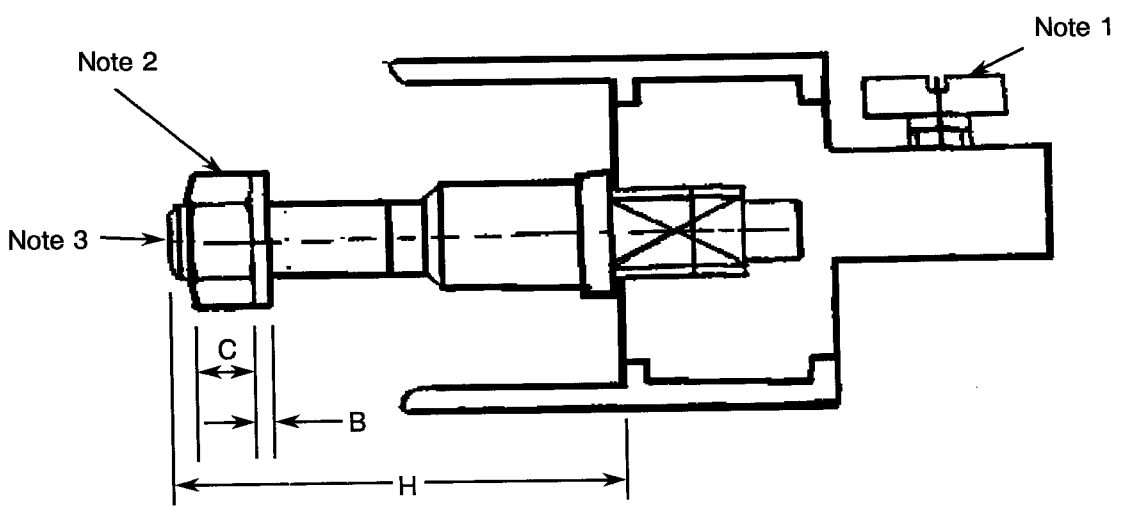

SYMBOL	MILLIMETRES	
	MIN.	MAX.
B	0.45	0.55
C	1.90	2.10
H	-	15.00

**NOTES**

1. Torque 15N.cm.
2. Torque 25N.cm.
3. M2.50.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(c) - CONTACT MOUNTING CONFIGURATIONS**


**VIEW OF REAR PART OF CONNECTOR**

**CODE 10, 11 AND 12**

**RIGHT-ANGLE SOLDER CONTACTS**

**RECEPTACLE SIDE**

**PLUG SIDE**

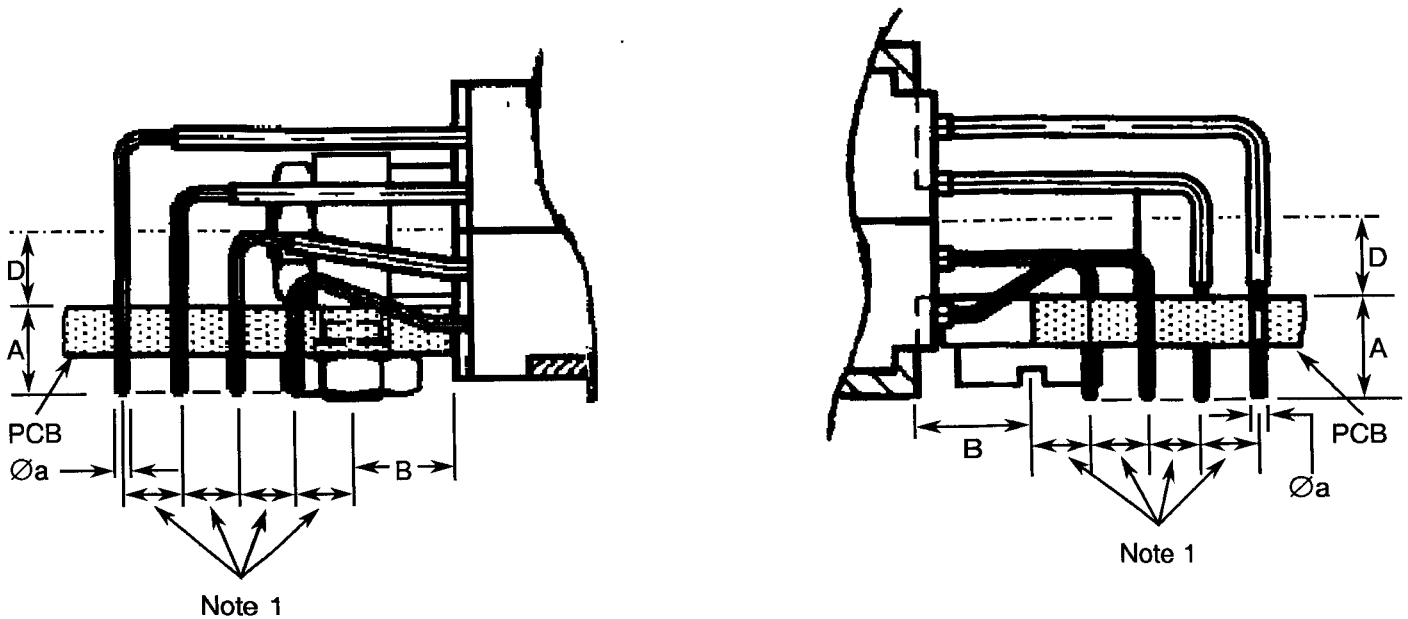

SYMBOL	CODE 10 Plug and Receptacle		CODE 11 Receptacle Only		CODE 12 Plug Only		
	MILLIMETRES						
	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	
A	2.60	3.80	3.10	4.30	4.10	5.30	
B	PLUG	3.40	3.60	-	-	3.40	3.60
	RECEPT.	3.20	3.80	3.20	3.80	-	-

SYMBOL	MILLIMETRES	
	MINIMUM	MAXIMUM
Øa	0.36	0.44
D	2.60	2.70

**NOTES**

1. Pitch : 1.905mm.

**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(c) - CONTACT MOUNTING CONFIGURATIONS (CONT.)**

**VIEW OF REAR PART OF CONNECTOR**

**CODE 30 AND 31**

**STRAIGHT SOLDER CONTACT**



SYMBOL	CODE 30 Plug and Receptacle		CODE 31 Receptacle		CODE 31 Plug	
	MILLIMETRES					
	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
A	3.50	4.00	6.10	6.60	4.60	5.10

SYMBOL	MILLIMETRES	
	MINIMUM	MAXIMUM
Øa	0.36	0.44

**NOTES**


1. Pitch : 1.905mm.
2. Pitch : 2.54mm.

**CODE 91 - SAVER**

SYMBOL	MILLIMETRES	
	MINIMUM	MAXIMUM
A	4.50	5.50
Øa	0.42	0.44

**NOTES**

1. Pitch : 1.905mm.
2. Pitch : 2.54mm.

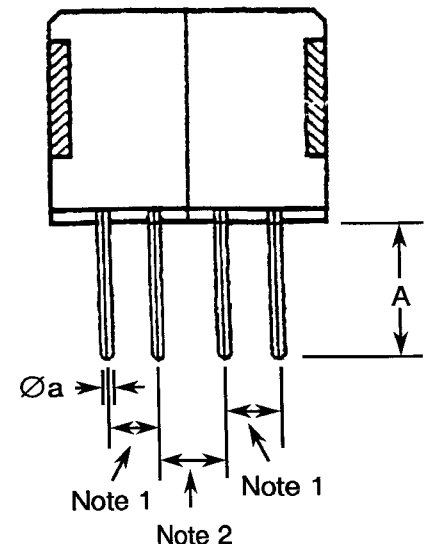


**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(c) - CONTACT MOUNTING CONFIGURATIONS (CONT.)**

**VIEW OF REAR PART OF CONNECTOR**

**CODE 43**

**SURFACE MOUNT - APPLICABLE TO PLUGS ONLY**

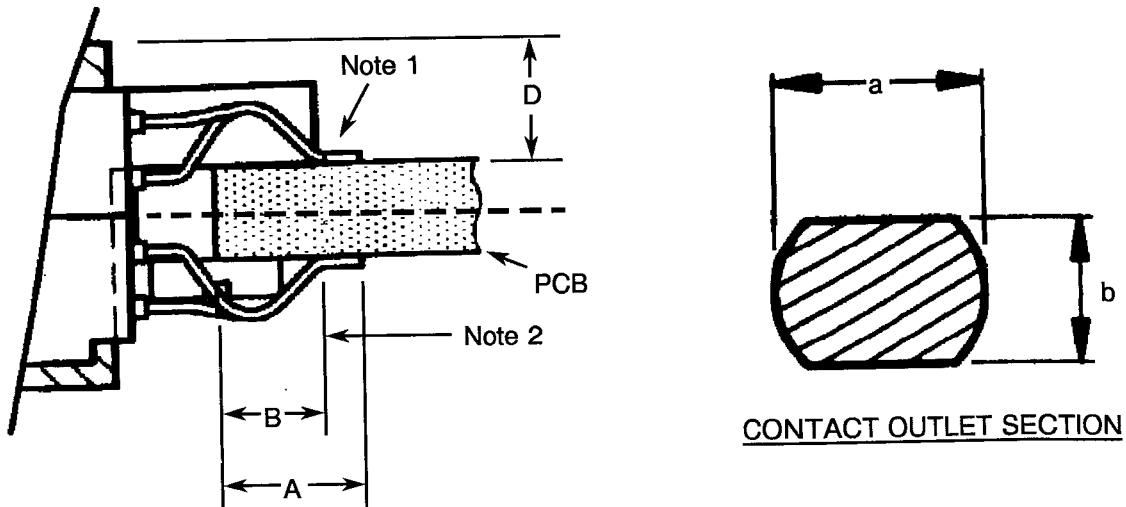

SYMBOL	MILLIMETRES		NOTES
	MIN.	MAX.	
a	0.25	0.45	
A	-	5.50	
b	0.20	0.40	
B	3.00	4.10	
D	-	4.80	

**NOTES**

1. See section. Pitch : 0.9525mm.
2. Contact point.


**FIGURE 2 - PHYSICAL DIMENSIONS (CONT.)**

**FIGURE 2(c) - CONTACT MOUNTING CONFIGURATIONS (CONT.)**

**VIEW OF REAR PART OF CONNECTOR**

CODE 45 AND 47

SURFACE MOUNT OFF CENTRE - APPLICABLE TO PLUGS ONLY

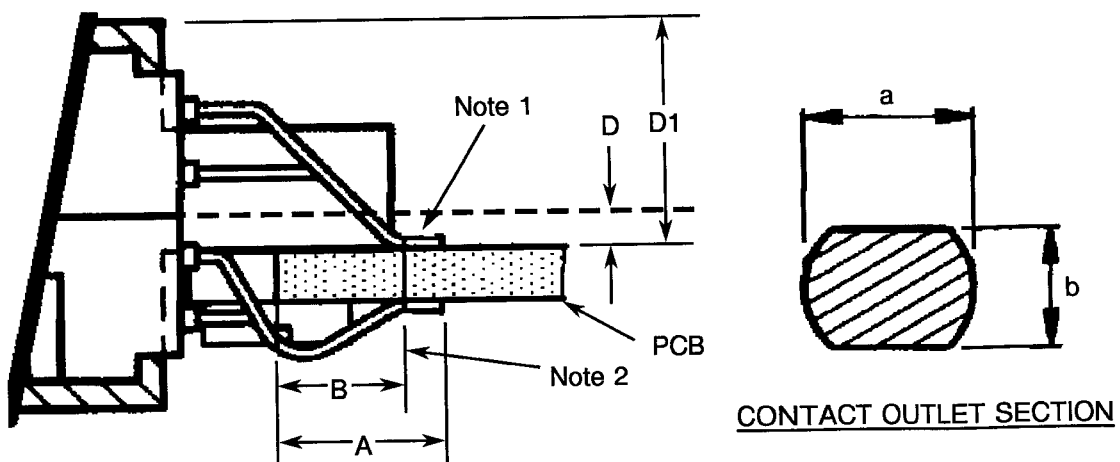


SYMBOL	CODE 45		CODE 47	
	MILLIMETRES			
	MIN.	MAX.	MIN.	MAX.
A	-	5.00	-	5.00

SYMBOL	MILLIMETRES	
	MINIMUM	MAXIMUM
a	0.25	0.45
b	0.20	0.40
B	3.00	4.10
D	0.90	1.20
D1	-	7.00

**NOTES**

1. See section. Pitch : 0.9525mm.
2. Contact point.

	<p style="text-align: center;">ESCC Detail Specification No. 3401/065</p>	<p>PAGE 31 ISSUE 2</p>
---	---	----------------------------

**4. REQUIREMENTS**

**4.1 GENERAL**

The complete requirements for procurement of the connectors specified herein are stated in this specification and ESCC Generic Specification No. 3401. Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

**4.2 DEVIATIONS FROM GENERIC SPECIFICATION**

**4.2.1 Deviations from Special In-process Controls**

None.

**4.2.2 Deviations from Final Production Tests (Chart II)**

- (a) Para. 9.1.1.4, Mated Shell Conductivity: Not applicable.
- (b) Para. 9.4, Contact Capability: Sampling in accordance with Para. 9.6 of ESCC No. 3401.
- (c) Para. 9.5, Magnetism Level: Not applicable.
- (d) Para. 9.9, Seal Test: Not applicable.

**4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)**

Not applicable.

**4.2.4 Deviations from Qualification Tests (Chart IV)**

- (a) Para. 9.1.1.4, Mated Shell Conductivity: Not applicable.
- (b) Para. 9.9, Seal Test: Not applicable.
- (c) Para. 9.15, Joint Strength: Not applicable.
- (d) Para. 9.24, Jackscrew Retention: Not applicable.
- (e) Para. 9.27, Maintenance Ageing: Not applicable.
- (f) Para. 9.30, Probe Damage: Not applicable.

**4.2.5 Deviations from Lot Acceptance Tests (Chart V)**

- (a) Para. 9.1.1.4, Mated Shell Conductivity: Not applicable.
- (b) Para. 9.9, Seal Test: Not applicable.
- (c) Para. 9.15, Joint Strength: Not applicable.
- (d) Para. 9.27, Maintenance Ageing: Not applicable.
- (e) Para. 9.30, Probe Damage: Not applicable.



4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the connectors specified herein shall be verified in accordance with the requirements set out in Para. 9.6 of ESCC Generic Specification No. 3401 and shall conform to those shown in Figure 2 of this specification. Only the following dimensions shall be checked during procurement:-

Figure 2(a) - Between centres of guiding or locking device. (Dimensions C, C2 and C3).

- Dimension E1 (where applicable).

Figure 2(b) - Protrusion of guiding/locking devices.

- Overall dimensions of guiding/locking devices.

Figure 2(c) - All dimensions, except pitch.

4.3.2 Weight

The maximum weight of the connectors with contacts, guiding and locking devices specified herein, shall be as specified in Table 1(a).

4.3.3 Contact Capability

For the purpose of this test, the pick-up and drop weights shall be as follows.

	Pick-up Weight	Drop Weight
Weight (g)	5.0	70
Pin Diameter (mm)	0.415 - 0.420	0.440 - 0.445
Insertion Depth (mm)	5.0	5.0

4.3.4 Contact Retention (In Insert)

The contact retention force (compression) within the insert shall be 40N.

4.3.5 Mating and Unmating Forces

The forces applied for mating and unmating of the connectors shall not exceed the values specified in Table 1(a).

4.3.6 Insert Retention (In Shell)

Connector inserts shall withstand a pressure of 25N/cm<sup>2</sup> without being dislodged from the shell.

4.3.7 Jackscrew Retention

Not applicable.

4.3.8 Contact Insertion and Withdrawal Forces

Not applicable.

**4.3.9 Engagement and Separation Forces**

The diameter of the test pin and the engagement and separation forces of the female contacts shall be as specified hereunder.

	Diameter (mm)		Engagement Max. (N)	Separation (N)	
	Min.	Max.		Min.	Max.
Minimum Diameter Test Pin	0.415	0.420	-	0.05	-
Maximum Diameter Test Pin	0.440	0.445	0.70	-	0.70

**4.3.10 Oversize Pin Exclusion**

The diameter of the test pin shall be 0.598mm minimum and 0.602mm maximum and the force applied to it shall be 0.7N.

**4.3.11 Probe Damage**

Not applicable.

**4.3.12 Solderability**

No special conditions.

**4.4 MATERIALS AND FINISHES**

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the contacts specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

**4.4.1 Shells**

Shells shall be made of aluminum alloy with an appropriate surface treatment against corrosion.

**4.4.2 Inserts**

The inserts shall be made of glass fibre-filled diallylphthalate resin.

**4.4.3 Contacts**

**4.4.3.1 Body**

The contact body shall be made of copper alloy.

- Male Contact and Saver

The plating shall be 1.27µm minimum gold over 1.27µm minimum nickel.

- Female Contact

The plating shall be 0.25µm minimum gold over 1.27µm minimum nickel.

**4.4.3.2 Female Contact Wire**

The wire shall be made of copper alloy.

The plating shall be 1.27µm minimum gold over 0.20µm minimum nickel.

4.4.3.3 Female Contact Sleeve

The sleeve shall be made of copper alloy. The plating shall be 0.25µm minimum gold over 0.8µm minimum nickel.

4.4.3.4 Tinned Terminations (Insert Codes 46 and 57)

Solder dipped, tin/lead 63/37, minimum thickness 1.0µm, minimum length 3.5mm.

4.4.4 Contact Retaining Clip

Not applicable.

4.4.5 Guiding and Locking Devices

Guiding and locking devices shall be made of brass (nickel-plated), stainless steel or arcap alloy.

4.4.6 Magnetism Level

Not applicable.

4.5 MARKING

4.5.1 General

The marking of all components delivered to this specification shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and the following paragraphs. When the component is too small to accommodate all of the marking specified, as much as space permits shall be marked and the marking information, in full, shall accompany the component in its primary package.

The information to be marked and the order of precedence, shall be as follows:-


- (a) Contact Identification.
- (b) The ESCC Component Number.
- (c) Characteristics.
- (d) Traceability information.

4.5.2 Contact Position

Contact position shall be marked on the inserts in accordance with Figure 2(a).

4.5.3 The ESCC Component Number

Each component shall bear the SCC Component Number which shall be constituted and marked as follows:-

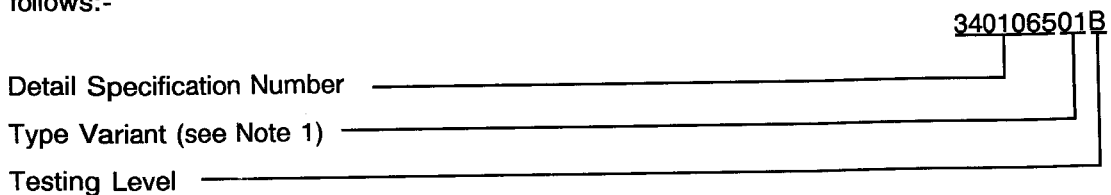

**NOTES**

1. Marking of the Type Variant is mandatory. No further reference to type variants is made in this specification.

4.5.4 Characteristics

The characteristics to be marked in the following order of precedence are:-

0524410110

Number of contacts \_\_\_\_\_

Insert type \_\_\_\_\_

Type of contacts \_\_\_\_\_

Guiding and locking devices \_\_\_\_\_

4.5.4.1 Number of Contacts

052 - 100 - 152 - 200 - 252 - 300 - 352 - 400.

4.5.4.2 Insert

Inserts shall be designated by the following code numbers.

Code No.	Description
44	Receptacle (female contacts)
46	Receptacle (female contact pre-tinned termination)
55	Plug (male contacts)
57	Plug (male contact pre-tinned termination)

4.5.4.3 Contacts

Contact rear configurations shall be designated by the codes given in Table 1(a) and Figure 2(c).

4.5.4.4 Guiding and Locking Devices

Guiding and locking devices shall be designated by the codes given in Figure 2(b).

**N.B.**

If the purchase order does not specify any guiding or locking devices, receptacles shall be delivered without.

4.5.5 Traceability Information

Traceability information shall be marked in accordance with the requirements of ESCC Basic Specification No. 21700.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured in respect of electrical characteristics are scheduled in Table 2. Unless otherwise specified, the measurements shall be performed at  $T_{amb} = +22 \pm 3 \text{ }^\circ\text{C}$ .

4.6.2 Electrical Measurements at High and Low Temperatures (Table 3)

Not applicable.

4.6.3 Circuits for Electrical Measurements (Figure 4)

Not applicable.

4.7 BURN-IN AND ELECTRICAL MEASUREMENTS

Not applicable.



- 4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESCC GENERIC SPECIFICATION No. 3401)
- 4.8.1 Measurements and Inspections on Completion of Environmental Tests  
The parameters to be measured and inspections to be performed on completion of environmental testing are scheduled in Table 6. Unless otherwise specified, the measurements shall be performed at  $T_{amb} = +22 \pm 3 \text{ }^\circ\text{C}$ .
- 4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests  
Not applicable.
- 4.8.3 Measurements and Inspections on Completion of Endurance Tests  
The parameters to be measured and inspections to be performed on completion of endurance testing are scheduled in Table 6. Unless otherwise specified, the measurements shall be performed at  $T_{amb} = +22 \pm 3 \text{ }^\circ\text{C}$ .
- 4.8.4 Conditions for Operating Life Tests (Part of Endurance Testing)  
Not applicable.
- 4.8.5 Electrical Circuit for Operating Life Tests (Figure 5)  
Not applicable.
- 4.8.6 Conditions for High Temperature Storage Test (Part of Endurance Testing)  
The requirements for the high temperature storage test are specified in Section 9 of ESCC Generic Specification No. 3401. The conditions for high temperature storage testing shall be the maximum storage temperature specified in Table 1(b) of this specification.

**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE**

No.	CHARACTERISTICS	SYMBOL	ESCC 3401 TEST METHOD	TEST CONDITION	LIMITS		UNIT
					MIN.	MAX.	
1	Insulation Resistance	Ri	Para 9.1.1.1	Para 9.1.1.1	10 000	-	MΩ
2	Voltage Proof Leakage Current (Sea Level)	I <sub>L</sub>	Para 9.1.1.2	800 Vrms	-	1.0	mA
3	Mated Shell Conductivity (Voltage Drop)	Vd	Para 9.1.1.4	Para 9.1.1.4	Not Applicable		mV
4	Contact Resistance (Low Level Current)	Rcl	Para 9.1.1.3	All	-	12	mΩ
5	Contact Resistance (Rated Current) (1)	Rcr	Para 9.1.1.3	2.0A	-	12	mΩ

**NOTES**

1. Contact Resistance at Rated Current is guaranteed but not tested during Final Production Tests (Chart II).

**TABLES 3, 4 AND 5**

Not applicable.



**TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTING**

NO.	ESCC GENERIC NO. 3401		MEASUREMENTS AND INSPECTIONS		SYMBOL	LIMITS		UNIT
	ENVIRONMENTAL AND ENDURANCE TESTS (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN	MAX	
01	Seal Test	Para. 9.9	Not applicable			Not applicable		
02	Wiring	Para. 9.10				-	-	
03	Vibration	Para. 9.11	<b>Initial Measurements</b> Coupling Screw(s) Unlocking Torque <b>Final Measurements</b> Full Engagement Coupling Screw(s) Unlocking Torque Drift Visual Examination	-	-	Record Values		
				-	Δ	-25	+25	%
				-	-	-	-	
04	Shock or Bump	Para. 9.12	Full Engagement Visual Examination	- -		- -	- -	
05	Climatic Sequence	Para. 9.13	<b>Dry Heat</b> Insulation Resistance <b>Low Air Pressure</b> Voltage Proof Leakage Curr. <b>Damp Heat</b> Insulation Resistance  External Visual Inspection  Insulation Resistance Voltage Proof Leakage Curr.	Table 2 Item 1  Figure 1 <b>Immediately after test</b> Table 2 Item 1 <b>After 1-24 hrs</b> <b>Recovery</b> ESCC 3401 Para. 9.7 Table 2 Item 1 Table 2 Item 2	Ri  I <sub>L</sub>  Ri  -  Ri I <sub>L</sub>	1 000  ESCC 3401 Para. 9.13.5 100  ESCC 3401 Para. 9.7 Table 2 Item 1 Table 2 Item 2	-  -  -  -	MΩ  MΩ
06	Plating Thickness	Para. 9.14	Thickness			Para. 4.4.3 of this spec.		
07	Joint Strength	Para. 9.15	ESCC 3401 Para. 9.15			Not applicable		
08	Rapid Change of Temperature	Para. 9.16	Visual Examination Insulation Resistance Voltage Proof Leakage Curr.	Table 2 Item 1 Table 2 Item 2	Ri I <sub>L</sub>	Table 2 Item 1 Table 2 Item 2		
09	Contact Retention (in insert)	Para. 9.17 and Para. 4.3.4 of this spec.	Contact Displacement			ESCC 3401 Para. 9.17		
10	Endurance	Para. 9.18	<b>Initial Measurements</b> Mating/Unmating Forces  Low Level Contact Resist Mated Shell Conductivity <b>Final Measurements</b> Visual Examination Mating/Unmating Forces  Low Level Contact Resistance Drift Mated Shell Conductivity Insulation Resistance Voltage Proof Leakage Curr.	Table 2 Item 4 Table 2 Item 3  -  Table 2 Item 4  Table 2 Item 3 Table 2 Item 1 Table 2 Item 2	F  Rcl Vd  -  F  ΔRcl  Vd Ri I <sub>L</sub>	Para. 4.3.5 of this spec. Record Values Not applicable  -  Para. 4.3.5 of this spec. - 4.0  Not applicable Table 2 Item 1 Table 2 Item 2	-  -  -  mΩ	

**NOTES** 1. The tests in this table refer to either Chart IV or V and shall be used as applicable.



**TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTING (CONT'D)**

NO.	ESCC GENERIC NO. 3401		MEASUREMENTS AND INSPECTIONS		SYMBOL	LIMITS		UNIT
	ENVIRONMENTAL AND ENDURANCE TESTS (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN	MAX	
11	Permanence of Marking	Para. 9.19	As applicable		-	-	-	
12	Mating/Unmating Forces	Para. 9.20	Force		F	Para. 4.3.5 of this spec.		
13	High Temperature Storage	Para. 9.21	<b>Initial Measurements</b> Low Level Contact Resis. Mated Shell Conductivity <b>Final Measurements</b> Visual Examination Mating/Unmating Forces  Low Level Contact Resistance Drift Rated Current Contact Resis. Mated Shell Conductivity Insulation Resistance Voltage Proof Leakage Curr. Contact Retention (in insert)	Table 2 Item 4 Table 2 Item 3  -  Table 2 Item 4  Table 2 Item 5 Table 2 Item 3 Table 2 Item 1 Table 2 Item 2 Para. 4.3.4 of this spec.	Rcl Vd  - F  ΔRcl  Rcr Vd Ri I <sub>L</sub>	Record Values Not applicable  - - Para. 4.3.5 of this spec. - 4.0  Table 2 Item 5 Not applicable Table 2 Item 1 Table 2 Item 2 ESCC 3401 Para. 9.17	mΩ	
14	Corrosion	Para. 9.22	Visual Examination	-	-	Not applicable		
15	Insert Retention (in shell)	Para. 9.23 & Para. 4.3.6 of this spec.	Visual Examination	-	-	Para. 4.3.6		
16	Jackscrew Retention	Para. 9.24 & Para. 4.3.7 of this spec.	Visual Examination	-	-	Not applicable		
17	High Temperature Measurements	Para. 9.25	Insulation Resistance	Table 2 Item 1	Ri	500	-	MΩ
18	Overload Test	Para. 9.26	Internal Temperature Rated Current Contact Resis. Mated Shell Conductivity Insulation Resistance Voltage Proof Leakage Curr.	Table 2 Item 5 Table 2 Item 3 Table 2 Item 1 Table 2 Item 2	T Rcr Vd Ri I <sub>L</sub>	-	+ 100	°C
19	Maintenance Aging	Para. 9.27	Visual Examination Contact Retention (in insert)  Contact Insertion & Withdrawal Forces	Para. 4.3.4 of this spec  Para. 4.3.8 of this spec	-	-	-	Not applicable
20	Engage/Separation Forces	Para. 9.28 & Para. 4.3.9 of this spec.	Force		F	Para. 4.3.9		
21	Oversize Pin Exclusion	Para. 9.29 & Para. 4.3.10 of this spec.				ESCC 3401 Para. 9.29		
22	Probe Damage	Para. 9.30 & Para. 4.3.11 of this spec.	Contact Separation Force	Para. 4.3.9 of this spec.		Not applicable		
23	Solderability	Para. 9.31 & Para. 4.3.12 of this spec.				ESCC 3401 Para. 9.31		

**NOTES**

1. The tests in this table refer to either Chart IV or V and shall be used as applicable.