



**CONNECTORS, ELECTRICAL, SINGLE-IN-LINE,
MICROMINIATURE,
BASED ON TYPE MTB 1**

ESCC Detail Specification No. 3401/031

**ISSUE 1
October 2002**



| | | | |
|---|---------------------------|--|--------------------|
|  | ESCC Detail Specification | | PAGE ii ISSUE 1 |
|---|---------------------------|--|--------------------|

LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2002. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole in any medium without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.



**european space agency
agence spatiale européenne**



Pages 1 to 28

**CONNECTORS, ELECTRICAL, SINGLE-IN-LINE,
MICROMINIATURE,
BASED ON TYPE MTB 1**

ESA/SCC Detail Specification No. 3401/031



**space components
coordination group**

| Issue/Rev. | Date | Approved by | |
|------------|----------------|---|---|
| | | SCCG Chairman | ESA Director General or his Deputy |
| Issue 2 | September 2002 |  |  |
| | | | |
| | | | |
| | | | |



DOCUMENTATION CHANGE NOTICE

| Rev. Letter | Rev. Date | Reference | CHANGE Item | Approved DCR No. |
|-------------|-----------|---|---|------------------|
| | | This Issue supersedes Issue 1 and incorporates all modifications defined in Revisions 'A', 'B', 'C' and 'D' to Issue 1 and the changes agreed in the following DCRs:- | | |
| | | Cover page | | None |
| | | DCN | | None |
| | | Para. 1.1 | : Second document deleted | 221664 |
| | | Para. 1.2 | : Title amended and text rearranged and amended | 221664 |
| | | Para. 1.3 | : In the text, Table reference amended to "1(d)" | 221664 |
| | | Para. 2 | : Items (b), (e) and (f) deleted, Item (c) renumbered as (b), Item (g) renumbered as (c) and new Item (e) added | 221664 |
| | | Table 1(a) | : New Table added | 221664 |
| | | Table 1(b) | : New Table added | 221664 |
| | | Table 1(c) | : New Table added | 221664/ 23960 |
| | | Table 1 | : Renumbered as Table 1(d) and expanded | 221664 |
| | | Figure 1 | : Existing Figure amended and Title added | 221664 |
| | | Figure 1(b) | : New Figure added | 221664 |
| | | Figure 2-1 | : Split into separate drawings for Plug and Receptacle | 221664 |
| | | Figure 2-3 | : Minimum length paragraph reference amended | 23960 |
| | | Figure 2-4 | : New Figure added | 221664 |
| | | Figure 2-5 | : New Figure added | 221664 |
| | | Para. 4.2.1 | : Deviation added | 221664 |
| | | Para. 4.2.2 | : Existing text deleted and deviations (a) to (d) added | 221664 |
| | | Para. 4.2.4 | : Existing text deleted and deviations (a) to (h) added | 221664 |
| | | Para. 4.2.5 | : "None" deleted and deviations (a) to (h) added | 221664 |
| | | Para. 4.3.1 | : Text amended | 221664 |
| | | Para. 4.3.2 | : Existing text deleted and new text added | 221664 |
| | | Para. 4.3.3 | : Existing text deleted and new text added | 221664 |
| | | Para. 4.3.4 | : Title expanded and text amended | 221664 |
| | | Para. 4.3.5 | : New paragraph added | 221664/ 23960 |
| | | Paras. 4.3.6 to 4.3.8 | : New paragraphs added | 221664 |
| | | Paras. 4.3.9 | : New paragraph added | 221664/ 23960 |
| | | Paras. 4.3.10 to 4.3.13 | : New paragraphs added | 221664 |
| | | Para. 4.4.1 | : Title and text amended | 221664 |
| | | Para. 4.4.2 | : New paragraph added and existing paragraph renumbered as "4.4.3" | 221664 |
| | | Para. 4.4.3 | : Renumbered as "4.4.5" | 221664 |
| | | Para. 4.4.4 | : New paragraph added and existing paragraph renumbered as "4.4.6" | 221664 |
| | | Para. 4.4.7 | : New paragraph added | 221664 |
| | | Para. 4.5.1 | : Text amended | 221664 |
| | | Para. 4.5.2 | : New paragraph added. Existing paragraph renumbered as "4.5.3", "Type Variant" amended and Note deleted. | 221664/ 23960 |



DOCUMENTATION CHANGE NOTICE (CONTINUED)

| Rev. Letter | Rev. Date | Reference | CHANGE Item | Approved DCR No. |
|-------------|-----------|-------------|-------------------------------|------------------|
| | | Para. 4.5.3 | : Renumbered as "4.5.4" | 221664 |
| | | | : First sub-paragraph amended | 221664 |
| | | | : Last sub-paragraph amended | 221664 |
| | | Para. 4.5.4 | : Renumbered as "4.5.5" | 221664 |
| | | Para. 4.7 | : Title amended | 221664 |
| | | Table 2 | : Table expanded | 221664 |
| | | Figure 3 | : Figure added | 221664 |
| | | Para. 4.8.1 | : Text amended | 221664 |
| | | Para. 4.8.3 | : Text amended | 221664 |
| | | Para. 4.8.6 | : Second sentence amended | 221664 |
| | | Table 6 | : Table rewritten | 221664/ 23960 |



TABLE OF CONTENTS

| | <u>Page</u> |
|---|-------------|
| 1. <u>GENERAL</u> | 5 |
| 1.1 Scope | 5 |
| 1.2 Component Type Variants/Range of Components | 5 |
| 1.2.1 Shell Sizes for Variant 01 | 5 |
| 1.2.2 Shell Sizes for Variant 02 | 5 |
| 1.3 Maximum Ratings | 5 |
| 1.4 Parameter Derating Information | 5 |
| 1.5 Physical Dimensions | 5 |
| 2. <u>APPLICABLE DOCUMENTS</u> | 5 |
| 3. <u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u> | 17 |
| 4. <u>REQUIREMENTS</u> | 17 |
| 4.1 General | 17 |
| 4.2 Deviations from Generic Specification | 17 |
| 4.2.1 Deviations from Special In-process Controls | 17 |
| 4.2.2 Deviations from Final Production Tests | 17 |
| 4.2.3 Deviations from Burn-in and Electrical Measurements | 17 |
| 4.2.4 Deviations from Qualification Tests | 17 |
| 4.2.5 Deviations from Lot Acceptance Tests | 18 |
| 4.3 Mechanical Requirements | 18 |
| 4.3.1 Dimension Check | 18 |
| 4.3.2 Weight | 18 |
| 4.3.3 Contact Capability | 18 |
| 4.3.4 Contact Retention (In Insert) | 18 |
| 4.3.5 Mating and Unmating Forces | 18 |
| 4.3.6 Insert Retention (In Shell) | 19 |
| 4.3.7 Jackscrew Retention | 19 |
| 4.3.8 Contact Insertion and Withdrawal Forces | 19 |
| 4.3.9 Engagement and Separation Forces (Male Contacts) | 19 |
| 4.3.10 Oversize Pin Exclusion | 19 |
| 4.3.11 Probe Damage | 19 |
| 4.3.12 Solderability | 19 |
| 4.3.13 Latching | 19 |
| 4.4 Materials and Finishes | 19 |
| 4.4.1 Inserts | 19 |
| 4.4.2 Contacts | 20 |
| 4.4.3 Guide Posts | 20 |
| 4.4.4 Latching | 20 |
| 4.4.5 Insulated Wires | 20 |
| 4.4.6 Uninsulated Solid Wires | 20 |
| 4.4.7 Rear Potting | 20 |
| 4.5 Marking | 20 |
| 4.5.1 General | 20 |
| 4.5.2 Contact Identification | 21 |
| 4.5.3 The SCC Component Number | 21 |
| 4.5.4 Characteristics | 21 |
| 4.5.5 Traceability Information | 22 |



| | <u>Page</u> |
|--|-------------|
| 4.6 Electrical Measurements | 22 |
| 4.6.1 Electrical Measurements at Room Temperature | 22 |
| 4.6.2 Electrical Measurements at High and Low Temperatures | 22 |
| 4.6.3 Circuits for Electrical Measurements | 22 |
| 4.7 Burn-in and Electrical Measurements | 22 |
| 4.8 Environmental and Endurance Tests | 25 |
| 4.8.1 Measurements and Inspections on Completion of Environmental Tests | 25 |
| 4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests | 25 |
| 4.8.3 Measurements and Inspections on Completion of Endurance Tests | 25 |
| 4.8.4 Conditions for Operating Life Tests | 25 |
| 4.8.5 Electrical Circuits for Operating Life Tests | 25 |
| 4.8.6 Conditions for High Temperature Storage Test | 25 |

TABLES

| | |
|---|----|
| 1(a) Type Variants | 6 |
| 1(b) Maximum Weights | 6 |
| 1(c) Engagements and Separation Forces | 6 |
| 1(d) Maximum Ratings | 6 |
| 2 Electrical Measurements at Room Temperature | 23 |
| 3 Not Applicable | 23 |
| 4 Not Applicable | 23 |
| 5 Not Applicable | 23 |
| 6 Measurements and Inspections on Completion of Environmental and Endurance Tests | 26 |

FIGURES

| | |
|--|-----|
| 1 Parameter Derating Information | 7 |
| 1(a) Working Voltage Versus Altitude | 7 |
| 1(b) Maximum Current Versus Number of Contacts | 7 |
| 2 Physical Dimensions | 8 |
| 2.1(a) Connectors Plug - Male Contacts | 8 |
| 2.1(b) Connectors Receptacle - Female Contacts | 11 |
| 2.2 Uninsulated Solid Wires | 14 |
| 2.3 Insulated Wires | 14 |
| 2.4 Latching | 15 |
| 2.5 Contact Position | 16 |
| 3 Gauge Fixture | 24 |
| 4 Not Applicable | N/A |
| 5 Not Applicable | N/A |

APPENDICES (Applicable to specific Manufacturers only)

None.



1. GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics, test and inspection data for Connectors, Electrical, Single-in-Line, Microminiature, based on Type MTB 1, with non-removable crimp-type contacts and their associated insulated wires and uninsulated solid wires.

It shall be read in conjunction with:

- (a) ESA/SCC Generic Specification No. 3401 for Connectors, Electrical, Non-filtered, Circular and Rectangular,

the requirements of which are supplemented herein.

1.2 COMPONENT TYPE VARIANTS / RANGE OF COMPONENTS

The single-in-line connectors specified herein are scheduled in Table 1(a). Alignment is effected by 2 guide posts; the posts are located at either end of the receptacle.

1.2.1 Shell sizes for Variant 01

These range from 5 to 81. Since 4 cavities are used (2 guide posts and 2 epoxy-filled cavities at either end) the number of available contact positions ranges from 1 to 77.

1.2.2 Shell sizes for Variant 02

These range from 6 to 81. Since 5 cavities are used (2 guide posts and 2 epoxy-filled cavities at either end plus 1 cavity for latching) the number of available contact positions ranges from 1 to 76.

Polarisation may be achieved by means of additional guide posts (according to Customer requirements). The different sizes of associated insulated wires and uninsulated solid wires are given in Figure 2. For bodies with more than 41 cavities, additional back-potting is necessary.

1.3 MAXIMUM RATINGS

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the connectors specified herein, are scheduled in Table 1(d).

1.4 PARAMETER DERATING INFORMATION

The applicable derating information for the contacts specified herein is shown in Figure 1(a).

1.5 PHYSICAL DIMENSIONS

The physical dimensions of the connectors, insulated wires and uninsulated solid wires specified herein are shown in Figure 2.

2. APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESA/SCC Generic Specification No. 3401, Connectors, Electrical, Non-filtered, Circular and Rectangular.
- (b) ESA/SCC Detail Specification No. 3901/013, PTFE Insulated Wires and Cables, 600V -100 to +200 °C.
- (c) QQ-W-343, Wires, Electrical, Uninsulated.
- (d) MIL-G-45204, Gold-plating, Electro-deposited.
- (e) MIL-C-14550, Copper-plating, Electro-deposited.



TABLE 1(a) - TYPE VARIANTS

| VARIANT | LATCHING OPTION |
|---------|------------------|
| 01 | Without latching |
| 02 | With latching |

TABLE 1(b) - MAXIMUM WEIGHTS

| DESCRIPTION | | WEIGHT (g) |
|--|---------------------|------------|
| Contact | Male | 0.02 |
| | Female | 0.02 |
| Body (per contact cavity) | Plug | 0.21 |
| | Receptacle | 0.006 |
| Guide Post, Stainless Steel (2 per connector) | - | 0.035 |
| Wire | Figures 2.2 and 2.3 | |

TABLE 1(c) - MATING AND UNMATING FORCES

| DESCRIPTION | MATING | | UNMATING | |
|-------------|--------|------|----------|------|
| | MIN. | MAX. | MIN. | MAX. |
| Per contact | - | 2.2N | 0.14N | 2.2N |

TABLE 1(d) - MAXIMUM RATINGS

| No. | CHARACTERISTICS | SYMBOL | MAXIMUM RATING | UNIT |
|-----|---|-----------|----------------|------------------|
| 1 | Working Voltage (Sea Level) | U_R | 150 | V _{rms} |
| 2 | Rated Current (AWG26 and Uninsulated Solid Wire) | I_R | 2.5 | A |
| 3 | Rated Current (AWG28) | I_R | 1.5 | A |
| 4 | Operating Temperature Range | T_{op} | -55 to +125 | °C |
| 5 | Storage Temperature Range | T_{stg} | -55 to +125 | °C |



FIGURE 1 - PARAMETER DERATING INFORMATION

FIGURE 1(a) - WORKING VOLTAGE VERSUS ALTITUDE

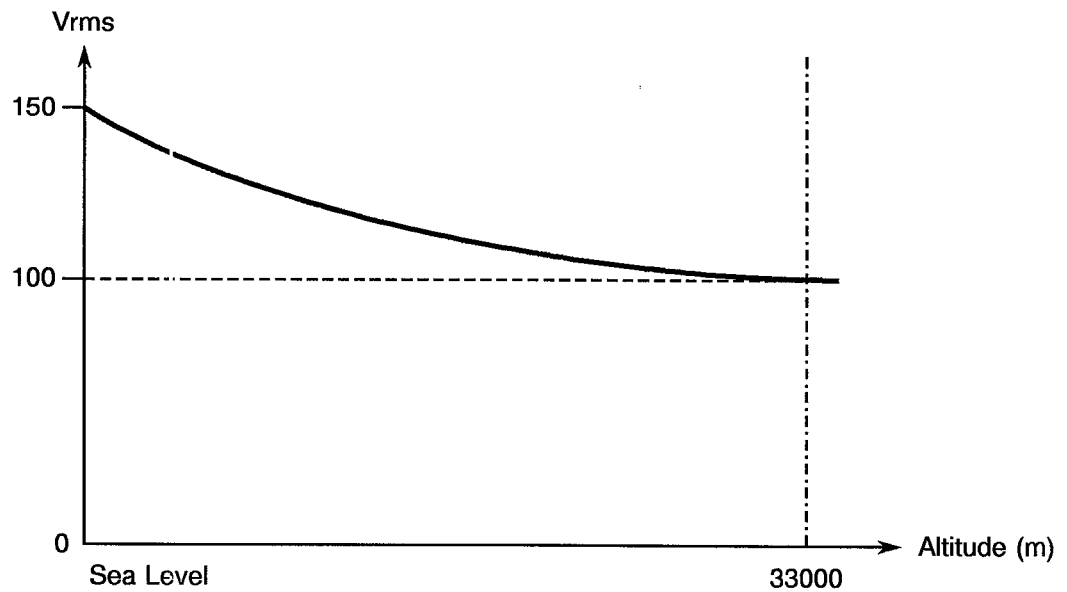



FIGURE 1(b) - MAXIMUM CURRENT VERSUS NUMBER OF CONTACTS

| NUMBER OF CONTACTS PER CONNECTOR | MAXIMUM CURRENT PER CONTACT | |
|----------------------------------|----------------------------------|-------|
| | WIRE SIZE | |
| | AWG26 AND UNINSULATED SOLID WIRE | AWG28 |
| 2-4 | 2.0 | 1.4 |
| 5-14 | 1.8 | 1.2 |
| 15 and over | 1.4 | 0.9 |



FIGURE 2 - PHYSICAL DIMENSIONS

FIGURE 2.1(a) - CONNECTORS PLUG - MALE CONTACTS

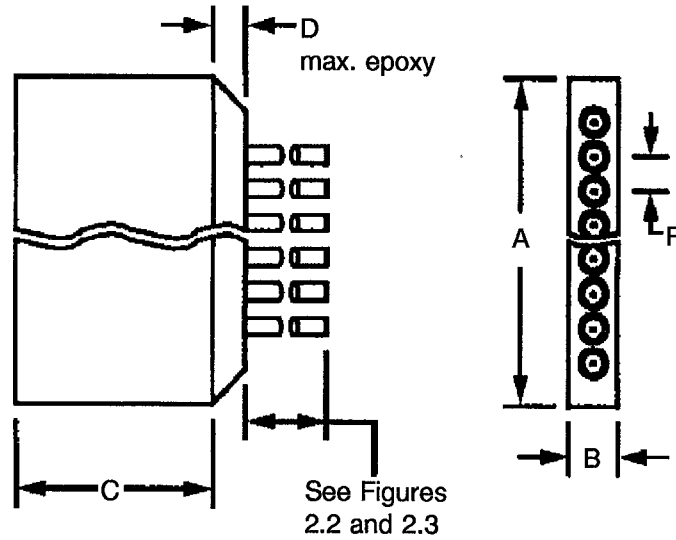

| Shell Size | A | | B | | C | | D | F |
|------------|-------|-------|------|------|------|------|------|---------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Max. | Typical |
| 5 | 6.47 | 7.23 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 6 | 7.75 | 8.51 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 7 | 9.02 | 9.78 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 8 | 10.29 | 11.05 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 9 | 11.56 | 12.32 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 10 | 12.82 | 13.58 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 11 | 14.10 | 14.86 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 12 | 15.37 | 16.13 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 13 | 16.64 | 17.40 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 14 | 17.91 | 18.67 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 15 | 19.18 | 20.04 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 16 | 20.45 | 21.21 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 17 | 21.72 | 22.48 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 18 | 22.99 | 23.75 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 19 | 24.26 | 25.02 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 20 | 25.53 | 26.29 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 21 | 26.8 | 27.56 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 22 | 28.07 | 28.83 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 23 | 29.34 | 30.10 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 24 | 30.61 | 31.47 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 25 | 31.88 | 32.64 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |

NOTES

1. All dimensions are in millimetres.



FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2.1(a) - CONNECTORS PLUG - MALE CONTACTS (CONTINUED)

| Shell Size | A | | B | | C | | D | F |
|------------|-------|-------|------|------|------|------|------|---------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Max. | Typical |
| 26 | 33.15 | 33.91 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 27 | 34.42 | 35.18 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 28 | 35.69 | 46.45 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 29 | 36.96 | 37.72 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 30 | 38.23 | 38.99 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 31 | 39.5 | 40.26 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 32 | 40.77 | 41.53 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 33 | 42.04 | 42.8 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 34 | 43.31 | 44.07 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 35 | 44.58 | 45.34 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 36 | 45.85 | 46.61 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 37 | 47.12 | 47.88 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 38 | 48.39 | 49.15 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 39 | 49.66 | 50.42 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 40 | 50.93 | 51.69 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 41 | 52.2 | 52.96 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 42 | 53.47 | 54.23 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 43 | 54.74 | 55.5 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 44 | 56.01 | 56.77 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 45 | 57.28 | 58.04 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 46 | 58.55 | 59.31 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 47 | 59.82 | 60.58 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 48 | 61.09 | 61.85 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 49 | 62.36 | 63.12 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 50 | 63.63 | 64.39 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 51 | 64.9 | 65.66 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 52 | 66.13 | 66.89 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 53 | 67.44 | 68.2 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 54 | 68.71 | 69.47 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 55 | 69.98 | 70.74 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 56 | 71.25 | 72.01 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 57 | 72.52 | 73.28 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 58 | 73.79 | 74.54 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 59 | 75.06 | 75.82 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 60 | 76.33 | 77.09 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 61 | 76.6 | 78.36 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 62 | 78.87 | 79.53 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 63 | 80.14 | 80.9 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 64 | 81.41 | 82.37 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 65 | 82.68 | 83.44 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |

NOTES

1. All dimensions are in millimetres.



FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2.1(a) - CONNECTORS PLUG - MALE CONTACTS (CONTINUED)

| Shell Size | A | | B | | C | | D | F |
|------------|--------|--------|------|------|------|------|------|---------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Max. | Typical |
| 66 | 83.95 | 84.71 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 67 | 85.22 | 86.08 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 68 | 86.39 | 87.15 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 69 | 87.76 | 88.52 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 70 | 89.03 | 89.79 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 71 | 90.3 | 91.06 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 72 | 91.57 | 92.33 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 73 | 92.34 | 93.6 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 74 | 94.11 | 94.87 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 75 | 95.38 | 96.14 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 76 | 96.65 | 97.41 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 77 | 97.92 | 98.68 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 78 | 98.19 | 99.05 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 79 | 100.46 | 101.22 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 80 | 101.73 | 102.49 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |
| 81 | 103 | 103.76 | 1.9 | 2.16 | 7.06 | 7.32 | 3.18 | 1.27 |


NOTES

1. All dimensions are in millimetres.



FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2.1(b) - CONNECTORS RECEPTACLE - FEMALE CONTACTS

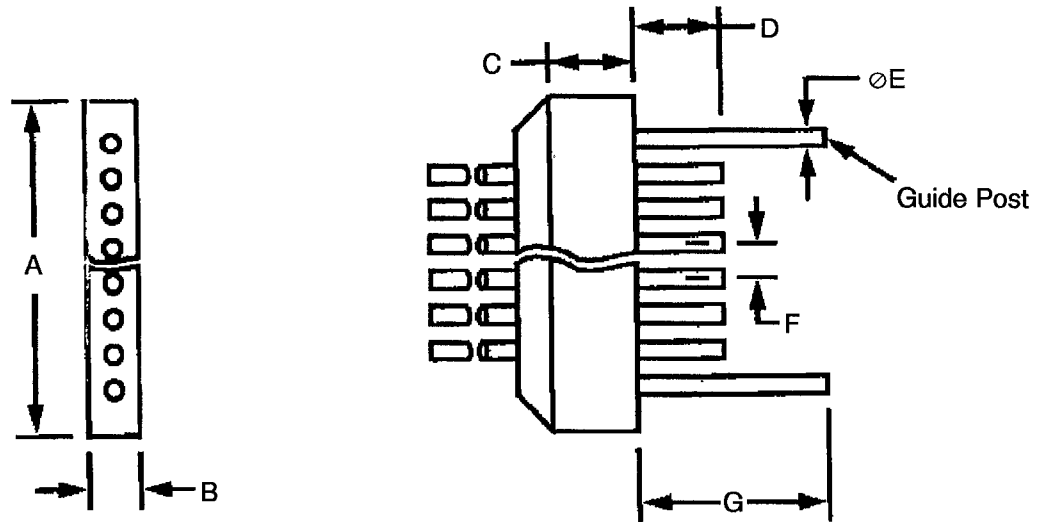

| Shell Size | A | | B | | C | | D | | ØE | | F | G | |
|------------|-------|-------|------|------|------|------|------|------|------|------|---------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Typical | Min. | Max. |
| 5 | 6.47 | 7.23 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 6 | 7.75 | 8.51 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 7 | 9.02 | 9.78 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 8 | 10.29 | 11.05 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 9 | 11.56 | 12.32 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 10 | 12.82 | 13.58 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 11 | 14.1 | 14.86 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 12 | 15.37 | 16.13 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 13 | 16.64 | 17.4 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 14 | 17.91 | 18.67 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 15 | 19.18 | 20.04 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 16 | 20.45 | 21.21 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 17 | 21.72 | 22.48 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 18 | 22.99 | 23.75 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 19 | 24.26 | 25.02 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 20 | 25.53 | 26.29 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 21 | 26.8 | 27.56 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 22 | 28.07 | 28.83 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 23 | 29.34 | 30.1 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 24 | 30.61 | 31.47 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 25 | 31.88 | 32.64 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |

NOTES

1. All dimensions are in millimetres.



FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2.1(b) - CONNECTORS RECEPTACLE - FEMALE CONTACTS (CONTINUED)

| Shell Size | A | | B | | C | | D | | ØE | | F | G | |
|------------|-------|-------|------|------|------|------|------|------|------|------|---------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Typical | Min. | Max. |
| 26 | 33.15 | 33.91 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 27 | 34.42 | 35.18 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 28 | 35.69 | 46.45 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 29 | 36.96 | 37.72 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 30 | 38.23 | 38.99 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 31 | 39.5 | 40.26 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 32 | 40.77 | 41.53 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 33 | 42.04 | 42.8 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 34 | 43.31 | 44.07 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 35 | 44.58 | 45.34 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 36 | 45.85 | 46.61 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 37 | 47.12 | 47.88 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 38 | 48.39 | 49.15 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 39 | 49.66 | 50.42 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 40 | 50.93 | 51.69 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 41 | 52.2 | 52.96 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 42 | 53.47 | 54.23 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 43 | 54.74 | 55.5 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 44 | 56.01 | 56.77 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 45 | 57.28 | 58.04 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 46 | 58.55 | 59.31 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 47 | 59.82 | 60.58 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 48 | 61.09 | 61.85 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 49 | 62.36 | 63.12 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 50 | 63.63 | 64.39 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 51 | 64.9 | 65.66 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 52 | 66.13 | 66.89 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 53 | 67.44 | 68.2 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 54 | 68.71 | 69.47 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 55 | 69.98 | 70.74 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 56 | 71.25 | 72.01 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 57 | 72.52 | 73.28 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 58 | 73.79 | 74.54 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 59 | 75.06 | 75.82 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 60 | 76.33 | 77.09 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 61 | 77.6 | 78.36 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 62 | 78.87 | 79.53 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 63 | 80.14 | 80.9 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 64 | 81.41 | 82.37 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 65 | 82.68 | 83.44 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |

NOTES

1. All dimensions are in millimetres.



FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2.1(b) - CONNECTORS RECEPTACLE - FEMALE CONTACTS (CONTINUED)

| Shell Size | A | | B | | C | | D | | ØE | | F | G | |
|------------|--------|--------|------|------|------|------|------|------|------|------|---------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Typical | Min. | Max. |
| 66 | 83.95 | 84.71 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 67 | 85.22 | 86.08 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 68 | 86.39 | 87.15 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 69 | 87.76 | 88.52 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 70 | 89.03 | 89.79 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 71 | 90.3 | 91.06 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 72 | 91.57 | 92.33 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 73 | 92.84 | 93.6 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 74 | 94.11 | 94.87 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 75 | 95.38 | 96.14 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 76 | 96.65 | 97.41 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 77 | 97.92 | 98.68 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 78 | 98.19 | 99.05 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 79 | 100.46 | 101.22 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 80 | 101.73 | 102.49 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |
| 81 | 103 | 103.76 | 1.9 | 2.16 | 2.41 | 2.67 | 3.07 | 3.33 | 0.78 | 0.84 | 1.27 | 4.83 | 5.33 |


NOTES

1. All dimensions are in millimetres.



FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2.2 - UNINSULATED SOLID WIRES

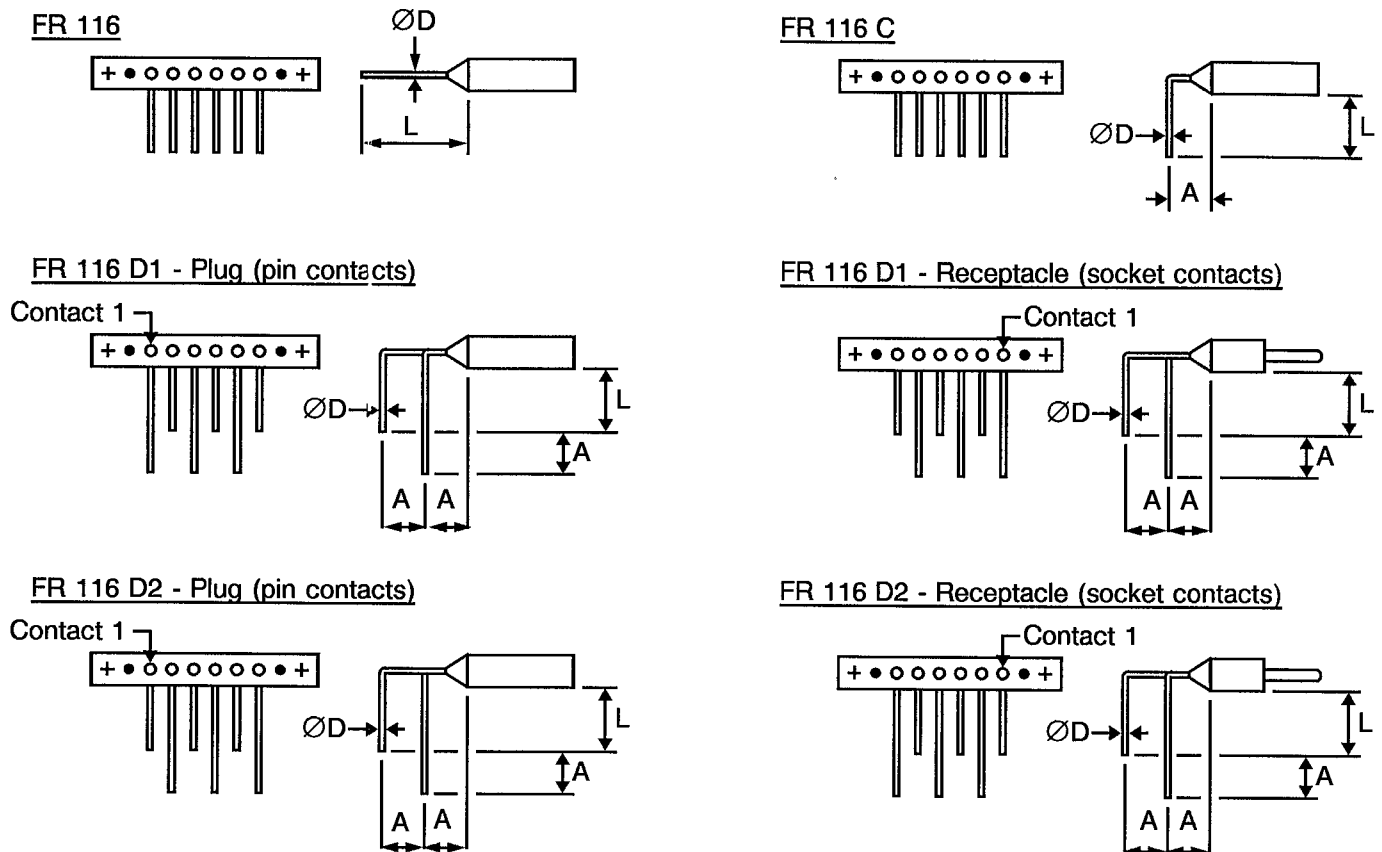

| TERMINATIONS CODE | FR 116 | FR 116 C | FR 116 D1 | FR 116 D2 |
|----------------------------------|--------|----------|-----------|-----------|
| Wire Size (AWG) | 25 | 25 | 25 | 25 |
| Max. Diameter 'D' (mm) | 0.46 | 0.46 | 0.46 | 0.46 |
| Min. Diameter 'D' (mm) | 0.45 | 0.45 | 0.45 | 0.45 |
| Max. Weight (g/m) | 1.60 | 1.60 | 1.60 | 1.60 |
| Min. Gold-plating Thickness (µm) | 0.50 | 0.50 | 0.50 | 0.50 |
| \underline{L} (mm) | 25 | 4 | 4 | 4 |
| \underline{A} (mm) | - | 2.54 | 2.54 | 2.54 |



FIGURE 2.3 - INSULATED WIRES

| WIRE SIZE AWG | | 26 | 28 |
|-------------------------------|--|-------------------|---------|
| Conductor Characteristics | Maximum diameter (mm) | 0.50 | 0.42 |
| | Nominal cross-section (mm ²) | 0.14 | 0.10 |
| Finished Wire Characteristics | Maximum diameter (mm) | 0.89 | 0.82 |
| | Maximum weight (g/m) | 2.3 | 1.8 |
| | Colour | Natural | Natural |
| | Minimum length | See Para. 4.5.4.3 | |



FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2.4 - LATCHING

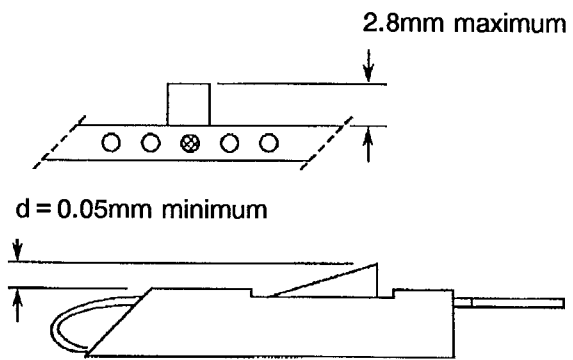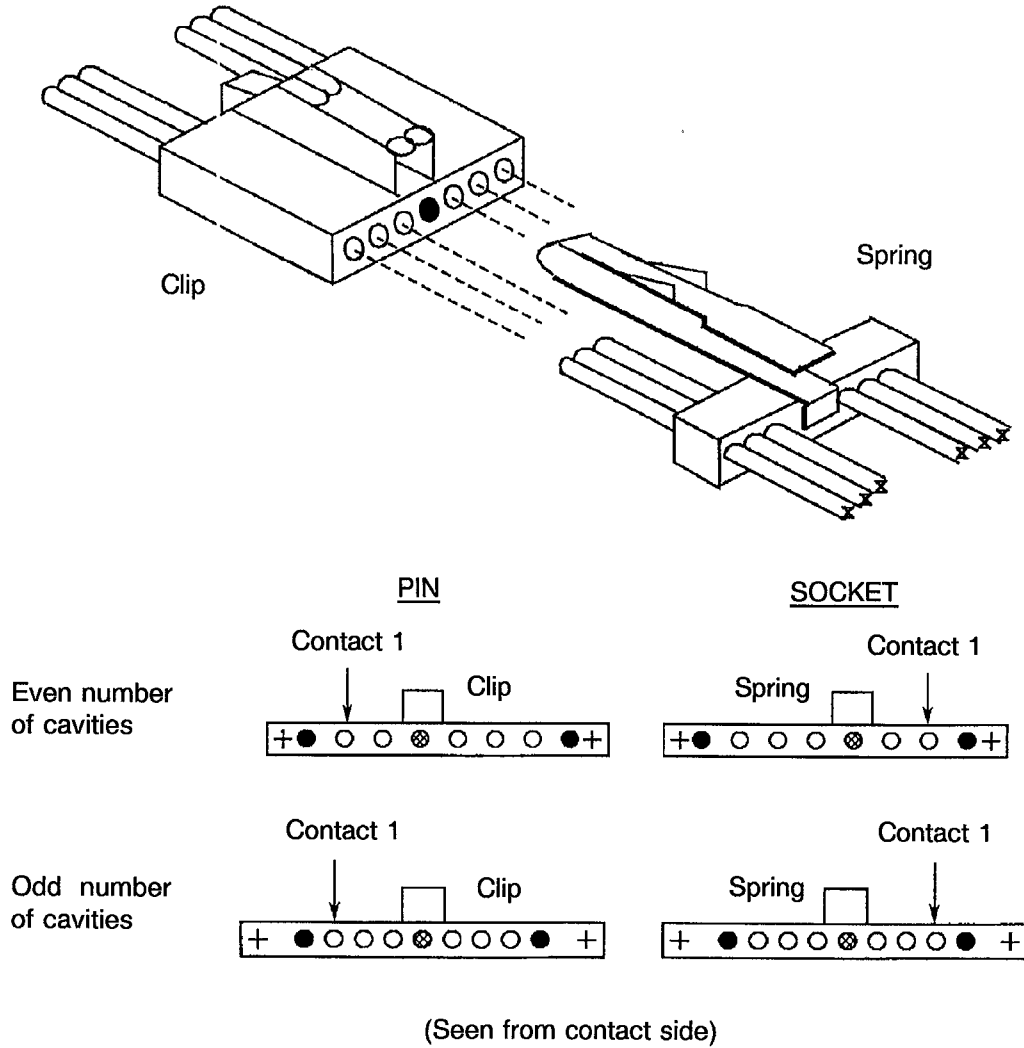

Latching force = 10N maximum



FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2.5 - CONTACT POSITION

Figure 2.5.1 - Mounting Condition

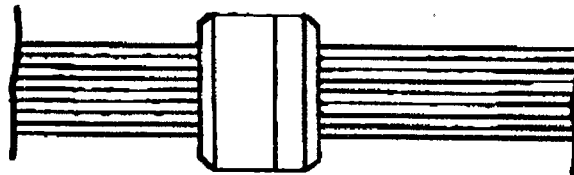


Figure 2.5.2 - Plug Male Contact


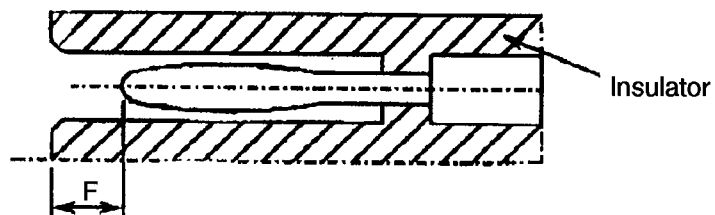


Figure 2.5.3 - Receptacle Female Contact

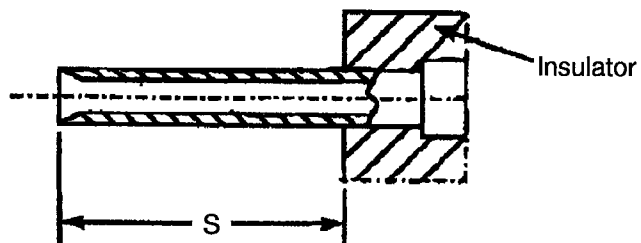

| F | | S | |
|------|------|------|------|
| Min. | Max. | Min. | Max. |
| 0.25 | 0.91 | 3.07 | 3.33 |

NOTES

1. All dimensions are in millimetres.



3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESA/SCC Basic Specification No. 21300 shall apply.

4. REQUIREMENTS

4.1 GENERAL

The complete requirements for procurement of the connectors specified herein are as stated in this specification and ESA/SCC Generic Specification No. 3401. Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESA/SCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION

4.2.1 Deviations from Special In-process Controls

(a) Para. 9.15, Joint Strength: The contacts shall be crimped to insulated stranded wire AWG26 and AWG28 and to uninsulated solid wire AWG25. The value of failure shall be recorded together with the information as to whether the failure was "pull-out", "break in crimp" or "break in wire". The minimum tensile strength shall be as follows.

| WIRE | MALE AND FEMALE CONTACTS | | |
|----------------------|--------------------------|-------|---------------------------|
| | AWG26 | AWG28 | AWG25 - Solid Uninsulated |
| Tensile Strength (N) | 22 | 13 | 22 |

4.2.2 Deviations from Final Production Tests (Chart II)

- (a) Para. 9.1.1.4, Mated Shell Conductivity: Not applicable.
- (b) Para. 9.3, Contact Retainer Test: Not applicable.
- (c) Para. 9.4, Contact Capability: This test shall be performed on male contacts. For details see Para. 4.3.3 of this specification.
- (d) Para. 9.5, Magnetism Level: Not applicable.

4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)

Not applicable.

4.2.4 Deviations from Qualification Tests (Chart IV)

- (a) Para. 9.1.1.4, Mated Shell Conductivity: Not applicable.
- (b) Para. 9.9, Seal Test: Not applicable.
- (c) Para. 9.15, Joint Strength: Not applicable.
- (d) Para. 9.17, Contact Retention (In Insert): Not applicable with male contact.
- (e) Para. 9.27, Maintenance Ageing: Not applicable.



- (f) Para. 9.29, Oversize Pin Exclusion: Not applicable.
- (g) Para. 9.30, Probe Damage: Not applicable.
- (h) Latching shall be performed as specified in Para. 4.3.13 of this specification.

4.2.5 Deviations from Lot Acceptance Tests (Chart V)

- (a) Para. 9.1.1.4, Mated Shell Conductivity: Not applicable.
- (b) Para. 9.9, Seal Test: Not applicable.
- (c) Para. 9.15, Joint Strength: Not applicable.
- (d) Para. 9.17, Contact Retention (In Insert): Not applicable with male contact.
- (e) Para. 9.27, Maintenance Ageing: Not applicable.
- (f) Para. 9.29, Oversize Pin Exclusion: Not applicable.
- (g) Para. 9.30, Probe Damage: Not applicable.
- (h) Latching shall be performed as specified in Para. 4.3.13 of this specification.

4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the connectors specified herein shall be verified in accordance with the requirements set out in Para. 9.6 of ESA/SCC Generic Specification No. 3401 and shall conform to those shown in Figure 2 of this specification. Only the underlined dimensions shall be checked during procurement.

4.3.2 Weight

The maximum weight of the connectors specified herein shall be calculated on the basis of, and be in accordance with, the values given in Table 1(b) and in Figures 2.2 and 2.3 of this specification.

4.3.3 Contact Capability

For the purpose of this test, the pick-up and drop weights shall be as follows.

| MEASUREMENTS | PICK-UP WEIGHT | DROP WEIGHT |
|-------------------------------|----------------|---------------|
| Weight (g) | 14 | 170 |
| Inner Gauge Diameter (mm) (1) | 0.582 - 0.587 | 0.559 - 0.564 |
| Insertion Depth (mm) | 1.5 | 1.5 |

NOTES

1. See Figure 3 for $\varnothing A$.

4.3.4 Contact Retention (In Insert)

Contact retention within the insert shall be 22.25 Newtons. There shall be no displacement of the contact. Not applicable to male contacts.

4.3.5 Mating and Unmating Forces

The forces applied for the mating and unmating of the connectors shall conform to the values specified in Table 1(c).

**4.3.6 Insert Retention (In Shell)**

Not applicable.

4.3.7 Jackscrew Retention

Not applicable.

4.3.8 Contact Insertion and Withdrawal Forces

Not applicable.

4.3.9 Engagement and Separation Forces (Male Contacts)

The contact engagement and separation forces of the male contacts shall be tested to a depth of 1.5mm with the applicable test gauge fixture specified in Figure 3 of this specification, and shall not exceed the values of the table hereunder.

| MEASUREMENTS | INNER DIAMETER (mm) | | SEPARATION FORCE Min. (N) | ENGAGEMENT FORCE Max. (N) |
|--------------------|---------------------|-------|------------------------------|------------------------------|
| | Min. | Max. | | |
| Max. Gauge Fixture | 0.559 | 0.564 | - | 1.667 |
| Min. Gauge Fixture | 0.582 | 0.587 | 0.137 | - |

4.3.10 Oversize Pin Exclusion

Not applicable.

4.3.11 Probe Damage

Not applicable.

4.3.12 Solderability

Not applicable.

4.3.13 Latching

Unlocking is achieved by applying a force of 3N minimum, perpendicular to the connector at the end of the spring.

The endurance test (10 cycles of mating/unmating) shall be performed with the force, applied at the end of the spring, necessary to achieve a travel of 1mm (unlocking travel = 0.5mm, total travel = 1.15mm). The requirement after the endurance test is that dimension d = 0.05mm, minimum.

4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the connectors specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

4.4.1 Inserts

Inserts shall be made of glass fibre-filled diallylphtalate resin or suitable thermoplastic material.



4.4.2 Contacts

4.4.2.1 Female Contacts

The contact body shall be made of copper alloy with an underplate of 1.0 μ m minimum of copper to MIL-C-14550, gold plated with 1.27 μ m minimum of gold, Type 2, Grade C of MIL-G-45204. Measurement of thickness shall be performed at a distance of 1.5mm from the engagement end.

4.4.2.2 Male Contacts

The contact body and the bundle shall be made of copper alloy with an underplate of 1.0 μ m minimum of copper to MIL-C-14550, gold plated with 1.27 μ m minimum of gold, Type 2, Grade C of MIL-G-45204. Measurement of thickness shall be performed at a distance of 1.5mm from the engagement end.

4.4.3 Guide Posts

Guide posts shall be made from passivated stainless steel, Type 303.

4.4.4 Latching

Clip and spring shall be made of passivated stainless steel.

4.4.5 Insulated Wires

Wire materials and finishes shall be in accordance with the requirements specified in Para. 4.4 of ESA/SCC Detail Specification No. 3901/013.

4.4.6 Uninsulated Solid Wires

Uninsulated solid wires shall be made of copper alloy in accordance with Type 'S' as specified in QQ-W-343. They shall be gold-plated in accordance with Class $\Phi\Phi$, Grade C or D, as specified in MIL-G-45204.

4.4.7 Rear Potting

Rear potting shall be made of epoxy resin.

4.5 MARKING

4.5.1 General

The marking of all components delivered to this specification shall be in accordance with the requirements of ESA/SCC Basic Specification No. 21700 and the following paragraphs.

When the component is too small to accommodate all of the marking specified, as much as space permits shall be marked and the marking information, in full, shall accompany the component in its primary package.

The information to be marked and the order of precedence shall be as follows:-

- (a) The SCC Component Number.
- (b) Characteristics.
- (c) Traceability Information.




4.5.2 Contact Identification

Not applicable.

4.5.3 The SCC Component Number

The SCC Component Number shall be constituted and marked as follows:

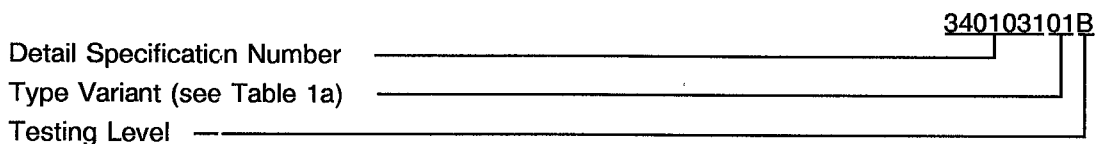


4.5.4 Characteristics

The characteristics to be marked in the following order of precedence are:-

- (a) Shell Size.
- (b) Contact Type.
- (c) Termination Type.
- (d) Polarisation (optional).

The information shall be constituted and marked as follows:-

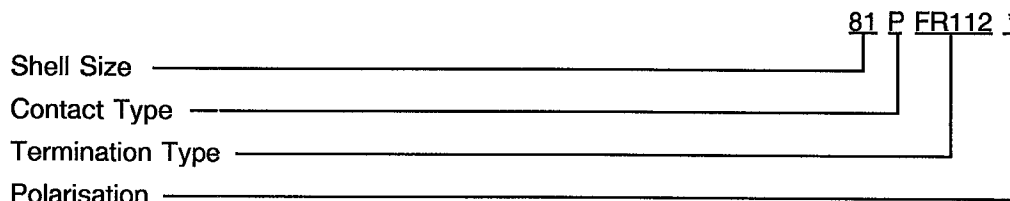

4.5.4.1 Shell Size

The shell size shall be designated by 2 digits representing the number of available cavities plus 4 additional cavities plus (see Para. 1.2):-

- (a) 4 additional cavities for Variant 01 - The specified numbers range from 05 through to 87 maximum.
- (b) 5 additional cavities for Variant 02 - The specified numbers range from 06 through to 87 maximum.

4.5.4.2 Contact Types

Contact types shall be indicated by the following code letters.

| Code Letter | Contact Type |
|-------------|--------------|
| P | Male |
| S | Female |



4.5.4.3 Termination Types

Termination types define length of insulated wire or uninsulated solid wire according to Figures 2.2 and 2.3 as follows.

| Code | Type (see Figure 2) | Min. Length (mm) |
|-----------|--|------------------|
| FR 112 | Wire AWG 26 | 508 |
| FR 113 | Wire AWG 26 | 914 |
| FR 114 | Wire AWG 28 | 508 |
| FR 115 | Wire AWG 28 | 918 |
| FR 116 | Uninsulated Solid Wire | 25 |
| FR 116 C | Uninsulated Solid 90°C Formed Wire | 4 |
| FR 116 D1 | Uninsulated Solid 90°C Formed Wire (Long Terminations on Odd Contacts) | 4 |
| FR 116 D2 | Uninsulated Solid 90°C Formed Wire (Long Terminations on Even Contacts) | 4 |

4.5.4.4 Polarisation

The marking of the cavity number used for the polarisation is optional and is used only in case the Orderer wishes to specify his own polarisation means by epoxy-filled cavities or guide posts (see Para. 1.2). There is no mandatory requirement for this part of the marking.

4.5.5 Traceability Information

Traceability information shall be marked in accordance with the requirements of ESA/SCC Basic Specification No. 21700.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured in respect of electrical characteristics are scheduled in Table 2. Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3^{\circ}\text{C}$.

4.6.2 Electrical Measurements at High and Low Temperatures

Not applicable.

4.6.3 Circuits for Electrical Measurements (Figure 4)

Not applicable

4.7 BURN IN AND ELECTRICAL MEASUREMENTS

Not applicable.

**SCC**ESA/SCC Detail Specification
No. 3401/031

PAGE 23

ISSUE 2

TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE

| No. | CHARACTERISTICS | SYMBOL | ESA/SCC 3401 TEST METHOD | TEST CONDITIONS | LIMITS | | UNIT |
|-----|---|----------------|--------------------------|-----------------|----------------|------|------|
| | | | | | MIN. | MAX. | |
| 1 | Insulation Resistance | Ri | Para. 9.1.1.1 | Para. 9.1.1.1 | 5000 | - | MΩ |
| 2 | Voltage Proof Leakage Current | I _L | Para. 9.1.1.2 | 600 Vrms | - | 2.0 | mA |
| 3 | Mated Shell Conductivity (Voltage Drop) (1) | Vd | Para. 9.1.1.4 | Para. 9.1.1.4 | Not applicable | | mV |
| 4 | Contact Resistance (Low Level Current) | Rcl max. | Para. 9.1.1.3 | Para. 9.1.1.3 | - | 6.0 | mΩ |
| 5 | Contact Resistance (Rated Current) | Rcr max. | Para. 9.1.1.3 | Table 1(d) | - | 5.0 | mΩ |

NOTES


1. Applicable to mated connectors with grounding option.

TABLES 3, 4 AND 5

Not applicable.



FIGURE 3 - GAUGE FIXTURE

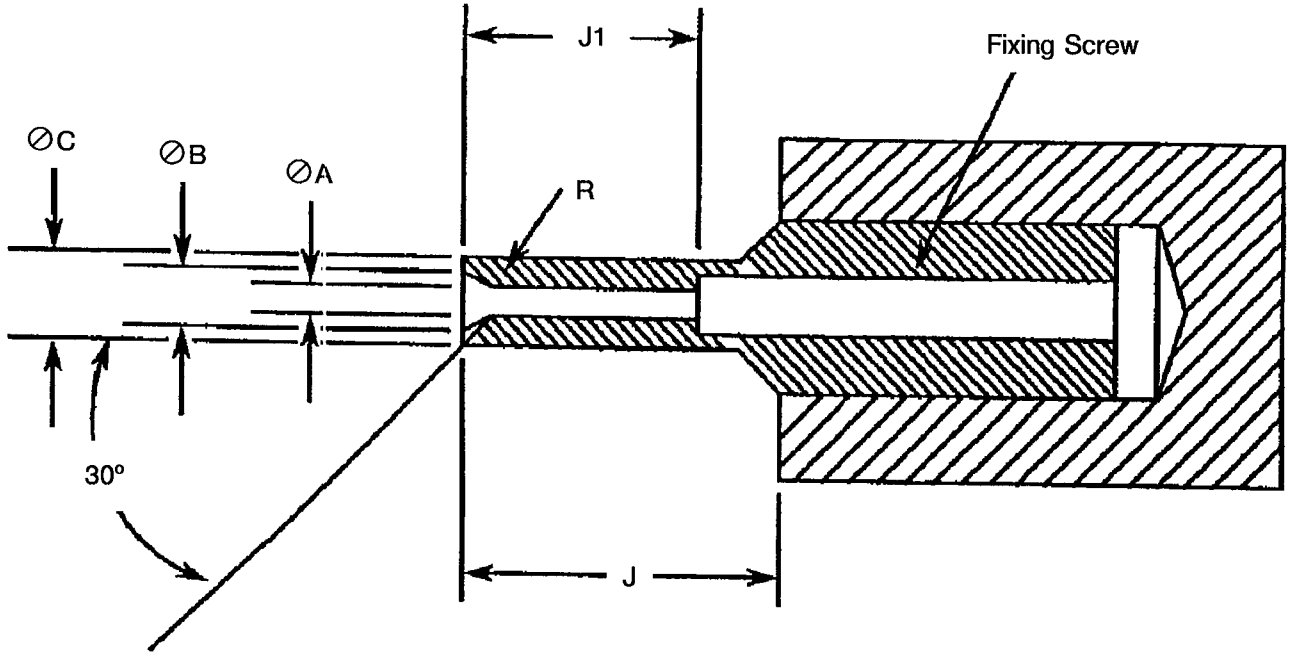

MAXIMUM GAUGE

| WEIGHT (g) 170 | | | REMARKS |
|----------------|-------|-------|---------|
| | MIN. | MAX. | |
| ØA | 0.559 | 0.564 | - |
| ØB | 0.749 | 0.775 | - |
| ØC | 0.813 | 0.825 | - |
| J | 4.0 | - | - |
| J1 | 3.13 | 3.23 | - |
| R | 0.381 | 0.483 | Note 1 |

MINIMUM GAUGE

| WEIGHT (g) 14 | | | REMARKS |
|---------------|-------|-------|---------|
| | MIN. | MAX. | |
| ØA | 0.582 | 0.587 | - |
| ØB | 0.749 | 0.775 | - |
| ØC | 0.813 | 0.825 | - |
| J | 4.0 | - | - |
| J1 | 3.13 | 3.23 | - |
| R | 0.381 | 0.483 | Note 1 |

NOTES

1. Radius "R" must be tangent to entry chamfer and ØA.
2. ØA and entry chamfer must be polished to ∇_{N8} .



- 4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESA/SCC GENERIC SPECIFICATION NO. 3401)
- 4.8.1 Measurements and Inspections on Completion of Environmental Tests
The parameters to be measured and inspections to be performed on completion of environmental tests shall be those scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.
- 4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests
Not applicable.
- 4.8.3 Measurements and Inspections on Completion of Endurance Tests
The parameters to be measured and inspections to be performed on completion of endurance tests shall be those scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.
- 4.8.4 Conditions for Operating Life Tests (Part of Endurance Testing)
Not applicable.
- 4.8.5 Electrical Circuits for Operating Life Tests (Figure 5)
Not applicable.
- 4.8.6 Conditions for High Temperature Storage Test (Part of Endurance Testing)
The requirements for the high temperature storage test are specified in Section 9 of ESA/SCC Generic Specification No. 3401. The temperature to be applied shall be the maximum storage temperature specified in Table 1(b) of this specification.



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTS

| NO. | ESA/SCC GENERIC SPEC. NO. 3401 | | MEASUREMENTS AND INSPECTIONS | | SYMBOL | LIMITS | | UNIT |
|-----|---|---|--|---|---|--|------------------------------|--------------------------------|
| | ENVIRONMENTAL AND ENDURANCE TESTS (1) | TEST METHOD AND CONDITIONS | IDENTIFICATION | CONDITIONS | | MIN. | MAX. | |
| 01 | Seal Test | Para. 9.9 | ESA/SCC 3401 Para. 9.9 | - | - | Not applicable | | - |
| 02 | Wiring | Para. 9.10 and Table 1(d) of this specification | Low Level Contact Resistance | Table 2 Item 4 | Rcl | Table 2, Item 4 | | - |
| 03 | Vibration | Para. 9.11 | Final Measurements Full Engagement Visual Examination | | - - | - - | - - | - - |
| 04 | Shock or Bump | Para. 9.12 | Full Engagement Visual Examination | - - | - - | - - | - - | - - |
| 05 | Climatic Sequence | Para. 9.13 | Dry Heat Insulation Resistance Low Air Pressure Voltage Proof Leakage Current Damp Heat Insulation Resistance Final Measurements External Visual Inspection Insulation Resistance Voltage Proof Leakage Current | At High Temperature Table 2, Item 1 Figure 1 Immediately after test Table 2, Item 1 After 1-24 hrs Recovery ESA/SCC 3401 Para. 9.7 Table 2, Item 1 Table 2, Item 2 | Ri I _L Ri - Ri I _L | 1000 ESA/SCC 3401 Para. 9.13.5 100 ESA/SCC 3401 Para. 9.7 Table 2, Item 1 Table 2, Item 2 | - - - - | MΩ - MΩ - |
| 06 | Plating Thickness | Para. 9.14 | Thickness | - | - | Para 4.4.2 of this spec. | | - |
| 07 | Joint Strength (N/A to solder contacts) | Para. 9.15 | ESA/SCC 3401 Para. 9.15 | - | - | Not applicable | | - |
| 08 | Rapid Change of Temperature | Para. 9.16 | Visual Examination Insulation Resistance Voltage Proof Leakage Current | - Table 2, Item 1 Table 2, Item 2 | - Ri I _L | - - | - - | - - |
| 09 | Contact Retention (In Insert) | Para. 9.17 and Para. 4.3.4 of this spec. | Contact Displacement | Not applicable for male contacts | - | ESA/SCC 3401 Para. 9.17 | | - |

NOTES

1. The tests in this Table refer to either Chart IV or V and shall be used as applicable.



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTS (CONTINUED)

| NO. | ESA/SCC GENERIC SPEC. NO. 3401 | | MEASUREMENTS AND INSPECTIONS | | SYMBOL | LIMITS | | UNIT |
|-----|---------------------------------------|--|---|---|--|---|---|------|
| | ENVIRONMENTAL AND ENDURANCE TESTS (1) | TEST METHOD AND CONDITIONS | IDENTIFICATION | CONDITIONS | | MIN. | MAX. | |
| 10 | Endurance | Para. 9.18 | Initial Measurements Mating/Unmating Forces Low Level Contact Resistance Mated Shell Conductivity Final Measurements Visual Examination Mating/Unmating Forces Low Level Contact Drift Resistance Mated Shell Conductivity Insulation Resistance Voltage Proof Leakage Current | Table 2, Item 4 Table 2, Item 3 - Table 2, Item 4 Table 2, Item 5 Table 2, Item 3 Table 2, Item 1 Table 2, Item 2 | F Rcl Vd - F ΔRcl Vd Ri I _L | Para 4.3.5 of this spec. Record Values Not applicable - Para. 4.3.5 of this spec. - 3.0 Not applicable Table 2, Item 1 Table 2, Item 2 | - mΩ | |
| 11 | Permanence of Marking | Para. 9.19 | - | - | - | - | - | - |
| 12 | Mating/Unmating Forces | Para. 9.20 | Force | - | F | Para 4.3.5 of this spec. | | - |
| 13 | High Temperature Storage | Para. 9.21 | Initial Measurements Low Level Contact Resistance Mated Shell Conductivity Final Measurements Visual Examination Mating/Unmating Forces Low Level Contact Drift Resistance Rated Current Contact Resistance Mated Shell Conductivity Insulation Resistance Voltage Proof Leakage Current Contact Retention (In Insert) | Table 2, Item 4 - - Table 2, Item 4 Table 2, Item 5 Table 2, Item 3 Table 2, Item 1 Table 2, Item 2 Para. 4.3.4 of this spec. | Rcl Vd - F ΔRcl Rcr Vd Ri I _L | Record Values Not applicable - Para. 4.3.5 of this spec. - 3.0 Table 2, Item 5 Not applicable Table 2, Item 1 Table 2, Item 2 ESA/SCC 3401 Para. 9.17 | - mΩ | |
| 14 | Corrosion | Para. 9.22 | Visual Examination | - | - | - | - | - |
| 15 | Insert Retention (In Shell) | Para. 9.23 and Para. 4.3.6 of this spec. | Visual Examination | - | - | Not applicable | | - |
| 16 | Jackscrew Retention | Para. 9.24 and Para. 4.3.7 of this spec. | Visual Examination | - | - | Not applicable | | - |

NOTES

1. The tests in this Table refer to either Chart IV or V and shall be used as applicable.



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTS (CONTINUED)

| NO. | ESA/SCC GENERIC SPEC. NO. 3401 | | MEASUREMENTS AND INSPECTIONS | | SYMBOL | LIMITS | | UNIT |
|-----|---------------------------------------|---|---|-----------------|----------------|----------------------------------|-------|------|
| | ENVIRONMENTAL AND ENDURANCE TESTS (1) | TEST METHOD AND CONDITIONS | IDENTIFICATION | CONDITIONS | | MIN. | MAX. | |
| 17 | High Temperature Measurements | Para. 9.25 | Insulation Resistance | Table 2, Item 1 | Ri | 5000 | - | MΩ |
| 18 | Overload Test | Para. 9.26 | Internal Temperature | - | T | - | + 100 | °C |
| | | | Rated Current Contact Resistance | Table 2, Item 5 | Rcr | Table 2, Item 5 | | |
| | | | Mated Shell Conductivity | Table 2, Item 3 | Vd | Not applicable | | |
| | | | Insulation Resistance | Table 2, Item 1 | Ri | Table 2, Item 1 | | |
| | | | Voltage Proof Leakage Current | Table 2, Item 2 | I _L | Table 2, Item 2 | | |
| 19 | Maintenance Ageing | Para. 9.27 and Paras. 4.2.4 and 4.2.5 of this spec. | Visual Examination Contact Retention (In Insert) | - - | - - | Not applicable Not applicable | | |
| 20 | Engagement/Separation Forces | Para. 9.28 and Para. 4.3.9 of this spec. | Force | - | F | Para. 4.3.9 of this spec. | | |
| 21 | Oversize Pin Exclusion | Para. 9.29 and Para. 4.3.10 of this spec. | - | - | - | Not applicable | | |
| 22 | Probe Damage | Para. 9.30 and Para. 4.3.11 of this spec. | Contact Separation Force | - | - | Not applicable | | |
| 23 | Solderability | Para. 9.31 and Para. 4.3.12 of this spec. | - | - | - | Not applicable | | |

NOTES

1. The tests in this Table refer to either Chart IV or V and shall be used as applicable.