



**CONNECTOR SAVERS, ELECTRICAL,
RECTANGULAR, MICROMINIATURE,
BASED ON TYPE MDM
ESCC Detail Specification No. 3401/041**

**ISSUE 1
October 2002**



	ESCC Detail Specification		PAGE ii ISSUE 1
---	---------------------------	--	--------------------

LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2002. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole in any medium without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.



europaean space agency
agence spatiale européenne

Pages 1 to 20

**CONNECTOR SAVERS, ELECTRICAL,
RECTANGULAR, MICROMINIATURE,
BASED ON TYPE MDM**

ESA/SCC Detail Specification No. 3401/041



**space components
coordination group**

Issue/Rev.	Date	Approved by	
		SCCG Chairman	ESA Director General or his Deputy
Issue 3	July 2002		



DOCUMENTATION CHANGE NOTICE

Rev. Letter	Rev. Date	Reference	CHANGE Item	Approved DCR No.
		This Issue supersedes Issue 2 and incorporates all modifications defined in Revision 'A' to Issue 2 and the changes agreed in the following DCRs:-		
		Cover page		None
		DCN		None
		Para. 1.1	: Item (b) text amended	221665
		Para. 2	: Item (b) text amended	221665
			: Item (c) deleted, remaining items renumbered	221665
		Table 1(a)	: New table added	221665
		Table 1(b)	: No. 3 deleted, remaining nos. renumbered	221665
		Figure 1(b)	: Table amended	221665
		Figure 2.1	: Figure amended	221665
			: New table added	221665
		Figure 2.2	: New figure inserted	221665
		Para. 4.2.2	: New item (a) added, remaining items renumbered	221665
		Para. 4.2.4	: New item (a) added, remaining items renumbered	221665
		Para. 4.2.5	: New item (a) added, remaining items renumbered	221665
		Para. 4.3.2	: Text amended	221665
		Para. 4.3.3	: New para. "Contact Capability" inserted	221665
		Para. 4.3.4	: Title amended	221665
		Para. 4.3.5	: New para. added	221665
		Para. 4.3.6	: New para. added	221665
		Para. 4.3.7	: New para. added	221665
		Para. 4.3.8	: New para. added	221665
		Para. 4.3.9	: New para. added	221665
		Para. 4.3.10	: New para. added	221665
		Para. 4.3.11	: New para. added	221665
		Para. 4.3.12	: New para. added	221665
		Para. 4.4.3	: New para. "Contacts" inserted	221665
		Para. 4.4.3	: Existing para. 4.4.3, renumbered 4.4.4	221665
		Para. 4.4.5	: New para. inserted	221665
		Para. 4.4.6	: New para. inserted	221665
		Para. 4.5.3	: Paragraph amended	221665
		Table 2	: New table inserted	221665
		Figure 4	: New figure inserted	221665
		Table 6	: No. 9, "Conditions" amended	221665
			: No. 19, "Test Method", "Identification" and "Conditions" amended	221665

**TABLE OF CONTENTS**

	<u>Page</u>
1. <u>GENERAL</u>	5
1.1 Scope	5
1.2 Range of Components	5
1.3 Maximum Ratings	5
1.4 Parameter Derating Information	5
1.5 Physical Dimensions	5
1.6 Contact Arrangements	5
2. <u>APPLICABLE DOCUMENTS</u>	5
3. <u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u>	5
4. <u>REQUIREMENTS:</u>	11
4.1 General	11
4.2 Deviations from Generic Specification	11
4.2.1 Deviations from Special In-process Controls	11
4.2.2 Deviations from Final Production Tests	11
4.2.3 Deviations from Burn-in and Electrical Measurements	11
4.2.4 Deviations from Qualification Tests	11
4.2.5 Deviations from Lot Acceptance Tests	11
4.3 Mechanical Requirements	12
4.3.1 Dimension Check	12
4.3.2 Weight	12
4.3.3 Contact Capability	12
4.3.4 Contact Retention (In Insert)	12
4.3.5 Mating and Unmating Forces	12
4.3.6 Insert Retention (In Shell)	12
4.3.7 Jackscrew Retention	12
4.3.8 Contact Insertion and Withdrawal Forces	12
4.3.9 Engagement and Separation Forces (Male Contacts)	12
4.3.10 Oversize Pin Exclusion	13
4.3.11 Probe Damage	13
4.3.12 Solderability	13
4.4 Materials and Finishes	13
4.4.1 Shells	13
4.4.2 Inserts	13
4.4.3 Contacts	13
4.4.4 Seals, Interfacial	13
4.4.5 Uninsulated Solid Wire	13
4.4.6 Potting	13
4.5 Marking	14
4.5.1 General	14
4.5.2 The SCC Component Number	14
4.5.3 Characteristics	14
4.5.4 Traceability Information	15
4.6 Electrical Measurements	15
4.6.1 Electrical Measurements at Room Temperature	15
4.6.2 Electrical Measurements at High and Low Temperatures	15
4.6.3 Circuits for Electrical Measurements	15
4.7 Burn-in and Electrical Measurements	15



	<u>Page</u>
4.8 Environmental and Endurance Tests	18
4.8.1 Measurements and Inspection on Completion of Environmental Tests	18
4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests	18
4.8.3 Measurements and Inspections on Completion of Endurance Tests	18
4.8.4 Conditions for Operating Life Tests	18
4.8.5 Electrical Circuits for Operating Life Tests	18
4.8.6 Conditions for High Temperature Storage Test	18

TABLES

1(a) Range of Components	6
1(b) Maximum Ratings	6
2 Electrical Measurements at Room Temperature	16
3 Not applicable	
4 Not applicable	
5 Not applicable	
6 Measurements and Inspections on Completion of Environmental and Endurance Tests	19

FIGURES

1 Parameter Derating Information	7
2 Physical Dimensions	8
3 Contact Arrangements	10
4 Gauge Fixture	17

APPENDICES (Applicable to specific Manufacturers only)

None.

**1. GENERAL****1.1 SCOPE**

This specification details the ratings, physical and electrical characteristics, test and inspection data of Electrical, Rectangular, Microminiature Connectors with Non-removable Crimp-type Contacts and their associated insulated wires and uninsulated solid wires, based on Type MDM.

It shall be read in conjunction with:

- (a) ESA/SCC Generic Specification No. 3401, Connectors, Electrical, Rectangular and Circular.
- (b) ESA/SCC Detail Specification No. 3401/032, Accessories for Connectors, Microminiature, 3401/029, and Connector Savers No. 3401/041.

the requirements of which are supplemented herein.

1.2 RANGE OF COMPONENTS

The different sizes of the basic type connectors specified herein, which are also covered by this specification, together with their mechanical characteristics, are scheduled in Table 1(a). The different sizes of associated insulated wires and uninsulated solid wires are given in Figure 2.

1.3 MAXIMUM RATINGS

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the contacts specified herein, are scheduled in Table 1(b).

1.4 PARAMETER DERATING INFORMATION

The derating information applicable to the contacts specified herein is shown in Figure 1.

1.5 PHYSICAL DIMENSIONS

The physical dimensions of the connectors, insulated wires and uninsulated solid wires specified herein are shown in Figure 2.

1.6 CONTACT ARRANGEMENTS

Contact arrangement are shown in Figure 3.

2. APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESA/SCC Generic Specification No. 3401, Connectors, Electrical, Circular and Rectangular.
- (b) ESA/SCC Detail Specification No. 3401/032, Accessories for Connectors, Microminiature for 3401/029, and Connector Savers No. 3401/041.
- (c) QQ-W-343, Wires, Electrical Uninsulated.
- (d) MIL-G-45204, Gold Plating, Electro-deposited.
- (e) MIL-C-14550, Copper Plating, Electro-deposited.
- (f) MIL-PRF-83513, Connectors Electrical, Rectangular, Microminiature, Polarised Shell, Generic Specification for.

3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESA/SCC Basic Specification No. 21300 shall apply.



TABLE 1(a) - TYPE VARIANTS

VARIANT	SHELL SIZE Note 1	MAX. WEIGHT (g) Note 2	MAX. ENGAGEMENT FORCE (N)	SEPARATION FORCE (N)	
				MAX	MIN
01	9 PS	4.0	20	20	1.3
02	15 PS	5.5	33	33	2.0
03	21 PS	7.0	47	47	2.9
04	25 PS	8.0	55	55	3.5
05	31 PS	9.5	69	69	4.3
06	37 PS	10.0	82	82	5.1
07	51 PS	13.5	113	113	7.1

NOTES

1. Connectors are fixed in the connector saver.
2. Connector with contacts and without screw-locks.

TABLE 1(b) - MAXIMUM RATINGS

NO.	CHARACTERISTICS	SYMBOL	MAXIMUM RATING	UNIT	REMARKS
1	Working Voltage Sea Level	U_R	150	Vrms	Note 1
2	Rated Current: (uninsulated solid wire)	I_R	2.5	A	
3	Operating Temperature Range	T_{op}	- 55 to + 125	°C	
4	Storage Temperature Range	T_{stg}	- 55 to + 125	°C	

NOTES

1. Between contacts, and contact and shell.

FIGURE 1 - PARAMETER DERATING INFORMATION

FIGURE 1(a) - WORKING VOLTAGE VERSUS ALTITUDE

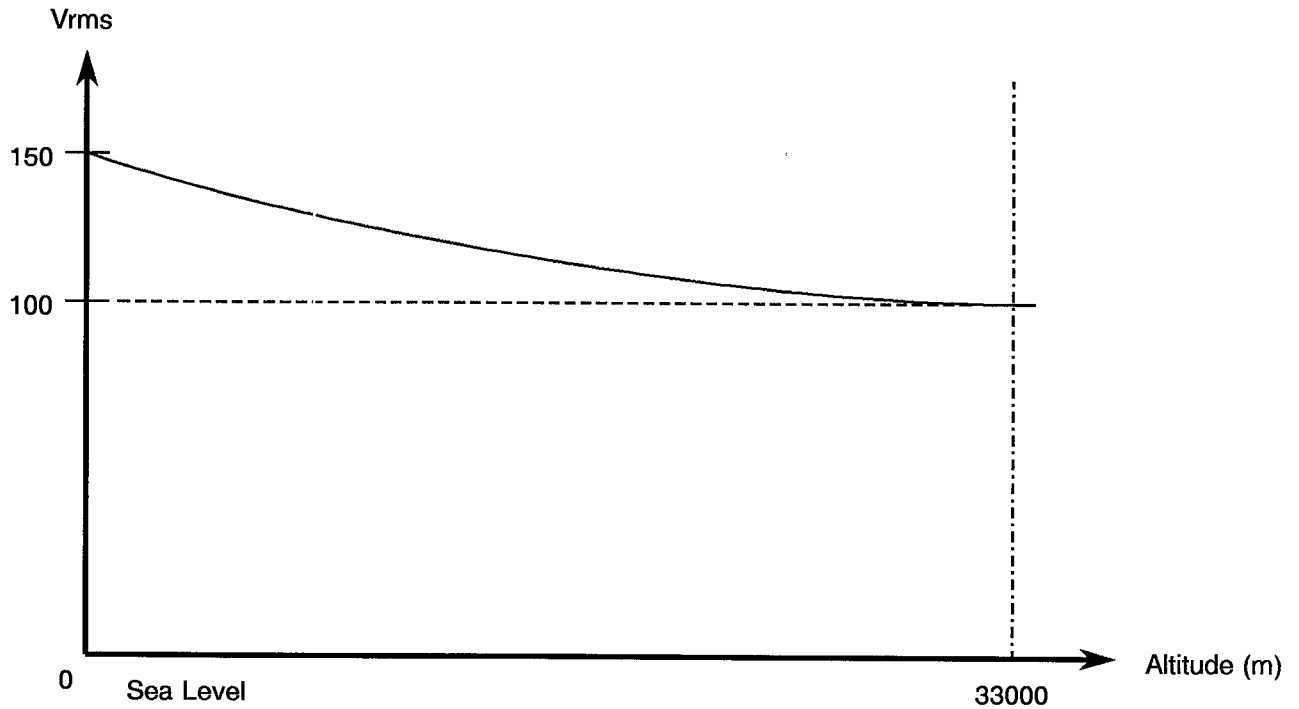



FIGURE 1(a) - MAXIMUM CURRENT VERSUS NUMBER OF CONTACTS

NUMBER OF CONTACTS PER CONNECTOR	MAXIMUM CURRENT PER CONTACT
	UNINSULATED SOLID WIRE
2 - 4	2.0
5 - 14	1.8
15 and over	1.4



FIGURE 2 - PHYSICAL DIMENSIONS

FIGURE 2.1 - CONNECTOR SAVER DIMENSIONS

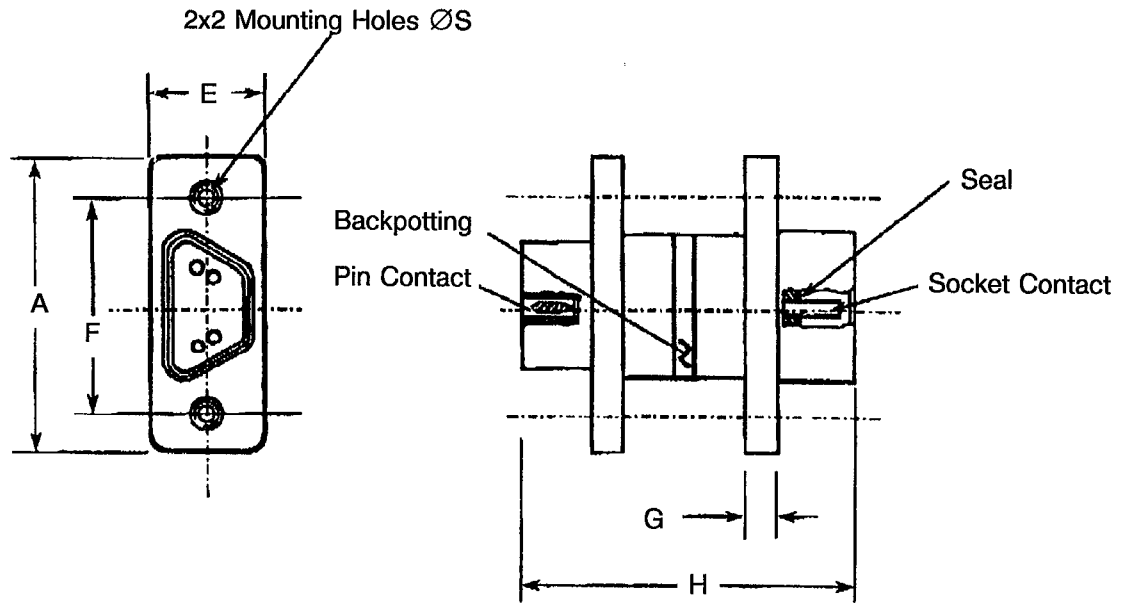

VARIANT	SIZE	A	E	F	G	H	ØS	
		MAX	MAX	MAX	TYPICAL	TYPICAL	MIN	MAX
01	09PS	19.94	7.75	14.35	2.29	22.86	2.23	2.39
02	15PS	23.75	7.75	18.16	2.29	22.86	2.23	2.39
03	21PS	27.56	7.75	21.97	2.29	22.86	2.23	2.39
04	25PS	30.10	7.75	24.51	2.29	22.86	2.23	2.39
05	31PS	33.91	7.75	28.32	2.29	22.86	2.23	2.39
06	37PS	37.72	7.75	32.13	2.29	22.86	2.23	2.39
07	51PS	36.45	8.76	30.86	2.29	22.86	2.23	2.39

NOTES

1. All dimensions are in millimetres.



FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2.2 - CONTACT POSITION

Figure 2.2.1 - Mounting Condition

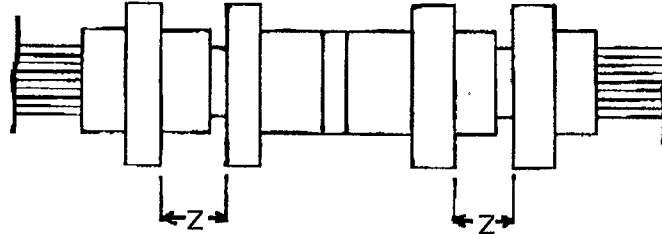


Figure 2.2.2 - Plug Male Contact


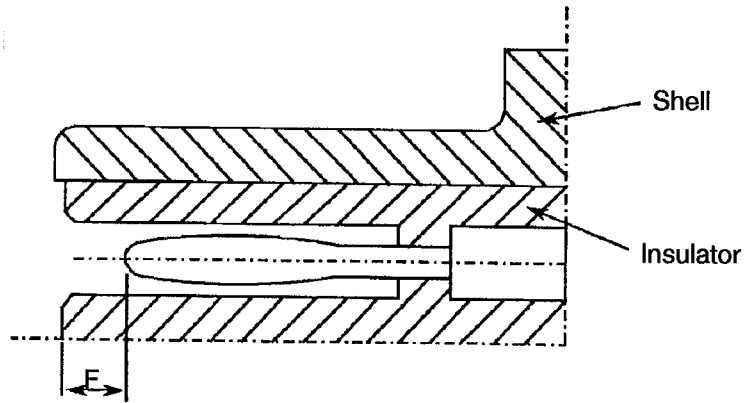


Figure 2.2.3 - Receptacle Female Contact

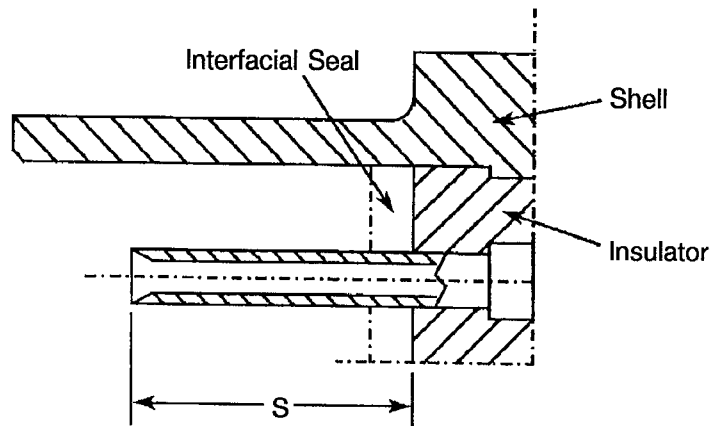

F		S		Z
MIN	MAX	MIN	MAX	MAX
0.25	0.91	3.30	3.66	5.49


NOTES

1. All dimensions are in millimetres.




FIGURE 3 - CONTACT ARRANGEMENTS


FRONT VIEW OF MALE INSERT - USE MIRROR VIEW FOR FEMALE INSERT




9 CONTACTS




15 CONTACTS




21 CONTACTS




25 CONTACTS



31 CONTACTS



37 CONTACTS

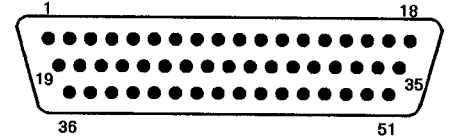


51 CONTACTS

NOTES

1. Only the outside contact cavities on each row are identified in the drawing, the remainder follow sequentially. Contact numbers are shown outside the insert for readability.

Contact Centres

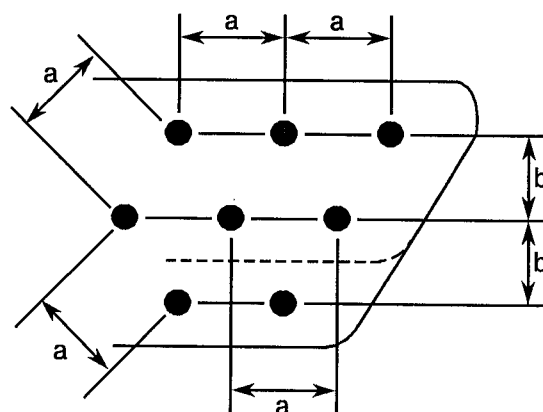

NOTES

1. a = Distance between contact centres: 1.27mm typical.
2. b = Distance between rows: 1.09mm typical.



4. REQUIREMENTS

4.1 GENERAL

The complete requirements for procurement of the connectors specified herein are stated in this specification and ESA/SCC Generic Specification No. 3401. Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESA/SCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION

4.2.1 Deviations from Social In-process Controls

Para. 9.15, Joint Strength: The contacts shall be crimped to insulated stranded wire AWG26 and AWG28, and to uninsulated solid wire AWG25. The value of failure shall be recorded together with the information as to whether the failure was "pull-out", "break in crimp" or "break in wire". The minimum tensile strength shall be as follows:

WIRE	MALE AND FEMALE CONTACTS
	AWG25 - Solid Uninsulated
Tensile Strength (N)	22

4.2.2 Deviations from Final Production Tests (Chart II)

- (a) Para. 9.3, Contact Retainer Test: Not applicable.
- (b) Para. 9.4, Contact Capability: This test shall be performed on the male contacts. For details see Para. 4.3.3 of this specification.
- (c) Para. 9.5, Magnetism Level: Not applicable.

4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)

None.

4.2.4 Deviations from Qualification Tests (Chart IV)

- (a) Para. 9.9, Seal Test: Not applicable.
- (b) Para. 9.15, Joint Strength: Not applicable.
- (c) Para. 9.17, Contact Retention (In insert): Not applicable with male contact.
- (d) Para. 9.27, Maintenance Ageing: Not applicable.
- (e) Para. 9.29, Oversize Pin Exclusion: Not applicable.
- (f) Para. 9.30, Probe Damage: Not applicable.

4.2.5 Deviations from Lot Acceptance Tests (Chart V)

- (a) Para. 9.9, Seal Test: Not applicable.
- (b) Para. 9.15, Joint Strength: Not applicable.
- (c) Para. 9.17, Contact Retention (In insert): Not applicable with male contact.
- (d) Para. 9.27, Maintenance Ageing: Not applicable.
- (e) Para. 9.29, Oversize Pin Exclusion: Not applicable.
- (f) Para. 9.30, Probe Damage: Not applicable.

**4.3 MECHANICAL REQUIREMENTS****4.3.1 Dimension Check**

The dimensions of the connectors specified herein shall be verified in accordance with the requirements set out in Para. 9.6 of ESA/SCC Generic Specification No. 3401 and shall conform to those shown in Figure 2 of this specification. Only the underlined dimensions shall be checked during procurement.

4.3.2 Weight

The maximum weight of the connectors specified herein shall be as specified in Table 1(a).

4.3.3 Contact Capability

For the purpose of this test, the pick-up and drop weights shall be as follows.

MEASUREMENTS	PICK-UP WEIGHT	DROP WEIGHT
Weight (g)	14	170
Inner Gauge Diameter (mm) (1)	0.582 - 0.587	0.559 - 0.564
Insertion Depth (mm)	1.5	1.5

NOTES

1. See Figure 4 for $\varnothing A$.

4.3.4 Contact Retention (In insert)

Contact retention within the insert shall be 22.25 Newtons. There shall be no displacement of the contact. Not applicable to male contacts.

4.3.5 Mating and Unmating Forces

The forces applied for the engagement and separation of the connectors shall conform to the values specified in Table 1(a).

4.3.6 Insert Retention (In shell)

Connector inserts shall withstand a pressure of 34.4N/cm² applied from the mating side to the rear side.

4.3.7 Jackscrew Retention

Not applicable.

4.3.8 Contact Insertion and Withdrawal Forces

Not applicable.

4.3.9 Engagement and Separation Forces (Male Contacts)

The contact engagement and separation forces of the male contacts shall be tested to a depth of 1.5mm with the applicable test gauge fixtures specified in Figure 4 of this specification, and shall not exceed the values of the table hereunder.

MEASUREMENTS	INNER DIAMETER (mm)		SEPARATION FORCE Min. (N)	ENGAGEMENT FORCE Max. (N)
	Min.	Max.		
Max. Gauge Fixture	0.559	0.564	-	1.667
Min. Gauge Fixture	0.582	0.587	0.137	-

**4.3.10 Oversize Pin Exclusion**

Not applicable.

4.3.11 Probe Damage

Not applicable.

4.3.12 Solderability

Not applicable.

4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the connectors specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

4.4.1 Shells

Shells shall be made of aluminium alloy. The plating shall be 25.4µm minimum of electroless nickel (Variant 01) or a minimum thickness of 2.54µm of gold over an electroless nickel underlay (Variant 02).

4.4.2 Inserts

Inserts shall be made of glass fibre-filled diallylphtalate resin or suitable thermoplastic material.

4.4.3 Contacts**4.4.3.1 Female Contacts**

The contact body shall be made of copper alloy with an underplate of 1.0µm minimum of copper to MIL-C-14550, gold plated with 1.27µm minimum of gold, Type 2, Grade C of MIL-G-45204. Measurement of thickness shall be performed at a distance of 1.5mm from the engagement end.

4.4.3.2 Male Contacts

The contact body and the bundle shall be made of copper alloy with an underplate of 1.0µm minimum of copper to MIL-C-14550, gold plated with 1.27µm minimum of gold, Type 2, Grade C of MIL-G-45204. Measurement of thickness shall be performed at a distance of 1.5mm from the engagement end.

4.4.4 Seals Interfacial

Interfacial seals shall be made of silicon base rubber.

4.4.5 Uninsulated Solid Wire

Uninsulated solid wires shall be made of copper alloy in accordance with Type 'S' as specified in QQ-W-343. They shall be gold-plated in accordance with Class ØØ, Grade C or D, as specified in MIL-G-45204.

4.4.6 Potting

Potting shall be made of epoxy resin.



4.5 MARKING


4.5.1 General

The marking of all components delivered to this specification shall be in accordance with the requirements of ESA/SCC Basic Specification No. 21700 and the following paragraphs. Each component shall be marked in respect of:-

- (a) The SCC Component Number.
- (b) Characteristics.
- (c) Traceability Information.

4.5.2 The SCC Component Number

Each component shall bear the SCC Component Number which shall be constituted and marked as follows:-

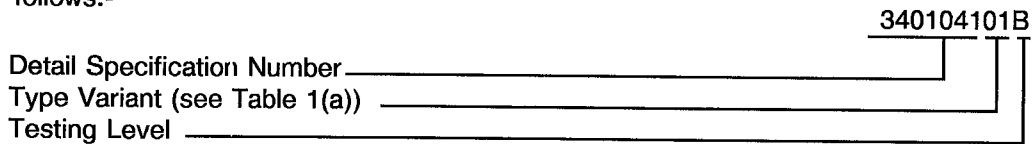

N.B.


Marking of the Type Variant is mandatory. No further reference to type variant is made in this specification.

4.5.3 Characteristics

The characteristics to be marked in the following order of precedence are:-

- (a) Shell Size.
- (b) Contact Type.

The information shall be constituted and marked as follows:-

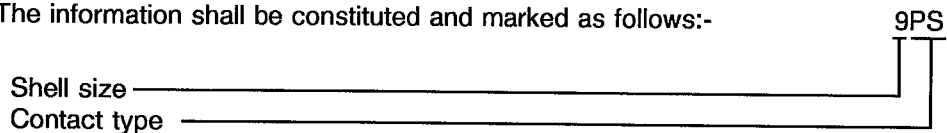

4.5.3.1 Shell Size

Shell size shall be designated by the number of contacts.

Specified numbers are: 9, 15, 21, 25, 31, 37 and 51.

4.5.3.2 Contact Type

Contact types shall be indicated by the following code letters.

Code Letter	Contact Type
PS	Male/Female

**4.5.4 Traceability Information**

Traceability information shall be marked in accordance with the requirements of ESA/SCC Basic Specification No. 21700.

4.6 ELECTRICAL MEASUREMENTS**4.6.1 Electrical Measurements at Room Temperature**

The parameters to be measured in respect of electrical characteristics are scheduled in Table 2. Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.6.2 Electrical Measurements at High and Low Temperatures

Not applicable.

4.6.3 Circuits for Electrical Measurements (Figure 4)

Not applicable.

4.7 BURN-IN AND ELECTRICAL MEASUREMENTS (TABLES 4 AND 5)

Not applicable.

**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE**

No.	Characteristic	Symbol	ESA/SCC 3401 Test Method	Test Condition	Limits		Unit
					Min.	Max.	
1	Insulation Resistance	Ri	Para. 9.1.1.1	Para. 9.1.1.1	5 000	-	MΩ
2	Voltage Proof Leakage Current	I_L	Para. 9.1.1.2	600 Vrms	-	2.0	mA
3	Mated Shell Conductivity (Voltage Drop) (1)	Vd	Para. 9.1.1.4	Para. 9.1.1.4	Not applicable		mV
4	Contact Resistance (Low Level Current)	Rcl max.	Para. 9.1.1.3	Para. 9.1.1.3	-	12	mΩ
5	Contact Resistance (Rated Current)	Rcr max.	Para. 9.1.1.3	Table 1(b)	-	10	mΩ

NOTES


1. Applicable to mated connectors with grounding option.

TABLES 3, 4 AND 5

Not applicable



FIGURE 4 - GAUGE FIXTURE

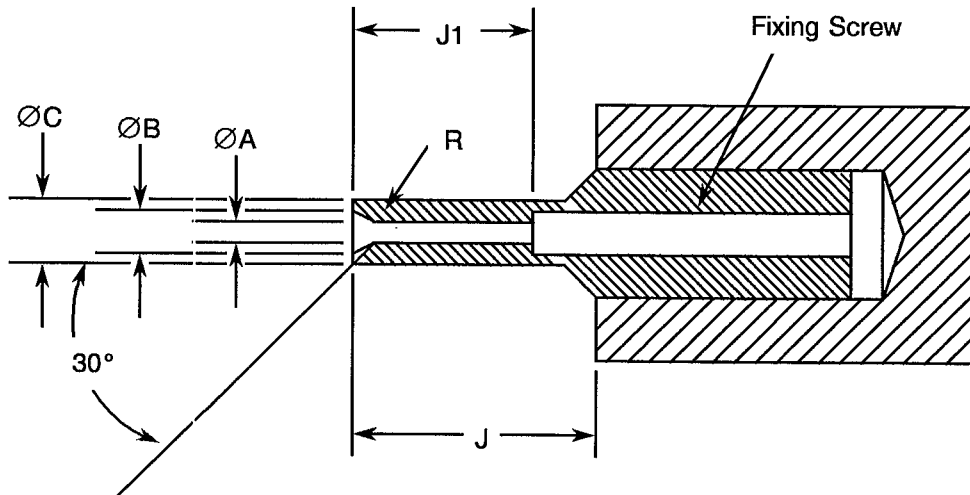

MAXIMUM GAUGE

WEIGHT (g) 170			REMARKS
	MIN.	MAX.	
ØA	0.559	0.564	-
ØB	0.749	0.775	-
ØC	0.813	0.825	-
J	4.0	-	-
J1	3.13	3.23	-
R	0.381	0.483	Note 1

MINIMUM GAUGE

WEIGHT (g) 14			REMARKS
	MIN.	MAX.	
ØA	0.582	0.587	-
ØB	0.749	0.775	-
ØC	0.813	0.825	-
J	4.0	-	-
J1	3.13	3.23	-
R	0.381	0.483	Note 1

NOTES

1. Radius 'R', must be tangent to entry chamfer and ØA.
2. ØA and entry chamfer must be polished to $\sqrt{N8}$.



- 4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESA/SCC GENERIC SPECIFICATION NO. 3401)
- 4.8.1 Measurements and Inspections on Completion of Environmental Tests
The parameters to be measured and inspections to be performed on completion of environmental testing shall be those specified in Table 6. Unless otherwise specified, these measurements shall be performed at $T_{amb} = +22 \pm 3 \text{ }^\circ\text{C}$.
- 4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests
Not applicable.
- 4.8.3 Measurement and Inspections on Completion of Endurance Tests
The parameters to be measured and inspections to be performed on completion of endurance testing shall be those specified in Table 6. Unless otherwise specified, these measurements shall be performed at $T_{amb} = +22 \pm 3 \text{ }^\circ\text{C}$.
- 4.8.4 Conditions for Operating Life Tests (Part of Endurance Testing)
Not applicable.
- 4.8.5 Electrical Circuits for Operating Life Tests (Figure 5)
Not applicable.
- 4.8.6 Conditions for High Temperature Storage Test (Part of Endurance Testing)
The requirements for the high temperature storage test are specified in Section 9 of ESA/SCC Generic Specification No. 3401. The temperature to be applied shall be the maximum storage temperature specified in Table 1(b) of this specification.



SCC

ESA/SCC Detail Specification
No. 3401/041

PAGE 19

ISSUE 3

TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTING

No.	ESA/SCC GENERIC SPEC. NO. 3401		MEASUREMENTS AND INSPECTIONS		SYMBOL	LIMITS		UNIT	
	ENVIRONMENTAL AND ENDURANCE TESTS (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN.	MAX.		
01	Seal Test	Para. 9.9	ESA/SCC 3401 Para. 9.9	-	-	Not applicable		-	
02	Wiring	Para. 9.10	Low Level Contact Resistance	-	Rcl	Not applicable		-	
03	Vibration	Para. 9.11	Initial Measurements Coupling screw(s) Unlocking Torque	ESCC 3601 Vibration	-	Record Values		-	
			Final Measurements Full Engagement Coupling screw(s) Unlocking Torque Drift Visual Examination		-	-	-	-	
04	Shock or Bump	Para. 9.12	Full Engagement Visual Examination	-	-	-	-	-	
05	Climatic Sequence	Para. 9.13	Dry Heat Insulation Resistance	At High Temperature Table 2, Item 1	Ri	1000	-	MΩ	
			Low Air Pressure Voltage Proof Leakage Current		Figure 1 Immediately after test Table 2, Item 1	I _L	ESA/SCC 3401 9.13.5	-	MΩ
			Damp Heat Insulation Resistance		After 1-24 hrs Recovery ESA/SCC 3401 Para. 9.7	Ri	100	-	MΩ
			Final Measurements External Visual Inspection		ESA/SCC 3401 Para. 9.7	VP	ESA/SCC 3401 Para. 9.7	-	-
06	Plating Thickness	Para. 9.14	Thickness	-	-	Para. 4.4.3 of this spec.		-	
07	Joint Strength (N/A to solder contacts)	Para. 9.15	ESA/SCC 3401 Para. 9.15	-	-	Not applicable		-	
08	Rapid Change of Temperature	Para. 9.16	Visual Examination	Table 2, Item 1 Table 2, Item 2	-	-	-	-	
			Insulation Resistance Voltage Proof Leakage Current		Ri I _L	Table 2, Item 1 Table 2, Item 1	-	-	
09	Contact Retention (In Insert)	Para. 9.17 & Para. 4.3.4 of this spec.	Contact Displacement	Not applicable for male contacts	-	ESA/SCC 3401 Para. 9.17		-	
10	Endurance	Para. 9.18	Initial Measurements Mating/Unmating Forces	Table 2, Item 4 Table 2, Item 3 - Table 2, Item 4 Table 2, Item 5 Table 2, Item 3 Table 2, Item 1 Table 2, Item 2	F	Para. 4.3.5 of this spec.		-	
			Low Level Contact Resistance Mated Shell Conductivity		Rcl Vd	Record Values Not applicable		-	
			Final Measurements Visual Examination Mating/Unmating Forces		- F	Para. 4.3.5 of this spec.		-	
			Low Level Contact Drift Resistance Mated Shell Conductivity		ΔRcl Vd	-	3.0	mΩ	
			Insulation Resistance Voltage Proof Leakage Current		Ri I _L	Not applicable Table 2, Item 1 Table 2, Item 2		-	

NOTES

1. The tests in this table refer to either Chart IV or V and shall be used as applicable.



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTING (CONTINUED)

No.	ESA/SCC GENERIC SPEC. NO. 3401		MEASUREMENTS AND INSPECTIONS		SYMBOL	LIMITS		UNIT
	ENVIRONMENTAL AND ENDURANCE TESTS (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN.	MAX.	
11	Permanence of Marking	Para. 9.19	-	-	-	-	-	-
12	Mating/Unmating Forces	Para. 9.20	Force	-	F	Para. 4.3.5 of this spec.		-
13	High Temperature Storage	Para. 9.21	Initial Measurements Low Level Contact Resistance Mated Shell Conductivity Final Measurements Visual Examination Mating/Unmating Forces Low Level Contact Resistance Drift Rated Current Contact Resis. Mated Shell Conductivity Insulation Resistance Voltage Proof Leakage Current Contact Retention (In insert)	Table 2 Item 4 - - Table 2 Item 4 Table 2 Item 5 Table 2 Item 3 Table 2 Item 1 Table 2 Item 2 Para. 4.3.4 of this spec.	Rcl Vd - F ΔRcl Rcr Vd Ri I _L	Record Values Not applicable - - Para. 4.3.5 of this spec. - 3.0 Table 2, Item 5 Not applicable Table 2, Item 1 Table 2, Item 2 ESA/SCC 3401 Para. 9.17	mΩ	
14	Corrosion	Para. 9.22	Visual Examination	-	-	-	-	-
15	Insert Retention (In Shell)	Para. 9.23 & Para. 4.3.6 of this spec.	Visual Examination	-	-	Para. 4.3.6 of this spec.		-
16	Jackscrew Retention	Para. 9.24 and Para. 4.2.7 of this spec.	Visual Examination	-	-	Not applicable		-
17	High Temperature Measurements	Para. 9.25	Insulation Resistance	Table 2 Item 1	Ri	5000	-	MΩ
18	Overload Test	Para. 9.26	Internal Temperature Rated Current Contact Resis. Mated Shell Conductivity Insulation Resistance Voltage Proof Leakage Current	- Table 2 Item 5 Table 2 Item 3 Table 2 Item 1 Table 2 Item 2	T Rcr Vd Ri I _L	-	+100	°C
19	Maintenance Ageing	Para. 9.27	-	-	-	Not applicable		-
20	Engage/Separation Forces	Para. 9.28 & Para. 4.3.9 of this spec.	Force	-	F	Para. 4.3.9 of this spec.		-
21	Oversize Pin Exclusion	Para. 9.29 and Para. 4.3.10 of this spec.	-	-	-	Not applicable		-
22	Probe Damage	Para. 9.30 and Para. 4.3.11 of this spec.	Contact Separation Force	-	F	Not applicable		-
23	Solderability	Para. 9.31 & Para. 4.3.12 of this spec.	-	-	-	Not applicable		-

NOTES

1. The tests in this table refer to either Chart IV or V and shall be used as applicable.