



**RELAYS, ELECTROMAGNETIC, LATCHING**

**50Vdc, 10A**

**BASED ON TYPE GP3-A**

**ESCC Detail Specification No. 3602/005**

**ISSUE 1**

**October 2002**



	ESCC Detail Specification		PAGE ii ISSUE 1
---	---------------------------	--	--------------------

### **LEGAL DISCLAIMER AND COPYRIGHT**

European Space Agency, Copyright © 2002. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole in any medium without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.



european space agency  
agence spatiale européenne

Pages 1 to 24

**RELAYS, ELECTROMAGNETIC, LATCHING**

**50Vdc, 10A**

**BASED ON TYPE GP3-A**

**ESA/SCC Detail Specification No. 3602/005**



**space components  
coordination group**

Issue/Rev.	Date	Approved by	
		SCCG Chairman	ESA Director General or his Deputy
Issue 5	October 1995		
Revision 'A'	January 2001		
Revision 'B'	June 2002		



**DOCUMENTATION CHANGE NOTICE**

Rev. Letter	Rev. Date	Reference	CHANGE Item	Approved DCR No.	
		This Issue supersedes Issue 4 and incorporates the changes agreed in the following DCR's:-			
		Cover Page		None	
		DCN		None	
		Para. 1.6	: Deleted in toto	23702	
		Para. 1.7	: Renumbered as "1.6" and in text, "4" amended to "3"	23702	
		Table 1(b)	: No. 2, "Rated" added to Characteristic	23702	
			: No. 3, "Note 1" added to Remarks	221164	
			: No. 4, Renumbered as "5" and Symbol corrected	23702	
			: , "L/R = 5ms" deleted from Remarks and "inductive" added	23702	
			: , "Note 1" added to Remarks	221164	
			: Nos. 7 and 8, "amb" added to Symbols		
			: No. 9, Remarks deleted and "Note 2" added	23702	
			: Note 1, new Note added	221164	
			: Note 2, new Note added	23702	
			Figures 2	: Symbols standardised	23702
			Figure 3	: Deleted in toto	23702
			Figure 4	: Renumbered as "3"	23702
		Para's 4.2.4 & 4.2.5	: (a) "Shock" corrected to "Mechanical Shock"	23702	
			: Deviations "(c)" and "(e)" deleted in toto and the remainder renumbered	23702	
		Para. 4.2.5	: Deviation for Para. 9.16 added	221319	
		Para. 4.3.3	: "Pull Test" added to text	23702	
		Para. 4.4.2	: In Title and text, "Lead" amended to "Terminal"	23702	
		Para. 4.5.1	: Existing text deleted and new text added	23702	
		Para. 4.5.2	: In Title and text, "Lead" amended to "Terminal" and in text, "4" amended to "3"	23702	
		Para. 4.5.3	: In Testing Level, "(B or C, as applicable)" deleted	23702	
		Para. 4.5.4	: "Coil Resistance" added	23702	
		Para. 4.6.1	: Second sentence completed	23702	
		Table 2	: 4th column heading amended and applicable paragraph numbers added to 4th and 5th columns	23702	
			: In Symbols column, "T" replaced by "t" where necessary	23702	
			: No. 5, Symbol corrected	23702	
			: No. 6, Symbol corrected	23702	
			: No. 7, Note reference moved to 5th column	23702	
			: No. 8, "Contact" added to Characteristics	23702	
			: 4th column heading amended and applicable paragraph numbers added to 4th and 5th columns	23702	
			: In Symbols column, "T" replaced by "t" where necessary	23702	
			: No. 5, Symbol corrected	23702	
			: No. 6, Symbol corrected and Note reference moved to 5th column	23702	
			Table 3	: Entry added	23702
			Table 4	: 4th column heading amended and applicable paragraph numbers added to 4th and 5th columns	23702
		: Change Limits column heading amended		23702	



**DOCUMENTATION CHANGE NOTICE**

Rev. Letter	Rev. Date	Reference	CHANGE Item	Approved DCR No.
		Table 5(b) Figure 5(a) Figure 5(b) Para. 4.8 Para's 4.8.1 to 4.8.3 Para. 4.8.5 Table 6	: No. 3 deleted in toto : Entry added : Entry added : Title expanded : Texts amended : Entry added : Table reformatted	23702 23702 23702 23702 23702 23702 23702
'A'	Jan. '01	P1. Cover page P2A. DCN P5. Para. 1.1 P6. Table 1(b)	: Title amended  : 2nd line text amended : No. 1, Symbol amended : No. 2, Characteristics, Symbol and Maximum Ratings amended : New Note 3 added	221599 None 221599 221599 221599 221599
'B'	June '02	P1. Cover page P2A. DCN P11. Figure 2(e) P12. Figure 2(f)	  : Dimension 'P', tolerance amended : Dimension 'P', tolerance amended	None None 23953 23953

**TABLE OF CONTENTS**

	<u>Page</u>
<b>1. <u>GENERAL</u></b>	<b>5</b>
1.1 Scope	5
1.2 Component Type Variants	5
1.3 Maximum Ratings	5
1.4 Parameter Derating Information	5
1.5 Physical Dimensions	5
1.6 Circuit Schematic	5
<b>2. <u>APPLICABLE DOCUMENTS</u></b>	<b>5</b>
<b>3. <u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u></b>	<b>5</b>
<b>4. <u>REQUIREMENTS</u></b>	<b>16</b>
4.1 General	16
4.2 Deviations from Generic Specification	16
4.2.1 Deviations from Special In-process Controls	16
4.2.2 Deviations from Final Production Tests	16
4.2.3 Deviations from Screening Tests	16
4.2.4 Deviations from Qualification Tests	16
4.2.5 Deviations from Lot Acceptance Tests	16
4.3 Mechanical Requirements	16
4.3.1 Dimension Check	16
4.3.2 Weight	17
4.3.3 Terminal Strength	17
4.4 Materials and Finishes	17
4.4.1 Case	17
4.4.2 Terminal Material and Finish	17
4.5 Marking	17
4.5.1 General	17
4.5.2 Terminal Identification	17
4.5.3 The SCC Component Number	18
4.5.4 Electrical Characteristics	18
4.5.5 Traceability Information	18
4.6 Electrical Measurements	18
4.6.1 Electrical Measurements at Room Temperature	18
4.6.2 Electrical Measurements at High and Low Temperatures	18
4.6.3 Circuits for Electrical Measurements	18
4.7 Screening	18
4.7.1 Miss Test	18
4.7.2 Conditions for Screening	18
4.7.3 Electrical Circuits for Screening	18
4.8 Environmental and Endurance Tests	22
4.8.1 Measurements and Inspections on Completion of Environmental Tests	22
4.8.2 Measurements and Inspections during Endurance Tests	22
4.8.3 Measurements and Inspections on Completion of Endurance Tests	22
4.8.4 Conditions for Operating Life Test	22
4.8.5 Electrical Circuits for Operating Life Tests	22

**TABLES**Page

1(a)	Type Variants	6
1(b)	Maximum Ratings	6
2	Electrical Measurements at Room Temperature	19
3	Electrical Measurements at High and Low Temperatures	20
4	Measurements during Screening	21
5(a)	Conditions for Screening	21
5(b)	Conditions for Operating Life Test	21
6	Measurements and Inspections on Completion of Environmental Tests and at Intermediate Points during and on Completion of Endurance Testing	23

**FIGURES**

1	Not applicable	N/A
2	Physical Dimensions	7
3	Circuit Schematic	15
4	Circuits for Electrical Measurements	21
5(a)	Electrical Circuits for Screening	21
5(b)	Electrical Circuits for Operating Life Test	21

**APPENDICES (Applicable to specific Manufacturers only)**

None.

**1. GENERAL****1.1 SCOPE**

This specification details the ratings, physical and electrical characteristics, test and inspection data for a Relay, Electromagnetic, Latching, 10A, 50Vdc, based on Type GP3-A. It shall be read in conjunction with ESA/SCC Generic Specification No. 3602, the requirements of which are supplemented herein.

**1.2 COMPONENT TYPE VARIANTS**

Variants of the basic type relays specified herein, which are also covered by this specification, are given in Table 1(a).

**1.3 MAXIMUM RATINGS**

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the relays specified herein, are as scheduled in Table 1(b).

**1.4 PARAMETER DERATING INFORMATION (FIGURE 1)**

Not applicable.

**1.5 PHYSICAL DIMENSIONS**

The physical dimensions of the relays specified herein are shown in Figure 2.

**1.6 CIRCUIT SCHEMATIC**

The circuit schematic, showing lead identification etc. for the relays specified herein, is shown in Figure 3.

**2. APPLICABLE DOCUMENTS**

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESA/SCC Generic Specification No. 3602 for Relays, Electromagnetic, Latching.
- (b) MIL-STD-202, Test Methods for Electronic and Electrical Component Parts.

**3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS**

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESA/SCC Basic Specification No. 21300 shall apply.



**TABLE 1(a) - TYPE VARIANTS**

VARIANT	DESCRIPTION	FIGURE
01	Relay with Plug-in Terminals and Plain Case	2(a)
02	Relay with Hook-end Terminals and Plain Case	2(b)
03	Relay with Plug-in Terminals and Horizontal Shoulder Brackets (12.7mm)	2(c)
04	Relay with Hook-end Terminals and Horizontal Shoulder Brackets (12.7mm)	2(d)
05	Relay with Plug-in Terminals and Vertical Shoulder Brackets	2(e)
06	Relay with Hook-end Terminals and Vertical Shoulder Brackets	2(f)
07	Relay with Hook-end Terminals and Horizontal Shoulder Brackets (6.4mm)	2(g)
08	Relay with Plug-in Terminals and Horizontal Shoulder Brackets (6.4mm)	2(h)

**TABLE 1(b) - MAXIMUM RATINGS**

No.	CHARACTERISTICS	SYMBOL	MAXIMUM RATING	UNIT	REMARKS
1	Rated Coil Voltage:- 26V 12V 6V	$V_{CR}$	26.5 12 6.0	Vdc	Note 3
2	Maximum Rated Coil Voltage:- 26V 12V 6V	$V_{CR}$	25 to 32 11 to 14.8 5.5 to 7.3	Vdc	
3	Rated Contact Current Resistive Load	$I_{CR}$	10	A	50Vdc resistive Note 1
4	Overload Current Resistive	$I_{overl}$	50	A	50Vdc resistive See Table 6
5	Rated Contact Current Inductive Load	$I_{CL}$	3.0	A	50Vdc inductive Note 1
6	Contact Resistance	$R_C$	10	m $\Omega$	
7	High Temperature	$T_{amb}$	+ 125	°C	
8	Low Temperature	$T_{amb}$	- 65	°C	
9	Soldering Temperature	$T_{sol}$	+ 260	°C	Note 2


**NOTES**

1. Relays should not be used in change over-mode where the potential difference between stationary contacts is greater than 10V and the switched current is greater than 0.1A.
2. Duration 10 seconds maximum at a distance of not less than 3.0mm from the device body and the same terminal shall not be resoldered until 3 minutes have elapsed.
3. The Coil Voltage rise time shall be less than  $0.1t_L$  or  $t_r$ . The coil voltage shall be applied for a minimum time of  $10t_L$  or  $10t_r$ .



**FIGURE 2 - PHYSICAL DIMENSIONS**

FIGURE 2(a) - VARIANT 01, RELAY WITH PLUG-IN TERMINALS AND PLAIN CASE

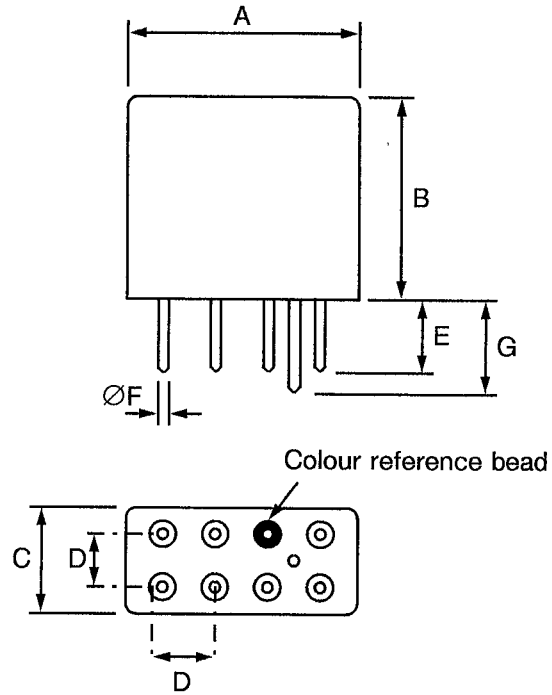


SYMBOL	MILLIMETRES	
	MIN.	MAX.
A	25.30	26.10
B	31.50	33.00
C	12.60	13.40
D	4.98	5.18
E	-	6.90
ØF	1.50	1.70
G	-	7.60



**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**

**FIGURE 2(b) - VARIANT 02, RELAY WITH HOOK-END TERMINALS AND PLAIN CASE**

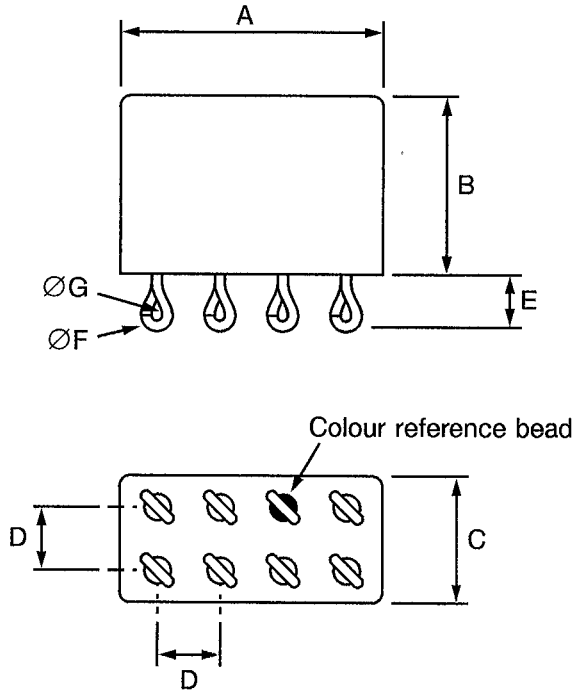


SYMBOL	MILLIMETRES	
	MIN.	MAX.
A	25.30	26.10
B	31.50	33.00
C	12.60	13.40
D	4.98	5.18
E	6.60	7.00
ØF	1.50	1.70
ØG	1.40	1.60



**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**

**FIGURE 2(c) - VARIANT 03, RELAY WITH PLUG-IN TERMINALS AND HORIZONTAL SHOULDER BRACKETS (12.7mm)**

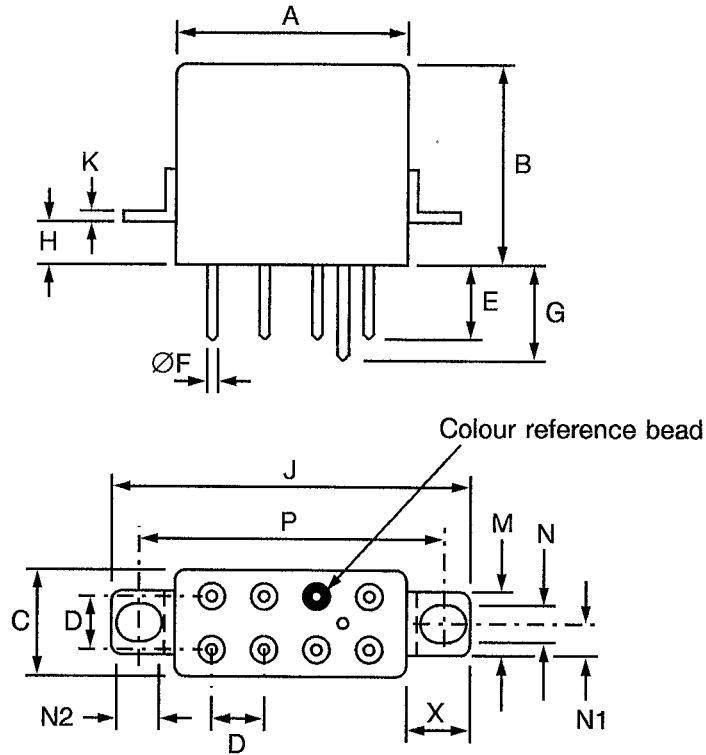


SYMBOL	MILLIMETRES	
	MIN.	MAX.
A	25.30	26.10
B	31.50	33.00
C	12.60	13.40
D	4.98	5.18
E	-	6.90
ØF	1.50	1.70
G	-	7.60
H	12.50	12.90
J	43.20	44.00
K	0.95	1.05
M	9.40	9.60
N	3.50	3.70
N1	4.65	4.85
N2	4.10	4.30
P	35.90	36.30
X	9.00	9.20



**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**

**FIGURE 2(d) - VARIANT 04, RELAY WITH HOOK-END TERMINALS AND HORIZONTAL SHOULDER BRACKETS (12.7mm)**

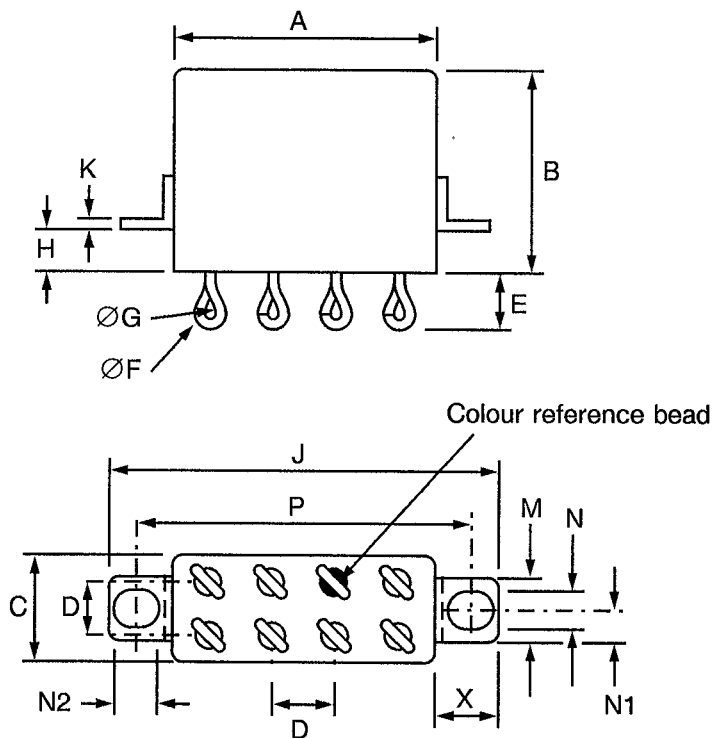


SYMBOL	MILLIMETRES	
	MIN.	MAX.
A	25.30	26.10
B	31.50	33.00
C	12.60	13.40
D	4.98	5.18
E	6.60	8.00
ØF	1.50	1.70
ØG	1.40	1.60
H	12.50	12.90
J	43.20	44.00
K	0.95	1.05
M	9.40	9.60
N	3.50	3.70
N1	4.65	4.85
N2	4.10	4.30
P	35.90	36.30
X	9.00	9.20



**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**

**FIGURE 2(e) - VARIANT 05, RELAY WITH PLUG-IN TERMINALS AND VERTICAL SHOULDER BRACKETS**

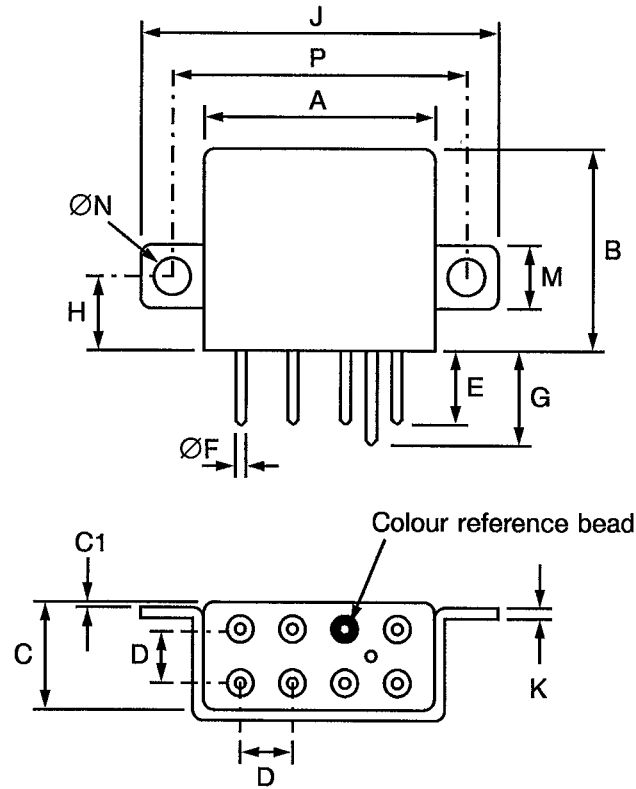


SYMBOL	MILLIMETRES	
	MIN.	MAX.
A	25.30	26.10
B	31.50	33.00
C	12.60	13.40
C1	0.40	0.60
D	4.98	5.18
E	-	6.90
ØF	1.50	1.70
G	-	7.60
H	12.50	12.90
J	43.20	44.00
K	0.70	0.90
M	-	9.50
ØN	3.80	4.20
P	35.90	36.30



**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**

**FIGURE 2(f) - VARIANT 06, RELAY WITH HOOK-END TERMINALS AND VERTICAL SHOULDER BRACKETS**

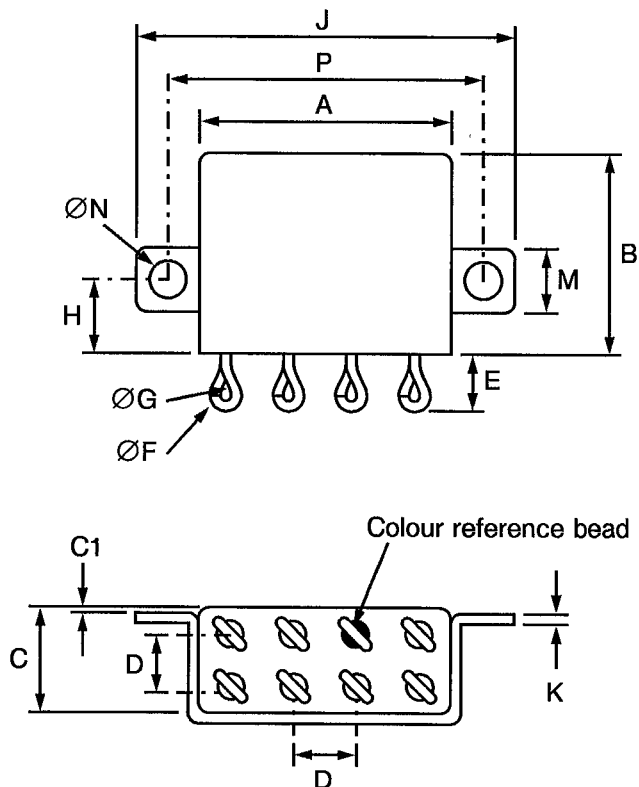


SYMBOL	MILLIMETRES	
	MIN.	MAX.
A	25.30	26.10
B	31.50	33.00
C	12.60	13.40
C1	0.40	0.60
D	4.98	5.18
E	6.60	8.00
ØF	1.50	1.70
ØG	1.40	1.60
H	12.50	12.90
J	43.20	44.00
K	0.70	0.90
M	-	9.50
ØN	3.80	4.20
P	35.90	36.30



**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**

**FIGURE 2(g) - VARIANT 07, RELAY WITH HOOK-END TERMINALS AND HORIZONTAL SHOULDER BRACKETS (6.4mm)**

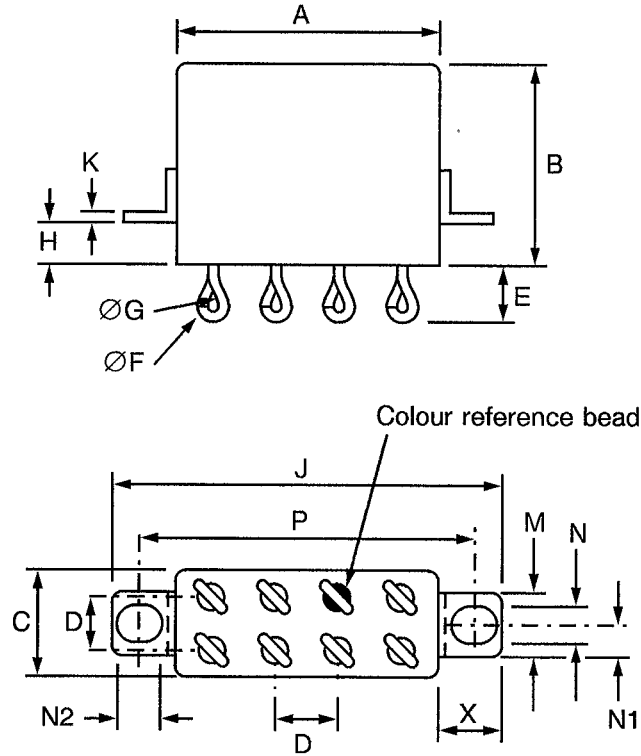


SYMBOL	MILLIMETRES	
	MIN.	MAX.
A	25.30	26.10
B	31.50	33.00
C	12.60	13.40
D	4.98	5.18
E	6.60	8.00
ØF	1.50	1.70
ØG	1.40	1.60
H	6.30	6.50
J	43.20	44.00
K	0.95	1.05
M	9.40	9.60
N	3.50	3.70
N1	4.65	4.85
N2	4.10	4.30
P	35.90	36.30
X	9.00	9.20





**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**


**FIGURE 2(h) - VARIANT 08, RELAY WITH PLUG-IN TERMINALS AND HORIZONTAL SHOULDER BRACKETS (6.4mm)**

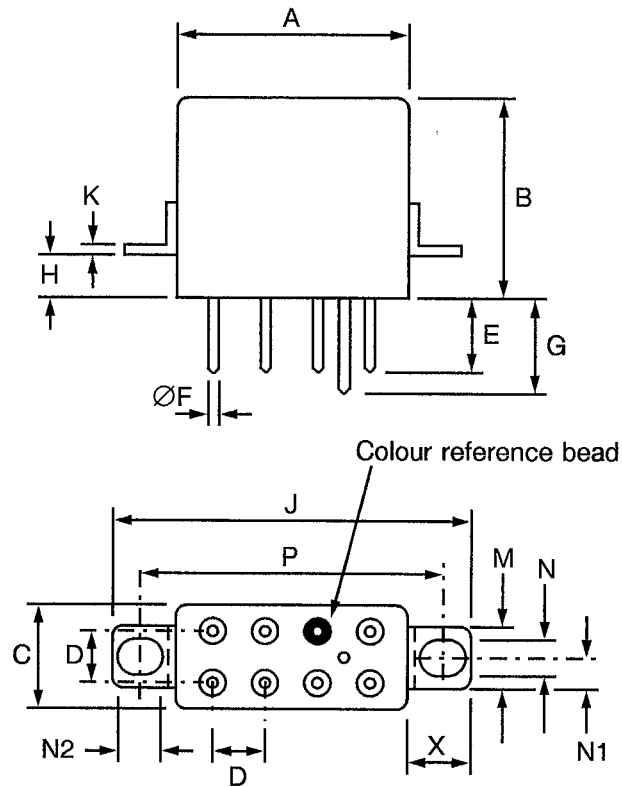

SYMBOL	MILLIMETRES	
	MIN.	MAX.
A	25.30	26.10
B	31.50	33.00
C	12.60	13.40
D	4.98	5.18
E	-	6.90
ØF	1.50	1.70
G	-	7.60
H	6.30	6.50
J	43.20	44.00
K	0.95	1.05
M	9.40	9.60
N	3.50	3.70
N1	4.65	4.85
N2	4.10	4.30
P	35.90	36.30
X	9.00	9.20



**FIGURE 3 - CIRCUIT SCHEMATIC**

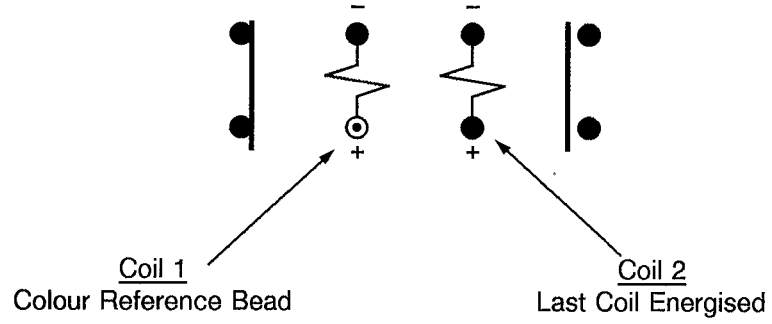



#### 4. REQUIREMENTS

##### 4.1 GENERAL

The complete requirements for procurement of the relays specified herein shall be as stated in this specification and ESA/SCC Generic Specification No. 3602 for Relays, Electromagnetic Latching. Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESA/SCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

##### 4.2 DEVIATIONS FROM GENERIC SPECIFICATION

###### 4.2.1 Deviations from Special In-process Controls

None.

###### 4.2.2 Deviations from Final Production Tests (Chart II)

None.

###### 4.2.3 Deviations from Screening Tests (Chart III)

None.

###### 4.2.4 Deviations from Qualification Tests (Chart IV)

(a) Para. 9.11, Mechanical Shock: Test Condition 'I'.

(b) Para. 9.12, Overload: Number of operations: 500.  
Test condition: 50A, 50Vdc.

(c) Para. 9.16, Intermediate Current: The normally open contact shall make, carry and break 1A, 50Vdc. The normally closed contact shall make, carry and break 10A, 50Vdc.

###### 4.2.5 Deviations from Lot Acceptance Tests (Chart V)

(a) Para. 9.11, Mechanical Shock: Test Condition 'I'.

(b) Para. 9.12, Overload: Number of operations: 500.  
Test condition: 50A, 50Vdc.

(c) Para. 9.16, Intermediate Current: The normally open contact shall make, carry and break 1A, 50Vdc. The normally closed contact shall make, carry and break 10A, 50Vdc. The number of operations shall be 5000.

##### 4.3 MECHANICAL REQUIREMENTS

###### 4.3.1 Dimension Check

The dimensions of the relays specified herein shall be verified in accordance with the requirements set out in Para. 9.5 of ESA/SCC Generic Specification No. 3602 and shall conform to those shown in Figure 2.



#### 4.3.2 Weight

The maximum weight of the relays specified herein shall be 41.5 grammes.

#### 4.3.3 Terminal Strength

The requirements for terminal strength testing are specified in Section 9 of ESA/SCC Generic Specification No. 3602. The test conditions shall be as follows:-

##### **Pull Test**

Applied Force: 45 Newtons.

Duration: 10 to 15 seconds.

Direction: Normal axis of terminal.

#### 4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the relays specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

##### 4.4.1 Case

Copper nickel, welded construction. Electro-deposited tin shall not be used. EP 90/10 SnPb alloy may be used.

##### 4.4.2 Terminal Material and Finish

The terminal material shall be Type 'H' with Type '3' finish in accordance with the requirements of ESA/SCC Basic Specification No. 23500.

#### 4.5 MARKING

##### 4.5.1 General

The marking of all components delivered to this specification shall be in accordance with the requirements of ESA/SCC Basic Specification No. 21700 and the following paragraphs. When the component is too small to accommodate all of the marking specified, as much as space permits shall be marked and the marking information, in full, shall accompany the component in its primary package.

The information to be marked and the order of precedence, shall be as follows:-

- (a) Lead Identification.
- (b) The SCC Component Number.
- (c) Electrical Characteristics.
- (d) Traceability Information.


##### 4.5.2 Terminal Identification

Terminal identification shall be marked on the relay can in accordance with Figure 3.



4.5.3 The SCC Component Number

Each component shall bear the SCC Component Number which shall be constituted and marked as follows:

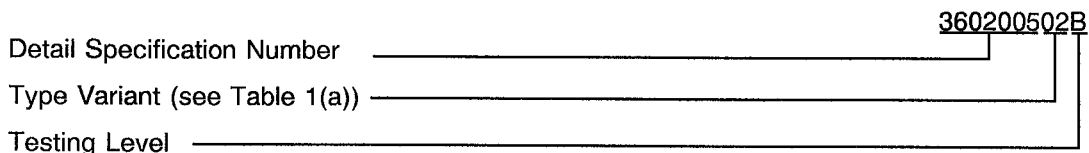

4.5.4 Electrical Characteristics

The electrical characteristic to be marked is the rated coil voltage. The information shall be constituted and marked as follows:-

Coil Voltage	Coil Resistance	Code
26.5Vdc	450Ω	26V
12Vdc	100Ω	12V
6.0Vdc	25Ω	6V

4.5.5 Traceability Information

Each component shall be marked in respect of traceability information as defined in ESA/SCC Basic Specification No. 21700.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured at room temperature are scheduled in Table 2. Unless otherwise specified, the measurements shall be performed at T<sub>amb</sub> = +22 ± 3 °C.

4.6.2 Electrical Measurements at High and Low Temperatures

The parameters to be measured at high and low temperatures are scheduled in Table 3.

4.6.3 Circuits for Electrical Measurements (Figure 4)

Not applicable.

4.7 SCREENING

4.7.1 Miss Test

During the miss test, the contact resistance shall be continuously monitored and shall not exceed the values specified in Table 4 of this specification.

4.7.2 Conditions for Screening

The requirements for screening are specified in Section 7 of ESA/SCC Generic Specification No. 3602. The conditions for screening shall be as specified in Table 5(a) of this specification.

4.7.3 Electrical Circuits for Screening (Figure 5(a))

Not applicable.

**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE**

No.	CHARACTERISTICS	SYMBOL	ESA/SCC 3602 TEST METHOD	TEST CONDITION	LIMITS		UNIT
					MIN.	MAX.	
1	Latch Voltage:- 26V 12V 6V	$U_L$	Para. 9.3.1	Para. 9.3.1	- - -	14 6.0 3.0	V
2	Reset Voltage:- 26V 12V 6V	$U_R$	Para. 9.3.2	Para. 9.3.2	- - -	14 6.0 3.0	V
3	Latch Time	$t_L$	Para. 9.3.4	Para. 9.3.4	-	10	ms
4	Reset Time	$t_r$	Para. 9.3.4	Para. 9.3.4	-	10	ms
5	Bounce Time	$t_b$	Para. 9.3.4	Para. 9.3.4	-	2.0	ms
6	Insulation Resistance	$R_i$	Para. 9.3.7	Para. 9.3.7 At 500Vdc	100	-	$M\Omega$
7	Voltage Proof	VP	Para. 9.3.6	Para. 9.3.6 Note 1	1250	-	Vrms
8	Contact Voltage Drop	$V_d$	Para. 9.3.3	Para. 9.3.3 10A, 50Vdc	-	100	mV
9	Coil Resistance Latch - 26V - 12V - 6V Reset - 26V - 12V - 6V	$R_{BL}$   $R_{BR}$	Para. 9.3.5	Para. 9.3.5	405 90 22.5 405 90 22.5	495 110 27.5 495 110 27.5	$\Omega$

**NOTES**

1. 500V between coil and case - between open contacts - between coils.

**TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES**

No.	CHARACTERISTICS	SYMBOL	ESA/SCC 3602 TEST METHOD	TEST CONDITION	LIMITS		UNIT
					MIN.	MAX.	
1	Latch Voltage:- 26V 12V 6V	$U_L$	Para. 9.3.1	Para. 9.3.1	- - -	18 8.4 4.4	V
2	Reset Voltage:- 26V 12V 6V	$U_R$	Para. 9.3.2	Para. 9.3.2	- - -	18 8.4 4.4	V
3	Latch Time	$t_L$	Para. 9.3.4	Para. 9.3.4	-	10	ms
4	Reset Time	$t_r$	Para. 9.3.4	Para. 9.3.4	-	10	ms
5	Bounce Time	$t_b$	Para. 9.3.4	Para. 9.3.4	-	2.0	ms
6	Insulation Resistance	$R_i$	Para. 9.3.7	Para. 9.3.7 At 500Vdc Note 1	50	-	$M\Omega$

**NOTES**

1. This measurement shall be made only at the high temperature condition.

**FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS**

Not applicable.

**TABLE 4 - MEASUREMENTS DURING SCREENING**

No.	CHARACTERISTICS	SYMBOL	ESA/SCC 3602 TEST METHOD	TEST CONDITIONS	MAXIMUM LIMIT	UNIT
10	Miss Test, Contact Resistance	$R_C$	Para. 9.8	Para. 9.8	100	$\Omega$

**TABLE 5(a) - CONDITIONS FOR SCREENING**

No.	CHARACTERISTICS	SYMBOL	CONDITION	UNIT
1	Ambient High Temperature	$T_{amb}$	+ 125( + 0 - 3)	$^{\circ}\text{C}$
2	Ambient Low Temperature	$T_{amb}$	- 65( + 3 - 0)	$^{\circ}\text{C}$
3	Ambient Room Temperature	$T_{amb}$	+ 22 $\pm$ 3	$^{\circ}\text{C}$

**TABLE 5(b) - CONDITIONS FOR OPERATING LIFE TEST**

No.	CHARACTERISTICS	SYMBOL	CONDITION	UNIT
1	Ambient Temperature	$T_{amb}$	+ 125( + 0 - 3)	$^{\circ}\text{C}$
2	Contact Load Resistive	V I	50 10	Vdc Adc

**FIGURE 5(a) - ELECTRICAL CIRCUITS FOR SCREENING**

Not applicable.

**FIGURE 5(b) - ELECTRICAL CIRCUITS FOR OPERATING LIFE TEST**

Not applicable.





- 4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESA/SCC GENERIC SPECIFICATION No. 3602)
- 4.8.1 Measurements and Inspections on Completion of Environmental Tests  
The parameters to be measured and inspections to be performed on completion of environmental tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.
- 4.8.2 Measurements and Inspections during Endurance Tests  
The parameters to be measured and inspections to be performed during endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.
- 4.8.3 Measurements and Inspections on Completion of Endurance Tests  
The parameters to be measured and inspections to be performed on completion of endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.
- 4.8.4 Conditions for Operating Life Tests (Part of Endurance Testing)  
The requirements for operating life testing are specified in Section 9 of ESA/SCC Generic Specification No. 3602. The conditions for operating life testing shall be as specified in Table 5(b) of this specification.
- 4.8.5 Electrical Circuits for Operating Life Tests (Figure 5(b))  
Not applicable.



**TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING**

No.	ESA/SCC GENERIC SPEC. NO. 3602		MEASUREMENTS AND INSPECTIONS		SYMBOL	LIMITS		UNIT
	ENVIRONMENTAL AND ENDURANCE TESTS (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN.	MAX.	
01	Vibration	Para. 9.10 and Para. 4.2.4 of this spec.	<b>Measurements during Test</b> Contact Monitoring  <b>Final Measurements</b> Visual Examination	ESA/SCC 3602 Para. 9.10  -	-  -	-  -	-  -	-  -
02	Mechanical Shock	Para. 9.11 and Para. 4.2.4 of this spec.	<b>Measurements during Test</b> Contact Monitoring  <b>Final Measurements</b> Electrical Measurements Visual Examination	ESA/SCC 3602 Para. 9.11  Table 2 Items 7-8-1-2 -	-  -	-  Table 2 -	-  -	-  -
03	Overload	Para. 9.12 and Table 1(b) Item 4 and Para. 4.2.4 of this spec.	<b>Measurements during Test</b> Contact Voltage Drop  <b>Final Measurements</b> Fuse Continuity Contact Voltage Drop Insulation Resistance Voltage Proof (all Points) Electrical Measurements	ESA/SCC 3602 Para. 9.12.2  - Table 2 Item 8 Table 2 Item 6 Table 2 Item 7 Table 2 Items 1-2-3-4-5-9	V <sub>d</sub>  - V <sub>d</sub> R <sub>i</sub> VP	Para. 9.12.2  Continuity -   200 50   - Table 2 Table 2	mV  mV MΩ Vrms	
04	Thermal Shock	Para. 9.13	<b>During 5th Cycle</b>  Electrical Measurements at +125°C Electrical Measurements at -65°C <b>Final Measurements</b> Visual Examination Voltage Proof (all Points)	In Conditioning Chamber Table 3 Items 1-2-3-4-6 Table 3 Items 1-2-3-4  - Table 2 Item 7	-  - VP	Table 3 Table 3  - Table 2	-  -	-  Vrms
05	Salt Spray	Para. 9.14	<b>Final Measurements</b> Visual Examination Electrical Measurements  Voltage Proof (all Points)	- Table 2 Items 1-2-3-4-5-6-8-9 Table 2 Item 7	-  VP	- Table 2 Table 2	-  -	-  Vrms
06	Intermediate Current	Para. 9.16 and Para. 4.2.4 of this spec.	<b>Measurements during Test</b> Contact Voltage Drop  <b>Final Measurements</b> Insulation Resistance Voltage Proof (all Points) Electrical Measurements  Contact Voltage Drop	ESA/SCC 3602 Para. 9.16.2  Table 2 Item 6 Table 2 Item 7 Table 2 Items 1-2-3-4-5-9 ESA/SCC 3602 Para. 9.16.2	V <sub>d</sub>  R <sub>i</sub> VP  V <sub>d</sub>	Para. 9.16.2  50   - Table 2 Table 2  Para. 9.16.2	mV  MΩ Vrms  mV	
07	Terminal Strength	Para. 9.17 and Para. 4.3.3 of this spec.	Visual Examination	ESA/SCC 3602 Para. 9.17.3	-	-	-	-

**NOTES**

1. The tests in this table refer to either Chart IV or V and shall be used as applicable.



**SCC**

ESA/SCC Detail Specification  
No. 3602/005

PAGE 24  
ISSUE 5

**TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING (CONT'D)**

No.	ESA/SCC GENERIC SPEC. NO. 3602		MEASUREMENTS AND INSPECTIONS		SYMBOL	LIMITS		UNIT
	ENVIRONMENTAL AND ENDURANCE TESTS (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN.	MAX.	
08	Resistance to Soldering Heat	Para. 9.18	Electrical Measurements	Table 2 Items 1-2-6-8-9		Table 2		
09	Operating Life Resistive	Para's 9.19, 9.19.1 and Table 5(b) of this spec.	<b>Measurements during Test</b> Contact Voltage Drop  <b>Final Measurements</b> Fuse Continuity Contact Voltage Drop Insulation Resistance Voltage Proof (all Points) Electrical Measurements	ESA/SCC 3602 Para. 9.19.1  - Table 2 Item 8 Table 2 Item 6 Table 2 Item 7 Table 2 Items 1-2-3-4-5-9	V <sub>d</sub>  - V <sub>d</sub> R <sub>i</sub> VP	Para. 9.19.1  Continuity -   200 50   - Table 2 Table 2	mV   mV MΩ Vrms	
10	Inductive Life	Para. 9.19.3 and Table 1(b) Item 5 of this spec.	<b>Measurements during Test</b> Contact Voltage Drop  <b>Final Measurements</b> Fuse Continuity Contact Voltage Drop Insulation Resistance Voltage Proof (all Points) Electrical Measurements	ESA/SCC 3602 Para. 9.19.1  - Table 2 Item 8 Table 2 Item 6 Table 2 Item 7 Table 2 Items 1-2-3-4-5-9	V <sub>d</sub>  - V <sub>d</sub> R <sub>i</sub> VP	Para. 9.19.1  Continuity -   200 50   - Table 2 Table 2	mV   mV MΩ Vrms	
11	Mechanical Life	Para. 9.19.4	<b>Final Measurements</b> Contact Voltage Drop Electrical Measurements	Table 2 Item 8 Table 2 Items 1-2-3-4-5-9		-   200 Table 2	mV	

**NOTES**

1. The tests in this table refer to either Chart IV or V and shall be used as applicable.