



Pages 1 to 18

**RESISTOR, FIXED, CHIP, THIN FILM**

**BASED ON TYPE P HR**

**ESCC Detail Specification No. 4001/023**

Issue 3	July 2008
---------	-----------



Document Custodian: European Space Agency - see <https://escies.org>

**LEGAL DISCLAIMER AND COPYRIGHT**

European Space Agency, Copyright © 2008. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

**DOCUMENTATION CHANGE NOTICE**

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
366, 374, 417	Specification updated to incorporate editorial and technical changes per DCR.

**TABLE OF CONTENTS**

<b>1.</b>	<b><u>GENERAL</u></b>	<b>6</b>
1.1	Scope	6
1.2	Component Type Variants And Range Of Components	6
1.3	Maximum Ratings	6
1.4	Parameter Derating Information	6
1.5	Physical Dimensions	6
1.6	Functional Diagram	6
<b>2.</b>	<b><u>APPLICABLE DOCUMENTS</u></b>	<b>6</b>
<b>3.</b>	<b><u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u></b>	<b>6</b>
<b>4.</b>	<b><u>REQUIREMENTS</u></b>	<b>9</b>
4.1	General	9
4.2	Deviations from Generic Specification	9
4.2.1	Deviations from Special In-process Controls	9
4.2.2	Deviations from Final Production Tests (Chart II)	9
4.2.3	Deviations from Burn-in and Electrical Measurements (Chart III)	9
4.2.4	Deviations from Qualification Tests (Chart IV)	9
4.2.5	Deviations from Lot Acceptance Tests (Chart V)	10
4.3	Mechanical Requirements	10
4.3.1	Dimension Check	10
4.3.2	Weight	10
4.3.3	Robustness of Terminations	10
4.4	Materials and Finishes	10
4.4.1	Case	10
4.4.2	Terminations	10
4.5	Marking	10
4.5.1	General	10
4.5.2	Electrical Characteristics and Ratings	11
4.5.2.1	Resistance Value	11
4.5.2.2	Tolerance	11
4.5.2.3	Temperature Coefficient	12
4.5.3	ESCC Component Number	12
4.5.4	Traceability Information	12
4.6	Electrical Measurements	12
4.6.1	Electrical Measurements at Room Temperature	12
4.6.2	Electrical Measurements at High and Low Temperatures	12
4.6.3	Circuits for Electrical Measurements (Figure 4)	13
4.7	Burn-in Tests	13
4.7.1	Parameter Drift Values	13
4.7.2	Conditions for Burn-in	13
4.7.3	Electrical Circuit for Burn-in	13
4.8	Environmental and Endurance Tests (Charts IV and V of ESCC Generic Specification No. 4001)	14
4.8.1	Measurements and Inspections on Completion of Environmental Tests	14
4.8.2	Measurements and Inspections at Intermediate Points During Endurance Tests	15
4.8.3	Measurements and Inspections on Completion of Endurance Tests	15
4.8.4	Conditions for Operating Life	15
4.8.5	Electrical Circuit for Operating Life (Figure 5)	15
4.8.6	Conditions for High Temperature Storage Test (Part of Endurance Test)	15



**1. GENERAL**

**1.1 SCOPE**

This specification details the ratings, physical and electrical characteristics, test and inspection data for a Resistor, Fixed, Chip, Thin Film based on type P HR. It shall be read in conjunction with ESCC Generic Specification No. 4001, the requirements of which are supplemented herein.

**1.2 COMPONENT TYPE VARIANTS AND RANGE OF COMPONENTS**

Variants of the basic type components and the range of components covered by this specification are given in Table 1(a).

**1.3 MAXIMUM RATINGS**

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the components specified herein, are as scheduled in Table 1(b).

**1.4 PARAMETER DERATING INFORMATION**

The parameter derating information applicable to the components specified herein is shown in Figure 1.

**1.5 PHYSICAL DIMENSIONS**

The physical dimensions of the components specified herein are shown in Figure 2.

**1.6 FUNCTIONAL DIAGRAM**

The functional diagram of the components specified herein is shown in Figure 3.

**2. APPLICABLE DOCUMENTS**

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. 4001 for Resistors, Fixed, Film.

**3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS**

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic specification No. 21300 shall apply.

**Table 1(a) - TYPE VARIANTS AND RANGE OF COMPONENTS**

Variant	Style (Note 1)	Resistance Range R <sub>n</sub> (Note 2)		Tolerance (± %) (Note 3)	Temperature Coefficient TC (±10 <sup>-6</sup> /°C) (Note 4)	Weight max (g)
		Min (Ω)	Max (MΩ)			
01	0603	50	0.2	0.01, 0.02, 0.05 and 0.1	±10, ±25	0.003
02	0805	50	0.25	0.01, 0.02, 0.05 and 0.1	±10, ±25	0.004
03	1206	50	1	0.01, 0.02, 0.05 and 0.1	±10, ±25	0.01

Variant	Style (Note 1)	Resistance Range $R_n$ (Note 2)		Tolerance ( $\pm$ %) (Note 3)	Temperature Coefficient TC ( $\pm 10^{-6}/^{\circ}\text{C}$ ) (Note 4)	Weight max (g)
		Min ( $\Omega$ )	Max (M $\Omega$ )			
04	2010	50	3	0.01, 0.02, 0.05 and 0.1	$\pm 10, \pm 25$	0.03
05	0603	50	0.2	0.01, 0.02, 0.05 and 0.1	$\pm 10, \pm 25$	0.003
06	0805	50	0.25	0.01, 0.02, 0.05 and 0.1	$\pm 10, \pm 25$	0.004
07	1206	50	1	0.01, 0.02, 0.05 and 0.1	$\pm 10, \pm 25$	0.01
08	2010	50	3	0.01, 0.02, 0.05 and 0.1	$\pm 10, \pm 25$	0.03

**NOTES:**

1. See Figure 2.
- 2.

Variant	Style	Critical Resistance (k $\Omega$ )
01, 05	0603	12.25
02, 06	0805	45
03, 07	1206	40
04, 08	2010	45

- 3.

Resistance ( $\Omega$ )	Available Tolerance ( $\pm$ %)	Value Series
$50 \leq R_n < 100$	0.05 and 0.1	Any value in the resistance range to 3 significant figures
$100 \leq R_n < 250$	0.02, 0.05 and 0.1	
$R_n \geq 250$	0.01, 0.02, 0.05 and 0.1	

4. Resistors with a Temperature Coefficient  $=\pm 5 \times 10^{-6}/^{\circ}\text{C}$  over the temperature range  $T_{\text{amb}}=22^{\circ}\text{C}$  to  $T_{\text{amb}}=+70^{\circ}\text{C}$  are also available.

**Table 1(b) - MAXIMUM RATINGS**


No.	Characteristics	Variant	Style	Symbol	Limits	Unit	Remarks
1	Rated Dissipation	01, 05 02, 06 03, 07 04, 08	0603 0805 1206 2010	$P_n$	100 125 250 500	mW	Note 1
2	Limiting Element Voltage	01, 05 02, 06 03, 07 04, 08	0603 0805 1206 2010	$U_L$	35 75 100 150	V	-
3	Rated Voltage	All	All	$U_R$	$\sqrt{(P_n \times R_n)}$	V	Note 2

No.	Characteristics	Variant	Style	Symbol	Limits	Unit	Remarks
4	Insulation Voltage	01, 05 02, 06 03, 07 04, 08	0603 0805 1206 2010	$U_I$	70 150 200 300	Vrms	-
5	Operating Temperature Range	All	All	$T_{op}$	-55 to +155	°C	$T_{amb}$
6	Storage Temperature Range	All	All	$T_{stg}$	-55 to +155	°C	-
7	Soldering Temperature	All	All	$T_{sol}$	+260	°C	Note 3

**NOTES:**


1. At  $T_{amb} \leq +70^\circ\text{C}$ . For derating at  $T_{amb} > +70^\circ\text{C}$ , see Figure 1.
2. Shall never exceed Limiting Element Voltage.  $R_n$ =rated resistance.
3. Duration 10 seconds maximum.

**FIGURE 1- PARAMETER DERATING INFORMATION**

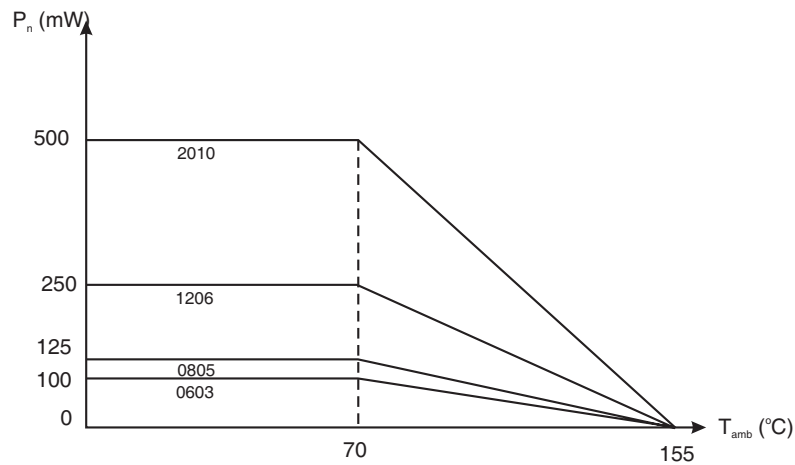

Rated Dissipation versus Temperature


**FIGURE 2 - PHYSICAL DIMENSIONS**

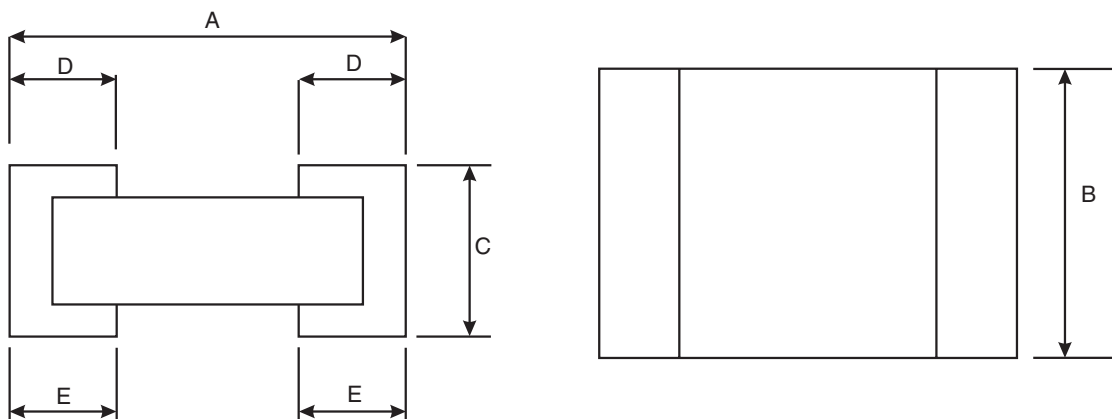



Variant	Style	Dimensions (mm)							
		A		B		C		D	
		Min	Max	Min	Max	Min	Max	Min	Max
01, 05	0603	1.39	2.16	0.62	1.01	0.25	1.02	0.25	0.51
02, 06	0805	1.78	2.55	1.14	1.53	0.25	1.02	0.25	0.51
03, 07	1206	2.87	3.64	1.47	1.86	0.25	1.02	0.25	0.51
04, 08	2010	4.95	5.72	2.41	2.8	0.25	1.02	0.35	0.85

**FIGURE 3 - FUNCTIONAL DIAGRAM**



**4. REQUIREMENTS**

**4.1 GENERAL**

The complete requirements for procurement of the components specified herein are stated in this specification and ESCC Generic Specification No. 4001. Deviations from the Generic Specification, applicable to this specification only, are detailed in Para. 4.2.

Deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

**4.2 DEVIATIONS FROM GENERIC SPECIFICATION**

**4.2.1 Deviations from Special In-process Controls**

None.

**4.2.2 Deviations from Final Production Tests (Chart II)**

- (a) Para. 9.1, Overload: Voltage  $\sqrt{(6.25P_n \times R_n)}$  or  $2U_L$ , whichever is less.  
Duration: 2 seconds minimum.

**4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)**

For  $\pm 0.01\%$  and  $\pm 0.02\%$  tolerances, components with a resistance outside the limits of Table 2, after burn-in, but remaining within a  $\pm 0.03\%$  tolerance shall be rejected, but not counted for PDA.

**4.2.4 Deviations from Qualification Tests (Chart IV)**

- (a) Para. 9.1, Overload: Test conditions as Para. 4.2.2 (a).
- (b) Para. 9.13, Vibration: Not applicable

#### 4.2.5 Deviations from Lot Acceptance Tests (Chart V)

(a) Para. 9.13, Vibration: Not applicable.

### 4.3 MECHANICAL REQUIREMENTS

#### 4.3.1 Dimension Check

The dimensions of the components specified herein shall be verified in accordance with the requirements set out in Para. 9.4 of ESCC Generic Specification No. 4001 and they shall conform to those shown in Figure 2 of this specification.

#### 4.3.2 Weight

The maximum weight of the components specified herein shall be as given in Table 1(a).

#### 4.3.3 Robustness of Terminations

The requirements for the robustness of terminations test are specified in Para. 9.10.2 of ESCC Generic specification No. 4001. The test conditions for Bend Strength of the End Face Plating shall be as follows:

Number of bends	: 10
Deflection	: 2mm (Variants 01, 02, 03, 05, 06, 07)
	:1mm (Variants 04, 08)
Duration	: 5 ± 1s

### 4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the components specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

#### 4.4.1 Case

The alumina substrate shall be covered with a suitable coating.

#### 4.4.2 Terminations

- Variants 01 to 04  
The terminal material shall be Type E with Type 4 finish in accordance with the requirements of ESCC Basic Specification No. 23500.
- Variants 05 to 08  
The terminal material shall be Type E with Type 7 finish in accordance with the requirements of ESCC Basic Specification No. 23500.

### 4.5 MARKING

#### 4.5.1 General

The marking of all components delivered to this specification shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and the following paragraphs. When the

component is too small to accommodate all of the marking specified, as much as space permits shall be marked and the marking information, in full, shall accompany each component in its primary package.

The information to be marked and the order of precedence, shall be as follows:

- (a) Electrical Characteristics and Ratings
- (b) The ESCC Component Number.
- (c) Traceability Information

4.5.2 Electrical Characteristics and Ratings

The electrical characteristics and ratings to be marked in the following order of precedence are:

- (a) Resistance Value ( $R_n$ )
- (b) Tolerance
- (c) Temperature Coefficient

The information shall be constituted and marked as follows:

Example: 2490P1

- Resistance Value (249Ω): 2490
- Tolerance ( $\pm 0.02\%$ ): P
- Temperature Coefficient ( $\pm 10 \times 10^{-6}/^{\circ}\text{C}$ ): 1

4.5.2.1 *Resistance Value*

The resistance value shall be expressed by means of the following codes. The unit quantity for marking shall be Ohms ( $\Omega$ ).

Resistance Value ( $\Omega$ )	Code
XX.X	XXRX
XXX	XXX0
XXX $10^1$	XXX1
XXX $10^2$	XXX2
XXX $10^3$	XXX3
XXX $10^4$	XXX4

For values of less than 100Ω the letter “R” is used to indicate the decimal point. When R is used all successive digits represent significant figures. For values of 100Ω and above the first 3 digits (X) represent significant figures and the last digit specifies the number of zeros to follow.

4.5.2.2 *Tolerance*

The tolerance on resistance value shall be indicated by the code letters specified hereafter.

Tolerance ( $\pm\%$ )	Code Letter
0.01	L
0.02	P
0.05	W
0.1	B

4.5.2.3 *Temperature Coefficient*

The temperature coefficient shall be indicated by the numerical code specified hereafter.

Temperature Coefficient ( $\pm 10^{-6}/^{\circ}\text{C}$ )	Code
5	0
10	1
25	2

4.5.3 ESCC Component Number

The ESCC Component Number shall be constituted and marked as follows:

Example : 400102301B

- Detail Specification Reference : 4001023
- Component Type Variant Number : 01 (as required)
- Testing Level (B or C, as applicable)

4.5.4 Traceability Information

Each component shall be marked in respect of traceability information in accordance with the requirements of ESCC Basic Specification No. 21700.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured at room temperature are scheduled in Table 2. Unless otherwise specified, measurements shall be performed at  $T_{amb}=+22\pm 3^{\circ}\text{C}$ .

4.6.2 Electrical Measurements at High and Low Temperatures

The parameters to be measured at high and low temperatures are scheduled in Table 3.

The distribution of the sample shall be as follows:

- 1/3 with lowest resistance value
- 1/3 with highest resistance value
- 1/3 with median resistance value or the critical resistance value if procured

of the procured range.

4.6.3 Circuits for Electrical Measurements (Figure 4)

Not applicable.

4.7 BURN-IN TESTS

4.7.1 Parameter Drift Values

The parameter drift values applicable to Burn-in are as specified in Table 4 of this specification. Unless otherwise stated, measurements shall be performed at  $T_{amb}=+22\pm 3^{\circ}\text{C}$ . The parameter drift values ( $\Delta$ ) applicable to the parameters scheduled shall not be exceeded. In addition to these drift value requirements for a given parameter, the appropriate limit values specified in Table 2 shall not be exceeded.

4.7.2 Conditions for Burn-in

The requirements for Burn-in are specified in Section 7 of ESCC Generic Specification No. 4001. The conditions for Burn-in shall be as specified in Table 5 of this specification.

After 168 (+24 -0) hours, the resistors shall be removed from the chamber and allowed to cool under normal atmospheric conditions for a minimum of 4 hours. They shall then be visually examined. There shall be no evidence of damage and marking shall still be legible.

4.7.3 Electrical Circuit for Burn-in

The circuit for use in performing the burn-in test is shown in Figure 5 of this specification.

**Table 2- ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE**

No.	Characteristics	Symbol	ESCC 4001 Test Method	Test Conditions	Tolerance ( $\pm$ %)	Limits		Unit
						Min	Max	
1	Resistance	$R_A$	Para. 9.5.1	Para. 9.5.1	0.01	$0.9999 R_n$	$1.0001 R_n$	$\Omega$
					0.02	$0.9998 R_n$	$1.0002 R_n$	
					0.05	$0.9995 R_n$	$1.0005 R_n$	
					0.1	$0.999 R_n$	$1.001 R_n$	

**Table 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES**

No.	Characteristics	Symbol	ESCC 4001 Test Method	Test Conditions (Note 1)	Limits		Unit
					Min	Max	
2	Resistance change between $-55 (+3-0)^{\circ}\text{C}$ and $+22 \pm 3^{\circ}\text{C}$	$\Delta R_A/R_A$	Para. 9.5.1	Para. 9.5.1 $TC = \pm 10 \times 10^{-6}/^{\circ}\text{C}$ $TC = \pm 25 \times 10^{-6}/^{\circ}\text{C}$	-0.08 -0.2	+0.08 +0.2	%
3	Resistance change between $+155 (+0 -3)^{\circ}\text{C}$ and $+22 \pm 3^{\circ}\text{C}$	$\Delta R_A/R_A$	Para. 9.5.1	Para. 9.5.1 $TC = \pm 10 \times 10^{-6}/^{\circ}\text{C}$ $TC = \pm 25 \times 10^{-6}/^{\circ}\text{C}$	-0.136 -0.34	+0.136 +0.34	%
4	Resistance change between $+70 (+0 -3)^{\circ}\text{C}$ and $+22 \pm 3^{\circ}\text{C}$	$\Delta R_A/R_A$	Para. 9.5.1	Para. 9.5.1 $TC = \pm 5 \times 10^{-6}/^{\circ}\text{C}$	-0.025	+0.025	%

**NOTES:**

1. The measurements shall be performed on a sample basis in accordance with special inspection

Level S-3, Table IIA, AQL = 1% of IEC Publication No. 60410 on the total production lot. In addition, see Para. 4.6.2 for distribution of the sample.

**FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS**

Not applicable.


**Table 4 - PARAMETER DRIFT VALUES**

No.	Characteristics	Symbol	Spec. and/or Test Method	Test Conditions	Change Limits ( $\Delta$ )	Unit
1	Resistance Change	$\Delta R_A/R_A$	As per Table 2	As per Table 2	$\pm 0.02$	%

**Table 5 - CONDITIONS FOR BURN-IN AND OPERATING LIFE**

No.	Characteristics	Symbol	Condition	Unit
1	Ambient Temperature	$T_{amb}$	$+70 \pm 5$	$^{\circ}C$
2	Test Voltage	$V_T$	$\sqrt{P_n \times R_n}$ or $U_L$ whichever is less	V

**FIGURE 5 - ELECTRICAL CIRCUIT FOR BURN-IN AND OPERATING LIFE**

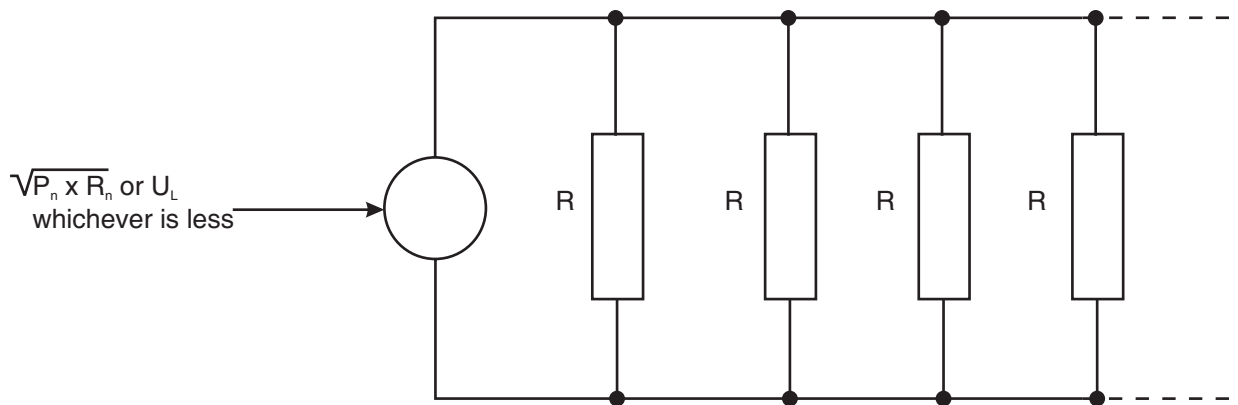

**4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESCC GENERIC SPECIFICATION NO. 4001)**

The resistors shall be mounted as prescribed in ESCC Generic Specification No. 4001, Para. 9.20. The substrate material shall be glass polyimide, except for high and low temperature measurements where alumina is required.

**4.8.1 Measurements and Inspections on Completion of Environmental Tests**

The parameters to be measured and inspections to be performed on completion of environmental tests

are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at  $T_{amb}=+22\pm 3^{\circ}\text{C}$ .

**4.8.2 Measurements and Inspections at Intermediate Points During Endurance Tests**

The parameters to be measured and inspections to be performed at intermediate points during endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at  $T_{amb}=+22\pm 3^{\circ}\text{C}$ .

**4.8.3 Measurements and Inspections on Completion of Endurance Tests**

The parameters to be measured and inspections to be performed on completion of endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at  $T_{amb}=+22\pm 3^{\circ}\text{C}$ .

**4.8.4 Conditions for Operating Life**

The requirements for operating life test are specified in Section 9 of ESCC Generic Specification No. 4001. The conditions for operating life testing shall be as specified in Table 5 of this specification.

**4.8.5 Electrical Circuit for Operating Life (Figure 5)**

The electrical circuit for use in performing the operating life test is shown in Figure 5 of this specification.

**4.8.6 Conditions for High Temperature Storage Test (Part of Endurance Test)**

The requirements for the high temperature storage test are specified in ESCC Generic Specification No. 4001. The conditions for high temperature storage shall be  $T_{amb} = +155 (+0 -5)^{\circ}\text{C}$ .

**Table 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING**

No.	ESCC Generic Spec. No. 4001		Measurements and Inspections		Symbol	Limits		Unit			
	Environmental and Endurance Tests (Note 1)	Test Methods and Conditions	Identification	Conditions		Min	Max				
01	Overload	Para. 9.1 and Paras 4.2.2 and 4.2.4 of this spec.	<u>Initial Measurements</u> Chart IV Resistance	Table 2 Item 1 After a recovery period of 1-2 hrs No evidence of damage and marking legible	$R_A$	Record Values		$\Omega$			
			<u>Final Measurements</u>						-	-	-
			Visual Examination								
			Chart II Resistance	Table 2 item 1	$R_A$	Table 2 Item 1		$\Omega$			
			Chart IV Resistance Change	Table 2 Item 1	$\Delta R_A/R_A$	Note 5		%			
02	Seal Test (Hermetically Sealed only)	Para. 9.3	Not applicable	-	-	-	-	-			
03	Insulation Resistance (Insulated only)	Para. 9.6	<u>Final Measurements</u> Insulation Resistance	Para. 9.6.1 of ESCC 4001 (Note 2)	$R_i$	1000	-	$\text{M}\Omega$			
04	Temperature Coefficient	Para. 9.7 Procedure I	Temperature Coefficient	Para. 9.5.1 of ESCC 4001	TC	Note 3		$10^{-6}/^{\circ}\text{C}$			
05	Voltage Proof	Para. 9.8.2	<u>During test</u>	1.4 x $U_1$ for 60 ± 5 sec (Note 4)	-	-	-	-			
			Visual Examination	No breakdown or flashover	-	-	-	-			

No.	ESCC Generic Spec. No. 4001		Measurements and Inspections		Symbol	Limits		Unit
	Environmental and Endurance Tests (Note 1)	Test Methods and Conditions	Identification	Conditions		Min	Max	
06	Solderability	Para. 9.9 Procedure I	<u>Initial Measurements</u> Resistance	After Drying Table 2 item 1	$R_A$	Record Values		$\Omega$
			<u>Final Measurements</u> Resistance Change	24 ± 4hrs after soldering Table 2 Item 1	$\Delta R_A/R_A$	Note 5		%
07	Robustness of Terminations	Para. 9.10.2  Adhesion	-	After Mounting				
			<u>Initial Measurements</u> Resistance	Table 2 Item 1	$R_A$	Record Values		$\Omega$
		<u>Final Measurements</u> Resistance Change	Table 2 Item 1	$\Delta R_A/R_A$	Note 5		%	
		Visual Examination	No damage, lifting, cracking or dry joints	-	-	-	-	
		Bend Strength of End Plate Facing	<u>Initial Measurements</u> Resistance	Table 2 Item 1	$R_A$	Record Values		$\Omega$
			<u>Final Measurements</u> Resistance Change	Table 2 Item 1 Board in bent position	$\Delta R_A/R_A$	Note 5		%
Visual Examination	No damage, lifting, cracking or dry joints	-	-	-	-			
08	Resistance to Soldering Heat	Para. 9.11 Procedure I	<u>Initial Measurements</u> Resistance	After Drying Table 2 Item 1	$R_A$	Record Values		$\Omega$
			<u>Final Measurements</u> Visual Examination	No evidence of damage and marking legible	-	-	-	
			Resistance Change	Table 2 Item 1	$\Delta R_A/R_A$	Note 5		%
09	Rapid Change of Temperature	Para. 9.12	<u>Initial Measurements</u> Resistance	Table 2 item 1	$R_A$	Record Values		$\Omega$
			<u>Final Measurements</u> Visual Examination	After a recovery period of 1-2 hrs No evidence of damage	-	-	-	
			Resistance Change	Table 2 Item 1	$\Delta R_A/R_A$	Note 5		%
10	Vibration	Para. 9.13 and Paras 4.2.4 and 4.2.5 of this spec.	Not applicable	-	-	-	-	-
11	Climatic Sequence	Para. 9.14 Procedure I	<u>Initial Measurements</u> Resistance	After Drying Table 2 Item 1	$R_A$	Record Values		$\Omega$
			<u>Final Measurements</u> Visual Examination	Following completion of DC load test and after a recovery period of 1-2 hrs No evidence of damage and marking legible	-	-	-	-
			Insulation Resistance	Para. 9.6 of ESCC 4001, (Note 2)	$R_i$	1000	-	M $\Omega$



No.	ESCC Generic Spec. No. 4001		Measurements and Inspections		Symbol	Limits		Unit
	Environmental and Endurance Tests (Note 1)	Test Methods and Conditions	Identification	Conditions		Min	Max	
			Resistance Change	Table 2 Item 1	$\Delta R_A/R_A$	Note 6		%
12	Operating Life	Para. 9.15 Chart IV	<u>Initial Measurements Resistance</u>	Table 2 Item 1	$R_A$	Record Values		$\Omega$
			<u>Intermediate Measurements</u> (1000 hrs)	After a recovery period of 1-2 hrs	-	-	-	-
			Visual Examination	No evidence of damage	-	-	-	-
			Resistance Change	Table 2 Item 1	$\Delta R_A/R_A$	Note 6		%
			<u>Final Measurements</u> (2000 hrs)	After a recovery period of 1-2 hrs	-	-	-	-
		Para. 9.15 Chart V	Visual Examination	No evidence of damage	-	-	-	-
			Resistance Change	Table 2, Item 1	$\Delta R_A/R_A$	Note 7		%
			Insulation Resistance	Para. 9.6 of ESCC 4001, (Note 2)	$R_i$	1000	-	M $\Omega$
			<u>Initial Measurements Resistance</u>	Table 2 Item 1	$R_A$	Record Values		$\Omega$
			<u>Final Measurements</u> (1000 hrs)	After a recovery period of 1 -2 hrs	-	-	-	-
13	High Temperature Storage	Para. 9.16	<u>Initial Measurements Resistance</u>	Table 2 Item 1	$R_A$	Record Values		$\Omega$
			<u>Intermediate Measurements</u> (1000 hrs)	After a recovery period of 1-2 hrs	-	-	-	-
			Visual Examination	No evidence of damage	-	-	-	-
			Resistance Change	Table 2 Item 1	$\Delta R_A/R_A$	Note 6		%
			<u>Final Measurements</u> (2000 hrs)	After a recovery period of 1-2 hrs	-	-	-	-
		Para. 9.16	Visual Examination	No evidence of damage	-	-	-	-
			Resistance Change	Table 2 Item 1	$\Delta R_A/R_A$	Note 7		%
			Insulation Resistance	Para. 9.6 of ESCC 4001, (Note 2)	$R_i$	1000	-	M $\Omega$
			<u>Initial Measurements Resistance</u>	Table 2 Item 1	$R_A$	Record Values		$\Omega$
			<u>Intermediate Measurements</u> (1000 hrs)	After a recovery period of 1-2 hrs	-	-	-	-
14	Permanence of Marking	Para. 9.19	-	-	-	-	-	-

**NOTES:**

- The tests in this Table refer to either Chart IV or V and shall be used as applicable.
- Test Voltage:  $V_T = 100V$
- TC per Table 1(a).
- For value of  $U_1$  see Table 1(b) Item 4.
- $\Delta R_A/R_A$  limit :  $\pm(0.05 + 0.05\Omega \times 100/R_n)\%$
- $\Delta R_A/R_A$  limit :  $\pm(0.1 + 0.05\Omega \times 100/R_n)\%$
- $\Delta R_A/R_A$  limit :  $\pm(0.15 + 0.05\Omega \times 100/R_n)\%$

**APPENDIX A****AGREED DEVIATIONS FOR VISHAY SFERNICE(F)**

Items Affected	Description of Deviations
Deviations from Final Production Tests (Chart II)	Para. 9.2 Third Harmonic Control and Current Noise This test is not applicable.