



Page 1 of 15

**CONTACTS, ELECTRICAL, CRIMP, FOR 3401/002
CONNECTORS**

ESCC Detail Specification No. 3401/058

Issue 4	June 2014
---------	-----------



Document Custodian: European Space Agency – see <https://escies.org>

LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2014. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
859	Specification upissued to incorporate editorial changes per DCR.

TABLE OF CONTENTS

1	GENERAL	6
1.1	SCOPE	6
1.2	COMPONENT TYPE VARIANTS	6
1.3	MAXIMUM RATINGS	6
1.4	PARAMETER DERATING INFORMATION (FIGURE 1)	6
1.5	PHYSICAL DIMENSIONS	6
2	APPLICABLE DOCUMENTS	8
3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	8
4	REQUIREMENTS	8
4.1	GENERAL	8
4.2	DEVIATIONS FROM GENERIC SPECIFICATION	10
4.2.1	Deviations from Special In-Process Controls	10
4.2.2	Deviations from Final Production Tests (Chart II)	11
4.2.3	Deviations from Burn-in and Electrical Measurements (Chart III)	11
4.2.4	Deviations from Qualification Tests (Chart IV)	11
4.2.5	Deviations from Lot Acceptance Tests (Chart V)	11
4.3	MECHANICAL REQUIREMENTS	11
4.3.1	Dimension Check	11
4.3.2	Weight	11
4.3.3	Contact Capability	11
4.3.4	Contact Retention (in Insert)	11
4.3.5	Mating and Unmating Forces	11
4.3.6	Insert Retention (in Shell)	11
4.3.7	Jackscrew Retention	11
4.3.8	Contact Insertion and Withdrawal Forces	11
4.3.9	Engagement and Separation Forces	11
4.3.10	Oversize Pin Exclusion	11
4.3.11	Probe Damage	11
4.4	MATERIALS AND FINISHES	12
4.4.1	Shell, Coupling Ring and Nuts	12
4.4.2	Inserts	12
4.4.3	Contacts	12
4.4.4	Contact Retaining Clip	12
4.4.5	Guiding and Locking Devices	12
4.4.6	Magnetism Level	12

4.5	MARKING	12
4.5.1	General	12
4.5.2	The ESCC Component Number	12
4.5.3	Traceability Information	13
4.6	ELECTRICAL MEASUREMENTS	13
4.6.1	Electrical Measurements at Room Temperature	13
4.6.2	Electrical Measurements at High and Low Temperatures (Table 3)	13
4.6.3	Circuits for Electrical Measurements (Figure 4)	13
4.7	BURN-IN TESTS (TABLES 4 AND 5)	13
4.8	ENVIRONMENTAL AND ENDURANCE TESTS	13
4.8.1	Measurements and Inspections on Completion of Environmental Tests	13
4.8.2	Measurements and Inspections at Intermediate Points During Endurance Tests	13
4.8.3	Measurements and Inspections on Completion of Endurance Tests	14
4.8.4	Conditions for Operating Life Test (Part of Endurance Testing)	14
4.8.5	Electrical Circuit for Operating Life Test	14
4.8.6	Conditions for High Temperature Storage Test (Part of Endurance Testing)	14

1 GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics, test and inspection data for Contacts, Electrical, Crimp, Gauge 22, 20, 16, 12, 8 and 4 for 3401/052 and /056 Connectors.

These contacts shall be packed separately from the connectors and may be procured either with the connectors or separately.

The specification shall be read in conjunction with:

- ESCC Generic Specification No. 3401, Connectors, Electrical, Non-Filtered, Circular and Rectangular.
- ESCC Detail Specification No. 3401/052, Connectors, Electrical, Circular, Bayonet Coupling, Scoop-Proof, Removable Crimp Contacts based on MIL-C-38999 Series I.
- ESCC Detail Specification No. 3401/056, Connectors, Electrical, Circular, Triple-Start Self-Locking Coupling, Scoop-Proof, Removable Crimp Contacts based on MIL-C-38999 Series III.

the requirements of which are supplemented herein.

1.2 COMPONENT TYPE VARIANTS

Variants of the different sizes of contacts specified herein, which are also covered by this specification are scheduled in Table 1(a).

1.3 MAXIMUM RATINGS

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the contacts specified herein, are scheduled in Table 1(b).

1.4 PARAMETER DERATING INFORMATION (FIGURE 1)

Not applicable.

1.5 PHYSICAL DIMENSIONS

The physical dimensions of the contacts specified herein are shown in Figure 2.

TABLE 1(a) – TYPE VARIANTS

Variant	Type	Mating End Size	Crimp Barrel Size	Rated Current A	Accept Wire AWG	Max. Weight g	Engagement & Separation				Contact Capability	
							Engag. Force N (1)	Separ. Force N (1)	Test Pin Dia. mm		Weight	
									Min.	Max.	Pick-up (2) g	Drop (3) g
01	Male	22	22	5	22	0.08	-	-	-	-	-	-
02	Female				24	0.26	3.33	0.19	0.773	0.775	-	340.2
					26						19.84	-
03	Male	20	20	7.5	20	0.16	-	-	-	-	-	-
04	Female				22	0.48	5.01	0.19	1.039	1.041	-	510.3
					24						19.84	-
05	Male	16	16	13	16	0.33	-	-	-	-	-	-
06	Female				18	0.87	8.34	0.56	1.611	1.613	-	850.5
					20						56.71	-
07	Male	12	12	23	12	0.68	-	-	-	-	-	-
08	Female				14	1.6	8.34	0.83	2.411	2.413	-	850.5
											85.05	-
09	Male	8	8	46	8	3.5	-	-	-	-	-	-
10	Female				10	5	9.9	1.1	3.629	3.632	-	800
											110	-
11	Male	4	4	80	6	6	-	-	-	-	-	-
12	Female				4	7.5	20.4	2.2	5.737	5.74	-	1600
					4						220	-
13	Male	4	8	46	8	6.5	-	-	-	-	-	-
14	Female				10	8	20.4	2.2	5.737	5.74	-	1600
											220	-

Variant	Contact Retention Force Max. N	Contact Insertion and Withdrawal Forces Max. N	Probe Damage			Oversize Pin Excl.		
			Moment N.cm	Probe Dia. mm		Force Max. N	Test Pin Dia. mm	
				Min.	Max.		Min.	Max.
01	44	44	-	-	-	-	-	-
02	44	44	1.34	0.749	0.774	2.45	0.905	0.907
03	67	89	-	-	-	-	-	-
04	67	89	5.64	1.003	1.029	3.33	1.18	1.182
05	111	89	-	-	-	-	-	-
06	111	89	22.56	1.575	1.6	5.49	1.738	1.74
07	111	133	-	-	-	-	-	-
08	111	133	22.56	2.375	2.4	8.24	2.55	2.552
09	111	150	-	-	-	-	-	-
10	111	150	50	3.594	3.619	10	4	4.01
11	180	190	-	-	-	-	-	-
12	180	190	50	5.702	5.727	15	6.1	6.11
13	180	190	-	-	-	-	-	-
14	180	190	50	5.702	5.727	15	6.1	6.11

NOTES:

- 1st line with maximum diameter test pin; 2nd line with minimum diameter test pin.
- With minimum diameter test pin and minimum insertion depth of 4mm.
- With maximum diameter test pin and minimum insertion depth of 4mm.

TABLE 1(b) – MAXIMUM RATINGS

No.	Characteristics	Symbol	Maximum Rating	Unit
1	Rated Current	I_{CR}	See Table 1(a)	A
2	Operating Temperature Range	T_{op}	-65 to +200	°C
3	Storage Temperature Range	T_{stg}	-65 to +200	°C

FIGURE 1 – PARAMETER DERATING INFORMATION

Not applicable.

2 APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. 3401 for Connectors, Electrical, Non-Filtered, Circular and Rectangular.
- (b) ESCC Detail Specification No. 3401/052, Connectors, Electrical, Circular, Bayonet Coupling, Scoop-Proof, Removable Crimp Contacts based on MIL-C-38999 Series I.
- (c) ESCC Detail Specification No. 3401/056, Connectors, Electrical, Circular, Triple-Start Self-Locking Coupling, Scoop-Proof, Removable Crimp Contacts based on MIL-C-38999 Series III.

3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. 21300 shall apply.


4 REQUIREMENTS**4.1 GENERAL**

The complete requirements for procurement of the contacts specified herein are stated in this specification and ESCC Generic Specification No. 3401. Deviations from the Generic Specification, applicable to this specification only, are detailed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

FIGURE 2 – PHYSICAL DIMENSIONS

Variants with Uneven Numbers - Male Contact

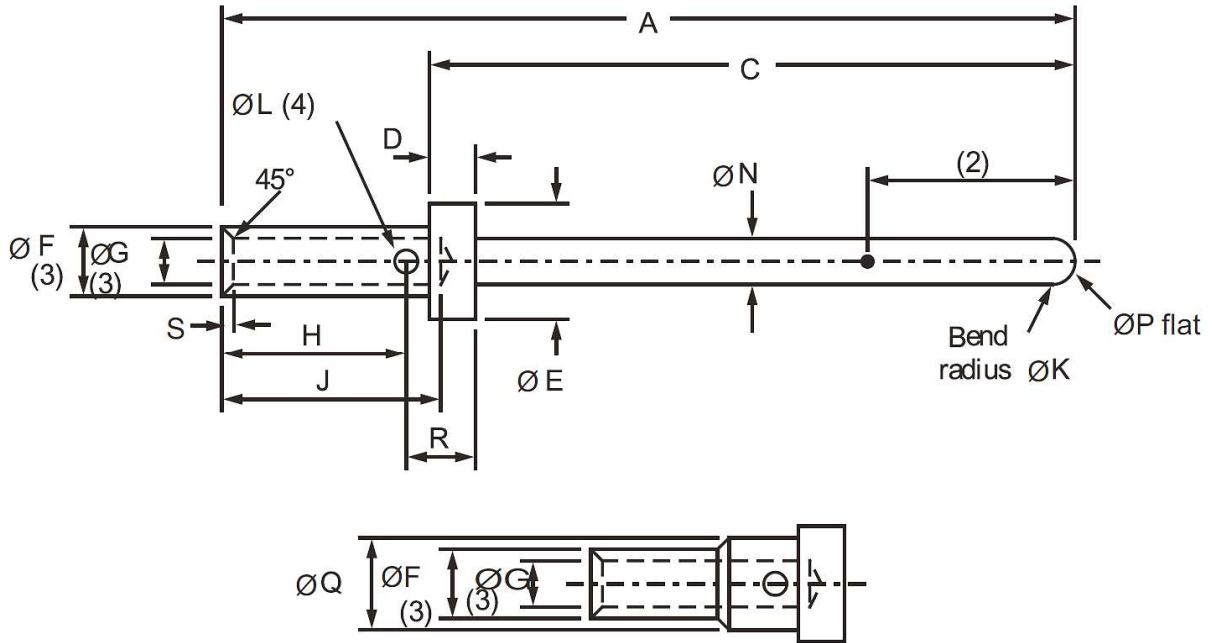


Crimp barrel configuration for Variants 09, 11 and 13

Type Variant		A	C	D	ØE	ØF	ØG	H	J	ØK	ØL	ØN	ØP	ØQ	R	S
01	Min.	-	7.49	0.74	1.52	1.17	0.85	3.09	3.58	0.25	0.46	0.75	-	-	-	0.08
	Max.	13.64	7.62	0.84	1.57	1.22	0.9	3.27	3.99	0.51	0.56	0.77	0.28	-	-	0.13
03	Min.	-	7.49	0.74	2.31	1.73	1.17	-	5.31	0.38	0.66	0.99	-	-	1.82	0.13
	Max.	13.64	7.62	0.84	2.39	1.78	1.22	-	5.82	0.64	0.81	1.04	0.38	-	1.98	0.25
05	Min.	-	7.49	0.74	3.23	2.57	1.68	-	5.31	0.51	0.91	1.56	0.28	-	2.08	0.13
	Max.	13.64	7.62	0.84	3.30	2.26	1.73	-	5.82	0.64	1.07	1.61	0.76	-	2.24	0.25
07	Min.	-	7.49	0.74	4.55	3.76	2.49	-	5.31	0.51	0.91	2.36	1.09	-	2.08	0.14
	Max.	13.64	7.62	0.84	4.62	3.84	2.59	-	5.82	0.64	1.02	2.41	1.57	-	2.24	0.4
09	Min.	-	11.75	0.74	7.69	6.65	4.54	-	12.2	1.8	1.7	3.58	1.5	6.9	2.3	0.4
	Max.	26.2	11.95	0.84	7.79	6.73	4.65	-	12.8	1	1.85	3.64	2	7	2.4	0.6
11	Min.	-	12.75	0.74	10.5	9.47	7.08	-	12.2	1	1.7	5.68	2	9.68	2.3	0.4
	Max.	26.2	12.95	0.84	10.6	9.55	7.19	-	12.8	1.1	1.85	5.74	2.5	9.8	2.4	0.6
13	Min.	-	12.75	0.74	10.5	6.65	4.54	-	14.8	1	1.7	5.68	2	9.68	2.3	0.4
	Max.	28.8	12.95	0.84	10.6	6.73	4.65	-	15.1	1.1	1.85	5.74	2.5	9.8	2.4	0.6

NOTES:

1. All dimensions are in millimetres.
2. Measurement point for plating thickness: 4 ± 1 .
3. ØF and ØG to be concentric within 0.05 TIR.
4. Inspection hole shall only penetrate one wall of the crimp barrel.

Variants with Even Numbers - Female Contact

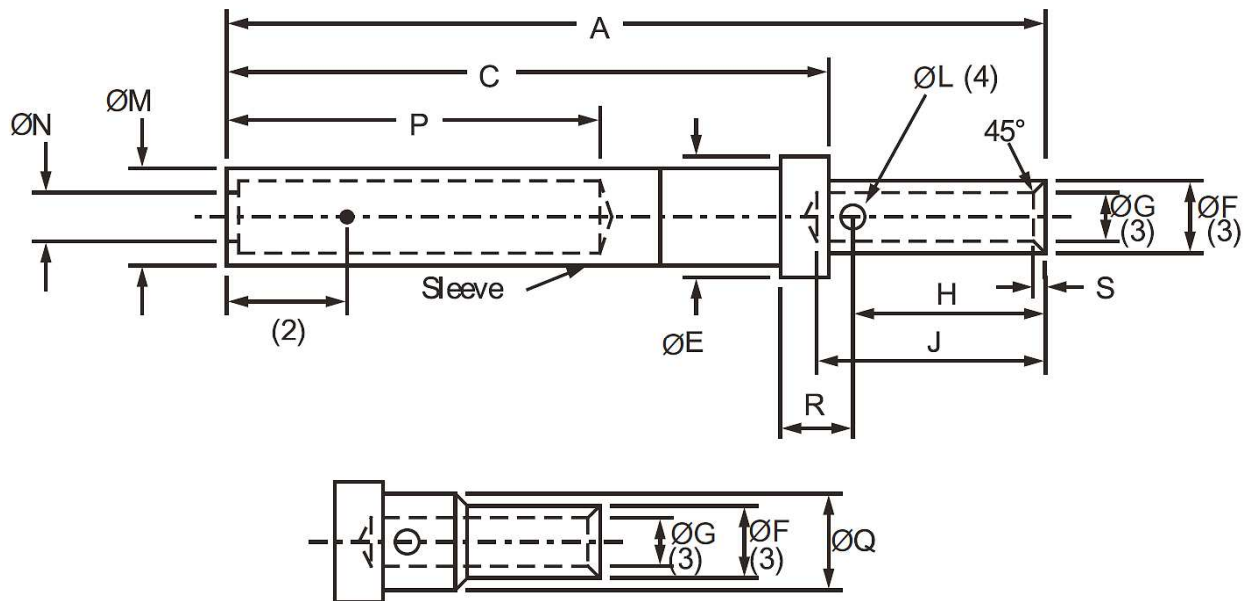

Crimp barrel configuration for Variants 10, 12 and 14

Type Variant		A	C	ØE	ØF	ØG	H	J	ØL	ØM	ØN	P	ØQ	R	S
02	Min.	-	15.64	1.52	1.17	0.85	3.09	3.58	0.46	-	0.78	4.22	-	-	0.08
	Max.	21.92	15.9	1.57	1.22	0.9	3.27	3.99	0.56	1.57	-	-	-	-	0.13
04	Min.	-	15.64	2.31	1.73	1.17	-	5.31	0.66	-	1.05	4.22	-	1.82	0.13
	Max.	21.92	15.9	2.39	1.78	1.22	-	5.82	0.81	1.98	-	-	-	1.98	0.25
06	Min.	-	15.64	3.23	2.57	1.68	-	5.31	0.91	-	1.63	4.22	-	2.08	0.13
	Max.	21.92	15.9	3.3	2.62	1.73	-	5.82	1.02	2.87	-	-	-	2.24	0.25
08	Min.	-	15.64	4.55	3.76	2.49	-	5.31	0.91	-	2.42	4.22	-	2.08	0.14
	Max.	21.92	15.9	4.62	3.84	2.59	-	5.82	1.02	4.09	-	-	-	2.24	0.4
10	Min.	-	16.4	7.69	6.65	4.54	-	12.2	1.7	-	3.85	13.1	6.9	2.3	0.4
	Max.	30	16.75	7.79	6.73	4.65	-	12.8	1.85	6.53	-	-	7	2.4	0.6
12	Min.	-	16.4	10.5	9.47	7.08	-	12.2	1.7	-	5.95	13.1	9.68	2.3	0.4
	Max.	30	16.75	10.6	9.55	7.19	-	12.8	1.85	8.54	-	-	9.8	2.4	0.6
14	Min.	-	16.4	10.5	6.65	4.54	-	14.8	1.7	-	5.95	13.1	9.68	2.3	0.4
	Max.	32.6	16.75	10.6	6.73	4.65	-	15.1	1.85	8.54	-	-	9.8	2.4	0.6

NOTES:

1. All dimensions are in millimetres.
2. Measurement point for plating thickness: 2 ± 1 .
3. ØF and ØG to be concentric within 0.05 TIR.
4. Inspection hole shall only penetrate one wall of the crimp barrel.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION

4.2.1 Deviations from Special In-Process Controls

None.

4.2.2 Deviations from Final Production Tests (Chart II)

None.

4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)

Not applicable.

4.2.4 Deviations from Qualification Tests (Chart IV)

(a) Para. 9.31, Solderability: Not applicable.

4.2.5 Deviations from Lot Acceptance Tests (Chart V)

(a) Para. 9.31, Solderability: Not applicable.

4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the contacts specified herein shall be verified in accordance with the requirements set out in Para. 9.6 of ESCC Generic Specification No. 3401 and they shall conform to those shown in Figure 2 of this specification.

4.3.2 Weight

The maximum weight of the contacts specified herein shall be as given in Table 1(a).

4.3.3 Contact Capability

For the purpose of this test, the pick-up and drop weights shall be as specified in Table 1(a).

4.3.4 Contact Retention (in Insert)

The contact retention force shall be as specified in Table 1(a).

4.3.5 Mating and Unmating Forces

As specified in ESCC Detail Specification No. 3401/052 or /056.

4.3.6 Insert Retention (in Shell)

As specified in ESCC Detail Specification No. 3401/052 or /056.

4.3.7 Jackscrew Retention

As specified in ESCC Detail Specification No. 3401/052 or /056.

4.3.8 Contact Insertion and Withdrawal Forces

The contact insertion and withdrawal forces shall be as specified in Table 1(a).

4.3.9 Engagement and Separation Forces

The diameter of the test pin and the contact engagement and separation forces of the female contacts shall be as specified in Table 1(a).

4.3.10 Oversize Pin Exclusion

The diameter of the test pin and the force applied to it shall be as specified in Table 1(a).

4.3.11 Probe Damage

The probe diameter and the moment at the end of the probe shall be as specified in Table 1(a).

4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the contacts specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

4.4.1 Shell, Coupling Ring and Nuts

As specified in ESCC Detail Specification No. 3401/052 or 3401/056.

4.4.2 Inserts

As specified in ESCC Detail Specification No. 3401/052 or 3401/056.

4.4.3 Contacts

The contact body shall be made of copper base alloy selected from raw materials with a minimum of impurities. The contacts shall be plated as follows:

- 1µm minimum nickel underplate.
- 1.27µm minimum gold plate.

4.4.4 Contact Retaining Clip

As specified in ESCC Detail Specification No. 3401/052 or 3401/056.

4.4.5 Guiding and Locking Devices

Not applicable.

4.4.6 Magnetism Level

As specified in ESCC Detail Specification No. 3401/052 or 3401/056.

4.5 MARKING

4.5.1 General

The marking of all components delivered to this specification shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and the following paragraphs. These components being too small to accommodate the marking specified hereafter, the full marking information shall accompany the component in its primary package.

Such marking shall comprise:

- (a) The ESCC Component Number.
- (b) Traceability Information.

4.5.2 The ESCC Component Number

The ESCC Component Number shall be constituted and marked as follows:

Example: 340105801B

- Detail Specification Number: 3401058
- Type Variant (See Table 1(a)): 01
- Testing Level: B

4.5.3 Traceability Information

Traceability information shall be marked in accordance with ESCC Basic Specification No. 21700.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured in respect of electrical characteristics are scheduled in Table 2. Unless otherwise specified these measurements shall be performed at $T_{amb} = +22 \pm 3 \text{ }^\circ\text{C}$.

4.6.2 Electrical Measurements at High and Low Temperatures (Table 3)

Not applicable.

4.6.3 Circuits for Electrical Measurements (Figure 4)

Not applicable

4.7 BURN-IN TESTS (TABLES 4 AND 5)

Not applicable.

TABLE 2 – ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE

No.	Characteristics	Symbol	ESCC 3401 Test Method	Test Condition	Variants	Limits		Unit
						Min.	Max.	
1	Contact Resistance (Low Level Current)	Rcl	Para. 9.1.1.3	Para. 9.1.1.3	All	-	8	mΩ
2	Contact Resistance (Rated Current)	Rcr	Para. 9.1.1.3	Para. 9.1.1.3				
				5A	01, 02	-	14	
				7.5A	03, 04	-	7	
				13A	05, 06	-	4	
				23A	07, 08	-	3.5	
				46A	03, 10, 13, 14	-	3	
80A	11, 12	-	2.5					

TABLES 3, 4 AND 5

Not applicable.

4.8 ENVIRONMENTAL AND ENDURANCE TESTS

4.8.1 Measurements and Inspections on Completion of Environmental Tests

The parameters to be measured and inspections to be performed on completion of environmental tests are scheduled in Table 6. Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3 \text{ }^\circ\text{C}$.

4.8.2 Measurements and Inspections at Intermediate Points During Endurance Tests

Not applicable.

4.8.3 Measurements and Inspections on Completion of Endurance Tests

The parameters to be measured and inspections to be performed on completion of endurance tests shall be those specified in Table 6. Unless otherwise specified, these measurements shall be performed at $T_{amb} = +22 \pm 3 \text{ }^\circ\text{C}$.

4.8.4 Conditions for Operating Life Test (Part of Endurance Testing)

Not applicable.

4.8.5 Electrical Circuit for Operating Life Test

Not applicable.

4.8.6 Conditions for High Temperature Storage Test (Part of Endurance Testing)

The requirements for the high temperature storage test are specified in Section 9 of ESCC Generic Specification No. 3401. The conditions for high temperature storage testing shall be the maximum storage temperature specified in Table 1(b) of this specification.

TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTING

No.	ESCC Generic Spec. No. 3401		Measurements and Inspections		Symbol	Limits		Unit
	Environmental and Endurance Tests (Note 1)	Test Method and Conditions	Identification	Conditions		Min.	Max.	
01	Wiring	Para. 9.10 & Table 1(a) of this spec.	Low Level Contact Resistance	Table 2 Item 1	Rcl	Table 2 Item 1		-
02	Vibration	Para. 9.11	ESCC 3401/052 or 3401/056		-	-	-	-
03	Shock or Bump	Para. 9.12	ESCC 3401/052 or 3401/056		-	-	-	-
04	Climatic Sequence	Para. 9.13	ESCC 3401/052 or 3401/056		-	-	-	-
05	Seal Test	Para. 9.9	ESCC 3401/052 or 3401/056		-	-	-	-
06	Plating Thickness	Para. 9.14	Thickness	-	-	Para. 4.4.3 of this spec		-
07	Joint Strength	Para. 9.15	ESCC 3401 Para. 9.15	-	-	-	-	-
08	Rapid Change of Temperature	Para. 9.16	ESCC 3401/052 or 3401/056		-	-	-	-
09	Contact Retention (in Insert)	Para. 9.17 & Para. 4.3.4 of spec.	Contact Displacement	-	-	ESCC 3401 Para. 9.17		-
10	Endurance	Para. 9.18	Initial Low Level Contact Resistance	Table 2 Item 1	Rcl	Record Values		mΩ
			Final Low Level Contact Resistance Drift	Table 2 Item 1	ΔRcl	-	3	mΩ
11	Permanence of Marking	Para. 9.19	Not applicable					
12	Mating/Unmating Forces	Para. 9.20	ESCC 3401/052 or 3401/056		-	-	-	-

No.	ESCC Generic Spec. No. 3401		Measurements and Inspections		Symbol	Limits		Unit
	Environmental and Endurance Tests (Note 1)	Test Method and Conditions	Identification	Conditions		Min.	Max.	
13	High Temperature Storage	Para. 9.21	Initial Low Level Contact Resistance	Table 2 Item 1	Rcl	Record Values		mΩ
			Final Low Level Contact Resistance Drift	Table 2 Item 1	ΔRcl	-	3	mΩ
			Rated Current Contact Resistance	Table 2 Item 2	Rcr	Table 2 Item 2		-
			Contact Retention (in Insert)	Para. 4.3.4 of this spec.	-	ESCC 3401 Para. 9.17		-
14	Corrosion	Para. 9.22	Visual Examination	-	-	-	-	
15	Insert Retention (in Shell)	Para. 9.23 & Para. 4.3.6 of this spec.	ESCC 3401/052 or 3401/056		-	-	-	
16	Jackscrew Retention	Para. 9.24 & Para. 4.3.7 of this spec.	ESCC 3401/052 or 3401/056		-	Not applicable		-
17	High Temperature Measurements	Para. 9.25	ESCC 3401/052 or 3401/056		-	-	-	-
18	Overload Test	Para. 9.26	Rated Current Contact Resistance	Table 2 Item 2	Rcr	Table 2 Item 2		-
19	Maintenance Aging	Para. 9.27	Visual Examination	-	-	-	-	-
			Contact Retention	Para. 4.3.4 of this spec.	-	ESCC 3401 Para. 9.17		-
			Contact Insertion & Withdrawal Forces	Para. 4.3.8 of this spec.	-	Para. 4.3.8 of this spec.		-
20	Engage/Separation Forces	Para. 9.28 & Para. 4.3.9 of this spec.	Force	-	-	Para. 4.3.9 of this spec.		-
21	Oversize Pin Exclusion	Para. 9.29 & Para. 4.3.10 of this spec.	-	-	-	ESCC 3401 Para. 9.29		-
22	Probe Damage	Para. 9.30 & Para. 4.3.11 of this spec.	Contact Separation Force	Para. 4.3.9 of this spec.	-	Para. 4.3.9 of this spec.		-
23	Solderability	Para. 9.31 & Para. 4.3.12 of this spec.	Not applicable					

NOTES:

1. The tests in this table refer to either Chart IV or V and shall be used as applicable.