



**CAPACITORS, FIXED, CHIPS, HIGH VOLTAGE
(1 TO 3KV), CERAMIC DIELECTRIC, TYPE II**

BASED ON TYPES 1812 AND 1825

ESCC Detail Specification No. 3009/034

Issue 3	July 2015
---------	-----------



LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2015. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
742	Specification updated to incorporate changes per DCR. Specification produced in MSWORD. Changes in presentation are possible.

TABLE OF CONTENTS

1	GENERAL	5
1.1	SCOPE	5
1.2	APPLICABLE DOCUMENTS	5
1.3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	5
1.4	THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS	5
1.4.1	The ESCC Component Number	5
1.4.2	Component Type Variants and Range of Components	6
1.5	MAXIMUM RATINGS	7
1.6	PHYSICAL DIMENSIONS	7
1.7	FUNCTIONAL DIAGRAM	7
1.8	MATERIALS AND FINISHES	7
2	REQUIREMENTS	8
2.1	GENERAL	8
2.1.1	Deviations from the Generic Specification	8
2.2	MARKING	8
2.3	ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES	9
2.3.1	Room Temperature Electrical Measurements	9
2.3.2	High and Low Temperatures Electrical Measurements	9
2.4	INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS	10
2.5	BURN-IN	11
	APPENDIX A	12

1 GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics, and test and inspection data for the component type variants and/or the range of components specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

1.2 APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. 3009.
- (b) IEC Publication No. 60068-2-78, Environmental Testing – Test Cab: Damp Heat, Steady State.

1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. 21300 shall apply.

1.4 THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS

1.4.1 The ESCC Component Number

The ESCC Component Number shall be constituted as follows:

Example: 300903401102

- Detail Specification Reference: 3009034
- Component Type Variant Number: 01 (as required)
- Characteristic code: Capacitance Value (1000pF): 102 (as required)

1.4.1.1 *Characteristics and Ratings Codes*

Characteristics and ratings to be codified as part of the ESCC Component Number shall be as follows:

- (a) Rated Capacitance Value C_n expressed by means of the following codes in accordance with ESCC Basic Specification No. 21700. The unit quantity shall be picofarad (pF).

Capacitance Value C_n (pF)	Code
XX 10 ¹	XX1
XX 10 ²	XX2
XX 10 ³	XX3

1.4.2 Component Type Variants and Range of Components

The component type variants and range of components applicable to this specification are as follows:

Variant Number	Style (Note 1)	Capacitance Range (pF) (Note 2)	Tolerance (\pm %)	Rated Voltage U_R (V)	Termination Finish	Weight Max (g)
01	1812	3900 to 22000	10	1000	No finish	0.3
02	1812	3900 to 22000	20	1000	No finish	0.3
03	1812	1500 to 1800	10	2000	No finish	0.3
04	1812	1500 to 1800	20	2000	No finish	0.3
05	1812	820 to 1000	10	3000	No finish	0.3
06	1812	820 to 1000	20	3000	No finish	0.3
07	1825	27000 to 5600	10	1000	No finish	0.6
08	1825	27000 to 5600	20	1000	No finish	0.6
09	1825	2200 to 6800	10	2000	No finish	0.6
10	1825	2200 to 6800	20	2000	No finish	0.6
11	1825	820 to 3900	10	3000	No finish	0.6
12	1825	820 to 3900	20	3000	No finish	0.6
13	1812	3900 to 22000	10	1000	Sn62 solder dip	0.3
14	1812	3900 to 22000	20	1000	Sn62 solder dip	0.3
15	1812	1500 to 1800	10	2000	Sn62 solder dip	0.3
16	1812	1500 to 1800	20	2000	Sn62 solder dip	0.3
17	1812	820 to 1000	10	3000	Sn62 solder dip	0.3
18	1812	820 to 1000	20	3000	Sn62 solder dip	0.3
19	1825	27000 to 5600	10	1000	Sn62 solder dip	0.6
20	1825	27000 to 5600	20	1000	Sn62 solder dip	0.6
21	1825	2200 to 6800	10	2000	Sn62 solder dip	0.6
22	1825	2200 to 6800	20	2000	Sn62 solder dip	0.6
23	1825	820 to 3900	10	3000	Sn62 solder dip	0.6
24	1825	820 to 3900	20	3000	Sn62 solder dip	0.6

NOTES:

1. See Physical Dimensions.
2. Available capacitance values are as follows:
 - Value series: E12

1.5 MAXIMUM RATINGS

The maximum ratings shall not be exceeded at any time during use or storage.


Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the ESCC Generic Specification.

Characteristics	Symbols	Maximum Ratings	Units	Remarks
Rated Voltage	U_R	1000, 2000, 3000	V	Note 1
Operating Temperature Range	T_{op}	-55 to +125	°C	Without derating. T_{amb}
Storage Temperature Range	T_{stg}	-55 to +125	°C	
Soldering Temperature	T_{sol}	+260	°C	Note 2

NOTES:

- As required; See Component Type Variants and Range of Components.
- Duration 5 seconds maximum.

1.6 PHYSICAL DIMENSIONS

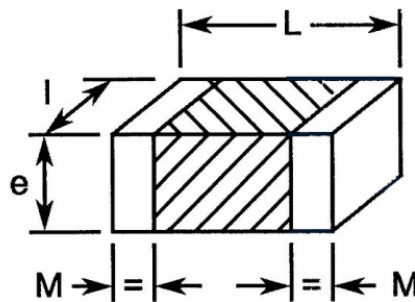

Symbols	Dimensions (mm)							
	Style 1812 Variants 01 to 06		Style 1825 Variants 07 to 12		Style 1812 Variants 13 to 18		Style 1825 Variants 19 to 24	
	Min	Max	Min	Max	Min	Max	Min	Max
L	4.2	5	4.2	5	4.2	5.5	4.2	5.5
l	2.8	3.6	5.67	6.67	2.8	4.1	5.67	7.17
e	-	3	-	3.3	-	3.5	-	3.8
M	0.25	0.75	0.25	0.75	0.25	0.75	0.25	0.75

1.7 FUNCTIONAL DIAGRAM



1.8 MATERIALS AND FINISHES

The components shall be terminated with metallised pads. The termination finish shall be as specified in Component Type Variants and Range of Components.

2 REQUIREMENTS

2.1 GENERAL

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component's reliability, are listed in the appendices attached to this specification.

2.1.1 Deviations from the Generic Specification

2.1.1.1 *Deviations from Qualification and Periodic Tests (Chart F4)*

- (a) Steady State Humidity (85/85): not applicable and shall be replaced in Chart F4 Group 1 of the Generic Specification by a Damp Heat Steady State test as follows:

Components mounted in accordance with Para. 8.6 of ESCC No. 3009 shall be subjected to Test Cab of IEC Publication No. 60068-2-78. The following details shall apply:

- Test Conditions:
 - (a) Temperature: $40 \pm 2^{\circ}\text{C}$
 - (b) Relative humidity: $93 \pm 3\%$
 - (c) Duration: 56 days
 - (d) Bias during test: Unless otherwise specified, no bias shall be applied.
- Data Points
Prior to the test, Capacitance shall be measured as specified in Intermediate and End-Point Electrical Measurements.

On completion of testing the components shall be subjected to standard atmospheric conditions for recovery for 6 to 24 hours.

After recovery, the components shall be visually examined. There shall be no evidence of damage. Capacitance, Change in Capacitance, Tangent of Loss Angle and Insulation Resistance shall be measured as specified in Intermediate and End-Point Electrical Measurements. Change in Capacitance shall be related to the initial measurements.

2.2 MARKING

The marking shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and as follows.

The information to be marked on the component or its primary package shall be:

- (a) The ESCC qualified components symbol (for ESCC qualified components only).
- (b) The ESCC Component Number.
- (c) Traceability information.

2.3 ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES

Electrical measurements shall be performed at room, high and low temperatures.

2.3.1 Room Temperature Electrical Measurements

The measurements shall be performed at $T_{amb} = +22 \pm 3^{\circ}\text{C}$.

Characteristics	Symbols	Test Method and Conditions	Tolerance (\pm %)	Limits		Units
				Min	Max	
Capacitance (Note 1)	C_A	ESCC No. 3009	10	$0.9C_n$	$1.1C_n$	pF
			20	$0.8C_n$	$1.2C_n$	
Tangent of Loss Angle	$\text{tg}\delta$	ESCC No. 3009	All	-	250×10^{-4}	-
Insulation Resistance	R_I	ESCC No. 3009 For $C_n \leq 10000\text{pF}$ For $C_n > 10000\text{pF}$	All	100	-	G Ω G Ω .nF
				1000	-	
Voltage Proof	VP	ESCC No. 3009 For $U_R < 1250\text{V}$ For $U_R > 1250\text{V}$	All	$1.5U_R$	-	V
				$1.3U_R$	-	

NOTES

1. Capacitance limits may be adjusted to take into account capacitance ageing, as specified in the Generic Specification.

2.3.2 High and Low Temperatures Electrical Measurements

Characteristics	Symbols	Test Method and Conditions (Note 1)	Limits		Units
			Min	Max	
Temperature Characteristic	TC	ESCC No. 3009 $T_{amb} = -55 \pm 2^{\circ}\text{C}, +20 \pm 2^{\circ}\text{C}, +125 \pm 2^{\circ}\text{C}$ Note 2 For $V_T = \text{no voltage applied}$ For $V_T = 500\text{V}$	-20	+20	%
			-50	+30	

NOTES:

1. The measurements shall be performed on a sample of 5 components from each manufacturing lot with 0 failures allowed. In the event of any failure a 100% inspection may be performed.
2. In the case of a 100% inspection, a 1% total percent defective is allowed.

2.4 INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3^{\circ}\text{C}$.

Unless otherwise specified the test methods and test conditions shall be as per the corresponding test defined in Room Temperature Electrical Measurements.

Test Reference per ESCC No. 3009	Characteristics	Symbols	Limits		Units
			Min	Max	
Mounting Final Measurements	Capacitance Tangent of Loss Angle Insulation Resistance	C_A $\text{tg}\delta$ R_I	Record Values - 250×10^{-4} Note 1		-
Rapid Change of Temperature Initial Measurements	Capacitance	C_A	Notes 1, 2		
Final Measurements	Capacitance Change in Capacitance Tangent of Loss Angle	C_A $\Delta C_A/C_A$ $\text{tg}\delta$	-10 -	+10 500×10^{-4}	% -
Damp Heat Steady State Initial Measurements	Capacitance	C_A	Note 1		
Final Measurements	Capacitance Change in Capacitance Tangent of Loss Angle Insulation Resistance: For $C_n \leq 10000\text{pF}$ For $C_n > 10000\text{pF}$	C_A $\Delta C_A/C_A$ $\text{tg}\delta$ R_I R_I	-10 -	+10 500×10^{-4} - - -	% - - $\text{G}\Omega$ $\text{G}\Omega.\text{nF}$

Test Reference per ESCC No. 3009	Characteristics	Symbols	Limits		Units
			Min	Max	
Operating Life					
Initial Measurements	Capacitance	C_A	Notes 1, 2		
Intermediate Measurements (1000 hours) (Note 3)	Capacitance	C_A	Note 1		
	Change in Capacitance	$\Delta C_A/C_A$	-15	+15	%
	Insulation Resistance: For $C_n \leq 10000\text{pF}$	R_I	10	-	$G\Omega$
	For $C_n > 10000\text{pF}$	R_I	100	-	$G\Omega.nF$
Final Measurements (1000 or 2000 hours) (Note 4)	Capacitance	C_A	Note 1		
	Change in Capacitance	$\Delta C_A/C_A$	-15	+15	%
	Tangent of Loss Angle	$tg\delta$	-	500×10^{-4}	-
	Insulation Resistance: For $C_n \leq 10000\text{pF}$	R_I	10	-	$G\Omega$
	For $C_n > 10000\text{pF}$	R_I	100	-	$G\Omega.nF$
	Voltage Proof	VP	Note 1		
Capacitance-Temperature Characteristics	Temperature Characteristic	TC	Note 5		
Robustness of Terminations					
Final Measurements	Capacitance	C_A	Note 1		

NOTES:

- As specified in Room Temperature Electrical Measurements.
- Capacitance values recorded during Mounting may be used as initial measurements.
- Intermediate measurements are optional at the Manufacturer's discretion.
- 1000 hours is applicable to Periodic Testing for extension of qualification. 2000 hours is applicable to Qualification Testing, and to Periodic Testing for renewal of qualification after lapse.
- As specified in High and Low Temperatures Electrical Measurements.

2.5 BURN-IN

The requirements for Burn-in are specified in the ESCC Generic Specification. The following conditions shall also apply:

After Burn-in, the components shall be removed from the chamber and allowed to cool under normal atmospheric conditions for recovery for 24 hours minimum.

APPENDIX A
AGREED DEVIATIONS FOR AVX LTD (GB)

Items Affected	Description of Deviations
Deviations from Generic Specification: Special In-Process Controls (Chart F2)	Microsection Inspection: may be performed using AVX inspection document as per PID.