



**TRANSISTORS, MICROWAVE, SILICON, BIPOLAR,
SMALL SIGNAL**

BASED ON TYPES BFY640B AND BFY650B

ESCC Detail Specification No. 5611/010

Issue 3	November 2016
---------	---------------



LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2016. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
1022	Specification upissued to incorporate changes per DCR.

TABLE OF CONTENTS

1	GENERAL	5
1.1	SCOPE	5
1.2	APPLICABLE DOCUMENTS	5
1.3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	5
1.4	THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS	5
1.4.1	The ESCC Component Number	5
1.4.2	Component Type Variants	5
1.5	MAXIMUM RATINGS	6
1.6	HANDLING PRECAUTIONS	6
1.7	PHYSICAL DIMENSIONS AND TERMINAL IDENTIFICATION	7
1.8	FUNCTIONAL DIAGRAM	8
1.9	MATERIALS AND FINISHES	8
2	REQUIREMENTS	8
2.1	GENERAL	8
2.1.1	Deviations from the Generic Specification	8
2.1.1.1	Deviations from Qualification and Periodic Tests for Packaged Components (Chart F4A)	8
2.2	MARKING	9
2.3	DIE SHEAR	9
2.4	TERMINAL STRENGTH	9
2.5	ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES	9
2.5.1	Room Temperature Electrical Measurements	9
2.5.2	High and Low Temperatures Electrical Measurements	11
2.6	PARAMETER DRIFT VALUES	12
2.7	INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS	13
2.8	BURN-IN 1 CONDITIONS	13
2.9	BURN-IN 2 CONDITIONS	14
2.10	OPERATING LIFE CONDITIONS	14
	APPENDIX A	15

1 GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics and test and inspection data for the component type variants and/or the range of components specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

1.2 APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. [5010](#)
- (b) [MIL-STD-750](#), Test Methods and Procedures for Semiconductor Devices

1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. [21300](#) shall apply.

1.4 THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS

1.4.1 The ESCC Component Number

The ESCC Component Number shall be constituted as follows:

Example: 561101001

- Detail Specification Reference: 5611010
- Component Type Variant Number: 01 (as required)

1.4.2 Component Type Variants

The component type variants applicable to this specification are as follows:

Variant Number	Based on Type	Case	Lead Material and Finish	Weight max g
01	BFY640B-01	Micro-X	G2	0.03
02	BFY640B-03	Micro-X	G2	0.03
03	BFY640B-04	Micro-X	G2	0.03
04	BFY650B-11	Micro-X	G2	0.03

The lead material and finish shall be in accordance with the requirements of ESCC Basic Specification No. [23500](#).

1.5 MAXIMUM RATINGS

The maximum ratings shall not be exceeded at any time during use or storage.

Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the ESCC Generic Specification.

Characteristics	Symbols	Maximum Ratings	Units	Remarks
Collector-Emitter Voltage	V_{CEO}	4 3.5	V	$T_{amb} > 0^{\circ}C$ $T_{amb} \leq 0^{\circ}C$
Collector-Emitter Voltage	V_{CES}	13	V	
Collector-Base Voltage	V_{CBO}	13	V	
Emitter-Base Voltage	V_{EBO}	1.2	V	
Collector Current Variants 01, 02, 03 Variant 04	I_c	50 150	mA	
Base Current Variants 01, 02, 03 Variant 04	I_B	3 10	mA	Note 1
Power Dissipation Variants 01, 02, 03 Variant 04	P_{tot}	200 600	mW	$T_s \leq +110^{\circ}C$ $T_s \leq +76^{\circ}C$ Note 2
Operating Temperature Range	T_{op}	-65 to +175	$^{\circ}C$	T_s
Storage Temperature Range	T_{stg}	-65 to +175	$^{\circ}C$	
Junction Temperature	T_j	+175	$^{\circ}C$	
Thermal Resistance, Junction-to-Soldering Point Variants 01, 02, 03 Variant 04	$R_{th(j-s)}$	325 165	$^{\circ}C/W$	
Soldering Temperature	T_{sol}	+250	$^{\circ}C$	Note 3

NOTES:


- Maximum ratings must not be exceeded under any combination of DC ratings and RF voltage/current swings except as specified in Room Temperature Electrical Measurements herein.
- T_s is measured on the collector lead at the soldering point to the PCB. For T_s greater than specified, P_{tot} derates linearly to 0W at $T_s = +175^{\circ}C$.
- Duration 5 seconds maximum at a distance of not less than 0.5mm from the device body and the same lead shall not be resoldered until 3 minutes have elapsed.

1.6 HANDLING PRECAUTIONS

These devices are susceptible to damage by electrostatic discharge. Therefore suitable precautions shall be employed for protection during all phases of manufacture test, packaging, shipping and handling.

These components are categorised as Class 1 per ESCC Basic Specification No. [23800](#) with a Minimum Critical Path Failure Voltage of 100V.

1.7 PHYSICAL DIMENSIONS AND TERMINAL IDENTIFICATION
Micro-X Package

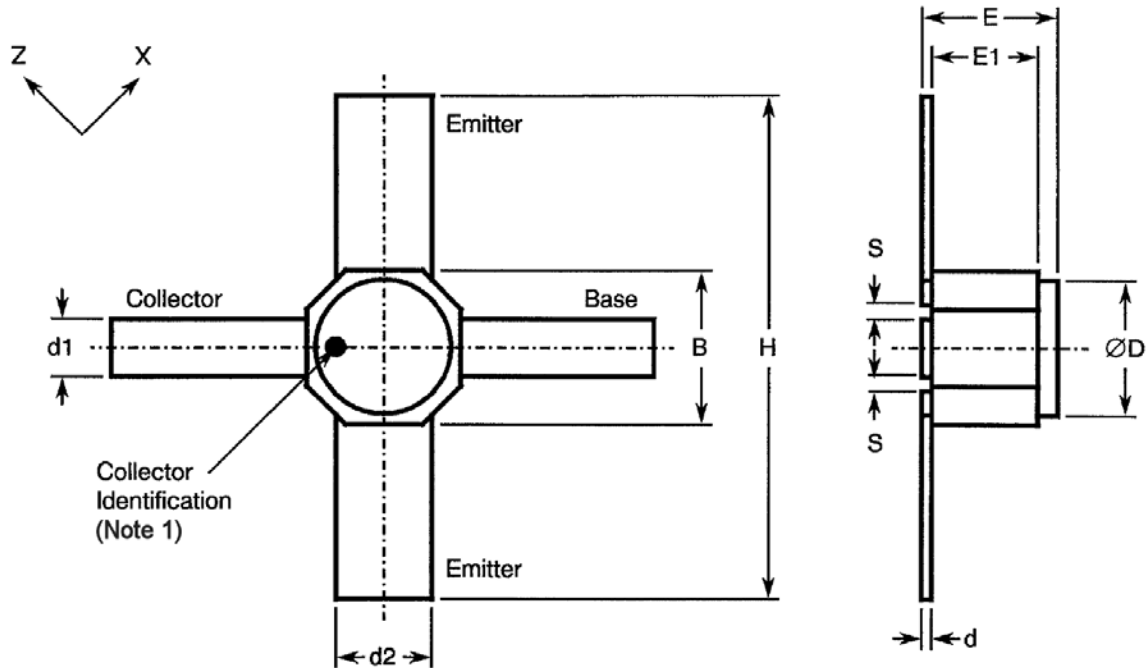


Symbols	Dimensions mm		Notes
	Min	Max	
B	1.68	1.88	2
d	0.07	0.15	3
d1	0.4	0.6	2
d2	0.92	1.12	2
ØD	1.55	1.85	
E	0.85	1.25	3
E1	0.66	0.86	3
H	4	4.4	2
S	0.08	0.3	4

NOTES:

1. The Collector terminal is identified by means of a black dot marked on the lid, with the three other terminals identifiable by the component's geometry.
2. Applies in two places.
3. Applies to all leads.
4. Applies in four places.

1.8 FUNCTIONAL DIAGRAM

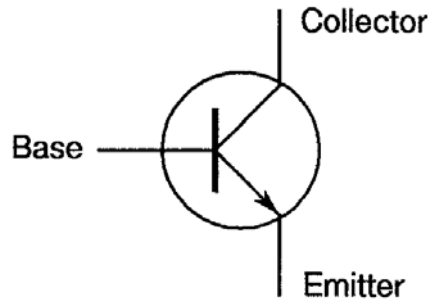

NOTES:

1. The lid is connected to the Emitter terminal.

1.9 MATERIALS AND FINISHES

Materials and finishes shall be as follows:

- (a) Case
The case shall be hermetically sealed and have a ceramic body with a metal lid.
- (b) Leads
As specified in Component Type Variants.

2 REQUIREMENTS

2.1 GENERAL

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component's reliability, are listed in the appendices attached to this specification.

2.1.1 Deviations from the Generic Specification

2.1.1.1 *Deviations from Qualification and Periodic Tests for Packaged Components (Chart F4A)*

- (a) Mechanical Shock: Not applicable.
- (b) Vibration: Not applicable.
- (c) Constant Acceleration: Not applicable.

2.2 MARKING

The marking shall be in accordance with the requirements of ESCC Basic Specification No. 21700. The information to be marked and the order of precedence shall be as follows:

- (a) Terminal identification.
- (b) The ESCC qualified components symbol (for ESCC qualified components only).
- (c) The ESCC Component Number.
- (d) Traceability information.

2.3 DIE SHEAR

In those cases where package clearances are such that a die shear test is not practicable, the die shall be pushed away with a suitable tool. The force required to remove the die need not be recorded. The die attachment area shall be inspected and the component shall be considered acceptable if more than 50% of the semiconductor material remains.

2.4 TERMINAL STRENGTH

The test conditions for terminal strength, tested as specified in the ESCC Generic Specification, shall be as follows:

- Test Condition A, tension, with a force of 2.23N and a duration of 5s.

2.5 ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES

2.5.1 Room Temperature Electrical Measurements

The measurements shall be performed at $T_{amb} = +25 \pm 3^{\circ}C$.

Characteristics	Symbols	MIL-STD-750 Test Method	Test Conditions	Limits		Units
				Min	Max	
Collector-Emitter Cut-off Current 1	I_{CES1}	3041	Bias Condition C $V_{CE} = 13V$	-	10	μA
Collector-Emitter Cut-off Current 2	I_{CES2}	3041	Bias Condition C $V_{CE} = 10.5V$	-	5	μA
Collector-Emitter Cut-off Current 3	I_{CES3}	3041	Bias Condition C $V_{CE} = 5V$	-	2	μA
Collector-Emitter Cut-off Current 4	I_{CEX}	3041	$V_{CE} = 4V, I_B = 100nA$	20	100	μA
Emitter-Base Cut-off Current 1	I_{EBO1}	3061	Bias Condition D $V_{EB} = 1.2V$ Variants 01, 02, 03 Variant 04	-	5	μA
				-	15	
Emitter-Base Cut-off Current 2	I_{EBO2}	3061	Bias Condition D $V_{EB} = 500mV$	-	100	nA
Forward-Current Transfer Ratio 1	h_{FE1}	3076	$V_{CE} = 3V$ Variants 01, 02, 03: $I_C = 30mA$ Variant 04: $I_C = 80mA$	135	250	-
				100	250	
Forward-Current Transfer Ratio 2	h_{FE2}	3076	$V_{CE} = 3V, I_C = 20\mu A$ Variants 01, 02, 03 Variant 04	190	600	-
				190	530	

Characteristics	Symbols	MIL-STD-750 Test Method	Test Conditions	Limits		Units
				Min	Max	
Base-Emitter Forward Voltage	V_{FBE}	4011	$I_B = 12mA, I_C = 0A$ Note 1	-	960	mV
Collector-Emitter Capacitance	C_{CE}	3236	$V_{CE} = 2V, I_B = 0A, f = 1MHz$ Common Base Configuration Variants 01, 02, 03 Variant 04	- -	0.6 0.8	pF
Collector-Base Capacitance	C_{CB}	3236	$V_{CB} = 2V, I_E = 0A, f = 1MHz$ Common Emitter Configuration Variants 01, 02, 03 Variant 04	- -	0.12 0.36	pF
Emitter-Base Capacitance	C_{EB}	3236	$V_{EB} = 500mV, I_C = 0A, f = 1MHz$ Common Collector Configuration Variants 01, 02, 03 Variant 04	- -	0.8 1.8	pF
Insertion Power Gain at 1.8GHz	$ S_{21} ^2_{1.8}$	-	$f = 1.8GHz, V_{CE} = 3V$ Variants 01, 02, 03: $I_C = 30mA$ Variant 04: $I_C = 80mA$ Notes 2, 3	20.5 14.5	- -	dB
Insertion Power Gain at 6GHz	$ S_{21} ^2_6$	-	$f = 6GHz, V_{CE} = 3V$ Variants 01, 02, 03: $I_C = 30mA$ Variant 04: $I_C = 80mA$ Notes 2, 3	10.5 5.5	- -	dB
Maximum Available / Stable Gain at 1.8GHz	MAG / $MSG_{1.8}$	-	$f = 1.8GHz, V_{CE} = 3V$ Variants 01, 02, 03: $I_C = 30mA$ Variant 04: $I_C = 80mA$ Notes 2, 3, 4	23 18	- -	dB
Maximum Available / Stable Gain at 6GHz	MAG / MSG_6	-	$f = 6GHz, V_{CE} = 3V$ Variants 01, 02, 03: $I_C = 30mA$ Variant 04: $I_C = 80mA$ Notes 2, 3, 4	12 8	- -	dB
Noise Figure at 1.8GHz	$NF_{1.8}$	-	$f = 1.8GHz, V_{CE} = 3V, I_C = 5mA$ Variant 01 Variant 02 Variant 03 Variant 04 Notes 3, 5, 6	- - - N/A	1 1 0.8 N/A	dB
Noise Figure at 6GHz	NF_6	-	$f = 6GHz, V_{CE} = 3V, I_C = 5mA$ Variants 01, 04 Variant 02 Variant 03 Notes 3, 5, 6	N/A - -	N/A 1.6 1.4	dB
Output Power	P_{out}	-	$f = 1.8GHz, V_{CE} = 3V, I_C = 80mA$ $P_{in} = 0dBm$ Variants 01, 02, 03 Variant 04 Notes 2, 7	N/A 16	N/A -	dBm

NOTES:

1. Pulsed measurement, pulse duration < 1s, single pulse. I_B may exceed that specified in Maximum Ratings.
2. Measured in a 50Ω system using a suitable network analyser.
3. Small signal measurement.
4. MAG if $K \geq 1$; MSG if $K < 1$.
5. Input tuned for NF_{min} .
6. Measurements shall be performed on a sample of 15 components with the maximum allowed limit reduced by 0.07dB. In the event of any failure a 100% inspection shall be performed and the specified limit shall apply.
7. Measurements shall be performed on a sample of 15 components with the minimum allowed limit increased by 0.5dBm. In the event of any failure a 100% inspection shall be performed and the specified limit shall apply.

2.5.2 High and Low Temperatures Electrical Measurements

Characteristics	Symbols	MIL-STD-750 Test Method	Test Conditions	Limits		Units
				Min	Max	
Collector-Emitter Cut-off Current 2	I_{CES2}	3041	$T_{amb} = +150 (+0 -5)^{\circ}C$ Bias Condition C $V_{CE} = 10.5V$, Note 1	-	5	μA
Collector-Emitter Cut-off Current 3	I_{CES3}	3041	$T_{amb} = +150 (+0 -5)^{\circ}C$ Bias Condition C $V_{CE} = 5V$, Note 1	-	1	μA
Emitter-Base Cut-off Current 1	I_{EBO1}	3061	$T_{amb} = +150 (+0 -5)^{\circ}C$ Bias Condition D $V_{EB} = 1.2V$, Note 1 Variants 01, 02, 03 Variant 04	-	50 150	μA
			$T_{amb} = -55 (+5 -0)^{\circ}C$ Bias Condition D $V_{EB} = 1.2V$, Note 2 Variants 01, 02, 03 Variant 04	-	5 15	μA
Emitter-Base Cut-off Current 2	I_{EBO2}	3061	$T_{amb} = +150 (+0 -5)^{\circ}C$ Bias Condition D $V_{EB} = 500mV$, Note 1	-	1	μA
Forward-Current Transfer Ratio 1	h_{FE1}	3076	$T_{amb} = +150 (+0 -5)^{\circ}C$ $V_{CE} = 3V$, Note 1 Variants 01, 02, 03: $I_C = 30mA$ Variant 04: $I_C = 80mA$	85 75	200 200	-
			$T_{amb} = -55 (+5 -0)^{\circ}C$ $V_{CE} = 3V$, $I_C = 30mA$, Note 2 Variants 01, 02, 03: $I_C = 30mA$ Variant 04: $I_C = 80mA$	150 80	500 400	-

NOTES:

1. Measurements shall be performed on a sample of 5 components. In the event of any failure a 100% inspection shall be performed.
2. Measurements shall be performed on a sample of 5 assembled components per wafer. In the event of any failure a 100% inspection shall be performed.

2.6 PARAMETER DRIFT VALUES

Unless otherwise specified, the measurements shall be performed at $T_{amb} = +25 \pm 3^{\circ}C$.

The test methods and test conditions shall be as per the corresponding test defined in Room Temperature Electrical Measurements.

The drift values (Δ) shall not be exceeded for each characteristic specified. The corresponding absolute limit values for each characteristic shall not be exceeded.

Characteristics	Symbols	Limits			Units
		Drift Value (1) Δ	Absolute		
			Min	Max	
Collector-Emitter Cut-off Current 2	I_{CES2}	± 20 or (2) $+100/-50\%$	-	5000	nA
Collector-Emitter Cut-off Current 3	I_{CES3}	± 5 or (2) $+100/-50\%$	-	2000	nA
Emitter-Base Cut-off Current 1 Variants 01, 02, 03 Variant 04	I_{EBO1}	± 0.5 or (2) $+100/-50\%$	- -	5 15	μA
Emitter-Base Cut-off Current 2	I_{EBO2}	± 20 or (2) $+100/-50\%$	-	100	nA
Forward-Current Transfer Ratio 1 Variants 01, 02, 03 Variant 04	h_{FE1}	$\pm 10\%$	135 100	250 250	-
Base-Emitter Forward Voltage	V_{FBE}	± 20 (3)	-	960	mV

NOTES:

1. $\Delta 1 = \Delta 2$ except for V_{FBE} .
2. Whichever is greater.
3. The total change over both Burn-in 1 and Burn-in 2 referred to the initial value made prior to Burn-in 1.

2.7 INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at $T_{amb} = +25 \pm 3^{\circ}C$.

The test methods and test conditions shall be as per the corresponding test defined in Room Temperature Electrical Measurements.

The limit values for each characteristic shall not be exceeded.

Characteristics	Symbols	Limits			Units
		Drift Value Δ	Absolute		
			Min	Max	
Collector-Emitter Cut-off Current 2	I_{CES2}	± 20 or (1) $+100/-50\%$	-	5000	nA
Collector-Emitter Cut-off Current 3	I_{CES3}	± 5 or (1) $+100/-50\%$	-	2000	nA
Emitter-Base Cut-off Current 1 Variants 01, 02, 03 Variant 04	I_{EBO1}	± 0.5 or (1) $+100/-50\%$	- -	5 15	μA
Emitter-Base Cut-off Current 2	I_{EBO2}	± 20 or (1) $+100/-50\%$	-	100	nA
Forward-Current Transfer Ratio 1 Variants 01, 02, 03 Variant 04	h_{FE1}	$\pm 10\%$	135 100	250 250	-
Base-Emitter Forward Voltage	V_{FBE}	± 20	-	960	mV

NOTES:

1. Whichever is greater.

2.8 BURN-IN 1 CONDITIONS

Characteristics	Symbols	Test Conditions (Note 1)	Units
Soldering Point Temperature	T_S	+150 (+0 -5)	$^{\circ}C$
Collector-Emitter Voltage	V_{CES}	10.5	V
Base-Emitter Voltage	V_{BE}	0	V

NOTES:

1. Maximum ratings shall not be exceeded during power up and power down sequences.

2.9 BURN-IN 2 CONDITIONS

Characteristics	Symbols	Test Conditions (Notes 1, 2)	Units
Soldering Point Temperature Variants 01, 02, 03 Variant 04	T_s	$\geq +110$ $\geq +76$	$^{\circ}\text{C}$
Junction Temperature	T_j	+175 (+0 -5)	$^{\circ}\text{C}$
Power Dissipation	P_{tot}	$\leq P_{\text{tot}}$ given in Maximum Ratings	mW
Collector-Emitter Voltage	V_{CE}	3.5	V

NOTES:

1. Maximum ratings shall not be exceeded during power up and power down sequences.
2. T_s and/or P_{tot} shall be adjusted to attain the specified T_j .

2.10 OPERATING LIFE CONDITIONS

The conditions shall be as specified for Burn-in 2.

APPENDIX A

AGREED DEVIATIONS FOR INFINEON TECHNOLOGIES AG (D)

Items Affected	Description of Deviations
Deviations from Generic Specification: Special In-Process Controls (Chart F2)	Internal Visual Inspection: Shall include verification of the length, height and shape of the wire bonding.
	Bond Strength: The following pre-seal bond strength shall apply: <ul style="list-style-type: none"> • 0.015N minimum
	Die Shear: If Para. 2.3 does not apply the following shear strength may be applied: <ul style="list-style-type: none"> • 0.4N minimum
	Dimension Check: May be performed during Chart F3 testing.
Deviations from Generic Specification: Screening Tests (Chart F3)	Temperature Cycling: Shall be replaced by a Thermal Shock test in accordance with MIL-STD-202, Test Method 107, Test Condition B, 20 cycles.
	Radiographic Inspection: Shall not be performed.
Deviations from Generic Specification: Qualification and Periodic Tests (Chart F4)	Temperature Cycling: Shall be replaced by a Thermal Shock test in accordance with MIL-STD-202, Test Method 107, Test Condition B, 100 cycles.
	Assembly Capability Subgroup tests: In addition to the permitted use of empty packages or electrical rejects as test samples, components rejected during the following Screening Tests: <ul style="list-style-type: none"> • Radiographic Inspection • Seal • External Visual Inspection may be used on the condition that the cause for rejection has no possible impact on the tests, and they have been subjected to the same screening as the packages of the assembly lot with which they are associated.
	Bond Strength: The following post-seal bond strength shall apply: <ul style="list-style-type: none"> • 0.012N minimum
	Die Shear: If Para. 2.3 does not apply the following shear strength may be applied: <ul style="list-style-type: none"> • 0.4N minimum
Deviations from Generic Specification: Final Customer Source Inspection	Final Customer Source Inspection shall be limited to witnessing of the DC and 1MHz parameters specified in Room Temperature Electrical Measurements.
Deviations from Generic Specification: Data Documentation	Additional Documentation and Wafer Lot Acceptance Data: If Wafer Lot Acceptance Data is stipulated in the Purchase Order, such data will not be delivered but will be available for review at Infineon Technologies AG.