



**CAPACITORS, LEADLESS SURFACE MOUNTED,
TANTALUM, SOLID ELECTROLYTE,
LOW EQUIVALENT SERIES RESISTANCE**

BASED ON TYPE TES

ESCC Detail Specification No. 3012/004

Issue 4	November 2016
---------	---------------



LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2016. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
1014	Specification upissued to incorporate technical changes per DCR.

TABLE OF CONTENTS

1	GENERAL	6
1.1	SCOPE	6
1.2	COMPONENT TYPE VARIANTS AND RANGE OF COMPONENTS	6
1.3	MAXIMUM RATINGS	6
1.4	PARAMETER DERATING INFORMATION	6
1.5	PHYSICAL DIMENSIONS	6
1.6	FUNCTIONAL DIAGRAM	6
2	APPLICABLE DOCUMENTS	6
3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	6
4	REQUIREMENTS	11
4.1	GENERAL	11
4.2	DEVIATIONS FROM GENERIC SPECIFICATION	11
4.2.1	Deviations from Special In-Process Controls	11
4.2.2	Deviations from Final Production Tests (Chart II)	11
4.2.3	Deviations from Burn-in and Electrical Measurements (Chart III)	11
4.2.4	Deviations from Qualification Tests (Chart IV)	11
4.2.5	Deviations from Lot Acceptance Tests (Chart V)	11
4.3	MECHANICAL REQUIREMENTS	11
4.3.1	Dimension Check	11
4.3.2	Weight	11
4.4	MATERIALS AND FINISHES	11
4.4.1	Terminal Material and Finish	12
4.5	MARKING	12
4.5.1	General	12
4.5.2	The ESCC Component Number	12
4.5.3	Electrical Characteristics and Ratings	12
4.5.3.1	Polarity	12
4.5.3.2	Capacitance Value	13
4.5.3.3	Tolerance	13
4.5.3.4	Rated Voltage	13
4.5.3.5	Equivalent Series Resistance	13
4.5.4	Traceability Information	13
4.6	ELECTRICAL MEASUREMENTS	13
4.6.1	Electrical Measurements at Room Temperature	13
4.6.2	Electrical Measurements at High and Low Temperatures	14
4.6.3	Circuits for Electrical Measurements (Figure 4)	14
4.7	BURN-IN TESTS	14

4.7.1	Parameter Drift Values	14
4.7.2	Conditions for Burn-in	14
4.7.3	Electrical Circuit for Burn-in (Figure 5)	14
4.8	ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESCC GENERIC SPECIFICATION NO. 3012)	16
4.8.1	Measurements and Inspections on Completion of Environmental Tests	16
4.8.2	Measurements and Inspections at Intermediate Points During Endurance Tests	16
4.8.3	Measurements and Inspections on Completion of Endurance Tests	16
4.8.4	Conditions for Operating Life (Part of Endurance Testing)	16
4.8.5	Electrical Circuit for Operating Life Tests (Figure 5)	16
APPENDIX 'A'		20

1 GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics, test and inspection data for Capacitors, Leadless Surface Mounted, Tantalum, Solid Electrolyte, Low Equivalent Series Resistance, based on Type TES.

It shall be read in conjunction with ESCC Generic Specification No.3012, the requirements of which are supplemented herein.

1.2 COMPONENT TYPE VARIANTS AND RANGE OF COMPONENTS

The variants and the range of components covered by this specification are given in Table 1(a).

1.3 MAXIMUM RATINGS

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the components specified herein, are as scheduled in Table 1(b).

1.4 PARAMETER DERATING INFORMATION

The parameter derating information applicable to the capacitors specified herein is shown in Figure 1.

1.5 PHYSICAL DIMENSIONS

The physical dimensions of the capacitors specified herein are shown in Figure 2.

1.6 FUNCTIONAL DIAGRAM

The functional diagram for the capacitors specified herein is shown in Figure 3.

2 APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. 3012 for Capacitors, Leadless Surface Mounted, Tantalum, Solid Electrolyte, Enclosed Anode Connection

3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic specification No. 21300 shall apply.

TABLE 1(a) - TYPE VARIANTS AND RANGE OF COMPONENTS

Variant Number	Case Code (Style) (Note 1)	Capacitance Range C_n (μ F) (Notes 2, 3)	Rated Voltage U_R (V) (Note 2)	Maximum Equivalent Series Resistance ESR ($m\Omega$) (Note 2)	Terminal Material and Finish	Weight Max (g)
01	A (1206)	1 to 22	6.3 to 25	900 to 3000	G16	0.1
02	B (1210)	1 to 47	6.3 to 50	500 to 2000	G16	0.2
03	C (2312)	3.3 to 150	6.3 to 50	300 to 1000	P17	0.3
04	D (2917)	4.7 to 330	6.3 to 50	35 to 200	P17	0.5
05	E (2917)	33 to 470	6.3 to 35	30 to 65	P17	0.7

NOTES:

- See Figure 2.
- The following rated Capacitance (C_n), maximum Rated Voltage (U_R) and maximum Equivalent Series Resistance values (ESR) are available related to the Case Code (letters indicate Case Code; numbers indicate maximum ESR in $m\Omega$):

Capacitance C_n (μ F)	Rated Voltage U_R							
	6.3V	10V	12V	16V	20V	25V	35V	50V
1						A 3000		B 2000
3.3					A 2500		B 1000	C 1000
4.7				A 2000		B 1000	C 600	D 200
10		A 1800			B 1000	C 600	D 120	
22	A 900			B 600	C 400		D 100	
33		B 650			C 300	D 65	E 65	
47	B 500			C 350	D 55	E 65		
100		C 200		D 55	E 45			
150	C 300	D 45		E 40				
220		D 35	E 35					
330	D 35	E 35						
470	E 30							

- The following Capacitance Tolerances are available:
 - $\pm 10\%$ (K)
 - $\pm 20\%$ (M)

TABLE 1(b) - MAXIMUM RATINGS

No.	Characteristics	Symbols	Maximum Ratings		Units	Remarks
1	Rated Voltage	U_R	See Table 1(a)		V	Note 1
2	Surge Voltage	U_S	-	$1.3 \times U_R$	V	$T_{amb} \leq +85^\circ\text{C}$
3	Category Voltage	U_C	-	$0.66 \times U_R$	V	
4	Ripple Current	I_{ripple}	-	See Note 2	mA	f = 100kHz, Note 3
5	Operating Temperature Range	T_{op}	-55 to +125		$^\circ\text{C}$	T_{amb}
6	Rated Temperature	T_R	-	+85	$^\circ\text{C}$	
7	Upper Category Temperature	T_C	-	+125	$^\circ\text{C}$	
8	Storage Temperature Range	T_{stg}	-55 to +125		$^\circ\text{C}$	
9	Soldering Temperature	T_{sol}	-	+260	$^\circ\text{C}$	Note 2

NOTES:

- At $T_{amb} \leq +85^\circ\text{C}$. For derating at $T_{amb} > +85^\circ\text{C}$, see Figure 1(a).
- Maximum I_{ripple} , which depends on C_n and U_R , shall be a follows:

Capacitance C_n (μF)	Rated Voltage U_R (V)	Maximum Ripple Current I_{ripple} (mA)	Capacitance C_n (μF)	Rated Voltage U_R (V)	Maximum Ripple Current I_{ripple} (mA)
22	6.3	290	10	20	290
47	6.3	410	22	20	520
150	6.3	610	33	20	610
330	6.3	2700	47	20	2200
470	6.3	3000	100	20	2500
10	10	200	1	25	160
33	10	360	4.7	25	290
100	10	740	10	25	430
150	10	2400	33	25	2000
220	10	2700	47	25	2000
330	50	2800	3.3	35	290
220	12	2800	4.7	35	430
4.7	16	190	10	35	1500
22	16	380	22	35	1600
47	16	560	33	35	2000
100	16	2200	1	50	200
150	16	2600	3.3	50	330
3.3	20	170	4.7	50	1100

- At $T_{amb} \leq +25^\circ\text{C}$. For derating at $T_{amb} > +25^\circ\text{C}$, see Figure 1(b).
- Duration 5 seconds maximum for wave soldering and 10 seconds maximum for reflow soldering.

FIGURE 1 - PARAMETER DERATING INFORMATION

FIGURE 1(a) - RATED VOLTAGE VERSUS AMBIENT TEMPERATURE

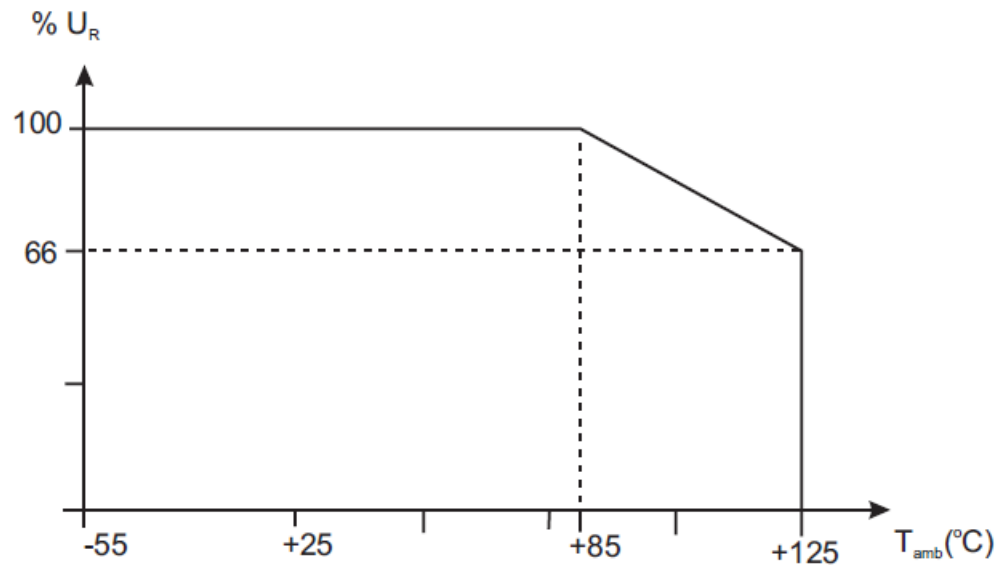


FIGURE 1(b) - MAXIMUM RIPPLE CURRENT VERSUS AMBIENT TEMPERATURE



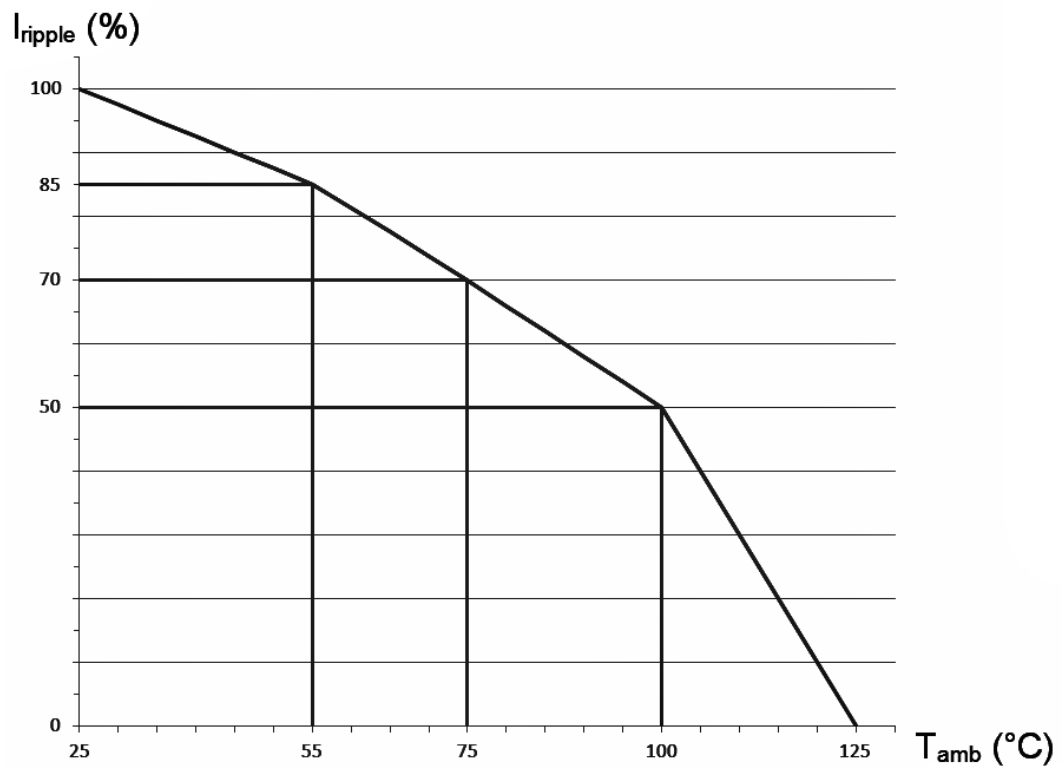


FIGURE 2 - PHYSICAL DIMENSIONS

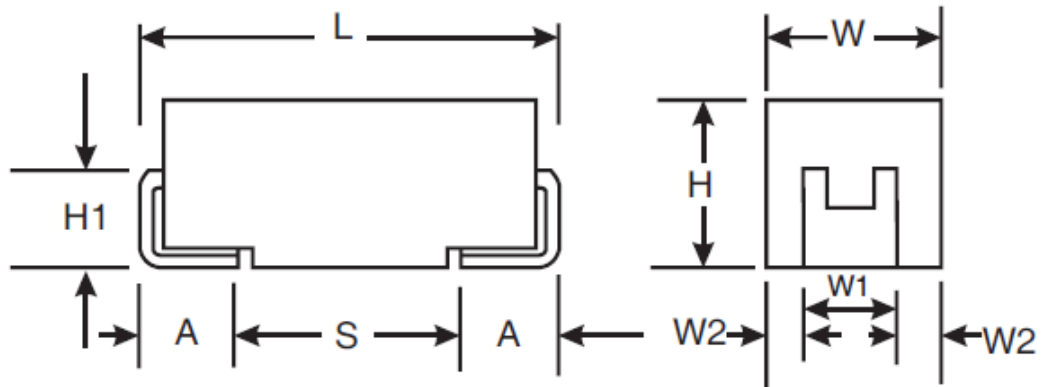

Variant Number	Case Code	Dimensions (mm)													
		L		W		H	W1		A		S	H1	W2		
		Min	Max	Min	Max	Max	Min	Max	Min	Max	Min	Min	Min	Max	
01	A	3	3.4	1.5	1.8	1.8	1	1.4	0.6	1.1	1.1	0.7	0.05	0.4	
02	B	3.3	3.7	2.7	3	2.1	2	2.4	0.6	1.1	1.4	0.7	0.15	0.5	
03	C	5.8	6.2	3.1	3.4	2.8	2	2.4	1.1	1.6	2.9	0.7	0.35	0.7	
04	D	7.1	7.5	4.2	4.5	3.1	2.2	2.6	1.1	1.6	4.4	0.7	0.8	1.15	
05	E	7.1	7.5	4.2	4.5	4.3	2.2	2.6	1.1	1.6	4.4	0.7	0.8	1.15	

FIGURE 3 - FUNCTIONAL DIAGRAM



Terminal 1: Anode

Terminal 2: Cathode

4 REQUIREMENTS

4.1 GENERAL

The complete requirements for procurement of the components specified herein are stated in this specification and ESCC Generic Specification No. 3012. Deviations from the Generic Specification, applicable to this specification only, are detailed in Para. 4.2.

Deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION

4.2.1 Deviations from Special In-Process Controls

None.

4.2.2 Deviations from Final Production Tests (Chart II)

None.

4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)

None

4.2.4 Deviations from Qualification Tests (Chart IV)

- (a) Para. 9.9, Mounting: Capacitance and Capacitance Change shall be measured in accordance with Table 6 herein. Capacitance Change shall be related to the initial measurement.
- (b) Para. 9.19, Solderability: The solderable area is the termination pad and up to 1/3 the height of the tab.

4.2.5 Deviations from Lot Acceptance Tests (Chart V)

- (a) Para. 9.9, Mounting: Capacitance and Capacitance Change shall be measured in accordance with Table 6 herein. Capacitance Change shall be related to the initial measurement.
- (b) Para. 9.19, Solderability: The solderable area is the termination pad and up to 1/3 the height of the tab.

4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the components specified herein shall be verified in accordance with the requirements set out in Para. 9.6 of ESCC Generic Specification No. 3012 and they shall conform to those shown in Figure 2 of this specification.

4.3.2 Weight

The maximum weight of the components specified herein shall be as given in Table 1(a).

4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the capacitors specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

4.4.1 Terminal Material and Finish

The terminal material and finish shall be as specified in Table 1(a) in accordance with the requirements of ESCC Basic Specification No. 23500.

4.5 MARKING

4.5.1 General

The marking of all components delivered to this specification shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and the following paragraphs. When the component is too small to accommodate all of the marking specified, as much as space permits shall be marked and the marking information, in full, shall accompany each component in its primary package.

The information to be marked and the order of precedence, shall be as follows:

- (a) The ESCC Component Number.
- (b) Electrical Characteristics and Ratings.
- (c) Traceability Information.

4.5.2 The ESCC Component Number

The ESCC Component Number shall be constituted and marked as follows:

301200401B

- Detail Specification Number: 3012004
- Type Variant (see Table 1(a)): 01
- Testing Level (B or C, as applicable): B

4.5.3 Electrical Characteristics and Ratings

The electrical characteristics and ratings to be marked in the following order of precedence are:

- (a) Polarity.
- (b) Capacitance Value.
- (c) Tolerance.
- (d) Rated Voltage.
- (e) Equivalent Series Resistance.

The information shall be constituted and marked as follows:

Example: 106KE0600

- Capacitance Value (10 μ F): 106
- Tolerance (\pm 10%): K
- Rated Voltage (25V): E
- Equivalent Series Resistance (600m Ω): 0600

4.5.3.1 *Polarity*

The anode terminal shall be indicated by a polarity stripe marked on the top surface of the component.

4.5.3.2 *Capacitance Value*

The capacitance value shall be indicated by the following codes. The unit quantity for marking shall be picofarad.

Capacitance C _n (pF)	Code
XX10 ⁵	XX5
XX10 ⁶	XX6
XX10 ⁷	XX7

4.5.3.3 *Tolerance*

The tolerance on capacitance value shall be indicated by the following code letters.

Tolerance (%)	Code Letter
±10	K
±20	M

4.5.3.4 *Rated Voltage*

The rated voltage shall be indicated by the following code letters.

Rated Voltage U _R (V)	Code Letter
6.3	J
10	A
12	B
16	C
20	D
25	E
35	V
50	T

4.5.3.5 *Equivalent Series Resistance*

The Equivalent Series Resistance maximum value shall be indicated by the following codes. The unit quantity for marking shall be milliohm.

Equivalent Series Resistance ESR (mΩ)	Code
XX	00XX
XXX	0XXX
XXXX	XXXX

4.5.4 Traceability Information

Traceability information shall be marked in accordance with the requirements of ESCC Basic Specification No. 21700.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured at room temperature are scheduled in Table 2. Unless otherwise specified the measurements shall be performed at T_{amb} = +22 ±3°C.

4.6.2 Electrical Measurements at High and Low Temperatures

The parameters to be measured at high and low temperatures are scheduled in Table 3.

4.6.3 Circuits for Electrical Measurements (Figure 4)

Not applicable.

4.7 BURN-IN TESTS

4.7.1 Parameter Drift Values

The parameter drift values applicable to Burn-in are as specified in Table 4 of this specification. Unless otherwise stated, measurements shall be performed at $T_{amb} = +22 \pm 3^{\circ}\text{C}$. The parameter drift values (Δ) applicable to the parameters scheduled shall not be exceeded. In addition to these drift value requirements for a given parameter, the appropriate limit values specified in Table 2 shall not be exceeded.

4.7.2 Conditions for Burn-in

The requirements for Burn-in are specified in Section 7 of ESCC Generic Specification No. 3012. The conditions for Burn-in shall be as specified in Table 5 of this specification.

4.7.3 Electrical Circuit for Burn-in (Figure 5)

Not applicable

TABLE 2 – ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE

No.	Characteristics	Symbols	ESCC 3012 Test Method	Rated Voltage	Tolerance	Limits		Unit
						Min	Max	
1	Capacitance	C	Para. 9.4.1.1	All	$\pm 10\%$ $\pm 20\%$	$0.9C_n$ $0.8C_n$	$1.1C_n$ $1.2C_n$	μF
2	DC Leakage Current	I_L	Para. 9.4.1.2	All	All	-	$0.01C_n \times U_R$ or (Note 1) 1	μA
3	Dissipation Factor	DF	Para. 9.4.1.3	$U_R < 10\text{V}$ $U_R \geq 10\text{V}$	All	-	10 6	%
4	Equivalent Series Resistance	ESR	Para. 9.4.1.4	All	All	-	Note 2	$\text{m}\Omega$

NOTES:

1. Whichever is greater.
2. See Table 1(a) Note 2.

TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES

No.	Characteristics	Symbols	ESCC 3012 Test Method	Test Conditions (Note 1)	Limits		Unit
					Min	Max	
1	Capacitance Change	$\Delta C/C$	Para. 9.4.1.1	$T_{amb} = -55 (+3 -0) ^\circ C$ $T_{amb} = +85 \pm 3^\circ C$ $T_{amb} = +125 (+0 -3) ^\circ C$	-10 0 0	0 +10 +12	% (Note 2)
2	DC Leakage Current	I_L	Para. 9.4.1.2	$T_{amb} = +85 \pm 3^\circ C$ $V = U_R \pm 2\%$ $T_{amb} = +125 (+0 -3) ^\circ C$ $V = U_C \pm 2\%$	- -	$0.1C_n \times U_R$ or (Note 3) 1 $0.125C_n \times U_R$ or (Note 3) 1	μA
3	Dissipation Factor	DF	Para. 9.4.1.3	$T_{amb} = -55 (+3 -0) ^\circ C$ $T_{amb} = +85 \pm 3^\circ C$ $T_{amb} = +125 (+0 -3) ^\circ C$	- - -	+50 +50 +100	% (Note 2)
4	Equivalent Series Resistance	ESR	Para. 9.4.1.4	$T_{amb} = -55 (+3 -0) ^\circ C$ $T_{amb} = +85 \pm 3^\circ C$ $T_{amb} = +125 (+0 -3) ^\circ C$	- - -	+150 +50 +50	% (Note 2)

NOTES:

1. Inspection level II single sampling, AQL 2.5% for each capacitance value. Each capacitance value shall be considered as constituting a complete lot.
2. Related to the value measured in Table 2.
3. Whichever is greater.

FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS

Not applicable.

TABLE 4 - PARAMETER DRIFT VALUES

No.	Characteristics	Symbol	Spec. and/or Test Method	Test Conditions	Change Limits (Δ)	Unit
1	Capacitance Change	$\Delta C/C$	As per Table 2	As per Table 2	± 5	%
2	DC Leakage Current Change	ΔI_L	As per Table 2	As per Table 2	2 x Initial Value (Note 1) or (Note 2) (0.25 x Table 2 Item 2) + 0.05	μA

NOTES:

1. Leakage currents $< 0.1\mu A$ shall be considered as a $0.1\mu A$ value.
2. Whichever is smaller.

TABLE 5(a) – CONDITIONS FOR BURN-IN

No.	Characteristics	Symbol	Condition	Unit
1	Ambient Temperature	T _{amb}	+85 (+0 -3)	°C
2	Test Voltage	V _T	U _R	V

TABLE 5(b) – CONDITIONS FOR OPERATING LIFE

No.	Characteristics	Symbol	Condition	Unit
1	Ambient Temperature 1	T _{amb1}	+85 (+0 -3)	°C
2	Test Voltage 1	V _{T1}	U _R	V
3	Ambient Temperature 2	T _{amb2}	+125 (+0 -3)	°C
4	Test Voltage 2	V _{T2}	U _C	V

4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESCC GENERIC SPECIFICATION No. 3012)

4.8.1 Measurements and Inspections on Completion of Environmental Tests

The parameters to be measured and inspections to be performed on completion of environmental tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at T_{amb} = +22 ±3°C.

4.8.2 Measurements and Inspections at Intermediate Points During Endurance Tests

The parameters to be measured and inspections to be performed at intermediate points during endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at T_{amb} = +22 ±3°C.

4.8.3 Measurements and Inspections on Completion of Endurance Tests

The parameters to be measured and inspections to be performed on completion of endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at T_{amb} = +22 ±3°C.

4.8.4 Conditions for Operating Life (Part of Endurance Testing)

The requirements for Operating Life testing are specified in Section 9 of ESCC Generic Specification No. 3012. The conditions for Operating Life testing shall be as specified in Table 5(b) of this specification.

4.8.5 Electrical Circuit for Operating Life Tests (Figure 5)

Not applicable.

TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING

No.	ESCC Generic Spec. No. 3012		Measurements and Inspections		Symbols	Limits		Units
	Environmental and Endurance Tests (Note 1)	Test Methods and Conditions	Identification	Conditions		Min	Max	
01	Mounting	Para. 9.9	Initial Measurements					
			Capacitance	Table 2	C	Table 2		μF
			Final Examination					
			Terminals	Good tinning	-	-	-	
			Final Measurements					
			Capacitance	Table 2 Item 1	C	Record Value		μF
			Capacitance Change	Table 2 Item 1	ΔC/C	-5	+5	%
			DC Leakage Current	Table 2 Item 2	I _L	-	Table 2	μA
02	Rapid Change of Temperature	Para. 9.3.2	Final Measurements					
			Recovery period of 4 hours min.					
			Visual Examination	No corrosion, no damage or obliteration of marking	-	-	-	
			Capacitance Change	Table 2 Item 1	ΔC/C	-5	+5	% (2)
			DC Leakage Current	Table 2 Item 2	I _L	-	Table 2	μA
			Dissipation Factor	Table 2 Item 3	DF	-	Table 2	%
			Equivalent Series Resistance	Table 2 Item 4	ESR	-	1.25 x Table 2	mΩ
03	External Visual Inspection	Para. 9.5	Final Inspection					
			External Visual Inspection	ESCC No. 20500	-	-	-	
04	Adhesion	Para. 9.10	Final Measurements					
			Visual Examination	No damage or loosing from the substrate	-	-	-	
			Capacitance Change	Table 2 Item 1	ΔC/C	-5	+5	% (2)
05	Vibration	Para. 9.11	Measurements during test	During Last Cycle				
			No intermittent Contact >0.5ms, arcing or open or shorts		-	-	-	
			Final Examination					
			Visual Examination	No damage	-	-	-	
06	Shock or Bump	Para. 9.12	Final Examination					
			Visual Examination	No damage	-	-	-	

No.	ESCC Generic Spec. No. 3012		Measurements and Inspections		Symbols	Limits		Units				
	Environmental and Endurance Tests (Note 1)	Test Methods and Conditions	Identification	Conditions		Min	Max					
07	Climatic Sequence	Para. 9.13	Intermediate Measurements	After Dry Heat								
			DC Leakage Current	Table 3 Item 2 (Note 3)					I _L	-	Table 3	μA
			Final Measurements	After recovery of 1 to 24 hours								
			External Visual Inspection	ESCC No. 20500					-	-	-	
			Capacitance Change	Table 2 Item 1					ΔC/C	-5	+5	% (2)
			DC Leakage Current	Table 2 Item 2					I _L	-	Table 2	μA
			Dissipation Factor	Table 2 Item 3					DF	-	1.25 x Table 2	%
		Equivalent Series Resistance	Table 2 Item 4	ESR	-	1.25 x Table 2	mΩ					
08	High and Low Temperature Stability	Para. 9.14	Measurements during test									
			Electrical Measurements	Tables 2 & 3			Tables 2 & 3					
09	Surge Voltage	Para. 9.15	Final Measurements									
			Capacitance	Table 2 Item 1	C		Table 2	μF				
			DC Leakage Current	Table 2 Item 2	I _L	-	Table 2	μA				
			Dissipation Factor	Table 2 Item 3	DF	-	Table 2	%				
			Equivalent Series Resistance	Table 2 Item 4	ESR	-	Table 2	mΩ				
10	Damp Heat Steady State	Para. 9.16	Final Measurements	After recovery of 1 to 2 hours								
			Visual Examination	No damage	-	-	-					
			Capacitance Change	Table 2 Item 1	ΔC/C	-10	+10	% (2)				
			DC Leakage Current	Table 2 Item 2	I _L	-	1.5 x Table 2	μA				
			Dissipation Factor	Table 2 Item 3	DF	-	1.2 x Table 2	%				
			Equivalent Series Resistance	Table 2 Item 4	ESR	-	1.25 x Table 2	mΩ				

No.	ESCC Generic Spec. No. 3012		Measurements and Inspections		Symbols	Limits		Units
	Environmental and Endurance Tests (Note 1)	Test Methods and Conditions	Identification	Conditions		Min	Max	
11	Operating Life	Para. 9.17	Intermediate Measurements DC Leakage Current Final Measurements Capacitance Change DC Leakage Current Dissipation Factor Equivalent Series Resistance Visual Examination	At 250 and 1000 hrs Table 3 Item 2 (Note 3) At 1000 and 2000 hrs and after recovery of 1 to 2 hours Table 2 Item 1 Table 2 Item 2 Table 2 Item 3 Table 2 Item 4 No damage	I _L ΔC/C I _L DF ESR -	- -10 - - - -	1.25 x Table 3 +10 1.25 x Table 2 Table 2 1.25 x Table 2 -	μA % (2) μA % mΩ -
12	Permanence of Marking	Para. 9.18	Final Examination Visual Examination	ESCC No. 24800	-	-	-	
13	Solderability	Para. 9.19, 4.2.4 and 4.2.5 of this spec	Final Examination Visual Examination	ESCC No. 3012 Para. 9.13.3 and no damage	-	-	-	

NOTES:

1. The tests in this Table refer to either Chart IV or V and shall be used as applicable.
2. Referred to the initial measurement recorded during the final measurements during Mounting.
3. While still at the high temperature.

APPENDIX 'A'**AGREED DEVIATIONS FOR AVX CZECH REPUBLIC s.r.o (CZ)**

Items Affected	Description of Deviations
Deviations from Final Production Tests (Chart II)	Para. 9.1, Internal Visual Inspection: Shall not be performed. Para. 9.5, External Visual Inspection: Visible base material is permitted on the edges of terminations (there is no plating on edges).
Deviations from Burn-in and Electrical Measurements (Chart III)	Para. 9.5, External Visual Inspection: Visible base material is permitted on the edges of terminations (there is no plating on edges).
Deviations from Qualification Tests (Chart IV)	Para. 9.5, External Visual Inspection: Visible base material is permitted on the edges of terminations (there is no plating on edges).
Deviations from Lot Acceptance Tests (Chart V)	Para. 9.5, External Visual Inspection: Visible base material is permitted on the edges of terminations (there is no plating on edges).