



HIGH DATA RATE CABLE ASSEMBLIES

ESCC Generic Specification No. 3409

Issue 1	September 2018
---------	----------------



LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2018. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION

TABLE OF CONTENTS

1	INTRODUCTION	8
1.1	SCOPE	8
1.2	APPLICABILITY	8
2	APPLICABLE DOCUMENTS	8
2.1	ESCC SPECIFICATIONS	8
2.2	OTHER (REFERENCE) DOCUMENTS	9
2.3	ORDER OF PRECEDENCE	9
3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	9
4	REQUIREMENTS	10
4.1	GENERAL	10
4.1.1	Specifications	10
4.1.2	Conditions and Methods of Test	10
4.1.3	Manufacturer's Responsibility for Performance of Tests and Inspections	10
4.1.4	Inspection Rights	10
4.1.5	Customer Source Inspections	10
4.1.5.1	Pre-Assembly Source Inspection	10
4.1.5.2	Final Source Inspection	11
4.2	QUALIFICATION AND QUALIFICATION MAINTENANCE REQUIREMENTS ON A MANUFACTURER	11
4.3	DELIVERABLE COMPONENTS	11
4.3.1	ESCC Qualified Components	11
4.3.2	ESCC Components	11
4.3.3	Component Failure	11
4.4	MARKING	12
4.5	MATERIALS AND FINISHES	12
4.6	ADD-ON COMPONENTS: SELECTION AND PROCUREMENT	12
4.6.1	General	12
4.6.1.1	Add-on Component: Connectors	12
4.6.1.2	Add-on Component: Cables	12
4.6.2	Supplier Selection	13
4.6.3	Traceability	13
4.6.4	Changes in Add-on Components	13
4.6.5	Documentation of Add-on Components	13
5	PRODUCTION CONTROL (SPECIAL IN-PROCESS CONTROLS)	14
5.1	GENERAL	14
5.1.1	Rework	14
5.2	DOCUMENTATION	14

6	SCREENING TESTS	15
6.1	GENERAL	15
6.2	FAILURE CRITERIA	15
6.2.1	Environmental and Mechanical Test Failure	15
6.2.2	Parameter Limit Failure	15
6.2.3	Other Failures	15
6.3	FAILED COMPONENTS	15
6.4	DOCUMENTATION	15
7	QUALIFICATION, QUALIFICATION MAINTENANCE AND LOT VALIDATION TESTING	16
7.1	QUALIFICATION TESTING	16
7.1.1	General	16
7.1.2	Distribution within the Qualification Test Lot	16
7.2	QUALIFICATION MAINTENANCE (PERIODIC TESTING)	17
7.3	LOT VALIDATION TESTING	17
7.4	FAILURE CRITERIA	17
7.4.1	Environmental and Mechanical Test Failure	17
7.4.2	Electrical Failure	17
7.4.3	Other Failures	18
7.5	FAILED COMPONENTS	18
7.6	QUALIFICATION, PERIODIC TESTING AND LOT VALIDATION TESTING SAMPLES	18
7.7	DOCUMENTATION	18
8	TEST METHODS AND PROCEDURES	19
8.1	TEST VEHICLES FOR QUALIFICATION, PERIODIC TESTING AND LOT VALIDATION TESTING	19
8.2	CONTACT CAPABILITY	19
8.3	ENGAGEMENT AND SEPARATION FORCES	21
8.4	GOLD PLATE POROSITY	21
8.5	PLATING THICKNESS	21
8.6	MAGNETISM LEVEL	22
8.7	PRE-ASSEMBLY VISUAL INSPECTION AND DIMENSION CHECK	22
8.8	INSULATION FLAWS (SPARK TEST)	22
8.9	MICROSECTIONING OF STRANDS	22
8.10	ANTHONY AND BROWN TEST	23
8.11	COATING TESTS	23
8.12	ADHESION OF INNER CONDUCTOR	23
8.13	DIELECTRIC STRENGTH OF JACKET	23
8.14	CONDUCTOR RESISTANCE	23
8.15	CAPACITANCE	23

8.16	CHARACTERISTIC IMPEDANCE	23
8.17	LENGTH AND WEIGHT (OF HDR CABLE ASSEMBLY)	24
8.18	TEMPERATURE CYCLING	24
8.18.1	During Screening Tests (Chart F3)	24
8.18.2	During Qualification Testing and Lot Validation Testing (Chart F4A)	24
8.18.3	During Periodic Testing and Lot Validation Testing (Chart F4B)	24
8.19	COUPLING PROOF TORQUE	25
8.20	MATING VERIFICATION	25
8.21	ELECTRICAL MEASUREMENTS	25
8.21.1	General	25
8.21.1.1	Dielectric Withstanding Voltage / Voltage Proof Leakage Current	25
8.21.1.2	Insulation Resistance	26
8.21.1.3	Conductor and Shield Resistance	26
8.21.1.4	Mated Shell Conductivity	26
8.21.1.5	Uniformity of Characteristic Impedance	26
8.21.1.6	Skew	27
8.21.1.7	Mask Test and Jitter	27
8.21.1.8	Near-end and Far-end Crosstalk	28
8.21.1.9	Insertion Loss	30
8.21.2	Room Temperature Electrical Measurements	31
8.21.3	Intermediate and End-Point Electrical Measurements	31
8.21.4	Electrical Measurements at Room, High and Low Temperatures	31
8.22	RADIOGRAPHIC INSPECTION	31
8.23	CONTACT HEIGHT AND/OR CONTACT RETENTION	32
8.24	EXTERNAL VISUAL INSPECTION	32
8.25	SHIELDING EFFECTIVENESS	32
8.26	CABLE RETENTION FORCE	33
8.27	AGEING	33
8.28	MATING ENDURANCE	33
8.29	CONTACT & INSERT RETENTION	34
8.29.1	Contact Retention (in Insert)	34
8.29.2	Insert Retention (in Shell)	34
8.30	BENDING	34
8.31	VIBRATION (RANDOM AND SINE)	34
8.31.1	Random Vibration	35
8.31.2	Sine Vibration	35
8.32	THERMAL STABILITY AND SKEW	36

8.33	DESTRUCTIVE PHYSICAL ANALYSIS (DPA)	36
8.34	RADIATION	36
8.35	PERMANENCE OF MARKING	37
8.36	MATING AND UNMATING FORCES	37
8.37	CRIMP CONTACT TENSILE STRENGTH	37
9	DATA DOCUMENTATION	38
9.1	GENERAL	38
9.1.1	Qualification and Qualification Maintenance	38
9.1.2	Component Procurement and Delivery	38
9.1.3	Additional Documentation	38
9.1.4	Data Retention/Data Access	38
9.2	COVER SHEET(S)	39
9.3	LIST OF EQUIPMENT USED	39
9.4	LIST OF TEST REFERENCES	39
9.5	ADD-ON COMPONENTS DOCUMENTATION	39
9.6	SPECIAL IN-PROCESS CONTROLS DATA (CHART F2)	39
9.7	SCREENING TESTS DATA (CHART F3)	40
9.8	QUALIFICATION, PERIODIC TESTING AND LOT VALIDATION TESTING DATA (CHARTS F4A AND F4B)	40
9.8.1	Qualification Testing (Chart F4A)	40
9.8.2	Periodic Testing for Qualification Maintenance (Chart F4B)	40
9.8.3	Lot Validation Testing (Charts F4A and/or F4B)	40
9.9	FAILED COMPONENTS LIST AND FAILURE ANALYSIS REPORT	40
9.10	CERTIFICATE OF CONFORMITY	41
10	DELIVERY	41
11	PACKAGING AND DISPATCH	41
12	CHARTS	42
12.1	CHART F1 - GENERAL FLOW FOR PROCUREMENT	42
12.2	CHART F2 - PRODUCTION CONTROL (SPECIAL IN-PROCESS CONTROLS)	43
12.3	CHART F3 - SCREENING TESTS	44
12.4	CHART F4 – QUALIFICATION, PERIODIC TESTING AND LOT VALIDATION TESTING	45
12.4.1	Chart F4A - Qualification Testing and Lot Validation Testing	45
12.4.2	Chart F4B - Periodic Testing and Lot Validation Testing	46

1 INTRODUCTION

1.1 SCOPE

This specification defines the general requirements for the qualification, qualification maintenance, procurement, and delivery of High Data Rate (HDR) Cable Assemblies for space applications. This specification contains the appropriate inspection and test schedules and also specifies the data documentation requirements.

An HDR cable assembly is defined as being composed of two or more HDR cables terminated, either at one end or at both ends, with one or more HDR connectors, designed and manufactured to achieve an HDR electrical function.

Components which are not compliant with the above definition are out of the scope of this specification.

1.2 APPLICABILITY

This specification is primarily applicable to the granting of qualification approval to components qualified in accordance with qualification of standard components per ESCC Basic Specification No. [20100](#).

It is also primarily applicable to the procurement of components so qualified.

This specification may also be applied to the procurement of unqualified components, recommendations for which are given in ESCC Basic Specification No. [23100](#).

2 APPLICABLE DOCUMENTS

The following documents form part of, and shall be read in conjunction with, this specification. The relevant issues shall be those in effect on the date of starting qualification or placing the Purchase Order.

2.1 ESCC SPECIFICATIONS

- No. [20100](#), Requirements for the Qualification of Standard Electronic Components for Space Application.
- No. [20500](#), External Visual Inspection.
- No. [20600](#), Preservation, Packaging and Dispatch of ESCC Components.
- No. [20900](#), Radiographic Inspection of Electronic Components.
- No. [21001](#), Destructive Physical Analysis of EEE Components.
- No. [21300](#), Terms, Definitions, Abbreviations, Symbols and Units.
- No. [21700](#), General Requirements for the Marking of ESCC Components.
- No. [22600](#), Requirements for the Evaluation of Standard Electronic Components for Space Application.
- No. [22800](#), ESCC Non-Conformance Control System.
- No. [23100](#), Recommendations on the use of the ESCC Specification System for the Evaluation and Procurement of Unqualified Components.
- No. [24600](#), Minimum Quality System Requirements.
- No. [24800](#), Resistance to Solvents of Marking, Materials and Finishes.
- No. [3401](#), Connectors Electrical Non-Filtered Circular and Rectangular
- No. [3402](#), Connectors, RF Coaxial.,
- No. [3902](#), Cables, Coaxial, Radio Frequency, Flexible.

For qualification and qualification maintenance or procurement of qualified components, with the exception of ESCC Basic Specifications Nos. [20100](#), [21700](#), [22800](#) and [24600](#), where Manufacturers' specifications are equivalent to, or more stringent than, the ESCC Basic Specifications listed above, they may be used in place of the latter, subject to the approval of the ESCC Executive.

Such replacements shall be clearly identified in the applicable Process Identification Document (PID).

For procurement of unqualified components, where Manufacturers' specifications are equivalent to or more stringent than the ESCC Basic Specifications listed above, they may be used in place of the latter subject to the approval of the Orderer.

Such replacements may be listed in an appendix to the appropriate Detail Specification at the request of the Manufacturer or Orderer, subject to the approval of the ESCC Executive.

Unless otherwise stated herein, references within the text of this specification to "the Detail Specification" shall mean the relevant ESCC HDR cable assembly Detail Specification.

2.2 OTHER (REFERENCE) DOCUMENTS

- ECSS-Q-ST-70-08, Manual Soldering of High-Reliability Electrical Connections.
- ECSS-Q-ST-70-26, Crimping of High-Reliability Electrical Connections.
- ECSS-Q-ST-70-37, Determination of the Susceptibility of Metals to Stress-Corrosion Cracking.
- [MIL-STD-202](#), Test Methods for Electronic and Electrical Component Parts.
- IEC Publication No. 61726, Cable Assemblies, Cables, Connectors and Passive Microwave Components - Screening Attenuation Measurement by the Reverberation Chamber Method.

2.3 ORDER OF PRECEDENCE

For the purpose of interpretation and in case of conflict with regard to documentation, the following order of precedence shall apply:

- (a) ESCC Detail Specification
- (b) ESCC Generic Specification
- (c) ESCC Basic Specification
- (d) Other documents, if referenced herein

3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

The terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. [21300](#) shall apply. In addition, the following definitions shall apply:

- High Data Rate (HDR): any digital link whose bit rate is superior or equal to 2Mbit/s over a distance of at least one metre.
- Cable Assembly Lot: A single HDR cable assembly production lot constituted of HDR cable assemblies with the same ESCC Component Number, produced with homogeneous lots of connectors and cables, manufactured and tested in the same time period.
- Add-on Components: HDR connectors and HDR cables used in the manufacture of HDR cable assemblies.

4 REQUIREMENTS

4.1 GENERAL

The test requirements for the qualification of a component shall be in accordance with ESCC Basic Specification No. 20100.

Unless otherwise specified in the Detail Specification, the components subjected to Qualification, Periodic Testing and Lot Validation Testing in accordance with this specification shall be test vehicles in accordance with Para. 8.1.

The test requirements for procurement of both qualified and unqualified Components (see Chart F1) shall comprise:

- Special In-Process Controls
- Screening Tests
- Periodic Testing (for qualified components only)
- Lot Validation Testing if stipulated in the Purchase Order

4.1.1 Specifications

For qualification, qualification maintenance, procurement and delivery of components in conformity with this specification, the applicable specifications listed in Section 2 of this document shall apply in total unless otherwise specified herein or in the Detail Specification.

4.1.2 Conditions and Methods of Test

The conditions and methods of test shall be in accordance with this specification, the ESCC Basic Specifications referenced herein and the Detail Specification.

4.1.3 Manufacturer's Responsibility for Performance of Tests and Inspections

The Manufacturer shall be responsible for the performance of tests and inspections required by the applicable specifications. These tests and inspections shall be performed at the plant of the Manufacturer of the components unless it is agreed by the ESCC Executive (for qualification, qualification maintenance, or procurement of qualified components) or the Orderer (for procurement of unqualified components), to use an approved external facility.

4.1.4 Inspection Rights

The ESCC Executive (for qualification, qualification maintenance, or procurement of qualified components) or the Orderer (for procurement of unqualified components if stipulated in the Purchase Order) reserves the right to monitor any of the tests and inspections scheduled in the applicable specifications.

4.1.5 Customer Source Inspections

4.1.5.1 *Pre-Assembly Source Inspection*

If stipulated in the Purchase Order, the Orderer may perform a source inspection at the Manufacturer's facility prior to assembly of the HDR cable assembly (e.g. perform Pre-Assembly Visual Inspection, review of Special In-Process Controls test results, etc.). Details of the inspections to be performed or witnessed and the required period of notification shall be as stipulated in the Purchase Order.

4.1.5.2 *Final Source Inspection*

If stipulated in the Purchase Order, the Orderer may perform a source inspection at the Manufacturer's facility at the end of Screening or during Lot Validation Testing, if applicable (e.g. witness of final Room Temperature Electrical Measurements, performance of External Visual Inspection, review of the data documentation package). Details of the inspections to be performed or witnessed and the required period of notification shall be as stipulated in the Purchase Order.

4.2 QUALIFICATION AND QUALIFICATION MAINTENANCE REQUIREMENTS ON A MANUFACTURER

To obtain and maintain the qualification of a component, or family of components, a Manufacturer shall satisfy the requirements of ESCC Basic Specification No. [20100](#).

4.3 DELIVERABLE COMPONENTS

4.3.1 ESCC Qualified Components

Components delivered to this specification shall be processed and inspected in accordance with the relevant Process Identification Document (PID).

4.3.2 ESCC Components

Each component, irrespective of qualification status, identified with an ESCC component number and delivered to this specification shall:

- be traceable to its cable assembly lot.
- have satisfactorily completed all the tests required by the relevant issues of the applicable specifications.
- be produced from cable assembly lots that are considered by the Manufacturer to be capable of passing all applicable tests, and sequences of tests, that are defined in Charts F4A and F4B. The Manufacturer shall not knowingly supply components that cannot meet this requirement. In the event that, subsequent to delivery and prior to operational use, a component is found to be in a condition such that, demonstrably, it could not have passed these tests at the time of manufacture, this shall be grounds for rejection of the delivered lot.

4.3.3 Component Failure

Component failure of an HDR cable assembly may occur during Screening Tests (Chart F3) or Qualification, Periodic Testing and Lot Validation Testing (Charts F4A and F4B). In addition, lot failure of add-on components (connectors or cable) may occur during Special In-Process Controls (Chart F2).

Should such failure occur during qualification, qualification maintenance or procurement of qualified HDR cable assemblies, the Manufacturer shall initiate the non-conformance procedure in accordance with ESCC Basic Specification No. [22800](#). The Manufacturer shall notify the Orderer and the ESCC Executive by any appropriate written means, within 5 working days, giving details of the number and mode of failure and the suspected cause. No further testing or analysis shall be performed on the failed components until so instructed by the ESCC Executive.

Should such failure occur during procurement of unqualified components the Manufacturer shall notify the Orderer by any appropriate written means within 5 working days, giving details of the number and mode of failure and the suspected cause. No further testing or analysis shall be performed on the failed components until so instructed by the Orderer. The Orderer shall inform the Manufacturer within 5 working days of receipt of notification what action shall be taken.

4.4 MARKING

All components procured and delivered to this specification shall be marked in accordance with ESCC Basic Specification No. [21700](#).

Marking shall not reduce the cable flexibility or routing and shall not modify the thermal behaviour of the HDR cable assembly.

4.5 MATERIALS AND FINISHES

Specific requirements for materials and finishes are specified in the Detail Specification. Where a definite material or finish is not specified a material or finish shall be used so as to ensure that the component meets the performance requirements of this specification and the Detail Specification. Acceptance or approval of any constituent material or finish does not guarantee acceptance of the finished product.

All materials and finishes of the components specified in the Detail Specification shall comply with the restrictions on materials specified in ESCC Basic Specification No. [22600](#).

All metallic materials shall meet stress-corrosion resistance Class 1 or Class 2 of ECSS-Q-ST-70-37.

4.6 ADD-ON COMPONENTS: SELECTION AND PROCUREMENT

4.6.1 General

For ESCC qualified HDR cable assemblies, the requirements for selection and procurement of piece parts and materials, including add-on components, used in their manufacture shall be as defined in the Process Identification Document (PID).

The PID shall include a list of add-on components which have been successfully tested according to the requirements of this specification and approved for their inclusion in the PID by the ESCC Executive.

Pure Tin ($\geq 97\%$) shall not be used on internal and external elements of the HDR cable assembly; this includes under-plating.

4.6.1.1 *Add-on Component: Connectors*

All connectors shall be as specified in the HDR cable assembly Detail Specification and shall comply with the requirements specified in ESCC Generic Specification No. [3401](#), [3402](#) or MIL equivalent.

For qualified HDR cable assemblies, the detail specification(s) used to procure the connector(s) shall be agreed by the ESCC Executive, shall form part of the PID and may be listed in the HDR cable assembly Detail Specification.

4.6.1.2 *Add-on Component: Cables*

All cables shall be as specified in the HDR cable assembly Detail Specification and shall comply with the requirements specified in ESCC Generic Specification No. [3902](#).

For qualified HDR cable assemblies, the detail specification used to procure the cable shall be agreed by the ESCC Executive, shall form part of the PID and may be listed in the HDR cable assembly Detail Specification.

4.6.2 Supplier Selection

The HDR cable assembly Manufacturer shall assure that the selected suppliers of add-on components are compliant with the requirements of this ESCC Generic Specification, the HDR cable assembly Detail Specification and, for qualified HDR cable assemblies, the PID.

4.6.3 Traceability

All add-on components used in the manufacturer of the HDR cable assemblies shall each be traceable to their respective production lot and their respective incoming inspection lot.

Records shall be maintained for a minimum of 10 years that provide traceability from each HDR cable assembly serial number to each of the add-on components' production lots and incoming inspection lots used in their manufacture.

In case of materials with limited shelf life, appropriate means to verify the validity of the relevant material shall be in place. For qualified manufacturers, the verification and any re-certification shall be in compliance with the Manufacturer's QM plan and the PID.

4.6.4 Changes in Add-on Components

The Manufacturer is responsible for controlling all add-on components. Any change must be controlled and evaluated by the Manufacturer and for qualified HDR cable assemblies, finally approved by the ESCC Executive and included in the PID.

The Manufacturer is also responsible for documentation of all changes, for any additional testing due to any changes and, for qualified HDR cable assemblies, for notification of the ESCC Executive.

4.6.5 Documentation of Add-on Components

Documentation of the Manufacturer's procurement requirements for add-on components shall be in accordance with Para. 9.5.

5 PRODUCTION CONTROL (SPECIAL IN-PROCESS CONTROLS)

5.1 GENERAL

Unless otherwise specified, all lots of connectors and cables add-on components used to manufacture the HDR cable assemblies used for qualification and qualification maintenance (test vehicles), Lot Validation Testing and for delivery, shall be subject to tests and inspections in accordance with Chart F2 in the sequence shown.

As specified in Chart F2, testing shall be performed on add-on components:

- Connectors (and contacts) (prior to being assembled with cable) from the same lot as used for the HDR cable assembly
- Cable (prior to being assembled with connectors) from the same lot as used for the HDR cable assembly.

Any connector, connector lots, cable or cable lots (as applicable) which do not meet these requirements shall be rejected and at no future time be resubmitted to the requirements of this specification.

The applicable test requirements are detailed in the paragraphs referenced in Chart F2.

When ESCC qualified connectors or cable are used to manufacture the HDR cable assembly type being subjected to Special In-Process Controls, specific tests that have already been performed in accordance with the respective ESCC specifications for the connectors or cable need not be repeated. These tests are indicated in Chart F2.

For qualified HDR cable assemblies, the full production control provisions are defined in the PID.

In the event of any connector (or contact) lot or any cable lot being rejected, the Manufacturer shall act in accordance with Para. 4.3.3.

5.1.1 Rework

Any rework procedures shall be agreed by the ESCC Executive (for qualification, qualification maintenance, or procurement of qualified components) or the Orderer (for procurement of unqualified components).

For qualified components, any rework procedures shall be specified in the PID.

Repair is not allowed.

5.2 DOCUMENTATION

Documentation of Special In-Process Controls shall be in accordance with Para. 9.6.

6 SCREENING TESTS

6.1 GENERAL

Unless otherwise specified, all components used for qualification and qualification maintenance (test vehicles), Lot Validation Testing, and for delivery, shall be subjected to tests and inspections in accordance with Chart F3 in the sequence shown.

All components shall be serialised prior to the tests and inspections.

Any components which do not meet these requirements shall be removed from the lot and at no future time be resubmitted to the requirements of this specification.

The applicable test methods and conditions are specified in the paragraphs referenced in Chart F3.

When ESCC qualified connectors are used to manufacture the HDR cable assembly type being subjected to Screening Tests, specific tests that have already been performed in accordance with the respective ESCC specifications for the connectors need not be repeated. These tests are indicated in Chart F3.

6.2 FAILURE CRITERIA

6.2.1 Environmental and Mechanical Test Failure

The following shall be counted as component failures:

- Components which fail during tests for which the pass/fail criteria are inherent in the test method, e.g. Length and Weight, Coupling Proof Torque, Radiographic Inspection, External Visual Inspection, etc.

6.2.2 Parameter Limit Failure

A component shall be counted as a limit failure if one or more parameters exceed the limits shown in Room Temperature Electrical Measurements in the Detail Specification.

6.2.3 Other Failures

A component shall be counted as a failure in any of the following cases:

- Visual failure.
- Mechanical failure.
- Handling failure.
- Lost component.

6.3 FAILED COMPONENTS

A component shall be considered as a failed component if it exhibits one or more of the failure modes described in Para. 6.2.

In the event of any failure during Chart F3, the Manufacturer shall act in accordance with Para. 4.3.3.

6.4 DOCUMENTATION

Documentation of Screening Tests shall be in accordance with Para. 9.7.

7 QUALIFICATION, QUALIFICATION MAINTENANCE AND LOT VALIDATION TESTING

The requirements of this paragraph are applicable to the tests performed on components or test structures as part of qualification or qualification maintenance in accordance with ESCC Basic Specification No. [20100](#). They are also applicable to Lot Validation Testing as part of the procurement of qualified or unqualified components.

7.1 QUALIFICATION TESTING

7.1.1 General

Qualification Testing shall be in accordance with the requirements specified in Chart F4A. Unless otherwise specified, the tests of Chart F4A shall be performed on the specified sample chosen at random from components (test vehicles) which have successfully passed the tests in Chart F3. This sample constitutes the Qualification Test Lot.

The Qualification Test Lot is divided into subgroups of tests and unless otherwise specified all test vehicles assigned to a subgroup shall be subjected to all of the tests in that subgroup, in the sequence shown. The applicable test requirements are detailed in the paragraphs referenced in Chart F4A.

The conditions governing Qualification Testing are specified in ESCC Basic Specification No. [20100](#).

When ESCC qualified connectors or cable are used to manufacture the HDR cable assembly type being subjected to Qualification Testing, specific tests that have already been performed in accordance with the respective ESCC specifications for the connectors or cable need not be repeated. These tests are indicated in Chart F4A.

7.1.2 Distribution within the Qualification Test Lot

Where a Detail Specification covers a range, or series of components that are considered similar, then the Qualification Test Lot shall be comprised of component types so selected that they adequately represent all of the various mechanical, structural and electrical peculiarities of that range or series.

The distribution shall be as specified by, or agreed with, the ESCC Executive.

7.2 QUALIFICATION MAINTENANCE (PERIODIC TESTING)

Qualification is maintained through Periodic Testing and the test requirements of Para. 7.1 and Chart F4B shall apply. Unless otherwise specified, all test vehicles shall be subjected to all of the tests in the sequence shown. The applicable test requirements are detailed in the paragraphs referenced in Chart F4B. The period between successive testing shall be as specified in Chart F4B.

The conditions governing qualification maintenance are specified in ESCC Basic Specification No. [20100](#).

For qualified components, specific tests in Chart F4B need not be performed for Periodic Testing if there is no change in the material, process and design of the component since initial qualification, subject to technical justification being provided by the Manufacturer and agreed by the ESCC Executive. These tests are indicated in Chart F4B. In this case, Periodic Testing for these specific tests shall be considered as having been performed during the initial qualification. Full details shall be specified in the PID.

When ESCC qualified connectors or cable are used to manufacture the HDR cable assembly type being subjected to Periodic Testing, specific tests that have already been performed in accordance with the respective ESCC specifications for the connectors or cable need not be repeated. These tests are indicated in Chart F4B.

7.3 LOT VALIDATION TESTING

For procurement of qualified components, Lot Validation Testing is not required and shall only be performed if specifically stipulated in the Purchase Order.

For procurement of unqualified Components, the need for Lot Validation Testing shall be determined by the Orderer (ref. ESCC Basic Specification No. [23100](#)).

When Lot Validation Testing is required, it shall consist of the performance of one or more of the tests or subgroup test sequences of Chart F4A and/or Chart F4B. The testing to be performed and the sample size shall be as stipulated in the Purchase Order.

When procurement of more than one component type is involved from a family, range or series, the selection of representative samples shall also be stipulated in the Purchase Order.

7.4 FAILURE CRITERIA

The following criteria shall apply to qualification, qualification maintenance and Lot Validation Testing.

7.4.1 Environmental and Mechanical Test Failure

The following shall be counted as component failures:

- Components which fail during tests for which the pass/fail criteria are inherent in the test method, e.g. Vibration, Permanence of Marking, Temperature Cycling, Radiographic Inspection, External Visual Inspection, etc.

7.4.2 Electrical Failure

The following shall be counted as component failures:

- Components which fail one or more of the applicable limits at each of the relevant data points specified for testing in Electrical Measurements at Room, High and Low Temperatures or Intermediate and End-Point Electrical Measurements in the Detail Specification.

7.4.3 Other Failures

A component shall be counted as a failure in any of the following cases:

- Visual failure.
- Mechanical failure.
- Handling failure.
- Lost component.

7.5 FAILED COMPONENTS

A component shall be considered as failed if it exhibits one or more of the failure modes detailed in Para. 7.4.

In the event of any failure during Charts F4A or F4B, the Manufacturer shall act in accordance with Para. 4.3.3.

When requested by the ESCC Executive (for qualification, qualification maintenance or procurement of qualified components) or the Orderer (for procurement of qualified or unqualified components), failure analysis of failed components shall be performed under the responsibility of the Manufacturer and the results provided.

Failed components shall be retained at the Manufacturer's plant until the final disposition has been agreed and certified.

7.6 QUALIFICATION, PERIODIC TESTING AND LOT VALIDATION TESTING SAMPLES

All tests of Charts F4A and F4B are considered to be destructive and therefore components so tested shall not form part of the delivery lot.

7.7 DOCUMENTATION

Documentation of Qualification, Periodic Testing and Lot Validation Testing shall be in accordance with Para. 9.8.

8 TEST METHODS AND PROCEDURES

If a Manufacturer elects to eliminate or modify a test method or procedure, the Manufacturer is still responsible for delivering components that meet all of the performance, quality and reliability requirements defined in this specification and the Detail Specification.

For a qualified component, documentation supporting the change shall be approved by the ESCC Executive and retained by the Manufacturer. It shall be copied, when requested, to the ESCC Executive. The change shall be specified in an appendix to the Detail Specification and in the PID.

For an unqualified component, the change shall be approved by the Orderer. The change may be specified in an appendix to the Detail Specification at the request of the Manufacturer or Orderer, subject to the approval of the ESCC Executive.

8.1 TEST VEHICLES FOR QUALIFICATION, PERIODIC TESTING AND LOT VALIDATION TESTING

Unless otherwise specified in the Detail Specification, the HDR cable assemblies submitted to Qualification, Periodic Testing and Lot Validation Testing (Charts F4A and F4B) shall include additional opposite test jig connectors that each mate with the HDR cable assembly connectors in order to facilitate connection to the test equipment.

The connectors shall be mated in the nominal manner as defined in the Detail Specification. These connectors shall be receptacles or plugs compatible with the HDR cable assembly connectors (i.e. same connector interface definition).

Depending on the HDR standard, an HDR cable assembly maybe composed of 1, 2, 4 or more transmission lines. See Figures 1A, 1B and 1C for examples of the test vehicle configuration for a pair wired cable assembly, a quad wired cable assembly and a coaxial pair cable assembly, respectively.

Unless otherwise specified in the Detail Specification, the test vehicles shall be of minimum total length 1m.


The electrical test jigs shall disrupt the performance of the test vehicle in the weakest way possible or shall be subtracted by relevant calibration.

8.2 CONTACT CAPABILITY

Only applicable to connectors with female contacts or with male contacts where the male contact deforms to make and retain electrical contact.

Contact Capability shall be performed prior to assembly on a sample of 13 contacts from each contact lot used in the HDR cable assembly. In the event of any failure, the contact lot shall be rejected.

The contacts shall pick up the minimum weight and drop the maximum weight. These weights shall be as specified in the Detail Specification.

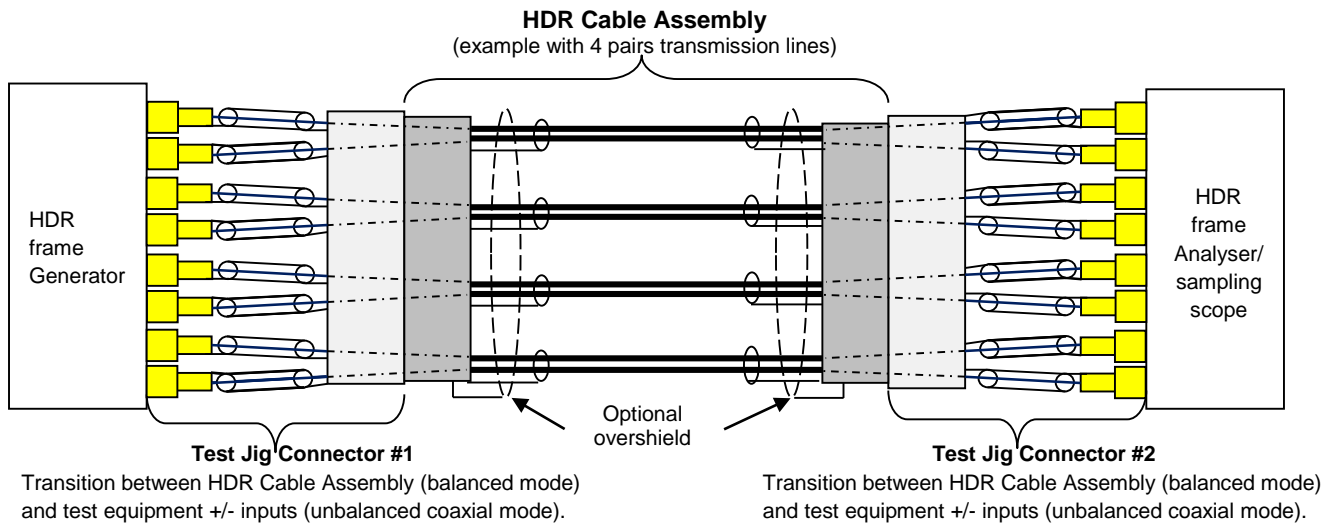

Note: Each pair wire is connected to the inner wire of the coaxial connector; the shield is connected to the connector shell:


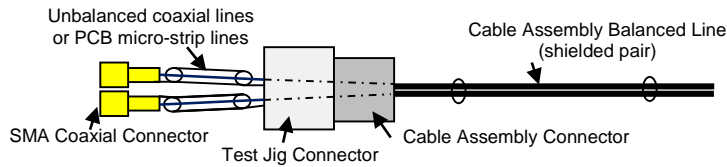


FIGURE 1A - TEST VEHICLE CONFIGURATION - PAIR WIRED HDR CABLE ASSEMBLY

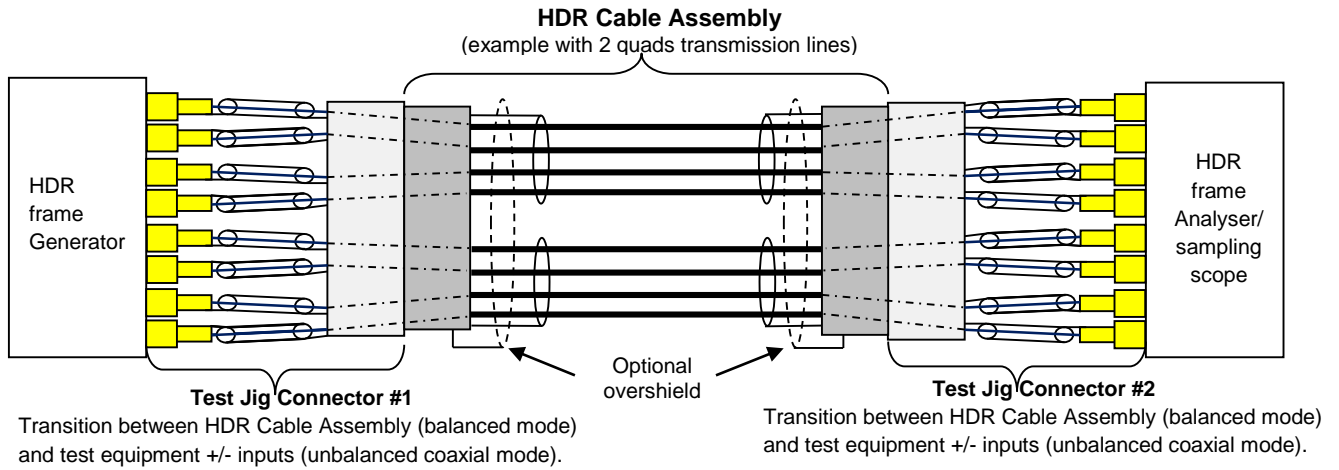

Note: Each quad wire is connected to the inner wire of the coaxial connector; the shield is connected to the connector shell. Transmission lines are made with wires Nos. 1 & 2 for the first one and wires Nos. 3 & 4 for the second one.


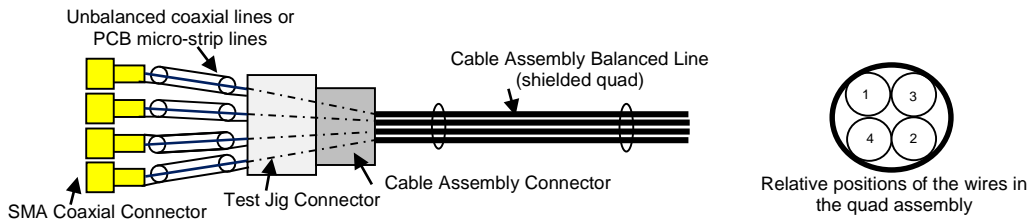


FIGURE 1B - TEST VEHICLE CONFIGURATION - QUAD WIRED HDR CABLE ASSEMBLY

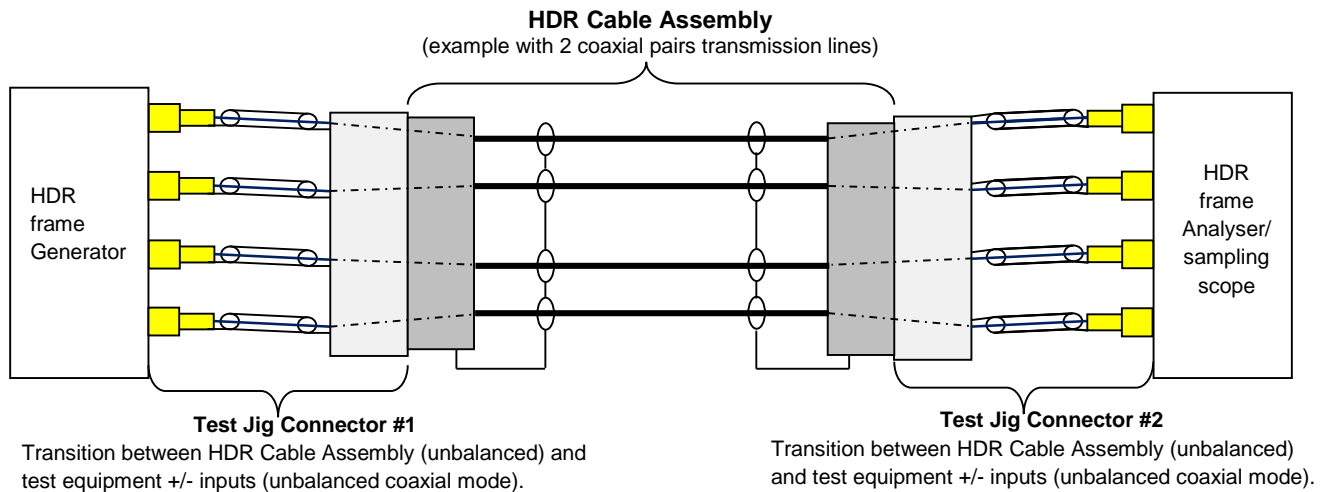

Note: Each pair wire is connected to the inner wire of the coaxial connector; the shield is connected to the connector shell:

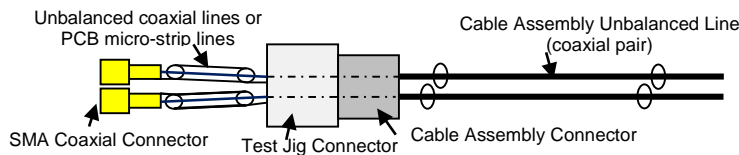


FIGURE 1C - TEST VEHICLE CONFIGURATION - COAXIAL PAIR HDR CABLE ASSEMBLY

8.3 ENGAGEMENT AND SEPARATION FORCES

Only applicable to connectors with female contacts or with male contacts where the male contact deforms to make and retain electrical contact.

Engagement and Separation Forces shall be measured on contacts prior to assembly, in accordance with Engagement and Separation Forces as specified in ESCC Generic Specification No. 3401 and the Detail Specification. The same sampling shall apply. In the event of any failure, the contact lot shall be rejected.

8.4 GOLD PLATE POROSITY

Gold Plate Porosity shall be performed on connectors (contacts) prior to assembly, in accordance with Gold Plate Porosity as specified in ESCC Generic Specification No. 3402. The same sampling shall apply. In the event of any failure, the contact lot shall be rejected.

8.5 PLATING THICKNESS

Plating Thickness shall be measured on connectors prior to assembly, in accordance with Plating Thickness as specified in ESCC Generic Specification No. 3402 and the Detail Specification. The same sampling shall apply. In the event of any failure, the contact or connector lot, as applicable, shall be rejected.

8.6 MAGNETISM LEVEL

Only required if specified in the Detail Specification.

Magnetism Level shall be performed on a sample of 3 connectors from each lot used in the HDR cable assembly prior to assembly, with contacts installed. In the event of any failure, a 100% measurement shall be performed. Any connectors failing to meet the Magnetism Level requirements shall be rejected.

The connectors' magnetism shall be measured in a magnetically 'quiet' area where machines, electronic equipment, vehicles and personnel traffic are restricted.

The connectors shall be passed through a known magnetic field three times. The magnetic field strength shall be approximately 5000 Gauss. If a coil is used to generate the magnetic field, the connector shall not make contact with the coil. The connectors' magnetism shall then be measured and shall meet the applicable requirements of the Detail Specification.

8.7 PRE-ASSEMBLY VISUAL INSPECTION AND DIMENSION CHECK

Prior to assembly, the connector and cable add-on components used in the HDR cable assemblies shall be inspected in accordance with the requirements of ESCC Basic Specification No. [20500](#).

Dimension Check shall be performed in accordance with ESCC Basic Specification No. [20500](#), the HDR cable assembly Detail Specification and the applicable add-on component detail specifications. Dimension Check is not required to be repeated if performed as part of the Manufacturer's incoming inspection or internal processing.

Any add-on components failing to meet the inspection requirements shall be rejected.

8.8 INSULATION FLAWS (SPARK TEST)

The test shall be performed by the cable manufacturer on the cable core prior to application of the outer conductor and jacket.

100% of the cable core shall pass a spark test without breakdown, performed in order to detect any insulation flaws in the dielectric. Applied voltage and frequency shall be as specified in the Detail Specification.

In the event of any failure, the failed section of the cable core shall be separated from the cable length and rejected. The remaining length of cable core shall be retested until no further insulation flaws are detected.

8.9 MICROSECTIONING OF STRANDS

Microsectioning of Strands shall be performed on cable prior to assembly, in accordance with Microsectioning of Strands as specified in ESCC Generic Specification No. [3902](#). The same sampling shall apply. In the event of any failure, the cable lot shall be rejected.

If other than silver coated copper strands are used, the requirements for Microsectioning of Strands shall be as specified in the Detail Specification.

8.10 ANTHONY AND BROWN TEST

Only applicable to HDR cable assemblies that use silver plated cable, as specified in the Detail Specification.

Unless otherwise specified, the Anthony and Brown Test shall only be performed if the cable lot is intended to be used to manufacture the HDR cable assembly test vehicles used for Qualification Testing, Periodic Testing or Lot Validation Testing. In any case, the test shall not be performed on ESCC qualified cable lots.

Anthony and Brown Test shall be performed on cable prior to assembly, in accordance with Anthony and Brown Test as specified in ESCC Generic Specification No. [3902](#). The same sampling shall apply. In the event of any failure, the cable lot shall be rejected.

8.11 COATING TESTS

Unless otherwise specified in the Detail Specification, Coating Tests shall be performed once on each cable lot prior to assembly, in accordance with Coating Tests as specified in ESCC Generic Specification No. [3902](#). The same sampling shall apply. In the event of any failure, the cable lot shall be rejected.

8.12 ADHESION OF INNER CONDUCTOR

Adhesion of Inner Conductor shall be performed once on each cable lot prior to assembly, in accordance with Adhesion of Inner Conductor as specified in ESCC Generic Specification No. [3902](#). The same sampling shall apply. In the event of any failure, the cable lot shall be rejected.

8.13 DIELECTRIC STRENGTH OF JACKET

Only required if specified in the Detail Specification.

Dielectric Strength of Jacket shall be performed on cable prior to assembly (on each length of finished cable), in accordance with Dielectric Strength of Jacket as specified in ESCC Generic Specification No. [3902](#). Test voltage and frequency shall be as specified in the Detail Specification. In the event of any failure, the failed cable length shall be rejected.

8.14 CONDUCTOR RESISTANCE

Conductor Resistance shall be measured once on each cable lot prior to assembly, in accordance with Conductor Resistance as specified in ESCC Generic Specification No. [3902](#) and the Detail Specification. In the event of any failure, the cable lot shall be rejected.

8.15 CAPACITANCE

Capacitance shall be measured on cable prior to assembly, in accordance with Capacitance as specified in ESCC Generic Specification No. [3902](#) and the Detail Specification. In the event of any failure, the cable lot shall be rejected.

8.16 CHARACTERISTIC IMPEDANCE

Characteristic Impedance shall be measured on cable prior to assembly, in accordance with Characteristic Impedance as specified in ESCC Generic Specification No. [3902](#) and the Detail Specification. The same sampling shall apply. In the event of any failure, the cable lot shall be rejected.

8.17 LENGTH AND WEIGHT (OF HDR CABLE ASSEMBLY)

Length and weight of the HDR cable assembly shall be measured and shall meet the requirements of the Detail Specification.

8.18 TEMPERATURE CYCLING

8.18.1 During Screening Tests (Chart F3)

Unless otherwise specified, the following conditions shall apply:

- Number of Temperature Cycles: 3 cycles minimum with 15 minutes minimum at each storage temperature extreme as specified in Maximum Ratings in the Detail Specification.
- Temperature transfer slope: $\leq 10^{\circ}\text{C}/\text{minute}$

8.18.2 During Qualification Testing and Lot Validation Testing (Chart F4A)

Unless otherwise specified, the following conditions shall apply:

- Number of Temperature Cycles: 200 cycles with 15 minutes minimum at each storage temperature extreme as specified in Maximum Ratings in the Detail Specification.
- Temperature transfer slope: $\leq 10^{\circ}\text{C}/\text{minute}$
- Data Points:
On completion of testing and after a recovery period of 2 hours minimum at room temperature conditions, the test vehicles shall be visually examined and there shall be no evidence of damage or loosening of parts.

Intermediate and End-Point Electrical Measurements shall be performed as specified in the Detail Specification. If parameter drift is specified, initial measurements also shall be performed and parameter drift calculated.

8.18.3 During Periodic Testing and Lot Validation Testing (Chart F4B)

Unless otherwise specified, the following conditions shall apply:

- Number of Temperature Cycles: 100 cycles with 15 minutes minimum at each storage temperature extreme as specified in Maximum Ratings in the Detail Specification.
- Temperature transfer slope: $\leq 10^{\circ}\text{C}/\text{minute}$
- Data Points:
On completion of testing and after a recovery period of 2 hours minimum at room temperature conditions, the test vehicles shall be visually examined and there shall be no evidence of damage or loosening of parts.

Intermediate and End-Point Electrical Measurements shall be performed as specified in the Detail Specification. If parameter drift is specified, initial measurements also shall be performed and parameter drift calculated.

8.19 COUPLING PROOF TORQUE

Only applicable to HDR cable assemblies that use circular connectors.

Coupling Proof Torque shall be performed in accordance with Coupling Proof Torque as specified in ESCC Generic Specification No. [3402](#) and the Detail Specification.

Coupling Proof Torque shall be performed on samples selected at random from the cable assembly lot in accordance with the sampling indicated in the table below. In the event of any failure, a 100% test shall be performed.

Cable Assembly Lot Size	Sampling
2 to 15	2
16 to 25	3
26 to 90	5
91 to 150	8
151 to 280	13
281 to 500	20
501 to 1200	32
1201 to 3200	50
3201 to 10000	80

8.20 MATING VERIFICATION

All connectors of the HDR cable assembly shall be mated and unmated once with their counterparts to verify proper functioning of the coupling mechanisms.

8.21 ELECTRICAL MEASUREMENTS

8.21.1 General

All test equipment shall have the same characteristic impedance as the HDR cable assembly under test (as applicable).

ESCC qualified connector savers shall be used for performance of electrical tests to minimise the number of mating and unmating cycles. The effect of the savers on the measurements shall be taken into account.

Where a parameter is specified over a frequency range, a plot of the parameter over the frequency range shall be produced.

8.21.1.1 *Dielectric Withstanding Voltage / Voltage Proof Leakage Current*

[MIL-STD-202, Test Method 301](#) and as follows:

- Relative Humidity: $\leq 50\%$.
- The test voltage, points of application of the test voltage shall be as specified in the Detail Specification.
- The test voltage shall be applied for 1 minute.
- There shall be no evidence of flashover or breakdown.
- Voltage Proof Leakage Current shall meet the limits specified in the Detail Specification.

8.21.1.2 *Insulation Resistance*

Unless otherwise specified, Insulation Resistance shall not be measured during Screening Tests (Chart F3).

[MIL-STD-202, Test Method 302](#) and as follows:

- Test Voltage: 500Vdc.
- Points of Measurement: Between the connector centre contact(s) and the body of the test vehicle. All contacts shall be tested.
- Measurement shall be read after 1 minute of voltage application.
- Insulation Resistance shall meet the limits specified in the Detail Specification.

8.21.1.3 *Conductor and Shield Resistance*

The DC resistance (in m Ω /m) of each inner conductor and each shield (inner or outer shield) of the cable shall be verified by any suitable equipment giving an accuracy of at least $\pm 1\%$ (4 wires method). This measurement shall be performed on the cable assembly pin to pin, and shell to shell for the outer shield.

Conductor and Shield Resistance shall meet the limits specified in the Detail Specification. In the event of any failure, the cable lot shall be rejected.

8.21.1.4 *Mated Shell Conductivity*

Unless otherwise specified in the Detail specification, the following shall apply:

- Test Conditions: a test current of 1 ± 0.1 A (DC or AC rms) at a maximum voltage of +1.5V (DC or AC rms), shall be used.
- Procedure: The resistance of the mated, assembled connectors shall be measured from a point on the rear accessory thread (or body, if no thread is present) of the plug to the mounting flange of the receptacle.

The point of measurement on a square flange receptacle shall be adjacent to the mounting holes. The point of measurement on a single hole mount receptacle shall be adjacent to the "O" ring on the front or mounting side of the flange.

Probes with spherical ends of 0.13mm minimum radius shall be used to make the measurements.

- Resistance shall meet the limits specified in the Detail Specification.

8.21.1.5 *Uniformity of Characteristic Impedance*

The differential characteristic impedance in the time domain shall be measured using a reflectometer. The test conditions including the reflectometer's signal slope shall be as specified in the Detail Specification. This measurement does not require any special calibration.

Impedance and tolerance shall meet the limits specified in the Detail Specification.

8.21.1.6 Skew

Skew shall be measured using an appropriate test method employing a suitable set-up and jig, as per Figure 1, at the maximum data rate as specified in the Detail Specification.

Intra-pair skew and inter-pair skew shall meet the limits specified in the Detail Specification.

Note:

Skew is the signal propagation time difference. Measuring skew allows the characterization of:

- Intra-pair skew: the transmission delays between the wires of a single pair.
- Inter-pair skew: the transmission delays between a particular wire pair and any other wire

8.21.1.7 Mask Test and Jitter

Mask Test and Jitter shall be measured using an appropriate test method employing a suitable set-up and jig, as per Figure 1, at the maximum data rate as specified in the Detail Specification.

The following conditions shall apply:

- When terminated by a termination resistor, the two outputs of the transmitter (Out+ and Out-) shall have a maximum amplitude, V_{tx} , within the maximum limit specified in the Detail Specification.
- Data rate: the Maximum Data Rate as specified in the Detail Specification.
- The received eye pattern shall not exceed the mask (see Figure 2), if a mask is specified in the Detail Specification, and/or the differential output voltages shall meet the limits specified in the Detail Specification.
- If specified in the Detail Specification, ringing on the differential output of the transmitter shall be less than the limits specified in the Detail Specification.
- Jitter shall meet the limits specified in the Detail Specification.

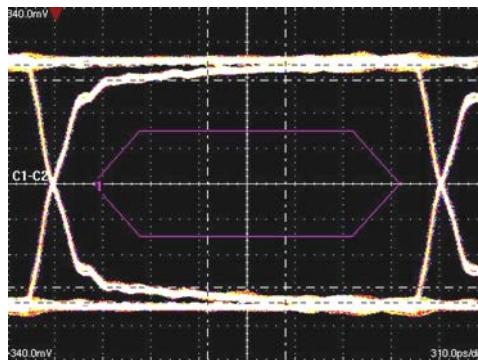


FIGURE 2 - MASK TEST EXAMPLE

8.21.1.8 Near-end and Far-end Crosstalk

Near-end and Far-end Crosstalk (N_{ext} and F_{ext}) shall be measured in the frequency domain using an appropriate test method employing a suitable set up and jig, as per Figure 1, at the maximum frequency as specified in the Detail Specification.

Crosstalk shall be measured using a network analyser with a balun of relevant bandwidth as specified in the Detail Specification with the following details:

- Crosstalk shall be measured from one transmission line to all the others.
- N_{ext} : Near-end crosstalk; injection and measurement on the same side.
- F_{ext} : Far-end crosstalk; injection on one side and measurement on the other side.

The following test conditions shall apply (see Figures 3 and 4 for test set-up examples):

- F_{ext} and N_{ext} shall meet the limits specified in the Detail Specification.
- One port (port 1) of the analyser shall be connected to one end of the transmission line and the other end shall be closed by terminations (Z_c Ohms).
- The second port (port 2) shall be connected to another transmission line with the other end closed by a termination (Z_c Ohms).

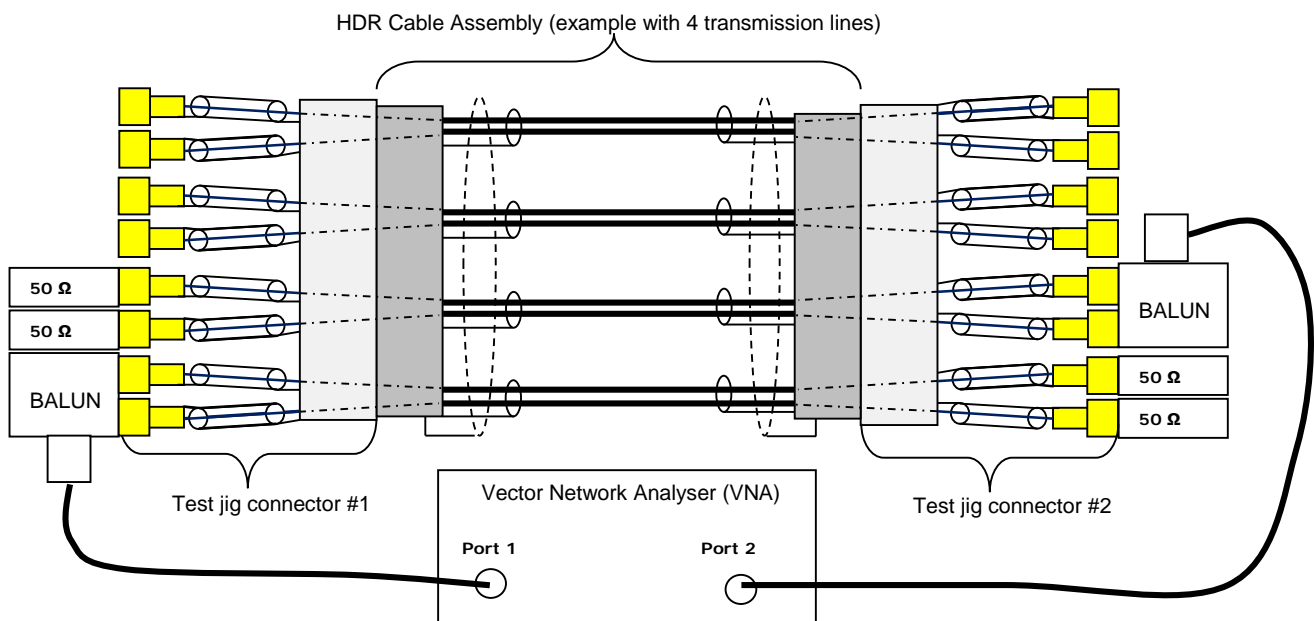


FIGURE 3A - FAR-END CROSSTALK TEST SET-UP EXAMPLE (USING BALUN AND VNA WITH 2 PORTS)

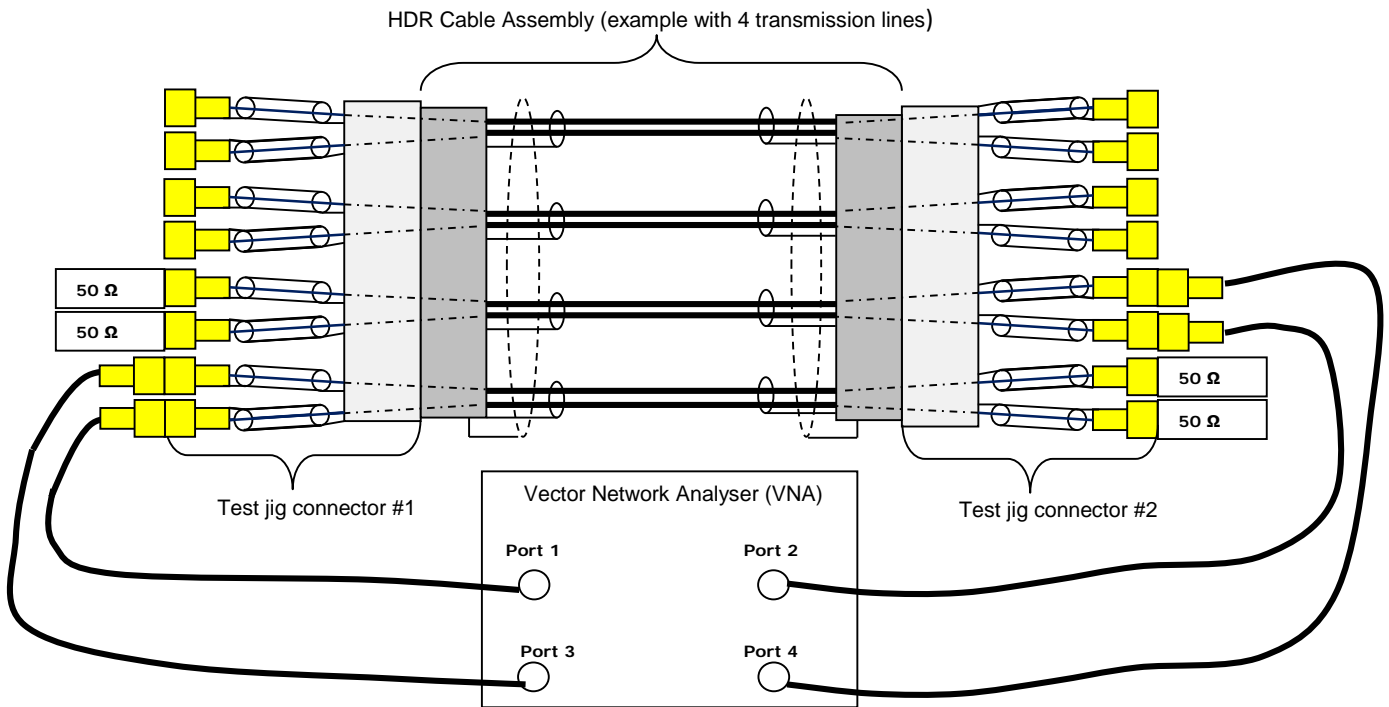


FIGURE 3B - FAR-END CROSSTALK TEST SET-UP EXAMPLE (USING VNA WITH 4 PORTS)

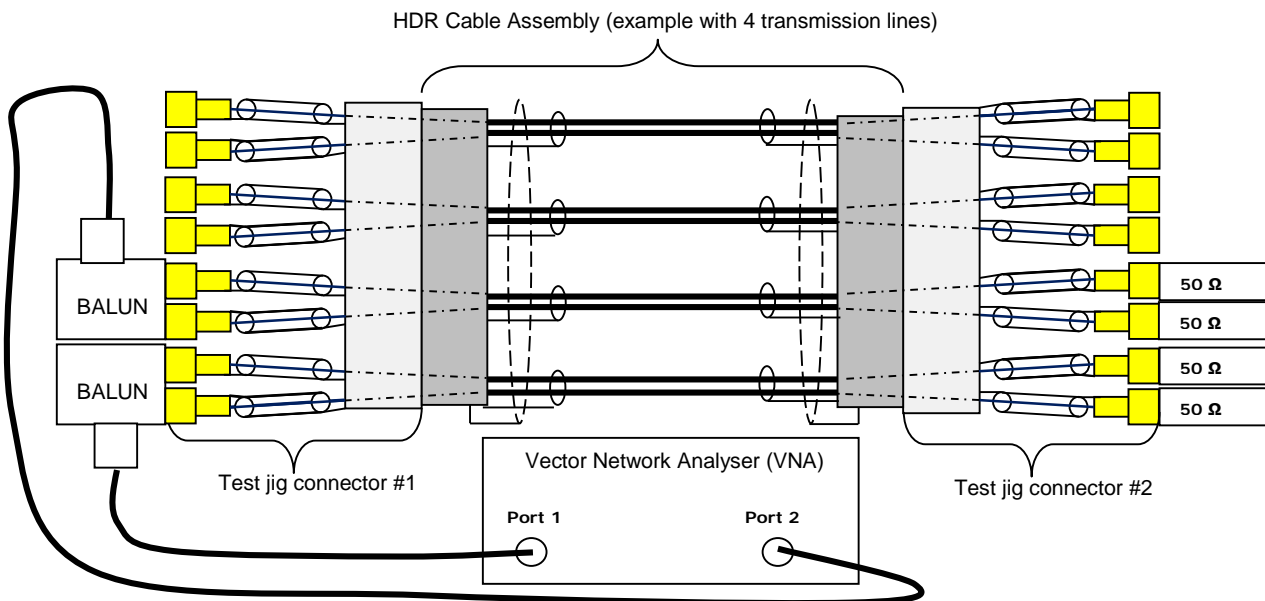


FIGURE 4 - NEAR-END CROSSTALK TEST SET-UP EXAMPLE

Note: no BALUN is necessary if a VNA with 4 ports is used as per Figure 3B

8.21.1.9 Insertion Loss

Insertion Loss shall be measured using an appropriate test method employing a suitable balanced/unbalanced test set-up and jig, as per Figure 5, across the full frequency range either by a swept frequency technique or, alternatively, at a minimum of 7 fixed frequencies equally spaced across the frequency range. The following conditions shall apply:

- Operating Frequency: Over the full operating frequency range as specified in the Detail Specification.
- Insertion Loss shall meet the limits specified in the Detail Specification.

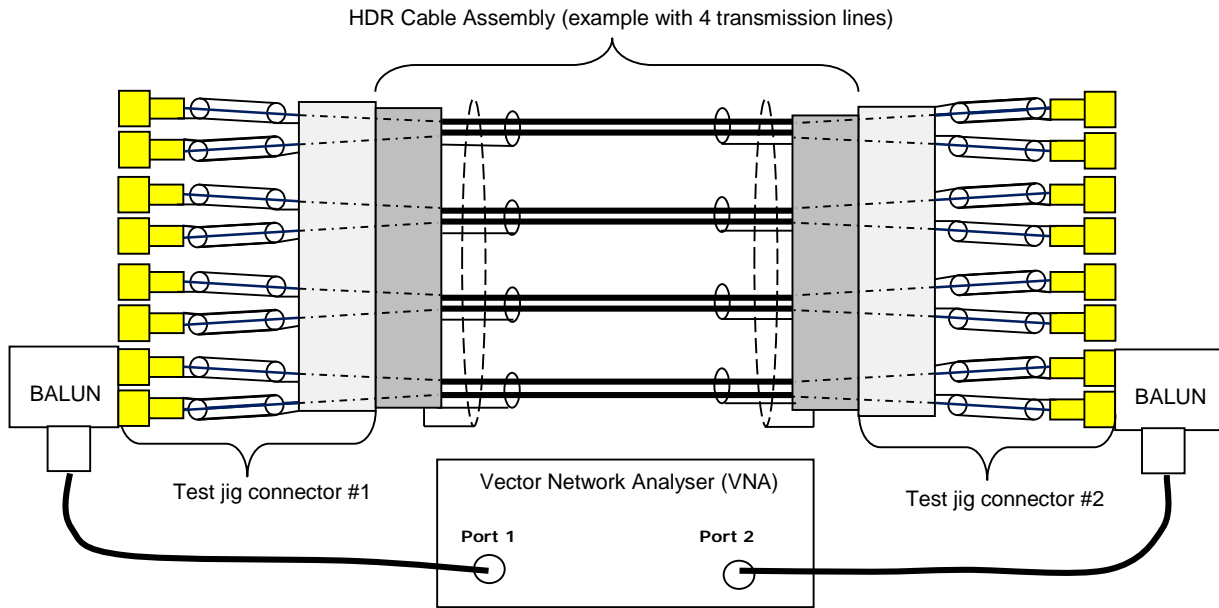


FIGURE 5A - INSERTION LOSS TEST SET-UP EXAMPLE (USING BALUN AND VNA WITH 2 PORTS)

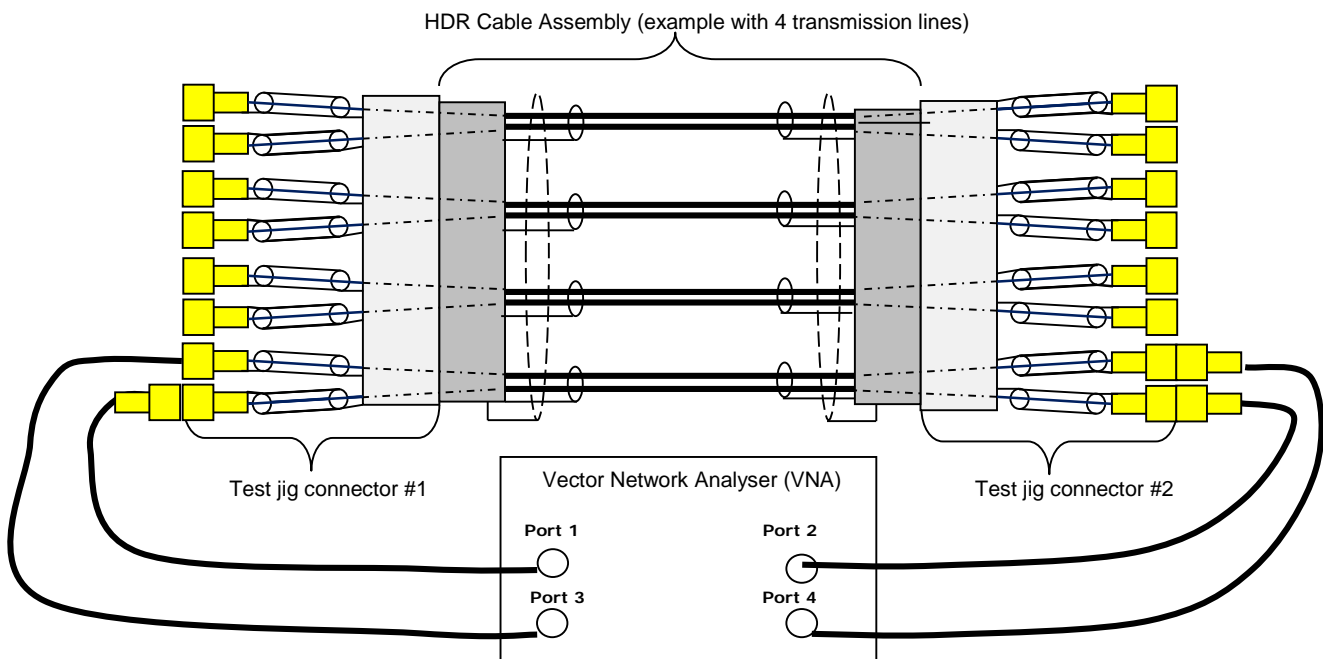


FIGURE 5B - INSERTION LOSS TEST SET-UP EXAMPLE (USING VNA WITH 4 PORTS)

8.21.2 Room Temperature Electrical Measurements

Room Temperature Electrical Measurements shall be performed as specified in the Detail Specification. Unless otherwise specified, Dielectric Withstanding Voltage, Voltage Proof Leakage Current, Skew, Mask Test, Jitter and Insertion Loss shall be measured at $T_{amb} = +22 \pm 3^{\circ}\text{C}$. All values obtained shall be recorded against serial numbers.

8.21.3 Intermediate and End-Point Electrical Measurements

At each of the relevant data points during Qualification, Periodic Testing and Lot Validation Testing (Charts F4A and F4B), Intermediate and End-Point Electrical Measurements shall be performed as specified herein and in the Detail Specification (including high data rate time domain parameters, and/or scattering parameters, and/or far-end and near-end crosstalk, and/or shielding effectiveness). All values obtained shall be recorded against serial numbers and the parameter drift calculated if specified.

8.21.4 Electrical Measurements at Room, High and Low Temperatures

At each of the relevant data points during Qualification, Periodic Testing and Lot Validation Testing (Charts F4A and F4B), unless otherwise specified, Dielectric Withstanding Voltage, Voltage Proof Leakage Current, Mask Test, Jitter and Insertion Loss shall be measured as specified in Intermediate and End-Point Electrical Measurements in the Detail Specification. Measurements shall be performed at $T_{amb} = +22 \pm 3^{\circ}\text{C}$, and at maximum and minimum operating temperatures as specified in Maximum Ratings in the Detail Specification. All values obtained shall be recorded against serial numbers.

8.22 RADIOGRAPHIC INSPECTION

ESCC Basic Specification No. [20900](#) and the following requirements:

Radiographic examination shall be performed on all cable-to-connector connections for each HDR cable assembly where solder joints are used.

In the case of crimp joints or shield clamping, the joints shall be inspected in accordance with the the Manufacturer's production inspection requirements in accordance with the PID; in this case no radiographic inspection is mandatory.

As a minimum, radiographs of solder joints shall be taken perpendicularly to the centreline of the connectors as follows:

- The solder joint(s) between the outer conductor(s) of the cable and the connector body, if one exists.
- The solder joints between the centre conductors of the cable and the contacts of the connector, if they exist.

The radiographs shall be examined against the following acceptance criteria:

- There shall be no evidence of solder projections, spikes, splashes or loose particles.
- Centre conductor(s) :
 - The centre conductor(s) of the cable shall be inserted into the contact hole for a minimum of 80% of the cavity length.
 - The centre conductor(s) of the cable shall present a straight shape in the connector.
 - The solder in the joint between the pin and the contact shall show a maximum of 30% voids within the solder joint.
 - The solder in the joint between the pin and the contact shall not show a single void bigger than 25% within the solder joint

- Outer conductor(s) :
 - The outer conductor(s) shall be inserted into the connector body or ferrule with a minimum of 70% of dedicated length.
 - The outer conductor(s) to connector body joint shall show a maximum of 30% voids within the solder joint
 - The outer conductor(s) to connector body joint shall not show a single void bigger than 25% within the solder joint.
- Any bend of the cable in 90° connector types shall be smooth and continuous, with uniform foil overlap and braid lay.

8.23 CONTACT HEIGHT AND/OR CONTACT RETENTION

The contact height and/or contact retention shall be checked on each connector of each HDR cable assembly using suitable gauges in accordance with the Detail Specification.

8.24 EXTERNAL VISUAL INSPECTION

External Visual Inspection shall be performed in accordance with ESCC Basic Specification No. 20500 with magnification power x10.

8.25 SHIELDING EFFECTIVENESS

Shielding Effectiveness (SE) shall be measured in accordance with IEC Publication No. 61726 and the following requirements:

- Maximum frequency range of the reverberant chamber shall not be less than the maximum operating frequency of the test vehicles.
- Number of measurement points: 100 points/decade.
- Shielding Effectiveness shall meet the limits specified in Intermediate and End-Point Electrical Measurements in the Detail Specification.

The Shielding Effectiveness (SE) is calculated using the following formula:

$$SE \text{ (dB)} = (P_i/P_t) \text{ (dB)} - X_c$$

Where :

- P_i is the incident power (from the generator)
- P_t is the transmitted power to the test vehicles
- X_c is the cage loss (dB). X_c is measured with an additional matched antenna in the reverberation chamber.

8.26 CABLE RETENTION FORCE

The test vehicles shall be held vertically and fixed such that the forces and torques to be applied will not cause it to move. The cable of the test vehicles shall be kept as unbent and untwisted as possible.

The connector at one end of each test vehicle shall be held while an axial force is applied to the connector at the other end, along the cable axis, by suitable means. The force shall be gradually increased until the cable retention force specified in the Detail Specification is attained. The cable retention force shall then be applied for 2 minutes.

- Data Points:

Prior to testing, Contact Height shall be checked as specified in Para. 8.23 herein.

On completion of testing, the test vehicles shall be visually inspected and there shall be no evidence of mechanical damage, loosening of the cable or rupture. Contact Height shall be rechecked. Intermediate and End-Point Electrical Measurements shall be performed as specified in the Detail Specification.

8.27 AGEING

[MIL-STD-202, Test Method 108](#) (non-operating) and as follows:

- Test Temperature: maximum storage temperature specified in Maximum Ratings in the Detail Specification

- Duration: 240h

- Data Points:

On completion of testing and after a recovery period of 2 hours minimum at room temperature conditions, Intermediate and End-Point Electrical Measurements shall be performed as specified in the Detail Specification.

8.28 MATING ENDURANCE

Mating Endurance shall be performed in accordance with Endurance as specified in ESCC Generic Specification No. [3401](#), and as follows. One connector of each connector type in each test vehicle shall be tested.

- Cycle Rate: $\leq 8/\text{minute}$

- Number of Mating/Unmating Cycles: 500

- Data Points:

Prior to testing, unless otherwise specified, Mating and Unmating Forces shall be performed as specified in Para. 8.36, plus Conductor and Shield Resistance, and Mated Shell Conductivity shall be performed as specified in Intermediate and End-Point Electrical Measurements in the Detail Specification.

On completion of testing and after a recovery period of 2 hours minimum at room temperature conditions, unless otherwise specified, Mating and Unmating Forces shall be performed as specified in Para. 8.36, plus Conductor and Shield Resistance, Mated Shell Conductivity, Insulation Resistance and Dielectric Withstanding Voltage / Voltage Proof Leakage Current shall be performed as specified in Intermediate and End-Point Electrical Measurements in the Detail Specification.

NOTE:

Unless otherwise specified, the threads of rotational parts shall not be lubricated before or during Mating Endurance testing. Solvents and tools shall not be used for cleaning.

8.29 CONTACT & INSERT RETENTION8.29.1 Contact Retention (in Insert)

Contact Retention (in Insert) shall be performed as specified in ESCC Generic Specification No. 3401.

8.29.2 Insert Retention (in Shell)

Insert Retention (in Shell) shall be performed as specified in ESCC Generic Specification No. 3401.

8.30 BENDING

The centre section of the cable of the test vehicles shall be wrapped entirely around a mandrel having a diameter equal to the minimum dynamic bending radius defined in the Detail Specification. First wrap shall be against the natural flow of the cable. Then second wrap shall be done according to the natural flow. Then wrapping shall be done alternatively to a total of 2 times in each direction.

- Data Points:

On completion of testing, the test vehicles shall be visually inspected. There shall be no cracks, flaws or other damage in the cable jacket material. Intermediate and End-Point Electrical Measurements shall be performed as specified in the Detail Specification.

8.31 VIBRATION (RANDOM AND SINE)

Test vehicles shall be subjected to both Random Vibration and Sine Vibration tests. The tests may be performed in any order.

Each complete test vehicle including all connector sets shall be mounted on the vibration generator either directly or by means of a fixture. The outer connector of each connector set shall be mounted rigidly on the vibration generator or fixture, as applicable.

The cable of each test vehicle shall be secured to the vibration-plate using 2.5 ±0.5mm wide cable-ties looped through aluminium tie-down posts starting 200 (+25 -0)mm from the reference plane or centreline of the mated connector sets and every 200mm minimum thereafter. Appropriate protective padding shall be placed between the cable jacket and tie down plates to prevent damage to the cable.

Mounting fixtures shall enable each test vehicle to be vibrated in 3 mutually perpendicular axes in turn, which should be so chosen that faults are most likely to be revealed.

8.31.1 Random Vibration

[MIL-STD-202, Test Method 214](#). Unless otherwise specified, the following conditions shall apply:

- Random Vibration Test Curve:

Envelope: Grms = 38.5	
20 to 60 Hz	+6dB/Octave
60 to 400 Hz	2g ² /Hz
400 to 800 Hz	-6dB/Octave
800 to 1000 Hz	0.5g ² /Hz
1000 to 2000 Hz	-6dB/Octave

- Duration: 180s in each of the 3 mutually perpendicular axes.
- Electrical continuity shall be monitored continuously during the test. No discontinuities > 1μs are allowed.
- Data Points:
On completion of testing, the test vehicles shall be visually inspected. There shall be no evidence of damage or loosening of parts. Intermediate and End-Point Electrical Measurements shall be performed as specified in the Detail Specification.

8.31.2 Sine Vibration

[MIL-STD-202, Test Method 204](#). Unless otherwise specified, the following conditions shall apply:

- Sweep Frequency: 5-100-5Hz. For the entire frequency range of 5 to 100Hz and return to 5Hz, the slope rate shall be 2 Octaves per minute maximum.
- Total number of Cycles: 9 (3 times in each of the 3 mutually perpendicular axes).
- Vibration Amplitude:
 - 5Hz to 26Hz: 11mm (peak)
 - 26Hz to 100Hz: 30g
- Data Points:
On completion of testing, the test vehicles shall be visually inspected. There shall be no evidence of damage or loosening of parts. Intermediate and End-Point Electrical Measurements shall be performed as specified in the Detail Specification.

8.32 THERMAL STABILITY AND SKEW

This measurement is performed to measure the variation of the skew in the transmission line (pair) submitted to temperature variation.

Test vehicles shall be subjected to temperature steps with the following conditions:

- Temperature Steps: Minimum Operating Temperature as specified in the Detail Specification, -5°C, 0°C, +5°C, +10°C, +15°C, +20°C, +25°C, Maximum Operating Temperature as specified in the Detail Specification
- Temperature transfer slope: $\leq 10^\circ\text{C}/\text{minute}$
- Operating Data Rate: the maximum operating data rate as specified in the Detail Specification, unless otherwise specified.
- Data Points:
Skew shall be measured after 15 minutes stabilisation at each temperature step, as specified in Intermediate and End-Point Electrical Measurements in the Detail Specification.

8.33 DESTRUCTIVE PHYSICAL ANALYSIS (DPA)

ESCC Basic Specification No. [21001](#) on both all the connectors and all the cables of the HDR Cable Assembly.

8.34 RADIATION

Only required if specified in the Detail Specification.

The test vehicle shall be subjected to a radiation test in accordance with the following conditions:

- Mounting:
Test set-up atmosphere shall exclude oxygen (i.e. tested under continuous Nitrogen flow or in vacuum).

Test set-up shall be implemented so that the test vehicle temperature during testing is limited to $\leq +40^\circ\text{C}$.
- Ambient test temperature during irradiation: $T_{\text{amb}} = +20 \pm 10^\circ\text{C}$.
- Radiation source: electron or gamma
- Radiation dosage: as specified in the Detail Specification.
- Dose rate: $\leq 45\text{MRAD}/\text{hour}$
- Data Points:
Prior to testing, Intermediate and End-Point Electrical Measurements shall be performed as specified in the Detail Specification.

On completion of testing and after a recovery period of 2 hours minimum at room temperature conditions, the test vehicle shall be visually inspected. There shall be no evidence of damage or loosening of parts. Intermediate and End-Point Electrical Measurements shall be performed as specified in the Detail Specification.

NOTES:

1. For qualified HDR cable assemblies, the radiation source and the radiation dosage shall be approved by ESCC Executive prior to testing.
2. For electron source radiation, the following conditions shall apply:
The electron source used for the test shall be a steady-state type. The electron energy shall be sufficient to guarantee 1 to 3 MeV energy remaining at the test samples.

3. For qualified HDR cable assemblies, the radiation cumulated dose shall be approved by the ESCC Executive.
4. For gamma source radiation, the following test procedure shall apply :
 - (a) Dielectric dosage level:
 - o Irradiate to dielectric dosage level as specified in the Detail Specification.
 - o On completion of testing and after a recovery period of 2 hours minimum at room temperature conditions, Intermediate and End-Point Electrical Measurements shall be performed as specified in the Detail Specification.

Note: Flexing of the cable of the test vehicle during testing shall be avoided.

- (b) Cable Jacket dosage level:
 - o Irradiate to cable jacket dosage level as specified in the Detail Specification.
 - o On completion, as a minimum inspect for integrity of the cable jacket material (both at magnification power x1 and minimum x10). There shall be no cracking, no particles of the cable jacket material flaking away.

8.35 PERMANENCE OF MARKING
ESCC Basic Specification No. [24800](#).

8.36 MATING AND UNMATING FORCES
Mating and Unmating Forces shall be performed in accordance with Mating and Unmating Forces as specified in ESCC Generic Specification No. [3401](#) and the Detail Specification. All connectors in each HDR cable assembly shall be tested.

8.37 CRIMP CONTACT TENSILE STRENGTH
Only required if specified in the Detail Specification.

All crimp contacts within the HDR cable assembly shall be subjected to, and shall meet the requirements of the tensile strength test as specified in ECSS-Q-ST-70-26.

9 DATA DOCUMENTATION

9.1 GENERAL

For the qualification, qualification maintenance and procurement for each lot, a data documentation package shall exist in a printed or electronic form.

This package shall be compiled from:

- (a) Cover sheet (or sheets).
- (b) List of equipment (testing and measuring).
- (c) List of test references.
- (d) Add-on components documentation.
- (e) Special In-Process Controls data (Chart F2).
- (f) Screening Tests data (Chart F3).
- (g) Qualification, Periodic Testing and Lot Validation Testing (when applicable) data (Charts F4A and F4B).
- (h) Failed components list and failure analysis report (when applicable).
- (i) Certificate of Conformity.

Items (a) to (i) inclusive shall be grouped, preferably as subpackages and, for identification purposes, each page shall include the following information:

- ESCC Component Number.
- Manufacturer's name.
- Lot identification.
- Date of establishment of the document.
- Page number.

Whenever possible, documentation should preferably be available in electronic format suitable for reading using a compatible PC. The format supplied shall be legible, durable and indexed. The preferred storage medium is CD-ROM and the preferred file format is PDF.

9.1.1 Qualification and Qualification Maintenance

In the case of qualification or qualification maintenance, the items listed in Para. 9.1(a) to (i) are required.

9.1.2 Component Procurement and Delivery

For all deliveries of components procured to this specification, the following documentation shall be supplied:

- (a) Cover sheet (if all of the information is not included on the Certificate of Conformity).
- (b) Certificate of Conformity (including range of delivered serial numbers).

9.1.3 Additional Documentation

The Manufacturer shall deliver additional documentation containing data and reports to the Orderer, if stipulated in the Purchase Order.

9.1.4 Data Retention/Data Access

If not delivered, all data shall be retained by the Manufacturer for a minimum of 10 years during which time it shall be available for review, if requested, by the Orderer or the ESCC Executive (for qualified components).

9.2 COVER SHEET(S)

The cover sheet(s) of the data documentation package shall include as a minimum:

- (a) Reference to the Detail Specification, including issue and date.
- (b) Reference to the applicable ESCC Generic Specification, including issue and date.
- (c) ESCC Component Number and the Manufacturer's part type number.
- (d) Lot identification.
- (e) Range of delivered serial numbers.
- (f) Number of the Purchase Order.
- (g) Information relative to any additions to this specification and/or the Detail Specification.
- (h) Manufacturer's name and address.
- (i) Location of the manufacturing plant (specify place of assembly and test).
- (j) Signature on behalf of Manufacturer.
- (k) Total number of pages of the data package.

9.3 LIST OF EQUIPMENT USED

A list of equipment used for tests and measurements shall be prepared. Where applicable, this list shall contain inventory number, Manufacturer's type number, serial number, etc. This list shall indicate for which tests such equipment was used.

9.4 LIST OF TEST REFERENCES

This list shall include all Manufacturer's references or codes which are necessary to correlate the test data provided with the applicable tests specified in the tables of the Detail Specification.

9.5 ADD-ON COMPONENTS DOCUMENTATION

A summary of the results of procurement and screening of add-on components (with reference to the traceability information) shall be compiled and shall provide the following information for each add-on component type:

- Reference
- Supplier name and location
- Lot identification and date code
- Quality level
- Procurement specifications (Generic and Detail)
- Reliability data reference
- Certificate of Conformity

In addition, for cable add-on components (as applicable), a summary of the results of the Insulation Flaws (Spark Test) shall be included in the documentation, traceable to each length of cable supplied.

9.6 SPECIAL IN-PROCESS CONTROLS DATA (CHART F2)

A test result summary shall be compiled showing the total number of add-on components submitted to, and the total number rejected after each of the tests. For Plating Thickness the minimum and maximum measurements shall be provided.

9.7 SCREENING TESTS DATA (CHART F3)

A test result summary shall be compiled showing the total number of components submitted to and the total number rejected after each of the tests. For each test requiring electrical measurements, the results shall be recorded against component serial number. For Radiographic Inspection, all radiographs shall be recorded against component serial number.

9.8 QUALIFICATION, PERIODIC TESTING AND LOT VALIDATION TESTING DATA (CHARTS F4A AND F4B)

9.8.1 Qualification Testing (Chart F4A)

A test result summary shall be compiled showing the components submitted to, and the number rejected after each test. Component serial numbers shall be identified. For each test requiring electrical measurements, the results shall be recorded against component serial number. Where a drift value is specified during a test the drift calculation shall be recorded against component serial number. For Radiographic Inspection, all radiographs shall be recorded against component serial number. For Destructive Physical Analysis, a DPA report shall be produced in accordance with ESCC Basic Specification No. [21001](#).

9.8.2 Periodic Testing for Qualification Maintenance (Chart F4B)

A test result summary shall be compiled showing the components submitted to and the number rejected after each test. Component serial numbers shall be identified. For each test requiring electrical measurements, the results shall be recorded against component serial number. Where a drift value is specified during a test the drift calculation shall be recorded against component serial number. For Radiographic Inspection, all radiographs shall be recorded against component serial number. For Destructive Physical Analysis, a DPA report shall be produced in accordance with ESCC Basic Specification No. [21001](#).

In addition to the full test data, a report shall be compiled to act as the most recent Periodic Testing summary. This report shall include a list of all tests performed, the ESCC Component Numbers and quantities of components tested, a statement confirming all the results were satisfactory, the date the tests were performed and a reference to the full test data.

9.8.3 Lot Validation Testing (Charts F4A and/or F4B)

A test result summary shall be compiled showing the components submitted to and the number rejected after each test (as applicable). Component serial numbers for each subgroup shall be identified. For each test requiring electrical measurements, the results shall be recorded against component serial number. Where a drift value is specified during a test the drift calculation shall be recorded against component serial number. For Radiographic Inspection, all radiographs shall be recorded against component serial number. For Destructive Physical Analysis, a DPA report shall be produced in accordance with ESCC Basic Specification No. [21001](#).

9.9 FAILED COMPONENTS LIST AND FAILURE ANALYSIS REPORT

The failed components list and failure analysis report shall provide full details of:

- (a) The reference and description of the test or measurement performed as defined in this specification and/or the Detail Specification during Special In-Process Controls, Screening Tests, and Qualification, Periodic Testing and Lot Validation Testing.
- (b) Traceability information including serial number (if applicable) of the failed component.
- (c) The failed parameter and the failure mode of the component.
- (d) Detailed failure analysis (if requested by the ESCC Executive or Orderer).

9.10 **CERTIFICATE OF CONFORMITY**

A Certificate of Conformity shall be established in accordance with the requirements of ESCC Basic Specification No. [20100](#).

10 DELIVERY

For procurement, for each order, the items forming the delivery are:

- (a) The delivery lot.
- (b) The components used for Lot Validation Testing (as applicable), but not forming part of the delivery lot, if stipulated in the Purchase Order.
- (c) The relevant documentation in accordance with the requirements of Paras. 9.1.2 and 9.1.3.

In the case of a component for which a valid qualification is in force, all data of all components submitted to Lot Validation Testing shall also be copied, when requested, to the ESCC Executive.


For qualification or qualification maintenance, the disposition of the Qualification Test Lot and its related documentation shall be as specified in ESCC Basic Specification No. [20100](#) and the relevant paragraphs of Section 9 of this specification.

11 PACKAGING AND DISPATCH

The packaging and dispatch of components to this specification shall be in accordance with the requirements of ESCC Basic Specification No. [20600](#).

12 CHARTS


12.1 CHART F1 - GENERAL FLOW FOR PROCUREMENT

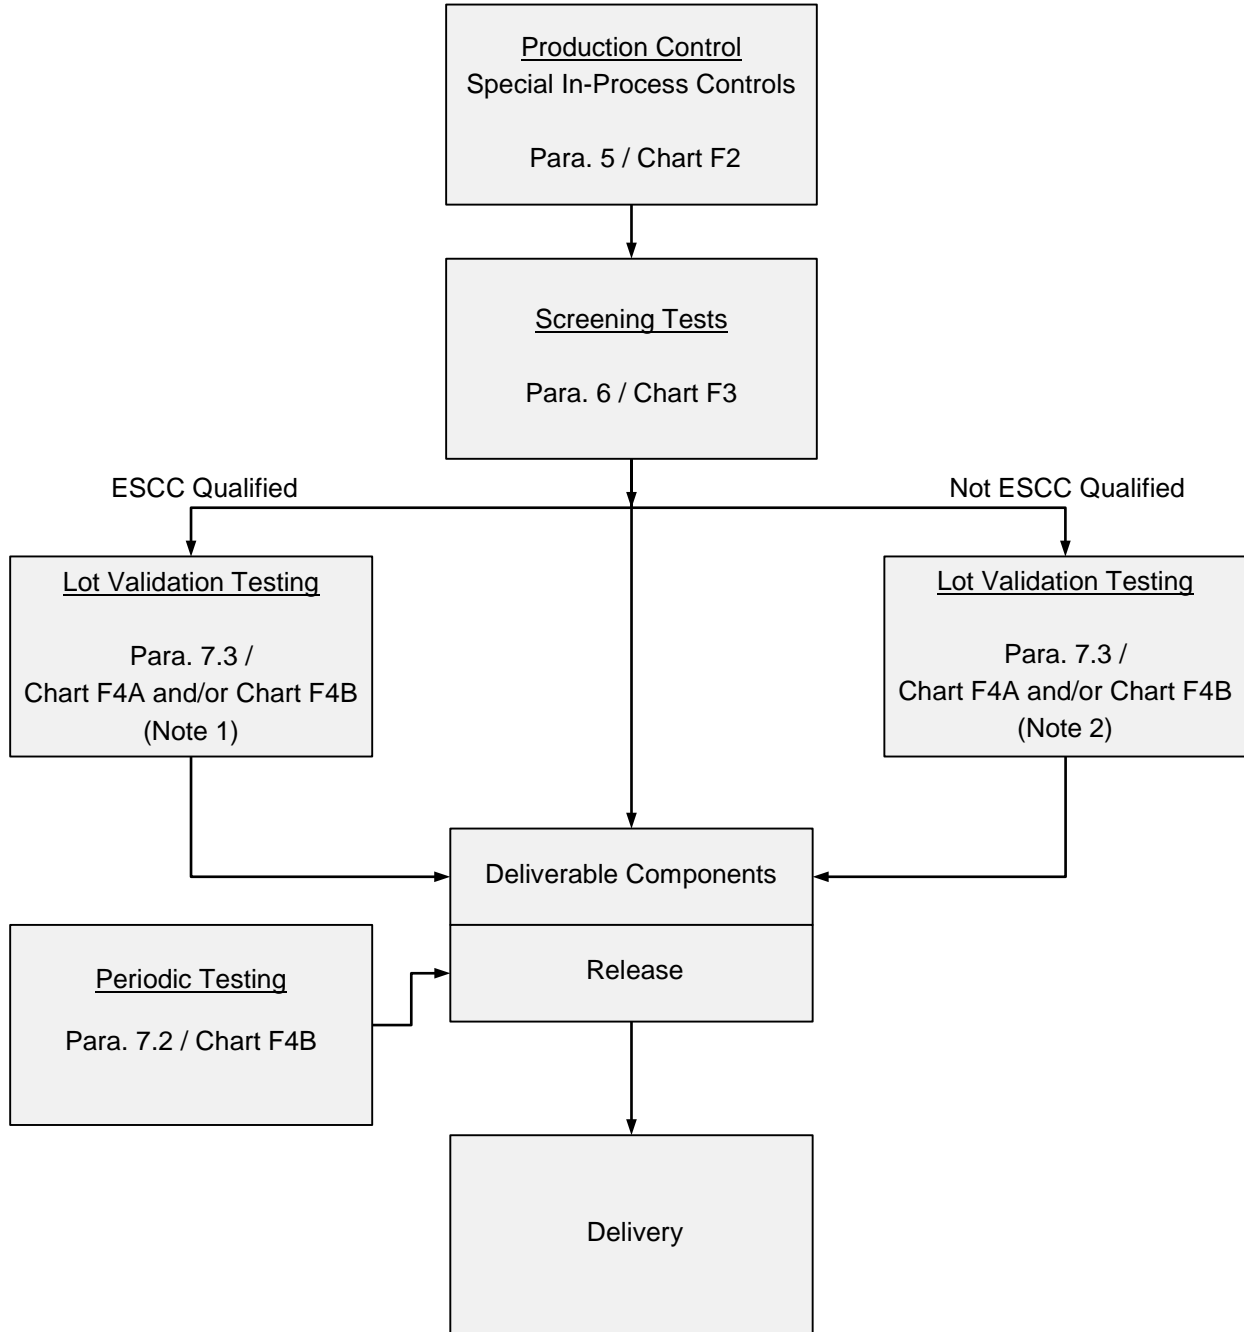

NOTES:

1. Lot Validation Testing is not required for qualified components unless specifically stipulated in the Purchase Order.
2. For unqualified components, the need for Lot Validation Testing shall be determined by the Orderer and the required testing shall be as stipulated in the Purchase Order (Ref. ESCC Basic Specification No. [23100](#)).

12.2 CHART F2 - PRODUCTION CONTROL (SPECIAL IN-PROCESS CONTROLS)

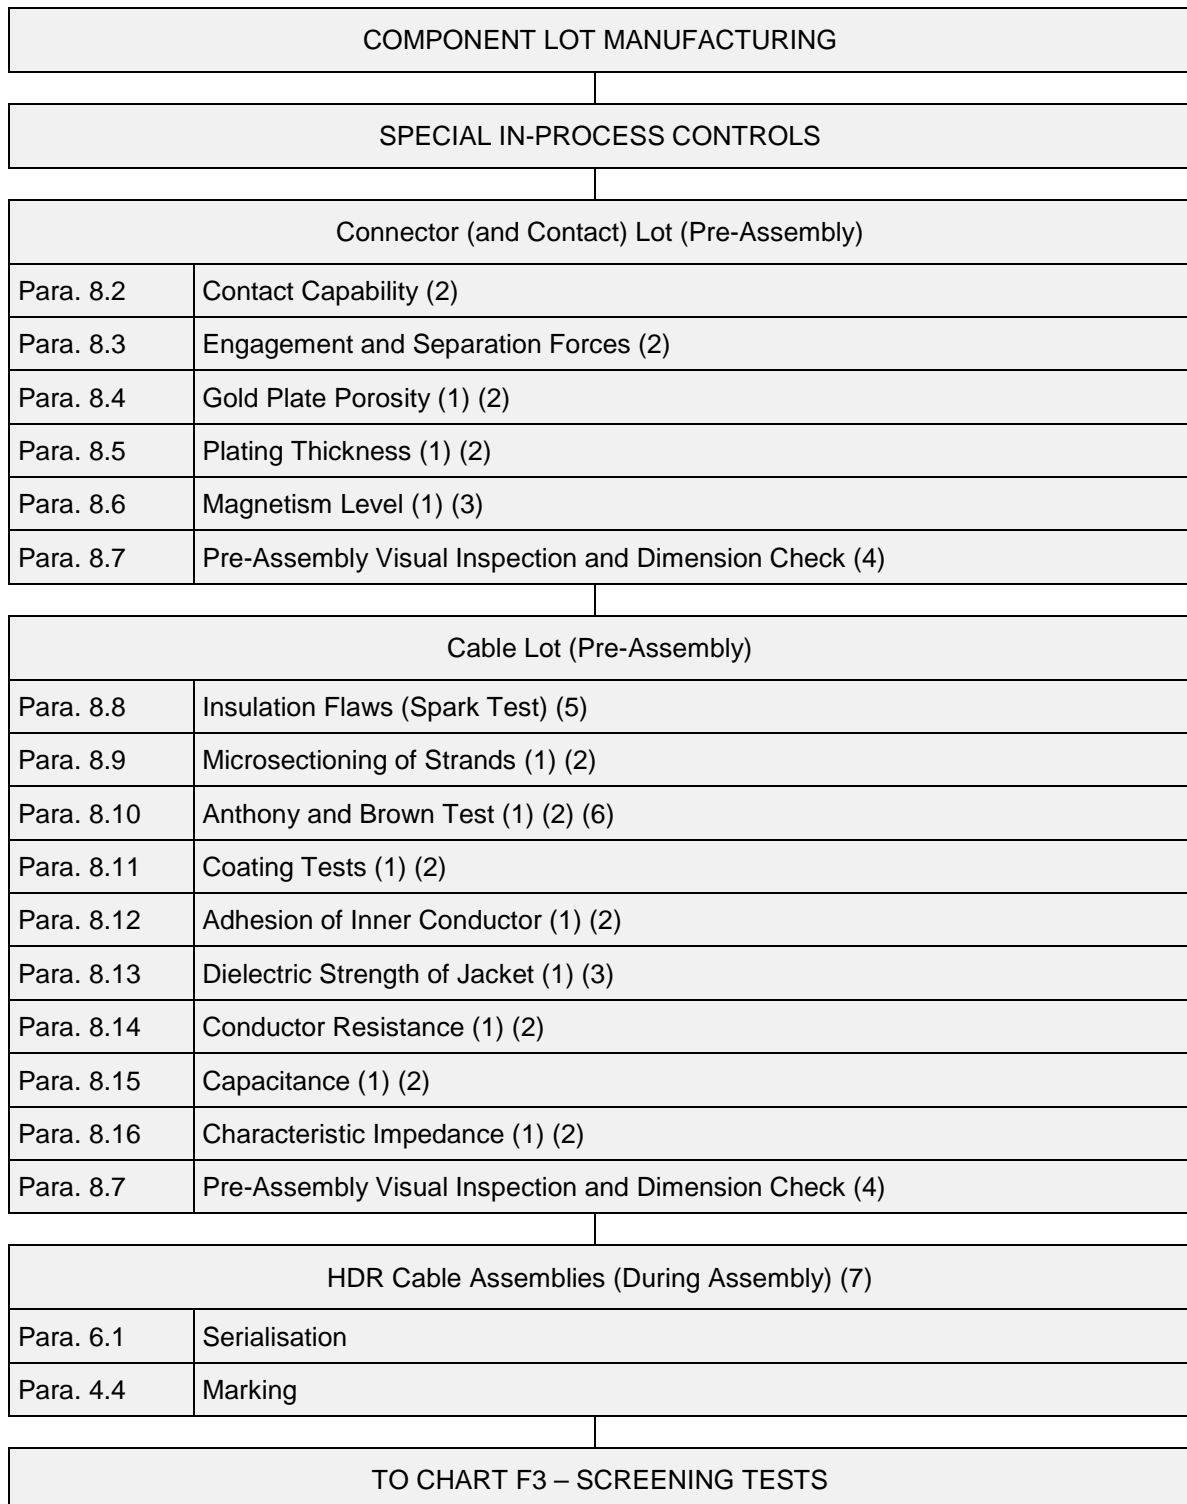

NOTES:

1. Testing is not required to be repeated for HDR cable assemblies manufactured using ESCC qualified connectors and ESCC qualified cable.
2. Performed on a sample basis.
3. Only if specified in the Detail Specification.
4. Dimension Check is not required to be repeated if performed as part of the Manufacturer's incoming inspection or internal processing.
5. Performed by the cable manufacturer on the cable core prior to application of the outer conductor and jacket.
6. Only if the cable lot is intended to be used to manufacture the HDR cable assembly test vehicles used for Qualification Testing, Periodic Testing or Lot Validation Testing.
7. Qualified HDR cable assemblies shall be assembled in accordance with the PID.

12.3 CHART F3 - SCREENING TESTS


COMPONENTS FROM PRODUCTION CONTROL (HDR Cable Assemblies After Assembly)	
Para. 8.17	Length and Weight (1) (2)
Para. 8.18.1	Temperature Cycling
Para. 8.19	Coupling Proof Torque (1) (3)
Para. 8.20	Mating Verification (1)
Para. 8.21.2	Room Temperature Electrical Measurements (1)
Para. 8.22	Radiographic Inspection (1) (4)
Para. 8.23	Contact Height and/or Contact Retention (1)
Para. 8.24	External Visual Inspection (1)
TO CHART F4A OR F4B WHEN APPLICABLE	

NOTES:

1. No failures are permitted.
2. Test may be performed at any point during Chart F3.
3. Testing is required only for HDR cable assemblies that use circular connectors.
4. Radiographic inspection is required only for HDR cable assemblies where solder joints are used.

12.4 CHART F4 – QUALIFICATION, PERIODIC TESTING AND LOT VALIDATION TESTING

12.4.1 Chart F4A - Qualification Testing and Lot Validation Testing

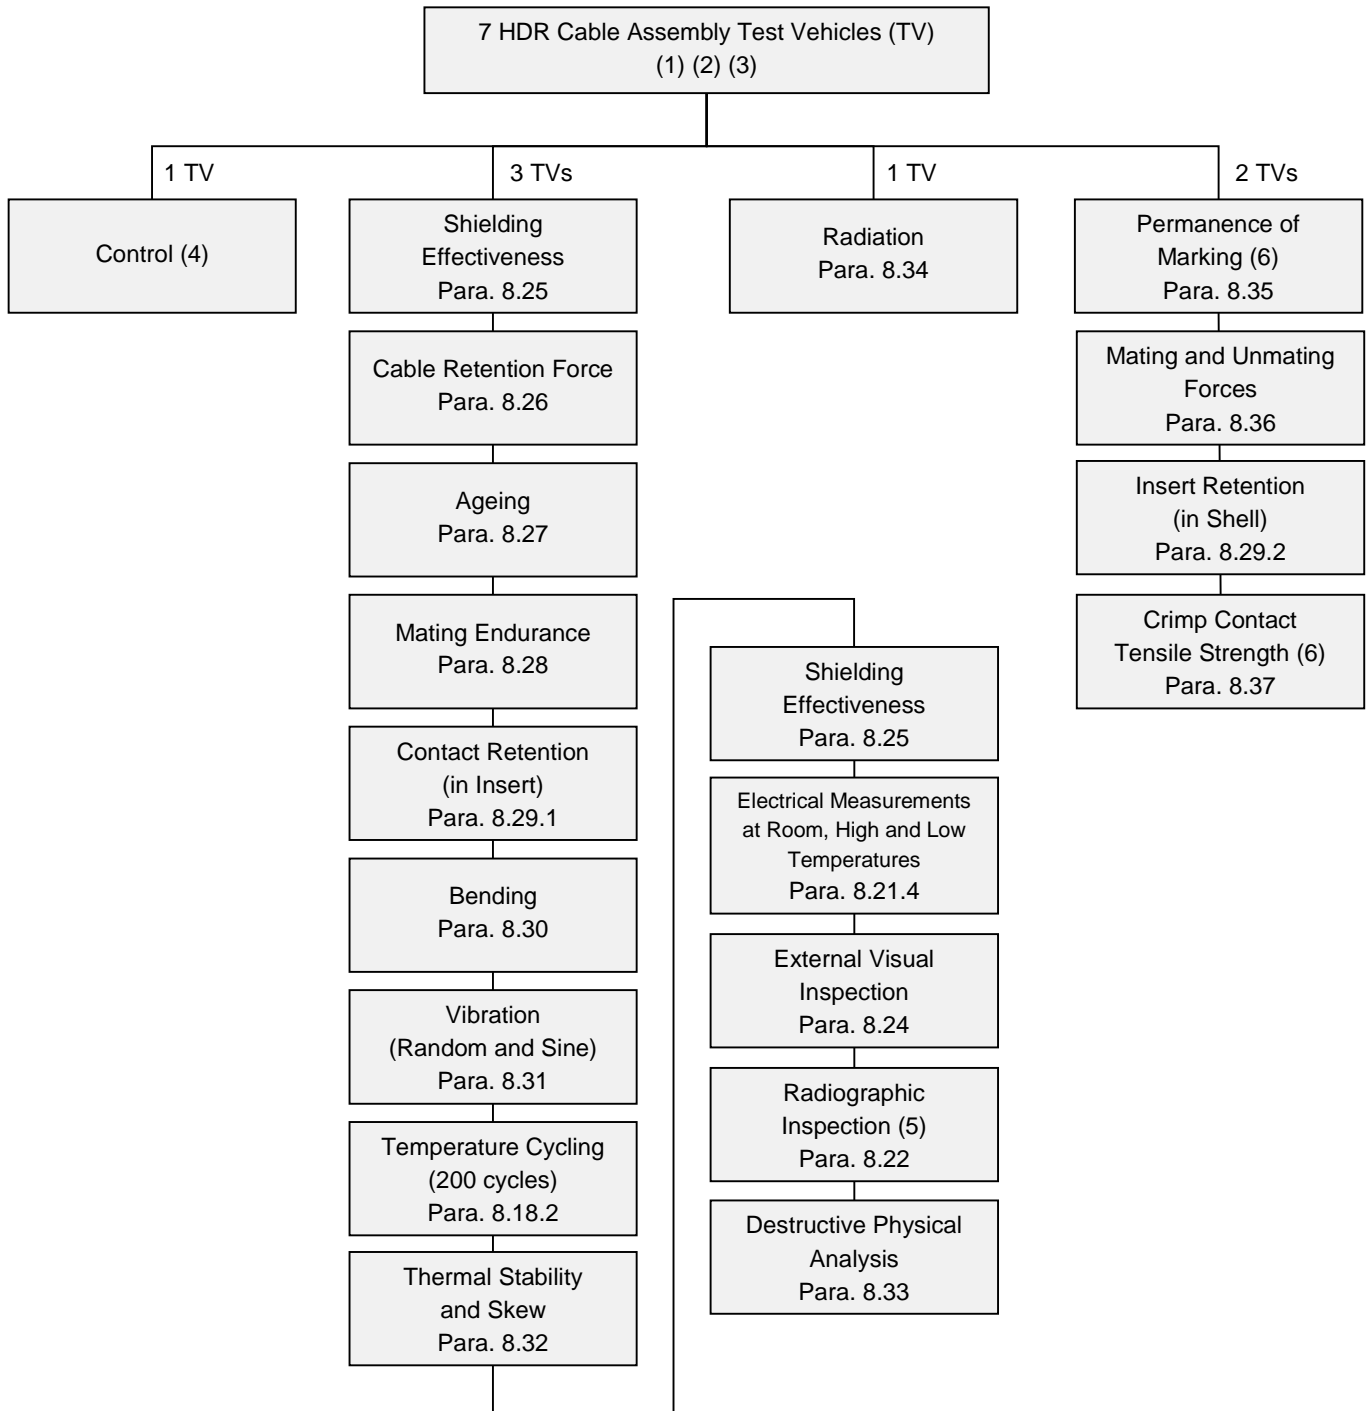


NOTES:

1. The quantity of test vehicles (TV) to be subjected to each test or subgroup test sequence is indicated in Chart F4A.
2. For distribution, see Para. 7.1.2 for Qualification Testing and Para. 7.3 for Lot Validation Testing.
3. No failures are permitted.

4. A control sample shall be used for reference purposes. Whenever electrical measurements are made on any component under test, the control sample shall also be measured.
5. Radiographic inspection is required only for HDR cable assemblies where solder joints are used.
6. Only if specified in the Detail Specification.

12.4.2 Chart F4B - Periodic Testing and Lot Validation Testing

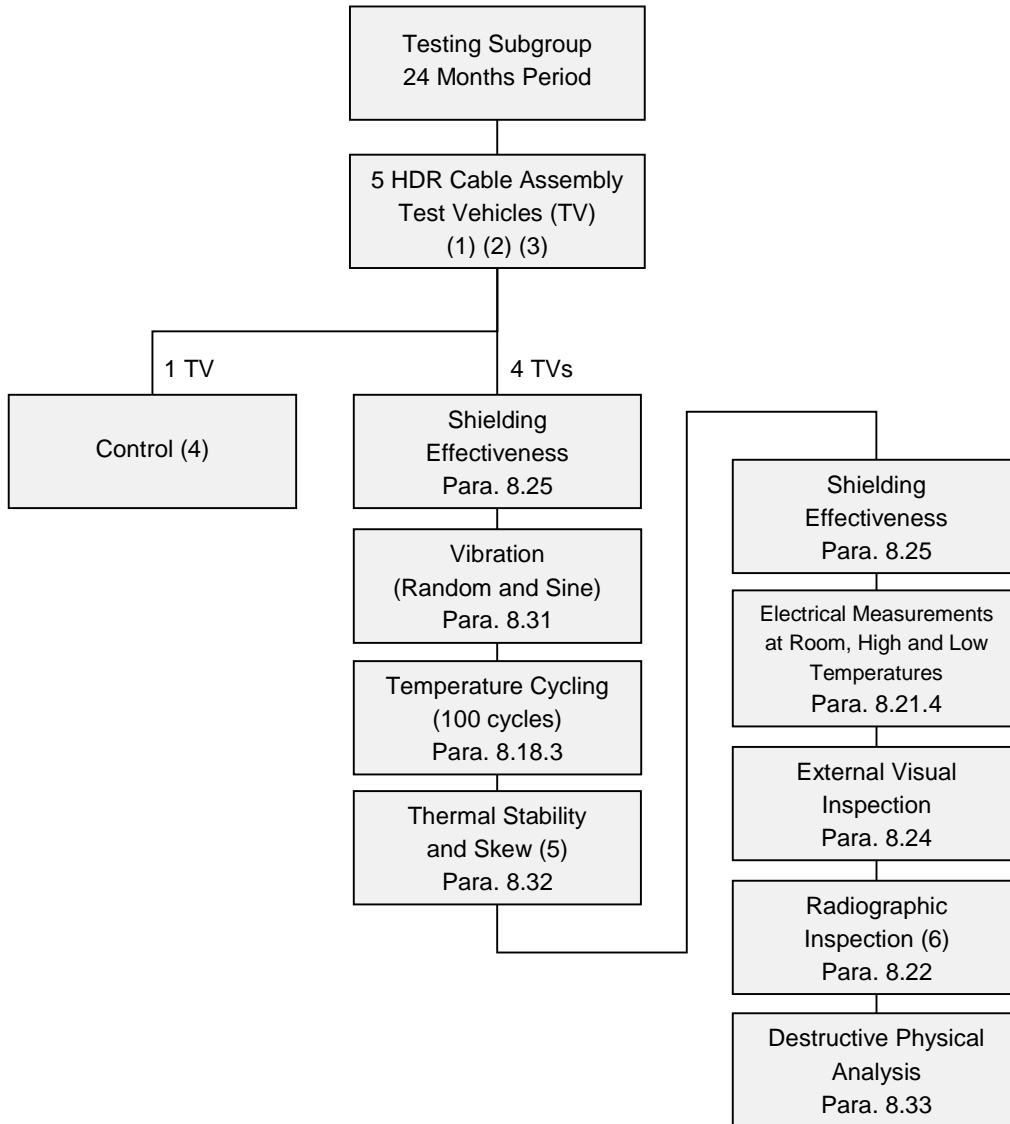

NOTES:

1. The quantity of test vehicles (TV) to be subjected to each test or subgroup test sequence is indicated in Chart F4B.
2. For distribution, see Para. 7.1.2 for Periodic Testing and Para. 7.3 for Lot Validation Testing.
3. No failures are permitted.
4. A control sample shall be used for reference purposes. Whenever electrical measurements are made on any component under test, the control sample shall also be measured.
5. Measurements shall be performed on 1 TV only.
6. Radiographic inspection is required only for HDR cable assemblies where solder joints are used.