



**DIODE, RECTIFIER, HIGH VOLTAGE, SURFACE  
MOUNT**

**BASED ON TYPE STTH60400**

**ESCC Detail Specification No. 5103/032**

Issue 1	November 2018
---------	---------------



### **LEGAL DISCLAIMER AND COPYRIGHT**

European Space Agency, Copyright © 2018. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

**DOCUMENTATION CHANGE NOTICE**

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION

**TABLE OF CONTENTS**

1	GENERAL	5
1.1	SCOPE	5
1.2	APPLICABLE DOCUMENTS	5
1.3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	5
1.4	THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS	5
1.4.1	The ESCC Component Number	5
1.4.2	Component Type Variants	5
1.5	MAXIMUM RATINGS	6
1.6	HANDLING PRECAUTIONS	6
1.7	PHYSICAL DIMENSIONS AND TERMINAL IDENTIFICATION	7
1.8	FUNCTIONAL DIAGRAM	8
1.9	MATERIALS AND FINISHES	8
2	REQUIREMENTS	8
2.1	GENERAL	8
2.1.1	Deviations from the Generic Specification	8
2.1.1.1	Deviations from Qualification and Periodic Tests – Chart F4	8
2.2	MARKING	8
2.3	ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES	8
2.3.1	Room Temperature Electrical Measurements	9
2.3.2	High and Low Temperatures Electrical Measurements	9
2.3.3	Notes to Electrical Measurements Tables	9
2.4	PARAMETER DRIFT VALUES	10
2.5	INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS	10
2.6	HIGH TEMPERATURE REVERSE BIAS BURN-IN CONDITIONS	10
2.7	POWER BURN-IN CONDITIONS	11
2.8	OPERATING LIFE CONDITIONS	11
	APPENDIX 'A'	12

## 1 GENERAL

### 1.1 SCOPE

This specification details the ratings, physical and electrical characteristics and test and inspection data for the component type variants and/or the range of components specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

### 1.2 APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. [5000](#)
- (b) [MIL-STD-750](#), Test Methods and Procedures for Semiconductor Devices

### 1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. [21300](#) shall apply.

### 1.4 THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS

#### 1.4.1 The ESCC Component Number

The ESCC Component Number shall be constituted as follows:

Example: 510303201

- Detail Specification Reference: 5103032
- Component Type Variant Number: 01

#### 1.4.2 Component Type Variants

The component type variants applicable to this specification are as follows:

Variant Number	Based on Type	Case	Terminal Material and Finish	Weight Max (g)
01	STTH60400	SMD1	Q14	1.84

The terminal material and finish shall be in accordance with the requirements of ESCC Basic Specification No. [23500](#).

### 1.5 MAXIMUM RATINGS

The maximum ratings shall not be exceeded at any time during use or storage.

Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the ESCC Generic Specification.

Characteristics	Symbols	Maximum Ratings	Units	Remarks
Forward Surge Current	$I_{FSM}$	500	A	Notes 1, 2
Working Peak Reverse Voltage	$V_{RWM}$	400	V	
Average Output Rectified Current	$I_O$	60	A	Note 3
Operating Temperature Range (Case Temperature)	$T_{op}$	-65 to +175	°C	
Junction Temperature	$T_j$	+175	°C	
Storage Temperature Range	$T_{stg}$	-65 to +175	°C	
Soldering Temperature	$T_{sol}$	+245	°C	Note 4
Thermal Resistance, Junction to Case	$R_{th(j-c)}$	1.8	°C/W	
Thermal Resistance, Junction to Ambient	$R_{th(j-a)}$	55	°C/W	

#### **NOTES:**


1. Sinusoidal pulse of 10ms duration.
2. At  $T_{amb} \leq 25^{\circ}C$ .
3. At  $T_{case} > +29.2^{\circ}C$ , derate linearly to 0A at +175°C.
4. Duration 5s maximum and the same package shall not be resoldered until 3 minutes have elapsed.

### 1.6 HANDLING PRECAUTIONS

These devices are susceptible to damage by electrostatic discharge. Therefore, suitable precautions shall be employed for protection during all phases of manufacture, testing, packaging, shipment and any handling.

These components are categorised as Class 3 per ESCC Basic Specification No. [23800](#) with a Minimum Critical Path Failure Voltage of 8kV.

1.7 PHYSICAL DIMENSIONS AND TERMINAL IDENTIFICATION  
Surface Mount Package (SMD1) - 3 Terminal

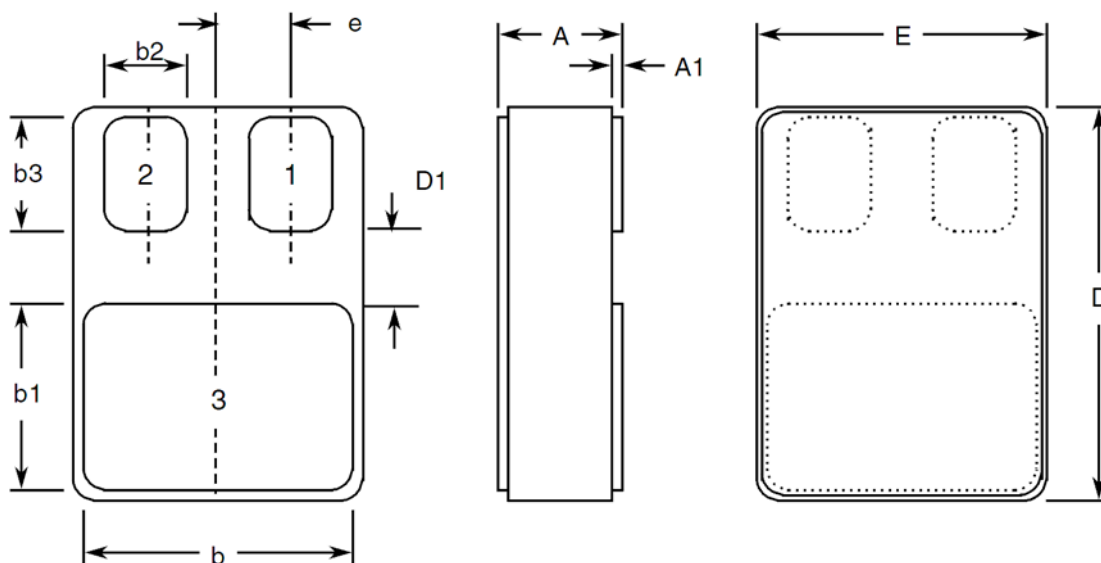


Symbols	Dimensions mm		Notes
	Min	Max	
A	3.3	3.61	
A1	0.25	0.51	
b	9.4	9.65	
b1	10.41	10.67	
b2	3.43	3.68	2
b3	3.86	4.11	2
D	15.75	16	
D1	0.76	-	2
E	11.3	11.56	
e	2.67 BSC		2

**NOTES:**

1. Terminal identification is specified by the component's geometry. See Para. 1.8 Functional Diagram for the terminal connections.
2. 2 places.

## 1.8 FUNCTIONAL DIAGRAM

Terminals 1 and 2: Anode  
Terminal 3: Cathode



### **NOTES:**

1. The lid is not connected to any terminal.

## 1.9 MATERIALS AND FINISHES

Materials and finishes shall be as follows:

- (a) Case  
The case shall be hermetically sealed and have a ceramic body with a Kovar lid.
- (b) Terminal Finish  
As specified in Para. 1.4.2 Component Type Variants.

## 2 REQUIREMENTS

### 2.1 GENERAL

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component's reliability, are listed in the appendices attached to this specification.

#### 2.1.1 Deviations from the Generic Specification

##### 2.1.1.1 *Deviations from Qualification and Periodic Tests – Chart F4*

- (a) Constant Acceleration is not applicable.
- (b) Terminal Strength is not applicable.

### 2.2 MARKING

The marking shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and as follows.

The information to be marked on the component shall be:

- (a) The ESCC qualified components symbol (for ESCC qualified components only).
- (b) The ESCC Component Number (see Para. 1.4.1).
- (c) Traceability information.

### 2.3 ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES

Electrical measurements shall be performed at room, high and low temperatures. Consolidated notes are given after the Tables (see Para. 2.3.3).



2.3.1 Room Temperature Electrical Measurements

The measurements shall be performed at  $T_{amb} = +25 \pm 3^{\circ}\text{C}$ .

Characteristics	Symbols	MIL-STD-750 Test Method	Test Conditions	Limits		Units
				Min	Max	
Reverse Current	$I_R$	4016	DC Method $V_R = 400\text{V}$	-	20	$\mu\text{A}$
Forward Voltage	$V_F$	4011	$I_F = 60\text{A}$ , Note 1	-	1.3	V
Capacitance	C	4001	$V_R = 10\text{V}$ $V_{sig} = 30\text{mV}$ (p-p) max $f = 1\text{MHz}$	-	250	pF
Reverse Recovery Time	$t_{rr}$	4031	$I_F = 1\text{A}$ $V_R = 30\text{V}$ $dI_F/dt = -50\text{A}/\mu\text{s}$	-	80	ns
Thermal Impedance, Junction to Case	$Z_{th(j-c)}$	3101	Note 2	$\Delta V_F$ , Note 3		$^{\circ}\text{C}/\text{W}$

2.3.2 High and Low Temperatures Electrical Measurements

Characteristics	Symbols	MIL-STD-750 Test Method	Test Conditions Note 4	Limits		Units
				Min	Max	
Reverse Current	$I_R$	4016	$T_{amb} = +125 (+0 -5)^{\circ}\text{C}$ DC Method $V_R = 400\text{V}$	-	200	$\mu\text{A}$
Forward Voltage	$V_F$	4011	$T_{amb} = +125 (+0 -5)^{\circ}\text{C}$ $I_F = 60\text{A}$ , Note 1	-	1.15	V
			$T_{amb} = -55 (+5 -0)^{\circ}\text{C}$ $I_F = 60\text{A}$ , Note 1	-	1.35	V

2.3.3 Notes to Electrical Measurements Tables

1. Pulsed measurement: Pulse Width  $\leq 680\mu\text{s}$ , Duty Cycle  $\leq 2\%$ .
2. Performed only during Screening Tests Parameter Drift Values (Initial Measurements), go-no-go.
3. The limits for  $\Delta V_F$  shall be defined by the Manufacturer on every lot in accordance with MIL-STD-750 Method 3101 and shall guarantee the  $R_{th(j-c)}$  limits specified in Para. 1.5 Maximum Ratings.
4. Read and record measurements shall be performed on a sample of 5 components with 0 failures allowed. Alternatively a 100% inspection may be performed.

2.4 PARAMETER DRIFT VALUES

Unless otherwise specified, the measurements shall be performed at  $T_{amb} = +25 \pm 3^{\circ}C$ .

The test methods and test conditions shall be as per the corresponding test defined in Para. 2.3.1 Room Temperature Electrical Measurements.

The drift values ( $\Delta$ ) shall not be exceeded for each characteristic specified. The corresponding absolute limit values for each characteristic shall not be exceeded.

Characteristics	Symbols	Limits			Units
		Drift Value $\Delta$	Absolute		
			Min	Max	
Reverse Current	$I_R$	$\pm 5$ or (1) $\pm 100\%$	-	20	$\mu A$
Forward Voltage	$V_F$	$\pm 0.05$	-	1.3	V

**NOTES:**

1. Whichever is the greater referred to the initial value.

2.5 INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at  $T_{amb} = +25 \pm 3^{\circ}C$ .

The test methods and test conditions shall be as per the corresponding test defined in Para. 2.3.1 Room Temperature Electrical Measurements.

The drift values ( $\Delta$ ) shall not be exceeded for each characteristic specified. The corresponding absolute limit values for each characteristic shall not be exceeded.

Characteristics	Symbols	Limits		Units
		Min	Max	
Reverse Current	$I_R$	-	20	$\mu A$
Forward Voltage	$V_F$	-	1.3	V

2.6 HIGH TEMPERATURE REVERSE BIAS BURN-IN CONDITIONS

Characteristics	Symbols	Test Conditions	Units
Ambient Temperature	$T_{amb}$	+150 (+0 -5)	$^{\circ}C$
Reverse Voltage	$V_R$	320	V
Duration	t	$\geq 48$	Hours

**2.7** POWER BURN-IN CONDITIONS

Characteristics	Symbols	Test Conditions	Units
Ambient Temperature	$T_{amb}$	+25 (+0 -5)	°C
Junction Temperature	$T_J$	+150 (+0 -5)	°C
Average Output Rectified Current	$I_o$	Note 1	A
Duration	$t$	≥ 168	Hours

**NOTES:**

1. The output current may be adjusted, within the given limit range, to attain the specified junction temperature.

**2.8** OPERATING LIFE CONDITIONS

The conditions shall be as specified in Para. 2.7 Power Burn-in Conditions.

**APPENDIX 'A'**  
**AGREED DEVIATIONS FOR STMICROELECTRONICS (F)**

ITEMS AFFECTED	DESCRIPTION OF DEVIATIONS
Para. 2.1.1, Deviations from the Generic Specification: Deviations from Production Control – Chart F2	Special In-Process Controls - Internal Visual Inspection: Wedge bonds equal to 1.1 wire diameter are acceptable for bonding with a V-Groove tool.
Para. 2.1.1, Deviations from the Generic Specification: Deviations from Screening Tests for Packaged Components – Chart F3A	<p>Solderability: Solderability is not applicable unless specifically stipulated in the Purchase Order.</p> <p>Room Temperature Electrical Measurements: Capacitance and Reverse Recovery Time may be considered guaranteed but not tested if successful pilot lot testing has been performed in accordance with STMicroelectronics “Acceptation wafers” internal procedure as specified in the PID, which includes AC characteristic measurements per the Detail Specification.</p> <p>A summary of the pilot lot testing shall be provided if required by the Purchase Order.</p>