



**CAPACITORS, FIXED, SELF-HEALING,
NON-INDUCTIVE,
POLYETHYLENE TEREPHTALATE DIELECTRIC**

BASED ON TYPE PM907S

ESCC Detail Specification No. 3006/025

Issue 3	July 2020
---------	-----------



LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2020. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
1346	Specification updated to incorporate changes per DCR.

TABLE OF CONTENTS

1	GENERAL	5
1.1	SCOPE	5
1.2	APPLICABLE DOCUMENTS	5
1.3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	5
1.4	THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS	5
1.4.1	The ESCC Component Number	5
1.4.1.1	Characteristics and Ratings Codes	5
1.4.2	Component Type Variants and Range of Components	6
1.5	MAXIMUM RATINGS	20
1.6	PHYSICAL DIMENSIONS AND TERMINAL IDENTIFICATION	21
1.6.1	Component Type Variants 01 to 08 (PM907S)	21
1.6.2	Component Type Variants 09 to 16 (PM907SR1)	22
1.6.3	Component Type Variants 17 to 24 (PM907SR2)	23
1.6.4	Component Type Variants 25 to 29 (PM907NS with 2 Rows of 7 Terminals)	24
1.6.5	Component Type Variants 30 to 32 (PM907NS with 2 Rows of 11 Terminals)	25
1.7	FUNCTIONAL DIAGRAM	25
1.8	MATERIALS AND FINISHES	26
1.8.1	Lead/Terminal Material	26
1.8.2	Lead/Terminal Finish	26
2	REQUIREMENTS	26
2.1	GENERAL	26
2.1.1	Deviations from the Generic Specification	26
2.1.1.1	Deviations from Qualification and Periodic Tests – Chart F4	26
2.2	MARKING	26
2.3	ROBUSTNESS OF TERMINATIONS	27
2.4	ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES	27
2.4.1	Room Temperature Electrical Measurements	27
2.4.2	High and Low Temperatures Electrical Measurements	28
2.5	INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS	28
2.6	BURN-IN CONDITIONS	30
	APPENDIX 'A'	31

1 GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics, and test and inspection data for the component type variants and/or the Component Type Variants and Range of Components specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

1.2 APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. [3006](#).

1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. [21300](#) shall apply.

1.4 THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS

1.4.1 The ESCC Component Number

The ESCC Component Number shall be constituted as follows:

Example: 300602501155KH

- Detail Specification Reference: 3006025
- Component Type Variant Number: 01 (as required)
- Characteristic code: Capacitance Value (1.5 μ F): 155 (as required)
- Characteristic code: Capacitance Tolerance (\pm 10%): K (as required)
- Rating code: Rated Voltage (250V): H (as required)

1.4.1.1 *Characteristics and Ratings Codes*

Characteristics and ratings to be codified as part of the ESCC Component Number shall be as follows:

- (a) Capacitance Value, C, expressed by means of the following codes in accordance with ESCC Basic Specification No. [21700](#). The unit quantity shall be picofarads (pF).

Capacitance Value C (pF)	Code
XX 10 ³	XX3
XX 10 ⁴	XX4
XX 10 ⁵	XX5
XX 10 ⁶	XX6
XX 10 ⁷	XX7

- (b) Capacitance Tolerance expressed by the following codes in accordance with ESCC Basic Specification No. 21700:

Tolerance (± %)	Code Letter
10	K
20	M

- (c) DC Rated Voltage, U_R , expressed by the following codes:

DC Rated Voltage U_R (V)	Code Letter
50	C
63	D
100	E
170	F
200	G
250	H
400	K
500	L
630	Z
800	P
1000	Q
1250	R

1.4.2 Component Type Variants and Range of Components

The Component Type Variants and Range of Components applicable to this specification are as follows:

Type Variants (Notes 1, 2)	Capacitance Value C (μ F)	Capacitance Tolerance (± %)	DC Rated Voltage (U_R) (V) (Note 2)	AC Current (I_{RA}) (Arms) Max	Weight Max (g)
01	15	10, 20	50	5.2	4.9
	8.2	10	63	3.2	
	10	10, 20		4	
	12	10		5	
	4.7	10, 20	100	2.5	
	5.6	10		3.2	
	6.8	10, 20		4.3	
	8.2	10		5.2	
	3.3	10, 20	170	2	
	3.9	10		2.5	
	4.7	10, 20		3.1	

Type Variants (Notes 1, 2)	Capacitance Value C (µF)	Capacitance Tolerance (± %)	DC Rated Voltage (U _R) (V) (Note 2)	AC Current (I _{RA}) (Arms) Max	Weight Max (g)
01	2.2	10, 20	200	2	4.9
	2.7	10		2.4	
	3.3	10, 20		2.8	
	1.5	10, 20	250	1.5	
	2.2	10, 20		2.2	
	2.7	10		2.4	
	0.82	10	400	2.5	
	1	10, 20		3.1	
	0.39	10	500	1.1	
	0.47	10, 20		1.3	
	0.56	10		1.5	
	0.68	10, 20		1.9	
	0.22	10, 20	630	0.8	
	0.27	10		0.9	
	0.33	10, 20		1.1	
	0.39	10		1.3	
0.22	10, 20	800	0.9		
02	18	10	50	6.2	6
	22	10, 20		7.6	
	15	10, 20	63	6.3	
	10	10, 20	100	6.4	
	5.6	10	170	4	
	6.8	10, 20		5	
	3.9	10	200	3.5	
	4.7	10, 20		4	
	3.3	10, 20	250	2.6	
	1.2	10	400	3.2	
	1.5	10, 20		4	
	0.82	10	500	2.3	
	1	10, 20		2.8	
	0.47	10, 20	630	1.6	
	0.56	10		2	
	0.27	10	800	1.1	
	0.33	10, 20		1.4	
	0.15	10, 20	1000	0.8	
0.22	10, 20	1.1			
0.082	10	1250	0.5		
0.1	10, 20		0.7		

Type Variants (Notes 1, 2)	Capacitance Value C (µF)	Capacitance Tolerance (± %)	DC Rated Voltage (U _R) (V) (Note 2)	AC Current (I _{RA}) (Arms) Max	Weight Max (g)
03	27	10	50	9.4	9.5
	33	10, 20		11.5	
	18	10	63	7.6	
	22	10, 20		8	
	12	10	100	6.4	
	15	10, 20		8	
	18	10			
	22	10, 20			
	8.2	10	170	6	
	10	10, 20		7.3	
	5.6	10	200	5	
	6.8	10, 20		6	
	8.2	10		7	
	3.9	10	250	3.1	
	4.7	10, 20		3.7	
	5.6	10		4.4	
	1.8	10	400	4	
	2.2	10, 20		4.5	
	2.7	10		5	
	1.2	10	500	3.3	
	1.5	10, 20		4.2	
	0.68	10, 20	630	2.5	
	0.82	10		3	
	1	10, 20		3.2	
	0.39	10	800	1.6	
	0.47	10, 20		1.9	
	0.56	10		2.3	
	0.68	10, 20		2.8	
	0.27	10	1000	1.4	
	0.33	10, 20		1.7	
0.39	10	3			
0.12	10	1250	0.8		
0.15	10, 20		1		
0.18	10		1.2		
0.22	10, 20		1.5		
04	47	10, 20	50	12.5	13.6
	56	10			
	68	10, 20			

Type Variants (Notes 1, 2)	Capacitance Value C (µF)	Capacitance Tolerance (± %)	DC Rated Voltage (U _R) (V) (Note 2)	AC Current (I _{RA}) (Arms) Max	Weight Max (g)
04	27	10	63	10	13.6
	33	10, 20			
	39	10		11.8	
	27	10	100	10	
	33	10, 20			
	12	10	170	8	
	15	10, 20		10	
	18	10			
	10	10, 20	200	7.5	
	12	10		9.5	
	6.8	10, 20	250	5.4	
	8.2	10		6.5	
	10	10, 20		7.9	
	3.3	10, 20	400	5	
	3.9	10		5.9	
	4.7	10, 20		7.1	
	1.8	10	500	5	
	2.2	10, 20		6.3	
	2.7	10			
	1.2	10	630	3.9	
	1.5	10, 20		5	
	1.8	10		5.8	
	0.82	10	800	3.4	
	1	10, 20		4.1	
	0.47	10, 20	1000	2.5	
	0.56	10		2.9	
	0.68	10, 20		3.4	
	0.27	10	1250	1.8	
0.33	10, 20	2.2			
0.39	10	2.6			
05	82	10	50	12.5	20.4
	100	10, 20	63	12.5	
	47	10, 20			
	56	10	100	12.5	
	39	10			
	47	10, 20			
	22	10, 20	170	10	
	27	10		12.5	
	33	10, 20			

Type Variants (Notes 1, 2)	Capacitance Value C (µF)	Capacitance Tolerance (± %)	DC Rated Voltage (U _R) (V) (Note 2)	AC Current (I _{RA}) (Arms) Max	Weight Max (g)
05	15	10, 20	200	10	20.4
	18	10		12.5	
	22	10, 20			
	12	10	250	9.5	
	15	10, 20		11.9	
	18	10		12.5	
	5.6	10	400	7.9	
	6.8	10, 20		9.6	
	8.2	10		11.5	
	3.3	10, 20	500	6.3	
	3.9	10		8	
	4.7	10, 20			
	2.2	10, 20	630	7.2	
	2.7	10		8.8	
	3.3	10, 20		10.8	
	1.2	10	800	5	
	1.5	10, 20		6.2	
	0.82	10	1000	4.3	
	1	10, 20		5.2	
	0.47	10, 20	1250	3.1	
0.56	10	3.7			
06	39	10	63	8.5	21.2
	47	10, 20		10.3	
	56	10		12.2	
	33	10, 20	100	9.1	
	39	10		10.7	
	47	10, 20		13	
	22	10, 20	170	7.7	
	27	10		9.5	
	33	10, 20		11.4	
	15	10, 20	200	7.1	
	18	10		8.9	
	22	10, 20		10.1	
	12	10	250	5.4	
	15	10, 20		6.7	
	18	10		8.1	
	5.6	10	400	6.3	
	6.8	10, 20		7.6	
	8.2	10		9.2	

Type Variants (Notes 1, 2)	Capacitance Value C (µF)	Capacitance Tolerance (± %)	DC Rated Voltage (U _R) (V) (Note 2)	AC Current (I _{RA}) (Arms) Max	Weight Max (g)
06	3.3	10, 20	500	4.5	21.2
	3.9	10		5.3	
	4.7	10, 20		6.4	
	2.2	10, 20	630	3.9	
	2.7	10		4.8	
	3.3	10, 20		5.9	
	1	10, 20	800	2.2	
	1.2	10		2.6	
	1.5	10, 20		3.3	
	0.68	10, 20	1000	1.9	
	0.82	10		2.3	
	1	10, 20		2.9	
	0.39	10	1250	1.4	
	0.47	10, 20		1.7	
	0.56	10		2	
07	68	10, 20	63	15	37.3
	82	10			
	100	10, 20			
	120	10			
	56	10	100	15	
	68	10, 20			
	82	10			
	100	10, 20			
	39	10	170	15	
	47	10, 20			
	56	10			
	27	10	200	15	
	33	10, 20			
	39	10			
	22	10, 20	250	9.9	
	27	10		12.1	
	33	10, 20		14.9	
	10	10, 20	400	11.2	
	12	10		13.4	
	15	10, 20		15	
	5.6	10	500	7.9	
	6.8	10, 20		9.6	
	8.2	10		11.5	
	10	10, 20		14	

Type Variants (Notes 1, 2)	Capacitance Value C (µF)	Capacitance Tolerance (± %)	DC Rated Voltage (U _R) (V) (Note 2)	AC Current (I _{RA}) (Arms) Max	Weight Max (g)
07	3.9	10	630	7	37.3
	4.7	10, 20		8.5	
	5.6	10		10.1	
	1.8	10	800	4.3	
	2.2	10, 20		5.2	
	2.7	10		6.4	
	3.3	10, 20		7.8	
	1.2	10	1000	3.4	
	1.5	10, 20		4.3	
	1.8	10		5.1	
	2.2	10, 20		6.2	
	0.68	10, 20	1250	2.4	
	0.82	10		3	
	1	10, 20		3.6	
	1.2	10		4.3	
	2.2	10, 20		7.9	
08	150	10, 20	63	15	54.2
	180	10			
	120	10	100	15	
	150	10, 20			
	68	10, 20	170	15	
	82	10			
	100	10, 20			
	47	10, 20	200	15	
	56	10			
	68	10, 20			
	39	10	250	15	
	47	10, 20			
	56	10			
	18	10	400	15	
	22	10, 20			
	12	10	500	15	
	15	10, 20			
	6.8	10, 20	630	12.3	
	8.2	10		14.7	
	10	10, 20		15	
3.9	10	800	9.2		
4.7	10, 20		11		
5.6	10		12.5		

Type Variants (Notes 1, 2)	Capacitance Value C (µF)	Capacitance Tolerance (± %)	DC Rated Voltage (U _R) (V) (Note 2)	AC Current (I _{RA}) (Arms) Max	Weight Max (g)
08	2.7	10	1000	7.7	54.2
	3.3	10, 20		9.4	
	3.9	10		11	
	1.5	10, 20	1250	5.4	37.3
	1.8	10		6.5	54.2
09, 17, 25	15	10, 20	50	5.2	4.9
	8.2	10	63	3.2	
	10	10, 20		4	
	12	10		5	
	4.7	10, 20	100	2.5	
	5.6	10		3.2	
	6.8	10, 20		4.3	
	8.2	10		5.2	
	3.3	10, 20	170	2	
	3.9	10		2.5	
	4.7	10, 20		3.1	
	2.2	10, 20	200	2	
	2.7	10		2.4	
	3.3	10, 20		2.8	
	1.5	10, 20	250	1.5	
	2.2	10, 20		2.2	
	2.7	10		2.4	
	0.82	10	400	2.5	
	1	10, 20		3.1	
	0.39	10	500	1.1	
	0.47	10, 20		1.3	
	0.56	10		1.5	
	0.68	10, 20		1.9	
	0.22	10, 20	630	0.8	
	0.27	10		0.9	
	0.33	10, 20		1.1	
	0.39	10		1.3	
	0.22	10, 20	800	0.9	
10, 18, 26	18	10	50	6.2	6
	22	10, 20		7.6	
	15	10, 20	63	6.3	
	10	10, 20	100	6.4	
	5.6	10	170	4	
	6.8	10, 20		5	

Type Variants (Notes 1, 2)	Capacitance Value C (µF)	Capacitance Tolerance (± %)	DC Rated Voltage (U _R) (V) (Note 2)	AC Current (I _{RA}) (Arms) Max	Weight Max (g)
10, 18, 26	3.9	10	200	3.5	6
	4.7	10, 20		4	
	3.3	10, 20	250	2.6	
	1.2	10		3.2	
	1.5	10, 20	500	4	
	0.82	10		2.3	
	1	10, 20		2.8	
	0.47	10, 20	630	1.6	
	0.56	10		2	
	0.27	10	800	1.1	
	0.33	10, 20		1.4	
	0.15	10, 20	1000	0.8	
	0.22	10, 20		1.1	
	0.082	10	1250	0.5	
	0.1	10, 20		0.7	
11, 19, 27	27	10	50	9.4	9.5
	33	10, 20		11.5	
	18	10	63	7.6	
	22	10, 20		8	
	12	10	100	6.4	
	15	10, 20		8	
	18	10			
	22	10, 20			
	8.2	10	170	6	
	10	10, 20		7.3	
	5.6	10	200	5	
	6.8	10, 20		6	
	8.2	10		7	
	3.9	10	250	3.1	
	4.7	10, 20		3.7	
	5.6	10		4.4	
	1.8	10	400	4	
	2.2	10, 20		4.5	
	2.7	10		5	
	1.2	10	500	3.3	
	1.5	10, 20		4.2	
	0.68	10, 20	630	2.5	
	0.82	10		3	
	1	10, 20		3.2	

Type Variants (Notes 1, 2)	Capacitance Value C (µF)	Capacitance Tolerance (± %)	DC Rated Voltage (U _R) (V) (Note 2)	AC Current (I _{RA}) (Arms) Max	Weight Max (g)
11, 19, 27	0.39	10	800	1.6	9.5
	0.47	10, 20		1.9	
	0.56	10		2.3	
	0.68	10, 20		2.8	
	0.27	10	1000	1.4	
	0.33	10, 20		1.7	
	0.39	10		3	
	0.12	10	1250	0.8	
	0.15	10, 20		1	
	0.18	10		1.2	
	0.22	10, 20		1.5	
	12, 20, 28	47	10, 20	50	
56		10			
68		10, 20			
27		10	63	10	
33		10, 20		11.8	
39		10			
27		10	100	10	
33		10, 20			
12		10	170	8	
15		10, 20		10	
18		10			
10		10, 20	200	7.5	
12		10		9.5	
6.8		10, 20	250	5.4	
8.2		10		6.5	
10		10, 20		7.9	
3.3		10, 20	400	5	
3.9		10		5.9	
4.7		10, 20		7.1	
1.8		10	500	5	
2.2		10, 20		6.3	
2.7		10			
1.2		10	630	3.9	
1.5		10, 20		5	
1.8		10		5.8	
0.82		10	800	3.4	
1		10, 20		4.1	

Type Variants (Notes 1, 2)	Capacitance Value C (µF)	Capacitance Tolerance (± %)	DC Rated Voltage (U _R) (V) (Note 2)	AC Current (I _{RA}) (Arms) Max	Weight Max (g)
12, 20, 28	0.47	10, 20	1000	2.5	13.6
	0.56	10		2.9	
	0.68	10, 20		3.4	
	0.27	10	1250	1.8	
	0.33	10, 20		2.2	
	0.39	10		2.6	
13, 21, 29	82	10	50	12.5	20.4
	100	10, 20	63	12.5	
	47	10, 20			
	56	10			
	39	10	100	12.5	
	47	10, 20			
	22	10, 20			
	27	10	170	10	
	33	10, 20		12.5	
	15	10, 20			
	18	10	200	10	
	22	10, 20		12.5	
	12	10			
	15	10, 20	250	9.5	
	18	10		11.9	
	18	10		12.5	
	5.6	10	400	7.9	
	6.8	10, 20		9.6	
	8.2	10		11.5	
	3.3	10, 20	500	6.3	
	3.9	10		8	
	4.7	10, 20			
	2.2	10, 20	630	7.2	
	2.7	10		8.8	
	3.3	10, 20		10.8	
	1.2	10	800	5	
	1.5	10, 20		6.2	
	0.82	10			
	1	10, 20	1000	4.3	
	0.47	10, 20		5.2	
	0.56	10		3.1	
	14, 22, 30	39	10	63	
47		10, 20	10.3		
56		10	12.2		

Type Variants (Notes 1, 2)	Capacitance Value C (µF)	Capacitance Tolerance (± %)	DC Rated Voltage (U _R) (V) (Note 2)	AC Current (I _{RA}) (Arms) Max	Weight Max (g)
14, 22, 30	33	10, 20	100	9.1	21.2
	39	10		10.7	
	47	10, 20		13	
	22	10, 20	170	7.7	
	27	10		9.5	
	33	10, 20		11.4	
	15	10, 20	200	7.1	
	18	10		8.9	
	22	10, 20		10.1	
	12	10	250	5.4	
	15	10, 20		6.7	
	18	10		8.1	
	5.6	10	400	6.3	
	6.8	10, 20		7.6	
	8.2	10		9.2	
	3.3	10, 20	500	4.5	
	3.9	10		5.3	
	4.7	10, 20		6.4	
	2.2	10, 20	630	3.9	
	2.7	10		4.8	
	3.3	10, 20		5.9	
	1	10, 20	800	2.2	
	1.2	10		2.6	
	1.5	10, 20		3.3	
	0.68	10, 20	1000	1.9	
	0.82	10		2.3	
	1	10, 20		2.9	
	0.39	10	1250	1.4	
0.47	10, 20	1.7			
0.56	10	2			
15, 23, 31	68	10, 20	63	15	37.3
	82	10			
	100	10, 20			
	120	10			
	56	10	100	15	
	68	10, 20			
	82	10			
	100	10, 20			

Type Variants (Notes 1, 2)	Capacitance Value C (µF)	Capacitance Tolerance (± %)	DC Rated Voltage (U _R) (V) (Note 2)	AC Current (I _{RA}) (Arms) Max	Weight Max (g)
15, 23, 31	39	10	170	15	37.3
	47	10, 20			
	56	10			
	27	10	200	15	
	33	10, 20			
	39	10			
	22	10, 20	250	9.9	
	27	10		12.1	
	33	10, 20		14.9	
	10	10, 20	400	11.2	
	12	10		13.4	
	15	10, 20		15	
	5.6	10	500	7.9	
	6.8	10, 20		9.6	
	8.2	10		11.5	
	10	10, 20		14	
	3.9	10	630	7	
	4.7	10, 20		8.5	
	5.6	10		10.1	
	1.8	10	800	4.3	
	2.2	10, 20		5.2	
	2.7	10		6.4	
	3.3	10, 20		7.8	
	1.2	10	1000	3.4	
	1.5	10, 20		4.3	
	1.8	10		5.1	
	2.2	10, 20		6.2	
	0.68	10, 20	1250	2.4	
	0.82	10		3	
	1	10, 20		3.6	
1.2	10	4.3			
2.2	10, 20	7.9			
16, 24, 32	150	10, 20	63	15	54.2
	180	10			
	120	10	100	15	
	150	10, 20			
	68	10, 20	170	15	
	82	10			
	100	10, 20			

Type Variants (Notes 1, 2)	Capacitance Value C (µF)	Capacitance Tolerance (± %)	DC Rated Voltage (U _R) (V) (Note 2)	AC Current (I _{RA}) (Arms) Max	Weight Max (g)
16, 24, 32	47	10, 20	200	15	54.2
	56	10			
	68	10, 20			
	39	10	250	15	
	47	10, 20			
	56	10			
	18	10	400	15	
	22	10, 20			
	12	10	500	15	
	15	10, 20			
	6.8	10, 20			
	8.2	10	630	12.3	
	10	10, 20		14.7	
	3.9	10		15	
	4.7	10, 20	800	9.2	
	5.6	10		11	
	2.7	10		12.5	
	3.3	10, 20	1000	7.7	
	3.9	10		9.4	
	1.5	10, 20		11	
1.8	10	1250	5.4	37.3	
			6.5	54.2	

NOTES:

1. See Para. 1.6.
2. The allowable voltage variation for each combination of Type Variant and DC Rated Voltage is shown below.

ALLOWABLE VOLTAGE VARIATION dV/dt (V/µs)

Type Variants	DC Rated Voltage (U _R)											
	50V	63V	100V	170V	200V	250V	400V	500V	630V	800V	1000V	1250V
01 to 05 09 to 13 17 to 21 25 to 29	15	20	30	35	40	45	65	85	105	150	200	250
06, 07, 08 14, 15, 16 22, 23, 24 30, 31, 32	N/A	10	15	20	25	25	40	45	55	80	100	120

1.5 MAXIMUM RATINGS

The maximum ratings shall not be exceeded at any time during use or storage.

Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the ESCC Generic Specification.


Characteristics	Symbols	Maximum Ratings	Units	Remarks
DC Rated Voltage	U_R	50, 63, 100, 170, 200, 250, 400, 500, 630, 800, 1000, 1250	V	Notes 1, 2
DC Category Voltage	U_C	Note 2	V	Over T_{op}
AC Current	I_{RA}	See Para. 1.4.2	Arms	$f = 300\text{kHz}$ Note 3
Operating Temperature Range	T_{op}	-55 to +125	$^{\circ}\text{C}$	T_{amb}
Storage Temperature Range	T_{stg}	-55 to +125	$^{\circ}\text{C}$	
Soldering Temperature	T_{sol}	+260	$^{\circ}\text{C}$	Notes 4, 5

NOTES:

1. As required; See Para. 1.4.2.
2. The DC Rated Voltage is also the DC Category Voltage when T_{op} is between -55°C (T_{amb}) and $+100^{\circ}\text{C}$ (T_{amb}). For $T_{op} > +100^{\circ}\text{C}$ (T_{amb}) only the DC Category Voltage applies, and derating must be observed as follows:
 - U_C derates linearly from $100\%U_C$ at $T_{amb} = +100^{\circ}\text{C}$ to $80\%U_C$ at $T_{amb} = +125^{\circ}\text{C}$.
3. The AC Ripple Current I_{Ripple} (Arms) is $100\%I_{RA}$ when $-55^{\circ}\text{C} < T_{amb} \leq +105^{\circ}\text{C}$. For $T_{amb} > +105^{\circ}\text{C}$ derating of I_{Ripple} must be observed as follows:
 - I_{Ripple} derates linearly from $100\%I_{RA}$ at $T_{amb} = +105^{\circ}\text{C}$ to $10\%I_{RA}$ at $T_{amb} = +125^{\circ}\text{C}$.
4. For Solderability and Resistance to Soldering Heat, for Component Type Variants 01 to 08, 25 to 32:
 - Maximum soldering time: 5s
 - Minimum soldering distance: 1mm
5. For Solderability and Resistance to Soldering Heat, for Component Type Variants 09 to 24, the soldering time shall be $< 5\text{s}$ and only the part of the terminals which are designed to be soldered shall be tested.

1.6 PHYSICAL DIMENSIONS AND TERMINAL IDENTIFICATION

1.6.1 Component Type Variants 01 to 08 (PM907S)

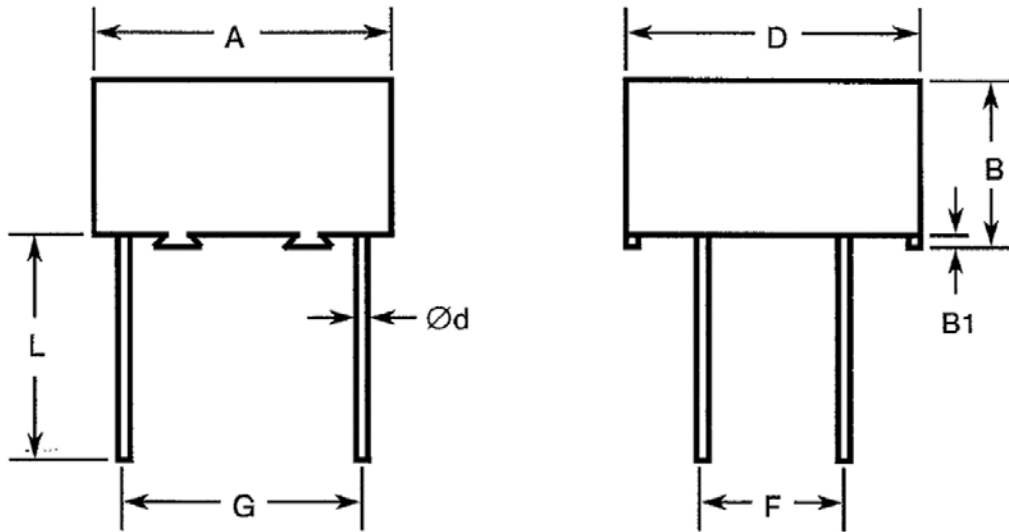


Type Variant	Dimensions (mm)												
	A		B	B1	D		Ød		F		G		L Min.
	Min.	Max.	Max.	Min.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
01	19.5	20.5	6.5	0.25	19.5	20.5	0.95	1.1	9.66	10.66	17.3	18.3	20
02	19.5	20.5	8	0.25	19.5	20.5	0.95	1.1	9.66	10.66	17.3	18.3	20
03	19.5	20.5	12.5	0.25	19.5	20.5	0.95	1.1	9.66	10.66	17.3	18.3	20
04	19.5	20.5	20	0.25	19.5	20.5	0.95	1.1	9.66	10.66	17.3	18.3	20
05	19.5	20.5	30	0.25	19.5	20.5	0.95	1.1	9.66	10.66	17.3	18.3	20
06	30.5	31.5	12.5	0.4	31.5	32.5	0.95	1.1	14.74	15.74	27.44	28.44	20
07	30.5	31.5	22	0.4	31.5	32.5	0.95	1.1	14.74	15.74	27.44	28.44	20
08	30.5	31.5	32	0.4	31.5	32.5	0.95	1.1	14.74	15.74	27.44	28.44	20

NOTES:

- Terminal identification: A voltage polarity “+” symbol shall be marked on the top of the body to indicate the row of terminals which should be connected to the highest potential.

1.6.2 Component Type Variants 09 to 16 (PM907SR1)

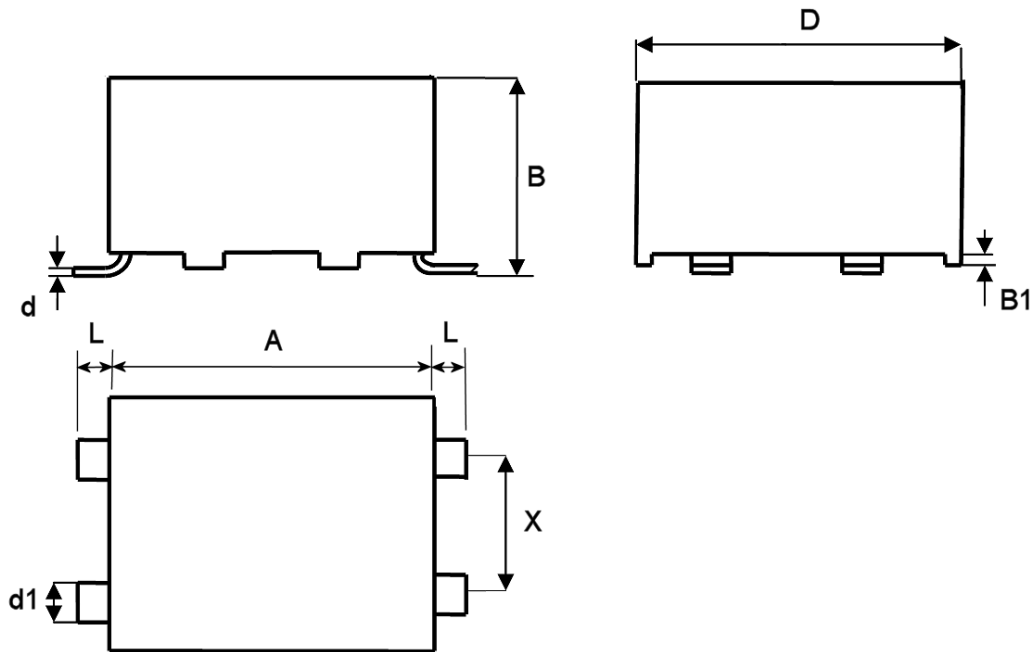


Type Variant	Dimensions (mm)													
	A		B		B1 Min.	D		d Max.	d1		X		L	
	Min.	Max.	Min.	Max.		Min.	Max.		Min.	Max.	Min.	Max.	Min.	Max.
09	19.5	20.5	6.5	7.5	0.25	19.5	20.5	0.3	2.45	2.75	9.5	10.5	2.75	3.25
10	19.5	20.5	8	9	0.25	19.5	20.5	0.3	2.45	2.75	9.5	10.5	2.75	3.25
11	19.5	20.5	12.5	13.5	0.25	19.5	20.5	0.3	2.45	2.75	9.5	10.5	2.75	3.25
12	19.5	20.5	20	21	0.25	19.5	20.5	0.3	2.45	2.75	9.5	10.5	2.75	3.25
13	19.5	20.5	30	31	0.25	19.5	20.5	0.3	2.45	2.75	9.5	10.5	2.75	3.25
14	30.5	31.5	12.5	13.5	0.4	31.5	32.5	0.3	3.95	4.4	14.5	15.5	2.75	3.25
15	30.5	31.5	22	23	0.4	31.5	32.5	0.3	3.95	4.4	14.5	15.5	2.75	3.25
16	30.5	31.5	32	33	0.4	31.5	32.5	0.3	3.95	4.4	14.5	15.5	2.75	3.25

NOTES:

1. Terminal identification: A voltage polarity “+” symbol shall be marked on the top of the body to indicate the row of terminals which should be connected to the highest potential.

1.6.3 Component Type Variants 17 to 24 (PM907SR2)

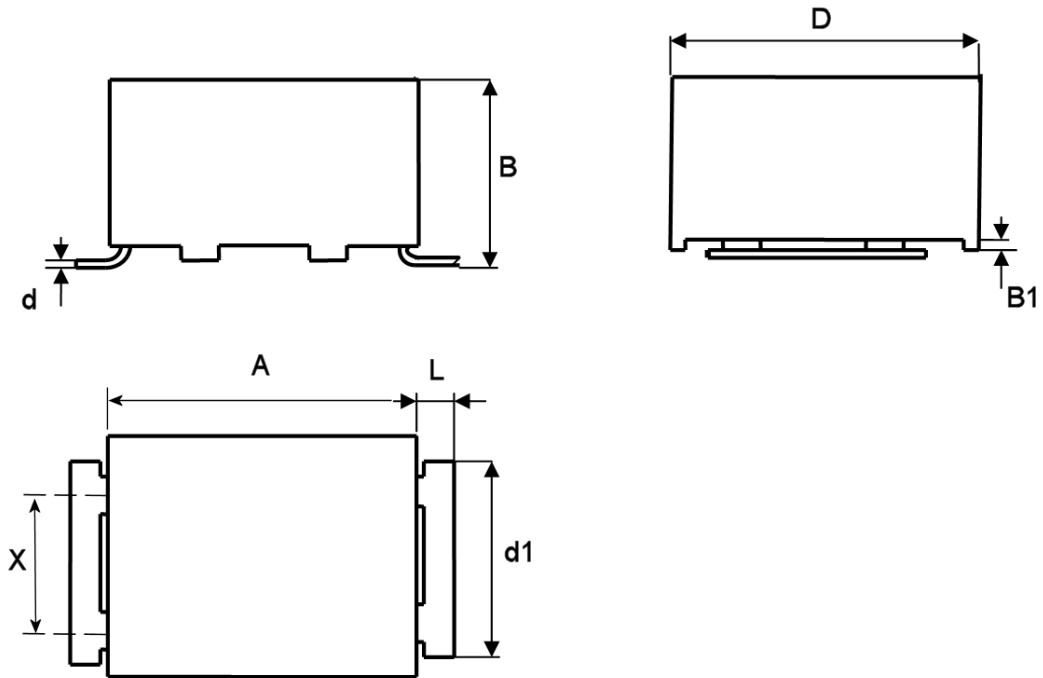


Type Variant	Dimensions (mm)													
	A		B		B1 Min.	D		d Max.	d1		X		L	
	Min.	Max.	Min.	Max.		Min.	Max.		Min.	Max.	Min.	Max.	Min.	Max.
17	19.5	20.5	6.5	7.5	0.25	19.5	20.5	0.3	14.5	15.5	9.5	10.5	2.75	3.25
18	19.5	20.5	8	9	0.25	19.5	20.5	0.3	14.5	15.5	9.5	10.5	2.75	3.25
19	19.5	20.5	12.5	13.5	0.25	19.5	20.5	0.3	14.5	15.5	9.5	10.5	2.75	3.25
20	19.5	20.5	20	21	0.25	19.5	20.5	0.3	14.5	15.5	9.5	10.5	2.75	3.25
21	19.5	20.5	30	31	0.25	19.5	20.5	0.3	14.5	15.5	9.5	10.5	2.75	3.25
22	30.5	31.5	12.5	13.5	0.4	31.5	32.5	0.3	23.5	24.5	14.5	15.5	2.75	3.25
23	30.5	31.5	22	23	0.4	31.5	32.5	0.3	23.5	24.5	14.5	15.5	2.75	3.25
24	30.5	31.5	32	33	0.4	31.5	32.5	0.3	23.5	24.5	14.5	15.5	2.75	3.25

NOTES:

- Terminal identification: A voltage polarity “+” symbol shall be marked on the top of the body to indicate the terminal which should be connected to the highest potential.

1.6.4 Component Type Variants 25 to 29 (PM907NS with 2 Rows of 7 Terminals)

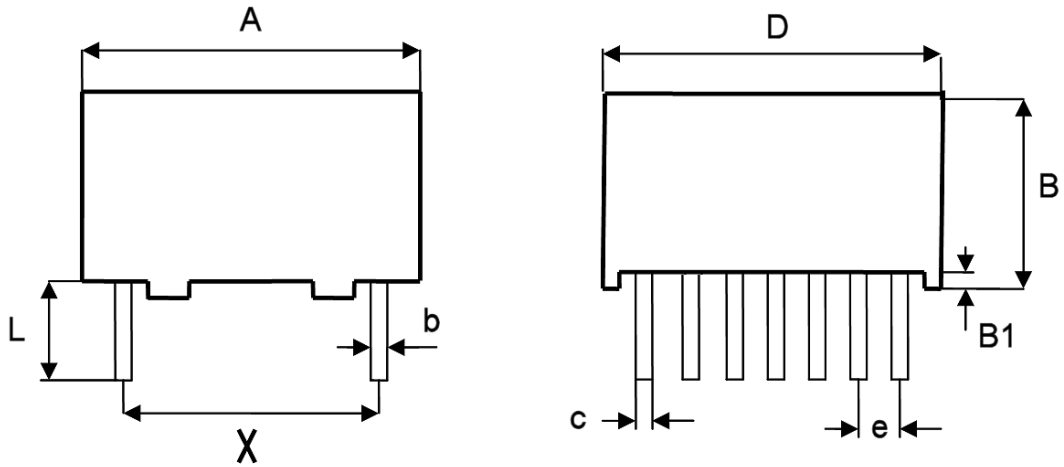


Type Variant	A		D		B Max.	B1 Min.	X		b		c		e		L Min.
	Min.	Max.	Min.	Max.			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
25	19.5	20.5	19.5	20.5	6.5	0.25	17.3	18.3	0.15	0.35	0.4	0.6	2.34	2.74	5
26	19.5	20.5	19.5	20.5	8	0.25	17.3	18.3	0.15	0.35	0.4	0.6	2.34	2.74	5
27	19.5	20.5	19.5	20.5	12.5	0.25	17.3	18.3	0.15	0.35	0.4	0.6	2.34	2.74	5
28	19.5	20.5	19.5	20.5	20	0.25	17.3	18.3	0.15	0.35	0.4	0.6	2.34	2.74	5
29	19.5	20.5	19.5	20.5	30	0.25	17.3	18.3	0.15	0.35	0.4	0.6	2.34	2.74	5

NOTES:

- Terminal identification: A voltage polarity “+” symbol shall be marked on the top of the body to indicate the row of terminals which should be connected to the highest potential.

1.6.5 Component Type Variants 30 to 32 (PM907NS with 2 Rows of 11 Terminals)

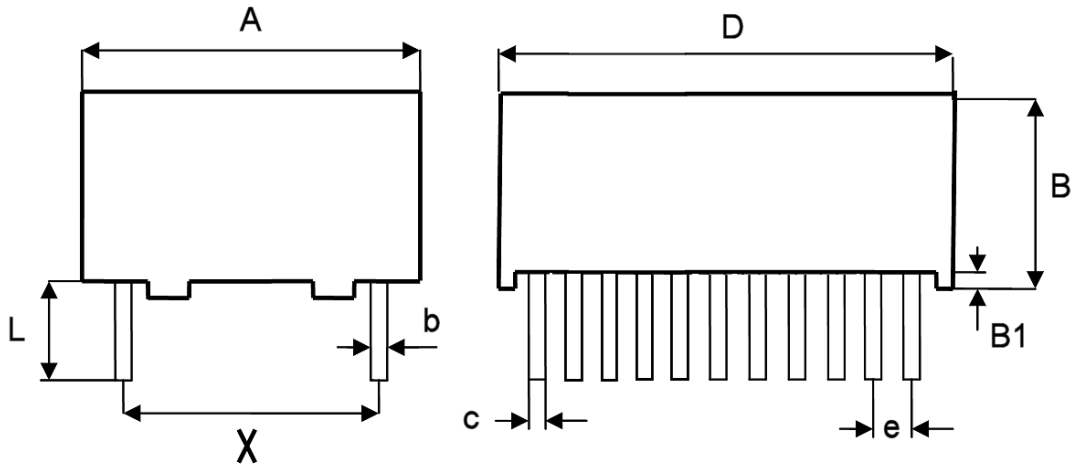


Type Variant	A		D		B Max.	B1 Min.	X		b		c		e		L Min.
	Min.	Max.	Min.	Max.			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
30	30.5	31.5	31.5	32.5	12.5	0.4	27.44	28.44	0.15	0.35	0.4	0.6	2.34	2.74	5
31	30.5	31.5	31.5	32.5	22	0.4	27.44	28.44	0.15	0.35	0.4	0.6	2.34	2.74	5
32	30.5	31.5	31.5	32.5	32	0.4	27.44	28.44	0.15	0.35	0.4	0.6	2.34	2.74	5

NOTES:

- Terminal identification: A voltage polarity “+” symbol shall be marked on the top of the body to indicate the row of terminals which should be connected to the highest potential.

1.7 FUNCTIONAL DIAGRAM



NOTES:

- These capacitors are not polarised; however, marking includes the voltage polarity symbol (see Para. 1.6) which should be respected in use.
- For Component Type Variants 01 to 16 and 25 to 32, each row of terminals is connected internally to a single electrode.

1.8 MATERIALS AND FINISHES

1.8.1 Lead/Terminal Material

The lead/terminal materials shall be as follows:

- Variants 01 to 08: Type A in accordance with the requirements of ESCC Basic Specification No. [23500](#).
- Variants 09 to 32: Brass.

1.8.2 Lead/Terminal Finish

The lead/terminal finishes shall be as follows:

- Variants 01 to 08: Tin-lead plating with a maximum tin content of 97%.
- Variants 09 to 32: Type 3 or Type 4 in accordance with the requirements of ESCC Basic Specification No. [23500](#).

2 REQUIREMENTS

2.1 GENERAL

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component's reliability, are listed in the appendices attached to this specification.

2.1.1 Deviations from the Generic Specification

2.1.1.1 *Deviations from Qualification and Periodic Tests – Chart F4*

- (a) Operating Life:
 - Test Condition (c), Applied voltage: $1.25 \times U_c$, where U_c is the applicable Category Voltage per Paras. 1.5 and 1.4.2.
- (b) Robustness of Terminations: for Component Type Variants 09 to 24 Robustness of Terminations shall be performed as follows:

The components shall be mounted on a suitable substrate. After mounting, examination shall be made for good tinning as evidenced by flowing of the solder with wetting of the terminations. A force of 10N shall be applied normal to the line joining the terminals and in a plane parallel to the substrate, for a duration of 10 ± 1 s. The components shall then be examined and there shall be no evidence of damage or loosening of the components from the substrate.

2.2 MARKING

The marking shall be in accordance with the requirements of ESCC Basic Specification No. [21700](#) and as follows. The information to be marked on the component shall be:

- (a) Terminal Identification (see Para. 1.6).
- (b) The ESCC qualified components symbol (for ESCC qualified components only).
- (c) The ESCC Component Number (see Para. 1.4.1).
- (d) Traceability information.

2.3 ROBUSTNESS OF TERMINATIONS

The terminals of the components are rigid.

For Component Type Variants 01 to 08 and 25 to 32 the test conditions for Robustness of Terminations shall be as specified in the ESCC Generic Specification and as follows:

- Test Ua1, tensile:
 - Applied force for Component Type Variants 01 to 08: 10N
 - Applied force for Component Type Variants 25 to 32: 20N
 - Duration: 7.5 ±2.5s

All terminals of the component shall be tested.

2.4 ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES

Electrical measurements shall be performed at room, high and low temperatures.

2.4.1 Room Temperature Electrical Measurements

The measurements shall be performed at T_{amb} = +22 ±3°C.

Characteristics	Symbols	Test Method and Conditions	Limits		Units
			Min	Max	
Capacitance	C	ESCC No. 3006 Test Frequency = 1kHz	Note 1	Note 2	µF
Tangent of Loss Angle	tgδ	ESCC No. 3006 Test Frequency = 1kHz	-	100×10 ⁻⁴	-
Insulation Resistance, Dielectric	R _I	ESCC No. 3006 C ≤ 0.33µF C > 0.33µF	7500	-	MΩ
			2500	-	MΩ.µF
Voltage Proof, Terminal-to-Terminal	VP	ESCC No. 3006	1.6×U _R (Note 3)	-	V

NOTES:

1. Capacitance Value of the component minus the applicable Tolerance (see Para. 1.4.2).
2. Capacitance Value of the component plus the applicable Tolerance (see Para. 1.4.2).
3. For the applicable Rated Voltage (U_R) see Para. 1.4.2.

2.4.2 High and Low Temperatures Electrical Measurements

Characteristics	Symbols	Test Method and Conditions (Note 1)	Limits		Units
			Min	Max	
Temperature Coefficient	$\Delta C/C$	ESCC No. 3006 Test Frequency = 1kHz $T_{amb} = -55 (+3 -0)^{\circ}C$	-	-10 (Note 2)	%
		$T_{amb} = +125 (+0 -3)^{\circ}C$	-	+18 (Note 2)	%

NOTES:

1. The measurements shall be performed on a sample of 6 components from each manufacturing lot with 0 failures allowed. In the event of any failure a 100% inspection may be performed.
2. The Temperature Coefficient limits are with respect to the capacitance at $+22 \pm 2^{\circ}C$ (reference point temperature).

2.5 INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3^{\circ}C$.

Unless otherwise specified the test methods and test conditions shall be as per the corresponding test defined in Para. 2.4.1, Room Temperature Electrical Measurements.

Test Reference per ESCC No. 3006	Characteristics	Symbols	Limits		Units
			Min	Max	
Resistance to Soldering Heat Initial Measurements Final Measurements	Capacitance	C	Note 1		μF
	Capacitance	C	Note 1		μF
	Change in Capacitance	$\Delta C/C$	-3	+3	%
	Insulation Resistance, Dielectric	R_i	Note 1	-	$M\Omega$
		$C \leq 0.33\mu F$ $C > 0.33\mu F$	Note 1	-	$M\Omega \cdot \mu F$
	Tangent of Loss Angle	$tg\delta$	-	Note 2	-
Temperature Coefficient	Temperature Coefficient (Note 3)	$\Delta C/C$	Note 4		%
Rapid Change of Temperature Initial Measurements Final Measurements	Capacitance	C	Note 1		μF
	Capacitance	C	Note 1		μF
	Change in Capacitance	$\Delta C/C$	-3	+3	%
	Tangent of Loss Angle	$tg\delta$	-	Note 1	-

Test Reference per ESCC No. 3006	Characteristics	Symbols	Limits		Units
			Min	Max	
Climatic Sequence Initial Measurements Final Measurements	Capacitance	C	Note 1		μF
	Capacitance	C	Note 1		μF
	Change in Capacitance	ΔC/C	-3	+3	%
	Tangent of Loss Angle	tgδ	-	Note 2	-
	Voltage Proof, Terminal-to-Terminal	VP	Note 1	-	V
	Insulation Resistance, Dielectric	R _i			
		C ≤ 0.33μF C > 0.33μF		Note 5 Note 5	- -
Operating Life Initial Measurements Intermediate Measurements (1000 hours) Final Measurements (1000 or 2000 hours) (Note 6)	Capacitance	C	Note 1		μF
	Capacitance	C	Note 1		μF
	Change in Capacitance	ΔC/C	-5	+5	%
	Capacitance	C	Note 1		μF
	Change in Capacitance	ΔC/C	-5	+5	%
	Tangent of Loss Angle	tgδ	-	Note 2	-
	Insulation Resistance, Dielectric	R _i			
	C ≤ 0.33μF C > 0.33μF		Note 5 Note 5	- -	MΩ MΩ.μF

NOTES:

1. As specified in Para. 2.4.1.
2. 1.5× the limit specified in Para. 2.4.1.
3. The test method and test conditions shall be as specified in Para. 2.4.2.
4. As specified in Para. 2.4.2.
5. 50% of the limit specified in Para. 2.4.1.
6. 1000 hours is applicable to Periodic Testing for extension of qualification. 2000 hours is applicable to Qualification Testing, and to Periodic Testing for renewal of qualification after lapse.

2.6 BURN-IN CONDITIONS

Characteristics	Symbols	Conditions (Note 1)	Units
Ambient Temperature	T_{amb}	+125 (+0 -5)	°C
Test Voltage	V_T	1.25× U_c (Note 2)	V

NOTES:

1. On completion of Burn-in the components shall be removed from the burn-in chamber and allowed to cool, under normal atmospheric conditions, for recovery for 24 ±2 hours.
2. U_c is the applicable Category Voltage; see Paras. 1.5 and 1.4.2.

APPENDIX 'A'
AGREED DEVIATIONS FOR EXXELIA TECHNOLOGIES (F)

Items Affected	Description of Deviations
Para. 2.1.1, Deviations from the Generic Specification: Deviations from Screening Tests – Chart F3	<p>All procurement lots shall have 100% Serialisation carried out at any point during Chart F3 testing prior to the performance of High and Low Temperatures Electrical Measurements.</p> <p>If a particular lot is required to undergo testing in accordance with Chart F4, then the Temperature Coefficient measurements, made during High and Low Temperatures Electrical Measurements on a sample of 6 randomly-selected serialised capacitors, shall be Read-and-Record measurements. See “Deviations from Qualification and Periodic Tests – Chart F4” below.</p>
Para. 2.1.1.1, Deviations from Qualification and Periodic Tests – Chart F4	<p>The Temperature Coefficient testing specified in Subgroup 2B of Chart F4 may not be performed.</p> <p>In instances when Temperature Coefficient testing per Subgroup 2B of Chart F4 is not performed, the Read-and-Record measurements data obtained during High and Low Temperature Electrical Measurements (part of Chart F3, Screening Tests) shall be submitted instead.</p>