



**CAPACITORS, LEADLESS SURFACE MOUNTED,  
TANTALUM, SOLID ELECTROLYTE,  
LOW EQUIVALENT SERIES RESISTANCE  
BASED ON TYPE TES  
ESCC Detail Specification No. 3012/004**

Issue 6	November 2021
---------	---------------



### **LEGAL DISCLAIMER AND COPYRIGHT**

European Space Agency, Copyright © 2021. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

**DOCUMENTATION CHANGE NOTICE**

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
1466	Specification upissued to incorporate changes per DCR.

**TABLE OF CONTENTS**

1	GENERAL	5
1.1	SCOPE	5
1.2	APPLICABLE DOCUMENTS	5
1.3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	5
1.4	THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS	5
1.4.1	The ESCC Component Number	5
1.4.2	Component Type Variants and Range of Components	6
1.5	MAXIMUM RATINGS	8
1.6	PHYSICAL DIMENSIONS AND TERMINAL IDENTIFICATION	10
1.7	FUNCTIONAL DIAGRAM	10
2	REQUIREMENTS	11
2.1	GENERAL	11
2.1.1	Deviations from the Generic Specification	11
2.2	MARKING	11
2.3	ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES	11
2.3.1	Room Temperature Electrical Measurements	11
2.3.2	High and Low Temperatures Electrical Measurements	12
2.4	INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS	13
	<b>APPENDIX A</b>	<b>15</b>

**1 GENERAL**

**1.1 SCOPE**

This specification details the ratings, physical and electrical characteristics, and test and inspection data for the component type variants and/or the Component Type Variants and Range of Components specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

**1.2 APPLICABLE DOCUMENTS**

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. [3012](#).

**1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS**

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. [21300](#) shall apply.

**1.4 THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS**

**1.4.1 The ESCC Component Number**

The ESCC Component Number shall be constituted as follows:

Example: 301200401106KE0600

- Detail Specification Reference: 3012004
- Component Type Variant Number: 01 (as required)
- Characteristic code: Rated Capacitance (10µF): 106 (as required)
- Characteristic code: Capacitance Tolerance (±10%): K (as required)
- Rating code: DC Rated Voltage (25V): E (as required)
- Characteristic code: Maximum Equivalent Series Resistance (600mΩ): 0600

**1.4.1.1 Characteristics and Ratings Codes**

Characteristics and ratings to be codified as part of the ESCC Component Number shall be as follows:

- (a) Rated Capacitance,  $C_n$ , expressed by means of the following codes in accordance with ESCC Basic Specification No. [21700](#). The unit quantity shall be picofarad (pF).

Capacitance Value C (pF)	Code
XX 10 <sup>5</sup>	XX5
XX 10 <sup>6</sup>	XX6
XX 10 <sup>7</sup>	XX7

- (b) Capacitance Tolerance expressed by the following codes in accordance with ESCC Basic Specification No. [21700](#):

Tolerance (± %)	Code
10	K
20	M

(c) DC Rated Voltage,  $U_R$ , expressed by the following codes:

DC Rated Voltage $U_R$ (V)	Code
6.3	J
10	A
12	B
16	C
20	D
25	E
35	V
50	T

(d) Equivalent Series Resistance maximum value, ESR, expressed by the following codes. The unit quantity shall be milliohm ( $m\Omega$ ):

Maximum Equivalent Series Resistance ESR ( $m\Omega$ )	Code
XX	00XX
XXX	0XXX
XXXX	XXXX

1.4.2 Component Type Variants and Range of Components

The Component Type Variants and Range of Components applicable to this specification are as follows:

Variant Number	Case Code (Style) (Note 1)	Terminal Material and Finish (Note 2)	Capacitance Range $C_n$ ( $\mu F$ ) (Notes 3, 4)	DC Rated Voltage $U_R$ (V) (Note 3)	Maximum Equivalent Series Resistance ESR ( $m\Omega$ ) (Note 2)	Weight Max (g)
01	A (1206)	G16	1 to 22	6.3 to 25	900 to 3000	0.1
02	B (1210)	G16	1 to 47	6.3 to 50	500 to 2000	0.2
03	C (2312)	P17	3.3 to 150	6.3 to 50	300 to 1000	0.3
04	D (2917)	P17	4.7 to 330	6.3 to 50	35 to 200	0.5
05	E (2917)	P17	33 to 470	6.3 to 35	30 to 65	0.7

**NOTES:**

1. See Para. 1.6.
2. Terminal material and finish shall in accordance with the requirements of ESCC Basic Specification No. [23500](#).

3. The following Rated Capacitance ( $C_n$ ), DC Rated Voltage ( $U_R$ ) and maximum Equivalent Series Resistance values (ESR) are available in the following cases (letters indicate Case Code; numbers indicate maximum ESR in  $m\Omega$ ):

Capacitance $C_n$ ( $\mu F$ )	DC Rated Voltage $U_R$							
	6.3V	10V	12V	16V	20V	25V	35V	50V
1						A 3000		B 2000
3.3					A 2500		B 1000	C 1000
4.7				A 2000		B 1000	C 600	D 200
10		A 1800			B 1000	C 600	D 120	
22	A 900			B 600	C 400		D 100	
33		B 650			C 300	D 65	E 65	
47	B 500			C 350	D 55	E 65		
100		C 200		D 55	E 45			
150	C 300	D 45		E 40				
220		D 35	E 35					
330	D 35	E 35						
470	E 30							

4. The following Capacitance Tolerances are available:
- $\pm 10\%$  (K)
  - $\pm 20\%$  (M)

1.5 MAXIMUM RATINGS

The maximum ratings shall not be exceeded at any time during use or storage.

Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the ESCC Generic Specification.

Characteristics	Symbols	Maximum Ratings	Units	Remarks
DC Rated Voltage	$U_R$	See Para. 1.4.1.1(d)	V	Note 1
DC Surge Voltage	$U_S$	$1.3 \times U_R$	V	$T_{amb} \leq +85^\circ\text{C}$
DC Category Voltage	$U_C$	$0.66 \times U_R$	V	
Ripple Current	$I_{ripple}$	See Note 2	mA	f = 100kHz, Note 3
Operating Temperature Range	$T_{op}$	-55 to +125	$^\circ\text{C}$	$T_{amb}$
Rated Temperature	$T_R$	+85	$^\circ\text{C}$	
Upper Category Temperature	$T_C$	+125	$^\circ\text{C}$	
Storage Temperature Range	$T_{stg}$	-55 to +125	$^\circ\text{C}$	
Soldering Temperature	$T_{sol}$	+260	$^\circ\text{C}$	Note 4


**NOTES:**

- At  $T_{amb} \leq +85^\circ\text{C}$ . For  $T_{amb} > +85^\circ\text{C}$ , derate linearly to  $U_C$  at  $T_{amb} = +125^\circ\text{C}$ .
- Maximum  $I_{ripple}$ , which depends on  $C_n$  and  $U_R$ , shall be as follows at  $T_{amb} \leq +25^\circ\text{C}$  and f = 100kHz:

Capacitance $C_n$ ( $\mu\text{F}$ )	Rated Voltage $U_R$ (V)	Maximum Ripple Current $I_{ripple}$ (mA)
22	6.3	290
47	6.3	410
150	6.3	610
330	6.3	2700
470	6.3	3000
10	10	200
33	10	360
100	10	740
150	10	2400
220	10	2700
330	10	2800
220	12	2800
4.7	16	190
22	16	380
47	16	560
100	16	2200
150	16	2600
3.3	20	170


Capacitance $C_n$ ( $\mu\text{F}$ )	Rated Voltage $U_R$ (V)	Maximum Ripple Current $I_{ripple}$ (mA)
10	20	290
22	20	520
33	20	610
47	20	2200
100	20	2500
1	25	160
4.7	25	290
10	25	430
33	25	2000
47	25	2000
3.3	35	290
4.7	35	430
10	35	1500
22	35	1600
33	35	2000
1	50	200
3.3	50	330
4.7	50	1100

3. At  $T_{amb} \leq +25^{\circ}\text{C}$ . For  $T_{amb} > +25^{\circ}\text{C}$ , derate maximum  $I_{ripple}$  as follows:

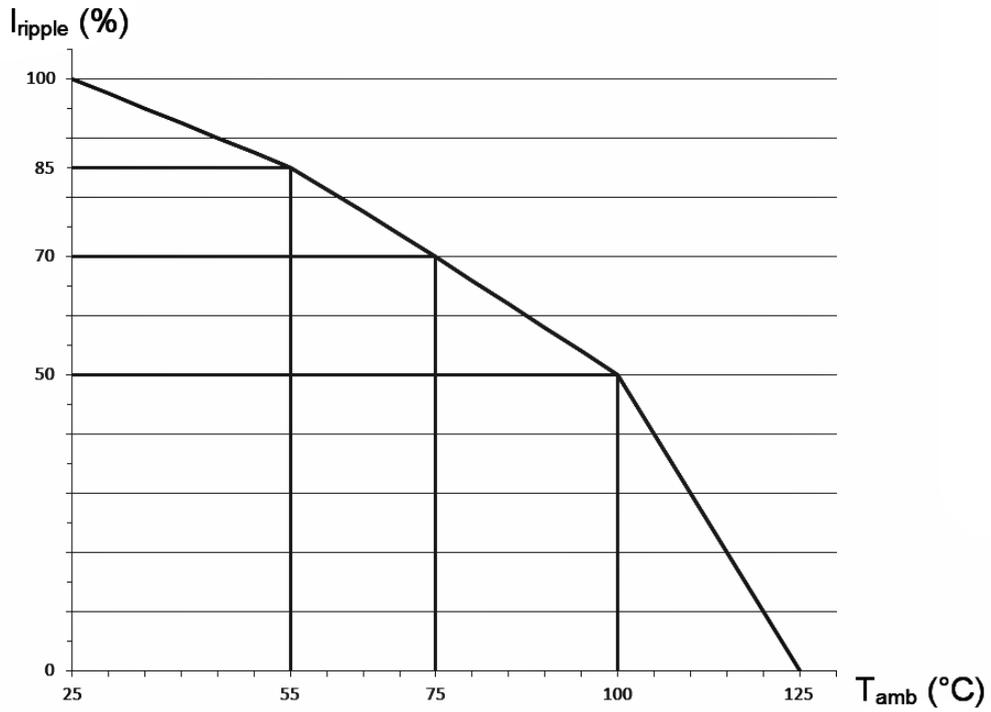

4. Duration 5 seconds maximum for wave soldering and 10 seconds maximum for reflow soldering. The solderable area is the terminal pad and up to 1/3 the height of the L-shape terminal (see Para. 1.6).

1.6 PHYSICAL DIMENSIONS AND TERMINAL IDENTIFICATION

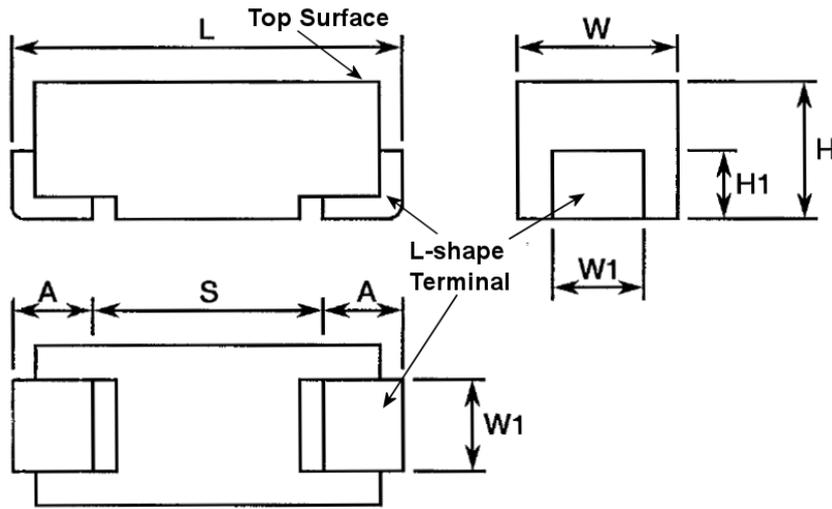

Variant Number	Case Code	Dimensions (mm)													
		L		H		H1		W		W1		A		S	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
01	A	3	3.4	-	1.8	0.7	-	1.5	1.8	1	1.4	0.6	1.1	1.1	-
02	B	3.3	3.7	-	2.1	0.7	-	2.7	3	2	2.4	0.6	1.1	1.4	-
03	C	5.8	6.2	-	2.8	0.7	-	3.1	3.4	2	2.4	1.1	1.6	2.9	-
04	D	7.1	7.5	-	3.1	0.7	-	4.2	4.5	2.2	2.6	1.1	1.6	4.4	-
05	E	7.1	7.5	-	4.3	0.7	-	4.2	4.5	2.2	2.6	1.1	1.6	4.4	-

**NOTES:**

- Terminal identification: The anode terminal shall be indicated by a polarity stripe marked on the top surface of the component. For qualified components, the ESCC qualified components symbol may be used to indicate the anode terminal.

1.7 FUNCTIONAL DIAGRAM



Terminal 1: Anode

Terminal 2: Cathode

**2 REQUIREMENTS**

**2.1 GENERAL**

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component's reliability, are listed in the appendices attached to this specification.

**2.1.1 Deviations from the Generic Specification**

None.

**2.2 MARKING**

The marking shall be in accordance with the requirements of ESCC Basic Specification No. 21700. The information to be marked shall be:

- (a) Terminal Identification (see Para. 1.6).
- (b) The ESCC qualified components symbol (for ESCC qualified components only).
- (c) The ESCC Component Number (see Para. 1.4.1).
- (d) Traceability information.

**2.3 ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES**

Electrical measurements shall be performed at room, high and low temperatures.

**2.3.1 Room Temperature Electrical Measurements**

The measurements shall be performed at  $T_{amb} = +22 \pm 3^{\circ}C$ .

Characteristics	Symbols	Test Method and Conditions	Tolerance	Limits		Units
				Min	Max	
Capacitance	C	ESCC No. 3012	$\pm 10\%$ $\pm 20\%$	$0.9C_n$ $0.8C_n$	$1.1C_n$ $1.2C_n$	$\mu F$
DC Leakage Current	$I_L$	ESCC No. 3012	All	-	$0.01C_n \times U_R$ or (1) 1	$\mu A$
Dissipation Factor	DF	ESCC No. 3012 For $U_R < 10V$ : For $U_R \geq 10V$ :	All	- -	10 6	%
Equivalent Series Resistance	ESR	ESCC No. 3012	All	-	Note 2	$m\Omega$

**NOTES:**

- 1. Whichever is greater.
- 2. See Para. 1.4.2, Note 3.

2.3.2 High and Low Temperatures Electrical Measurements

Characteristics	Symbols	Test Method and Conditions (Note 1)	Tolerance	Limits		Units
				Min	Max	
Capacitance	C	ESCC No. 3012  $T_{amb} = -55 (+3 -0)^{\circ}C:$  $T_{amb} = +85 \pm 3^{\circ}C:$  $T_{amb} = +125 (+0 -3)^{\circ}C:$	$\pm 10\%$ $\pm 20\%$  $\pm 10\%$ $\pm 20\%$  $\pm 10\%$ $\pm 20\%$	0.81C <sub>n</sub> 0.72C <sub>n</sub>  0.9C <sub>n</sub> 0.8C <sub>n</sub>  0.9C <sub>n</sub> 0.8C <sub>n</sub>	1.1C <sub>n</sub> 1.2C <sub>n</sub>  1.21C <sub>n</sub> 1.32C <sub>n</sub>  1.232C <sub>n</sub> 1.344C <sub>n</sub>	$\mu F$
DC Leakage Current	I <sub>L</sub>	ESCC No. 3012  $T_{amb} = +85 \pm 3^{\circ}C, V = U_R \pm 2\%:$  $T_{amb} = +125 (+0 -3)^{\circ}C, V = U_C \pm 2\%:$	All	-	0.1C <sub>n</sub> x U <sub>R</sub> or (2) 1	$\mu A$
Dissipation Factor	DF	ESCC No. 3012  $T_{amb} = -55 (+3 -0)^{\circ}C$ For U <sub>R</sub> < 10V: For U <sub>R</sub> ≥ 10V:  $T_{amb} = +85 \pm 3^{\circ}C$ For U <sub>R</sub> < 10V: For U <sub>R</sub> ≥ 10V:  $T_{amb} = +125 (+0 -3)^{\circ}C$ For U <sub>R</sub> < 10V: For U <sub>R</sub> ≥ 10V:	All	- -  - -  - -	15 9  15 9  20 12	%
Equivalent Series Resistance	ESR	ESCC No. 3012  $T_{amb} = -55 (+3 -0)^{\circ}C:$ $T_{amb} = +85 \pm 3^{\circ}C:$ $T_{amb} = +125 (+0 -3)^{\circ}C:$	All	- - -	Note 3 Note 4 Note 4	%

**NOTES:**

1. Measurements shall be performed on a sample of 5 components from each manufacturing lot and each capacitance value with 0 failures allowed. In the event of any failure a 100% inspection may be performed.
2. Whichever is greater.
3. 2.5× the limit specified in Para. 2.3.1.
4. 1.5× the limit specified in Para. 2.3.1.

2.4 INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at  $T_{amb} = +22 \pm 3^{\circ}\text{C}$ .

Unless otherwise specified the test methods and test conditions shall be as per the corresponding test defined in Para. 2.3.1 Room Temperature Electrical Measurements.

Test Reference per ESCC No. 3012	Characteristics	Symbols	Limits		Units	
			Min	Max		
Mounting Initial Measurements	Capacitance	C	Note 1		$\mu\text{F}$	
	Final Measurements	Capacitance	C	Record Value		$\mu\text{F}$
		Capacitance Change	$\Delta\text{C}/\text{C}$	-5	+5	%
		DC Leakage Current	$I_L$	-	Note 1	$\mu\text{A}$
		Dissipation Factor	DF	-	Note 1	%
		Equivalent Series Resistance	ESR	-	Note 2	$\text{m}\Omega$
Robustness of Terminations Initial Measurements	Capacitance	C	Note 3		$\mu\text{F}$	
	Final Measurements	Capacitance	C	Record Value		$\mu\text{F}$
		Capacitance Change	$\Delta\text{C}/\text{C}$	-5	+5	% (3)
Rapid Change of Temperature Initial Measurements	Capacitance	C	Note 3		$\mu\text{F}$	
	Final Measurements	Capacitance	C	Record Value		$\mu\text{F}$
		Capacitance Change	$\Delta\text{C}/\text{C}$	-5	+5	% (3)
		DC Leakage Current	$I_L$	-	Note 1	$\mu\text{A}$
		Dissipation Factor	DF	-	Note 1	%
		Equivalent Series Resistance	ESR	-	Note 2	$\text{m}\Omega$
Vibration During Last Sweep Cycle	No intermittent contact $\geq 0.5\text{ms}$ , arcing, or open/short circuits	-	-	-	-	
Climatic Sequence Initial Measurements	Capacitance	C	Note 3		$\mu\text{F}$	
	Dry Heat	DC Leakage Current (at $+125^{\circ}\text{C}$ ; $U_C$ )	$I_L$	-	Note 4	$\mu\text{A}$
		Final Measurements	Capacitance	C	Record Value	
	Capacitance Change		$\Delta\text{C}/\text{C}$	-5	+5	% (3)
	DC Leakage Current		$I_L$	-	Note 1	$\mu\text{A}$
	Dissipation Factor		DF	-	Note 2	%
	Equivalent Series Resistance		ESR	-	Note 2	$\text{m}\Omega$
High and Low Temperature Stability	Step 1 (at $+22^{\circ}\text{C}$ )	Note 1 (All Characteristics)	Note 1	Note 1		
	Step 2 (at $-55^{\circ}\text{C}$ )	Note 4 (All Characteristics)	Note 4	Note 4		
	Step 3 (at $+22^{\circ}\text{C}$ )	Note 1 (All Characteristics)	Note 1	Note 1		
	Step 4 (at $+85^{\circ}\text{C}$ )	Note 4 (All Characteristics)	Note 4	Note 4		
	Step 5 (at $+125^{\circ}\text{C}$ )	Note 4 (All Characteristics)	Note 4	Note 4		
	Step 6 (at $+22^{\circ}\text{C}$ )	Note 1 (All Characteristics)	Note 1	Note 1		

Test Reference per ESCC No. 3012	Characteristics	Symbols	Limits		Units
			Min	Max	
Surge Voltage Final Measurements	Capacitance DC Leakage Current Dissipation Factor Equivalent Series Resistance	C I <sub>L</sub> DF ESR	Note 1 -   Note 1 -   Note 1 -   Note 1		μF μA % mΩ
Damp Heat, Steady State Initial Measurements	Capacitance	C	Note 3		μF
Final Measurements	Capacitance Capacitance Change DC Leakage Current Dissipation Factor Equivalent Series Resistance	C ΔC/C I <sub>L</sub> DF ESR	Record Value -10   +10 -   Note 5 -   Note 6 -   Note 2	μF % (3) μA % mΩ	
Operating Life Initial Measurements	Capacitance	C	Note 3		μF
Intermediate Measurements (250h and 1000h)(Note 8)	DC Leakage Current (at T1 = +85°C) DC Leakage Current (at T2 = +125°C)	I <sub>L</sub> I <sub>L</sub>	-   Note 7 -   Note 7	μA μA	
Intermediate Measurements (250h)(Note 9)	DC Leakage Current (at T1 = +85°C)	I <sub>L</sub>	-   Note 7	μA	
Final Measurements (1000h or 2000h)(Note 10)	Capacitance Capacitance Change DC Leakage Current Dissipation Factor Equivalent Series Resistance	C ΔC/C I <sub>L</sub> DF ESR	Record Value -10   +10 -   Note 2 -   Note 1 -   Note 2	μF % (3) μA % mΩ	

**NOTES:**

- As specified in Para. 2.3.1.
- 1.25× the limit specified in Para. 2.3.1.
- Capacitance measured during the final measurements during Mounting may be used as the initial measurement for other tests. In this case, Capacitance Change shall be referred to this initial measurement.
- As specified in Para. 2.3.2.
- 1.5× the limit specified in Para. 2.3.1.
- 1.2× the limit specified in Para. 2.3.1.
- 1.25× the limit specified in Para. 2.3.2.
- Applicable to Qualification Testing, and to Periodic Testing for renewal of qualification after lapse.
- Applicable to Periodic Testing for extension of qualification.
- 1000 hours is applicable to Periodic Testing for extension of qualification. 2000 hours is applicable to Qualification Testing, and to Periodic Testing for renewal of qualification after lapse.

**APPENDIX A****AGREED DEVIATIONS FOR KYOCERA AVX COMPONENTS s.r.o. (CZ)**

Items Affected	Description of Deviations
Para. 2.1.1, Deviations from the Generic Specification: Deviations from Special In-Process Controls - Chart F2	Internal Visual Inspection: Need not be performed immediately prior to encapsulation but may be performed at various stages during production, as specified in the PID.
Para. 2.1.1, Deviations from the Generic Specification: Deviations from Screening Tests - Chart F3, Deviations from Qualification and Periodic Testing - Chart F4	External Visual Inspection: Visible base material is permitted on the edges of terminals (there may be no plating on edges).