




**CONNECTORS, SUBMINIATURE, ELECTRICAL,
RECTANGULAR, CENTRAL JACKSCREW COUPLING,
CRIMP-TYPE, REMOVABLE CONTACTS,
BASED ON TYPE U.R.
ESCC Detail Specification No. 3401/011**

**ISSUE 1
October 2002**



| | | | |
|---|---------------------------|--|--------------------|
|  | ESCC Detail Specification | | PAGE ii ISSUE 1 |
|---|---------------------------|--|--------------------|

LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2002. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole in any medium without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.



**europaean space agency
agence spatiale européenne**



Pages 1 to 20

**CONNECTORS, SUBMINIATURE, ELECTRICAL,
RECTANGULAR, CENTRAL JACKSCREW COUPLING,
CRIMP-TYPE, REMOVABLE CONTACTS,
BASED ON TYPE U.R.**

ESA/SCC Detail Specification No. 3401/011



**space components
coordination group**

| Issue/Rev. | Date | Approved by | |
|------------|-------------|---|---|
| | | SCCG Chairman | ESA Director General or his Deputy |
| Issue 4 | August 2001 |  |  |
| | | | |
| | | | |
| | | | |



ESA/SCC Detail Specification
No. 3401/011

PAGE 2

ISSUE 4

DOCUMENTATION CHANGE NOTICE

| Rev. Letter | Rev. Date | Reference | CHANGE Item | Approved DCR No. |
|----------------|--------------|---|----------------|---------------------|
| | | This issue supersedes Issue 3 and incorporates the changes agreed in the following DCR's: Specification entirely rewritten to align with ESA/SCC Detail Specification No. 3401/002 | | 21191 |
| | | | | |

**ESC**

ESA/SCC Detail Specification

No. 3401/011

PAGE 3

ISSUE 4

TABLE OF CONTENTS

| | <u>Page</u> |
|---|-------------|
| 1. <u>GENERAL</u> | 5 |
| 1.1 Scope | 5 |
| 1.2 Range of Components | 5 |
| 1.3 Maximum Ratings | 5 |
| 1.4 Parameter Derating Information | 5 |
| 1.5 Physical Dimensions | 5 |
| 2. <u>APPLICABLE DOCUMENTS</u> | 5 |
| 3. <u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u> | 5 |
| 4. <u>REQUIREMENTS</u> | 11 |
| 4.1 General | 11 |
| 4.2 Deviations from Generic Specification | 11 |
| 4.2.1 Deviations from Special In-process Controls | 11 |
| 4.2.2 Deviations from Final Production Tests | 11 |
| 4.2.3 Deviations from Burn-in and Electrical Measurements | 11 |
| 4.2.4 Deviations from Qualification Tests | 11 |
| 4.2.5 Deviations from Lot Acceptance Tests | 11 |
| 4.3 Mechanical Requirements | 11 |
| 4.3.1 Dimension Check | 11 |
| 4.3.2 Weight | 11 |
| 4.3.3 Contact Capability | 11 |
| 4.3.4 Contact Retention (In Insert) | 12 |
| 4.3.5 Mating and Unmating Forces | 12 |
| 4.3.6 Insert Retention (In Shell) | 12 |
| 4.3.7 Jackscrew Retention | 12 |
| 4.3.8 Contact Insertion and Withdrawal Forces | 12 |
| 4.3.9 Engagement and Separation Forces | 12 |
| 4.3.10 Oversize Pin Exclusion | 12 |
| 4.3.11 Probe Damage | 12 |
| 4.3.12 Solderability | 12 |
| 4.4 Materials and Finishes | 12 |
| 4.4.1 Shells | 12 |
| 4.4.2 Inserts | 12 |
| 4.4.3 Contacts | 12 |
| 4.4.4 Contact Retaining Clip | 12 |
| 4.4.5 Guiding and Locking Devices | 13 |
| 4.4.6 Magnetism Level | 13 |
| 4.4.7 Jackscrew | 13 |
| 4.5 Marking | 13 |
| 4.5.1 General | 13 |
| 4.5.2 Contact Identification | 13 |
| 4.5.3 The SCC Component Number | 13 |
| 4.5.4 Characteristics | 14 |
| 4.5.5 Traceability Information | 15 |
| 4.6 Electrical Measurements | 16 |
| 4.6.1 Electrical Measurements at Room Temperature | 16 |
| 4.6.2 Electrical Measurements at High and Low Temperatures | 16 |
| 4.6.3 Circuit for Electrical Measurements | 16 |
| 4.7 Burn-in and Electrical Measurements | 16 |



| | <u>Page</u> |
|--|-------------|
| 4.8 Environmental and Endurance Tests | 16 |
| 4.8.1 Measurements and Inspections on Completion of Environmental Tests | 16 |
| 4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests | 16 |
| 4.8.3 Measurements and Inspections on Completion of Endurance Tests | 16 |
| 4.8.4 Conditions for Operating Life Test | 16 |
| 4.8.5 Electrical Circuits for Operating Life Test | 16 |
| 4.8.6 Conditions for High Temperature Storage Test | 16 |

TABLES

| | |
|---|----|
| 1(a) Range of Components | 6 |
| 1(b) Maximum Ratings | 6 |
| 2 Electrical Measurements at Room Temperature | 17 |
| 3 Not Applicable | 17 |
| 4 Not Applicable | 17 |
| 5 Not Applicable | 17 |
| 6 Measurements and Inspections on Completion of Environmental and Endurance Testing | 18 |

FIGURES

| | |
|----------------------------------|---|
| 1 Parameter Derating Information | 7 |
| 2 Physical Dimensions | 8 |

APPENDICES (Applicable to specific Manufacturers only)
None.

**1. GENERAL****1.1 SCOPE**

This specification details the ratings, physical and electrical characteristics, test and inspection data for Connectors, Subminiature, Electrical, Central Jackscrew Coupling, Crimp-type, Removable Contacts based on Type U.R.

It shall be read in conjunction with:-

ESA/SCC Generic Specification No. 3401, Connectors, Electrical, Non-Filtered, Circular and Rectangular.

ESA/SCC Detail Specification No. 3401/012, Contacts, Electrical, Crimp-type, for 3401/011 Connectors.

the requirements of which are supplemented herein.

1.2 RANGE OF COMPONENTS

The different sizes of connectors specified herein, which are also covered by this specification, together with their mechanical characteristics, are given in Table 1(a).

1.3 MAXIMUM RATINGS

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the connectors specified herein, are scheduled in Table 1(b).

1.4 PARAMETER DERATING INFORMATION

The applicable derating information for the connectors specified herein is shown in Figure 1.

1.5 PHYSICAL DIMENSIONS

The physical dimensions of the connectors specified herein are shown in Figure 2.

2. APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESA/SCC Generic Specification No. 3401 for Connectors, Electrical, Non-Filtered, Circular and Rectangular.
- (b) ESA/SCC Detail Specification No. 3401/012, Contacts, Electrical, for 3401/011 Connectors.
- (c) MIL-STD-202, Test Methods for Electronic and Electrical Component Parts.
- (d) MIL-STD-1344, Test Methods for Electrical Connectors.

3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESA/SCC Basic Specification No. 21300 shall apply.

**TABLE 1(a) - RANGE OF COMPONENTS (MALE)**

| SHELL TYPE | SHELL SIZE | TYPE OF CONTACT | MAXIMUM WEIGHT (g) (1) | JACKSCREW COUPLING TORQUE (N.Max.) |
|------------|------------|-----------------|------------------------|------------------------------------|
| Receptacle | 2 | P | 6.90 | - |
| Receptacle | 3 | P | 10.10 | - |
| Receptacle | 4 | P | 11.40 | - |
| Receptacle | 6 | P | 14.90 | - |
| Receptacle | 7 | P | 18.50 | - |
| Plug | 2 | P | 6.10 | 0.006 |
| Plug | 3 | P | 9.50 | 0.006 |
| Plug | 4 | P | 11.20 | 0.006 |
| Plug | 6 | P | 14.30 | 0.006 |
| Plug | 7 | P | 18.60 | 0.006 |

TABLE 1(a) - RANGE OF COMPONENTS (FEMALE)

| SHELL TYPE | SHELL SIZE | TYPE OF CONTACT | MAXIMUM WEIGHT (g) (1) | JACKSCREW COUPLING TORQUE (N.Max.) |
|------------|------------|-----------------|------------------------|------------------------------------|
| Receptacle | 2 | S | 6.30 | - |
| Receptacle | 3 | S | 9.20 | - |
| Receptacle | 4 | S | 10.90 | - |
| Receptacle | 6 | S | 14.50 | - |
| Receptacle | 7 | S | 18.80 | - |
| Plug | 2 | S | 5.60 | 0.006 |
| Plug | 3 | S | 8.70 | 0.006 |
| Plug | 4 | S | 10.20 | 0.006 |
| Plug | 6 | S | 14.20 | 0.006 |
| Plug | 7 | S | 17.10 | 0.006 |

NOTES


- Weights shown are for connector less contact.

TABLE 1(b) - MAXIMUM RATINGS

| No. | CHARACTERISTICS | SYMBOL | MAXIMUM RATING | | UNIT |
|-----|------------------------------|-----------|----------------|-------|------|
| | | | MIN. | MAX. | |
| 1 | Working Voltage Sea Level | U_R | - | 250 | Vrms |
| 2 | Operating Temperature Range | T_{op} | - 55 | + 125 | °C |
| 3 | Storage Temperature Range | T_{stg} | - 65 | + 125 | °C |



FIGURE 1 - PARAMETER DERATING INFORMATION

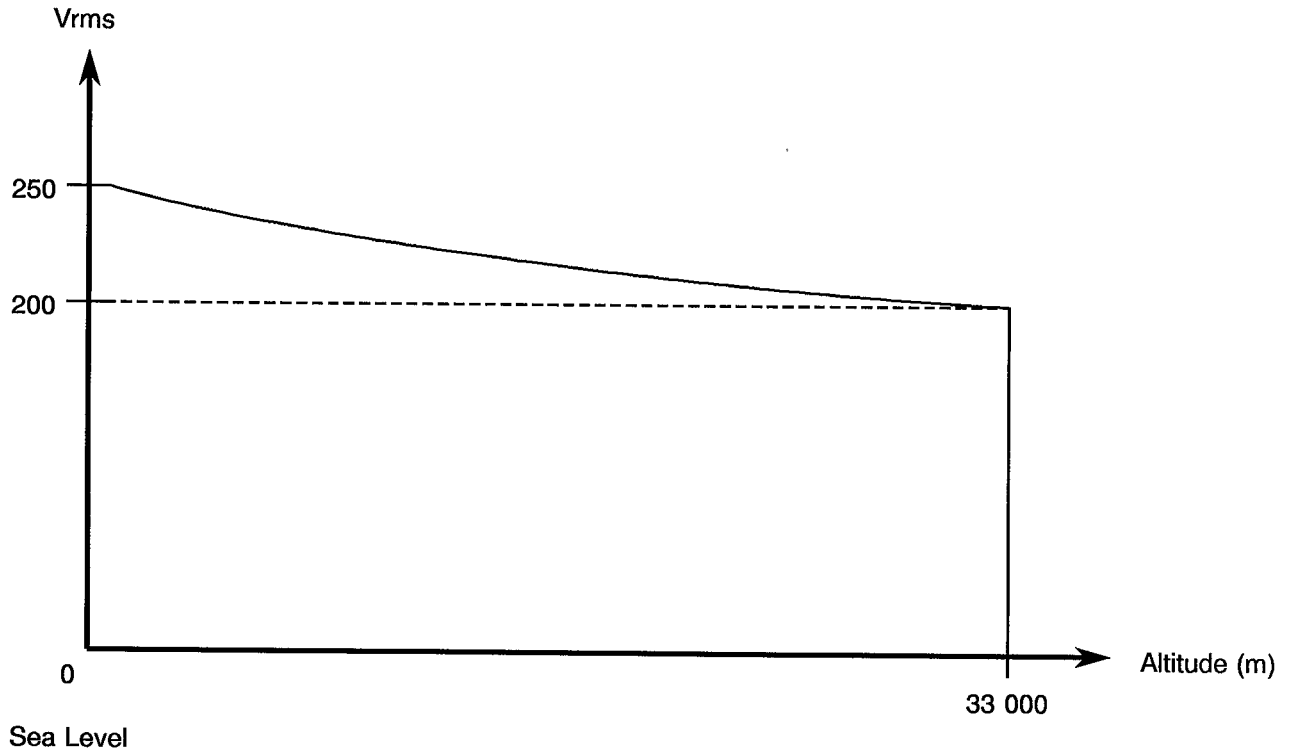


Working Voltage Versus Altitude



FIGURE 2 - PHYSICAL DIMENSIONS

FIGURE 2(a) - RECEPTACLE

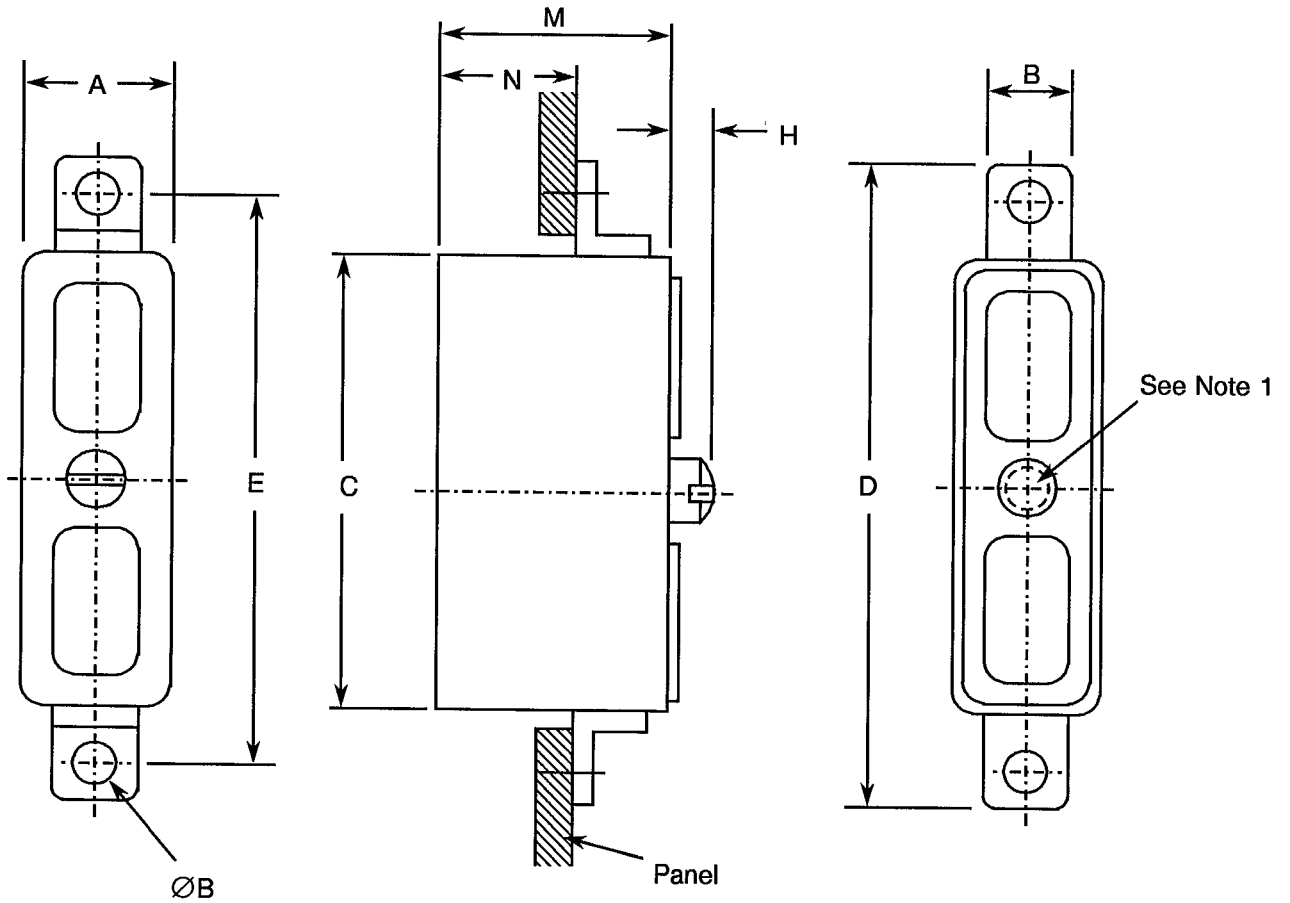

| SHELL SIZE | A Max. | B Max. | ØB | C Max. | D Max. | E | | G | | H Max. | M Max. | N Max. |
|------------|--------|--------|------|--------|--------|-------|-------|-------|-------|--------|--------|--------|
| | | | | | | Min. | Max. | Min. | Max. | | | |
| 2 | 8.35 | 6.50 | 3.05 | 23.60 | 38.80 | 32.23 | 32.43 | 9.95 | 10.15 | 3.60 | 17.90 | 11.90 |
| 3 | 8.35 | 6.50 | 3.05 | 39.85 | 55 | 48.52 | 48.72 | 9.95 | 10.15 | 3.60 | 17.90 | 11.90 |
| 4 | 10.40 | 6.50 | 3.05 | 39.85 | 55 | 48.52 | 48.72 | 12.00 | 12.20 | 3.60 | 17.90 | 11.90 |
| 6 | 14.45 | 6.50 | 3.05 | 39.85 | 55 | 48.52 | 48.72 | 16.05 | 16.25 | 3.60 | 17.90 | 11.90 |
| 7 | 14.45 | 6.50 | 3.05 | 52.00 | 67.20 | 60.53 | 60.73 | 16.05 | 16.25 | 3.60 | 17.90 | 11.90 |


NOTES

1. Thread:3-48 UNC-2A.
2. All dimensions in millimetres.



FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2(a) - PLUG

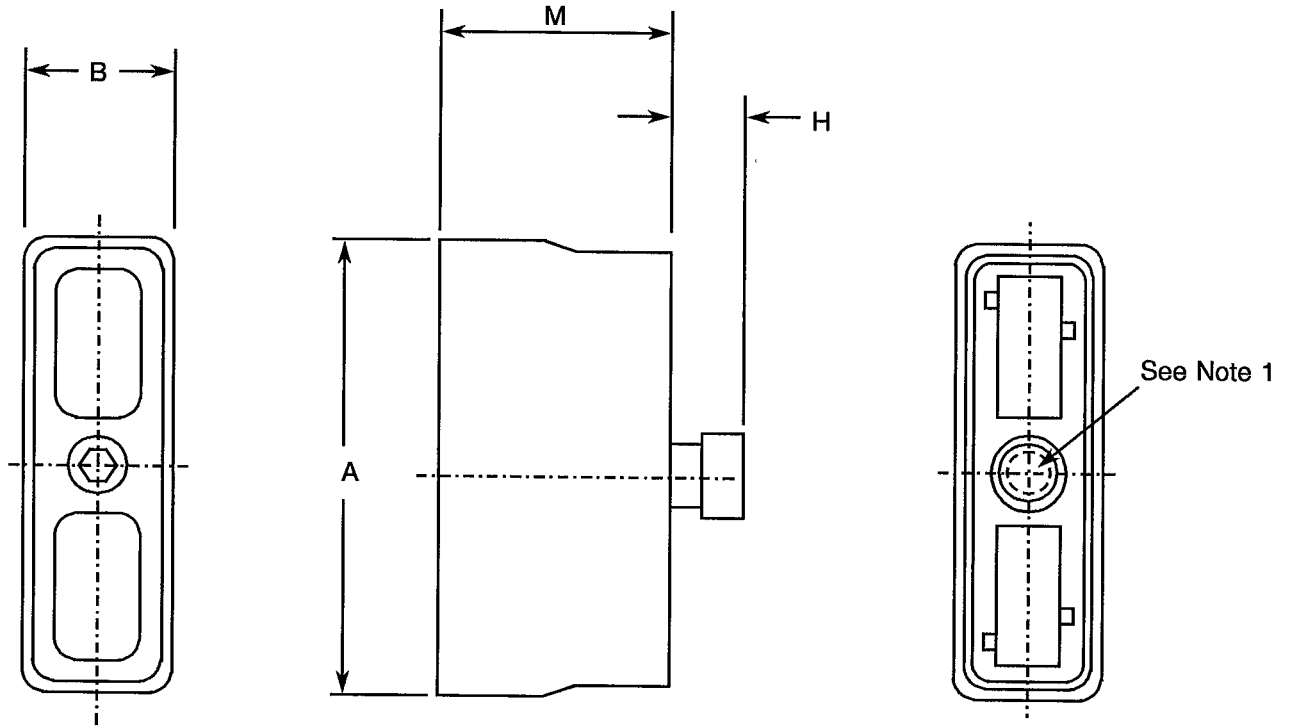

| SHELL SIZE | A Max. | B Max. | H Max. | M Max. |
|------------|--------|--------|--------|--------|
| 2 | 24.85 | 9.60 | 6.35 | 17.90 |
| 3 | 41.10 | 9.60 | 6.35 | 17.90 |
| 4 | 41.10 | 11.65 | 6.35 | 17.90 |
| 6 | 41.10 | 15.70 | 6.35 | 17.90 |
| 7 | 53.15 | 15.70 | 6.35 | 17.90 |

NOTES


1. Thread:3-48 UNC-2A.
2. All dimensions in millimetres.




FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2(b) - STANDARD CONTACT ARRANGEMENTS


FRONT VIEW MALE INSERT

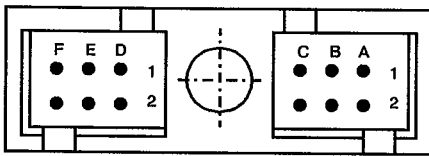


212
12 Contacts Gauge 22

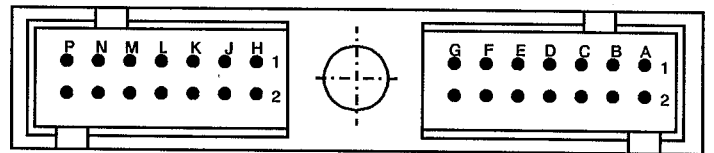


328
28 Contacts Gauge 22

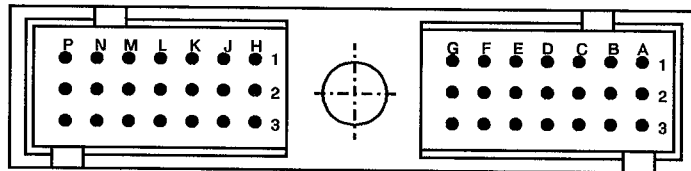

442
42 Contacts Gauge 22

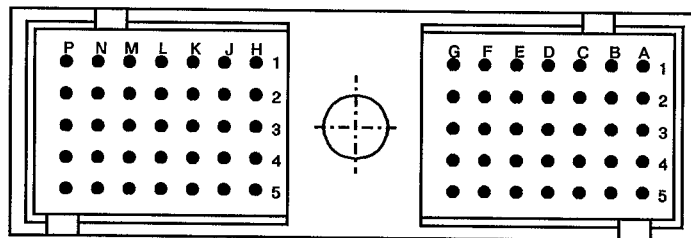

670
70 Contacts Gauge 22

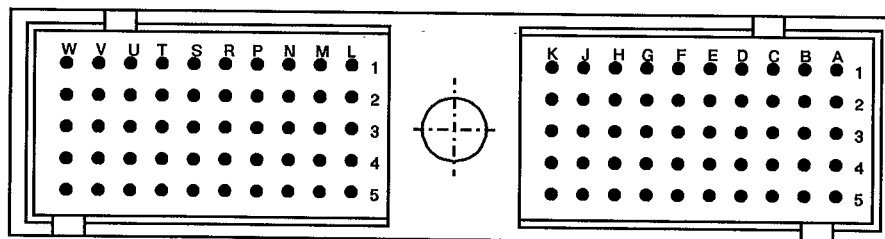

700
100 Contacts Gauge 22

NOTES

- 1. See Para. 4.5.4 for definition of numbers.



4. REQUIREMENTS

4.1 GENERAL

The complete requirements for procurement of the connectors specified herein are stated in this specification and ESA/SCC Generic Specification No. 3401. Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESA/SCC requirements and do not affect the component's reliability, are listed in the appendices attached to this specification.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION

4.2.1 Deviations from Special In-process Controls

Not applicable.

4.2.2 Deviations from Final Production Tests (Chart II)

(a) Para. 9.5, Magnetism Level: Not applicable.

For information: The magnetism level is of the order of 2 000 gammas for a mated connector set after testing, in compliance with Para. 9.5 of ESA/SCC Generic Specification No. 3401.

4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)

Not applicable.

4.2.4 Deviations from Qualification Tests (Chart IV)

(a) Para. 9.12.1, Shock: 100g; 11ms; $\frac{1}{2}$ sine wave.

(b) Para. 9.18, Endurance: For shell size 7 (100 contacts), the 500 engagements and separations shall be performed as follows:

- 150 engagements and separations with the jackscrew.
- 350 remaining engagements and separations without jackscrew, manually.

4.2.5 Deviations from Lot Acceptance Tests (Chart V)

(a) Para. 9.18, Endurance: For shell size 7 (100 contacts), the 100 engagements and separations shall be performed with the jackscrew.

4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the connectors specified herein shall be verified in accordance with the requirements set out in Para. 9.6 of ESA/SCC Generic Specification 3401 and shall conform to those shown in Figure 2 of this specification.

4.3.2 Weight

The maximum weight of the connectors specified herein, without contacts, shall be as specified in Table 1(a).

4.3.3 Contact Capability

As specified in ESA/SCC Detail Specification No. 3401/012.

**4.3.4 Contact Retention (In Insert)**

As specified in ESA/SCC Detail Specification No. 3401/012.

4.3.5 Mating and Unmating Forces

Refer to the jackscrew coupling torque in Table 1(a).

4.3.6 Insert Retention (In Shell)

Connector inserts shall withstand a pressure of 42.8N/cm² without being dislodged from the shell.

4.3.7 Jackscrew Retention

An axial load shall be applied to the jackscrew from the engagement end of the connector. The load shall be gradually increased at a rate not exceeding 0.45N per second up to 20N and maintained for a period of 15 seconds. The jackscrew shall not be dislodged from the connector.

4.3.8 Contact Insertion and Withdrawal Forces

As specified in ESA/SCC Detail Specification No. 3401/012.

4.3.9 Engagement and Separation Forces

As specified in ESA/SCC Detail Specification No. 3401/012.

4.3.10 Oversize Pin Exclusion

As specified in ESA/SCC Detail Specification No. 3401/012.

4.3.11 Probe Damage

As specified in ESA/SCC Detail Specification No. 3401/012.

4.3.12 Solderability

As specified in ESA/SCC Detail Specification No. 3401/012.

4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the connectors specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

4.4.1 Shells

Shells shall be made of aluminium alloy conductive anodise.

4.4.2 Inserts

Bonded sandwich: Silicone/phenolic/silicone.

4.4.3 Contacts

As specified in ESA/SCC Detail Specification No. 3401/012.

4.4.4 Contact Retaining Clip

Not applicable.



4.4.5 Guiding and Locking Devices

Not applicable.

4.4.6 Magnetism Level

Not applicable.

4.4.7 Jackscrew

Stainless steel, passivated

4.5 MARKING

4.5.1 General

The marking of all components delivered to this specification shall be in accordance with with the requirements of ESA/SCC Basic Specification No. 21700 and the following paragraphs. When the component is too small to accommodate all of the marking specified, as much as space permits shall be marked and the marking information, in full, shall accompany the component in its primary package.

The information to be marked and the order of precedence, shall be as follows:-


- (a) Contact identification.
- (b) The SCC Component Number.
- (c) Characteristics.
- (d) Traceability information.

4.5.2 Contact Identification

Contact identification shall be marked in accordance with Figure 2(b).

4.5.3 The SCC Component Number

Each component shall bear the SCC Component Number which shall be constituted and marked as follows:

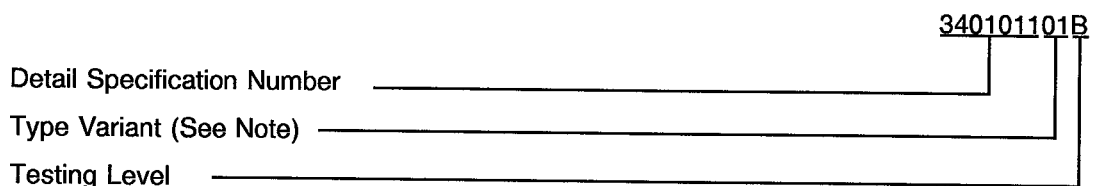

N.B.

Marking of the Type Variant Number is mandatory. No further reference to type variants is made in this specification.




4.5.4 Characteristics

The characteristics to be marked in the following order of precedence are:-

- (a) Series.
- (b) Shell size.
- (c) Insert type.
- (d) Alternative designs.
- (e) Contact arrangement.
- (f) Type of contact.
- (g) Magnetism Level.
- (h) Contact information.

The information shall be constituted and marked as follows:-

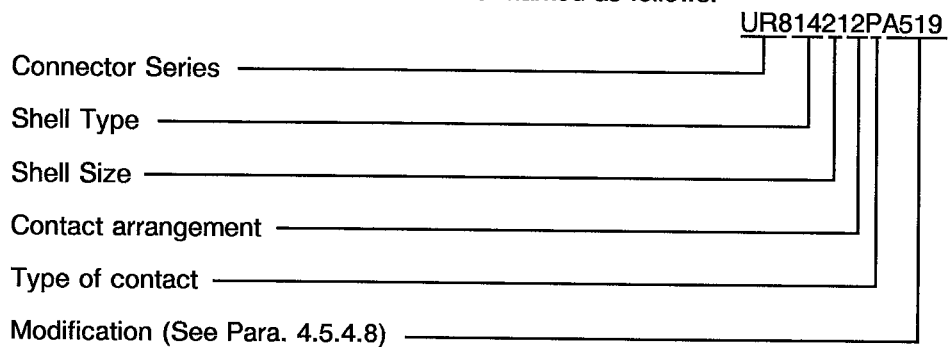

4.5.4.1 Connector Series

This connector series shall be designated by the Code UR8.

4.5.4.2 Shell Types

The shell types shall be designated by the following code numbers:-

| Code No. | Shell Type |
|----------|------------------|
| 14 | Plug Shell |
| 64 | Receptacle Shell |

4.5.4.3 Insert Type

Not applicable.



4.5.4.4 Shell Sizes and Contact Arrangement

Shell sizes and contact arrangements are closely interrelated and shall be indicated by the following codes.

| Code | | Number of Contacts |
|------------|---------------------|--|
| Shell Size | Contact Arrangement | |
| 2 | 12 | Number of contacts and contact sizes are as shown in Figure 2(b) |
| 3 | 28 | |
| 4 | 42 | |
| 6 | 70 | |
| 7 | 100 | |

4.5.4.5 Type of Contact

The contact types shall be indicated by the following code letters.

| CODE LETTER | CONTACT TYPE |
|-------------|--------------|
| P | Male |
| S | Female |

4.5.4.6 Magnetism Level

Not applicable.

4.5.4.7 Contact Information

Not applicable.

4.5.4.8 Modification Codes

Modification codes shall be expressed in letters or numbers, or both. They shall be defined by the Manufacturer who shall keep a code register for reference purposes. These high reliability connectors are ordered separately from the contacts and this is specified by code 090. This code shall never appear on the connector itself, but be used in paperwork only.

The Plug shell is to be marked A519 and the Receptacle shell is to be marked A520.

4.5.5 Traceability Information

Traceability information shall be marked in accordance with the requirements of ESA/SCC Basic Specification No. 21700.



4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured in respect of electrical characteristics are scheduled in Table 2. Unless otherwise specified, these measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.6.2 Electrical Measurements at High and Low Temperatures (Table 3)

Not applicable.

4.6.3 Circuit for Electrical Measurements (Figure 4)

Not applicable.

4.7 BURN-IN AND ELECTRICAL MEASUREMENTS (TABLES 4 AND 5)

Not applicable.

4.8 ENVIRONMENTAL AND ENDURANCE TESTS

4.8.1 Measurements and Inspections on Completion of Environmental Tests

The parameters to be measured and inspections to be performed on completion of environmental testing shall be those specified in Table 6. Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests

Not applicable.

4.8.3 Measurements and Inspections on Completion of Endurance Tests

The parameters to be measured and inspections to be performed on completion of endurance tests shall be those specified in Table 6. Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.8.4 Conditions for Operating Life Test (Part of Endurance Testing)

Not applicable.

4.8.5 Electrical Circuits for Operating Life Test

Not applicable.

4.8.6 Conditions for High Temperature Storage Test (Part of Endurance Testing)

The requirements for the high temperature storage test are specified in Section 9 of ESA/SCC Generic Specification No. 3401. The conditions for high temperature storage testing shall be the maximum storage temperature specified in Table 1(b) of this specification.

**SCC**ESA/SCC Detail Specification
No. 3401/011

PAGE 17

ISSUE 4

TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE

| No. | CHARACTERISTIC | SYMBOL | SPECIFICATION AND TEST METHOD | TEST CONDITION | LIMITS | | UNIT |
|-----|----------------------------------|----------------|----------------------------------|-------------------|--------|------|------|
| | | | | | MIN. | MAX. | |
| 1 | Insulation Resistance | R _i | ESA/SCC 3401 Para. 9.1.1.1 | Para. 9.1.1.1 | 10 000 | - | MΩ |
| 2 | Voltage Proof Leakage Current | I _L | ESA/SCC 3401 Para. 9.1.1.2 | 1 000Vrms | - | 2.0 | mA |

TABLES 3, 4 AND 5

Not applicable.



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTING

| NO. | ESA/SCC GENERIC NO. 3401 | | MEASUREMENTS AND INSPECTIONS | | SYMBOL | LIMITS | | UNIT |
|-----|---------------------------------------|--|---|---|--|--|--|--|
| | ENVIRONMENTAL AND ENDURANCE TESTS (1) | TEST METHOD AND CONDITIONS | IDENTIFICATION | CONDITIONS | | MIN | MAX | |
| | | | | | | | | |
| 01 | Wiring | Para. 9.10 | ESA/SCC 3401/012 | | | - | - | |
| 02 | Vibration | Para. 9.11 | Initial Measurements Coupling Screw(s) Unlocking Torque Final Measurements Full Engagement Coupling Screw(s) Unlocking Torque Drift Visual Examination | - - - - | - Δ - | - -25 - | - +25 - | % |
| 03 | Shock or Bump | Para. 9.12 | Full Engagement Visual Examination | - - | | - - | - - | |
| 04 | Climatic Sequence | Para. 9.13 | Dry Heat Insulation Resistance Low Air Pressure Voltage Proof Leakage Curr. Damp Heat Insulation Resistance External Visual Inspection Insulation Resistance Voltage Proof Leakage Curr. | Table 2 Item 1 Figure 1 Table 2 Item 1 After 1-24 hrs Recovery ESA/SCC 3401 Para. 9.7 Table 2 Item 1 Table 2 Item 2 | Ri I _L Ri - Ri I _L | 500 Table 2 Item 2 100 ESA/SCC 3401 Para. 9.7 500 Table 2 Item 2 | - - - - | M Ω M Ω M Ω |
| 05 | Seal Test | Para. 9.9 | ESA/SCC 3401 Para. 9.9 | | | Not applicable | | |
| 06 | Plating Thickness | Para. 9.14 | Thickness | | | ESA/SCC 3401/012 | | |
| 07 | Joint Strength | Para. 9.15 | ESA/SCC 3401 Para. 9.15 | | | ESA/SCC 3401 Para. 9.15 | | |
| 08 | Rapid Change of Temperature | Para. 9.16 | Visual Examination Insulation Resistance Voltage Proof Leakage Curr. | - Table 2 Item 1 Table 2 Item 2 | - Ri I _L | - 500 Table 2 Item 2 | - - - | M Ω |
| 09 | Contact Retention (In Insert) | Para. 9.17 & Para. 4.3.4 of this spec. | Contact Displacement | | | ESA/SCC 3401 Para. 9.17 | | |
| 10 | Endurance | Para. 9.18 | Initial Measurements Mating/Unmating Forces Low Level Contact Resist Mated Shell Conductivity Final Measurements Visual Examination Mating/Unmating Forces Low Level Contact Resistance Drift Mated Shell Conductivity Insulation Resistance Voltage Proof Leakage Curr. | ESA/SCC 3401/012 Table 2 Item 3 - ESA/SCC 3401/012 Table 2 Item 3 Table 2 Item 1 Table 2 Item 2 | F Rcl Vd - F Δ Rcl Vd Ri I _L | Para. 4.3.5 of this spec. Record Values Not applicable - - - Para. 4.3.5 of this spec. ESA/SCC 3401/012 - Not applicable 500 Table 2 Item 2 | M Ω | |

NOTES 1. The tests in this table refer to either Chart IV or V and shall be used as applicable.



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTING (CONTINUED)

| NO. | ESA/SCC GENERIC NO. 3401 | | MEASUREMENTS AND INSPECTIONS | | SYMBOL | LIMITS | | UNIT |
|-----|---------------------------------------|--|---|--|--|--|------|---|
| | ENVIRONMENTAL AND ENDURANCE TESTS (1) | TEST METHOD AND CONDITIONS | IDENTIFICATION | CONDITIONS | | MIN | MAX | |
| 11 | Permanence of Marking | Para. 9.19 | As applicable | | - | - | - | |
| 12 | Mating/Unmating Forces | Para. 9.20 | Force | | F | Para. 4.3.5 of this spec. | | |
| 13 | High Temperature Storage | Para. 9.21 | Initial Measurements Low Level Contact Resis. Mated Shell Conductivity Final Measurements Visual Examination Mating/Unmating Forces Low Level Contact Resistance Drift Rated Current Contact Resis. Mated Shell Conductivity Insulation Resistance Voltage Proof Leakage Curr. Contact Retention (In Insert) | ESA/SCC 3401/012 Table 2 Item 3 - ESA/SCC 3401/012 ESA/SCC 3401/012 Table 2 Item 3 Table 2 Item 1 Table 2 Item 2 Para. 4.3.4 of this spec. | Rcl Vd - F ΔRcl Rcr Vd Ri I _L | Record Values Not applicable - - Para. 4.3.5 of this spec. ESA/SCC 3401/012 ESA/SCC 3401/012 Not applicable 500 - Table 2 Item 2 ESA/SCC 3401 Para. 9.17 | MΩ | |
| 14 | Corrosion | Para. 9.22 | Visual Examination | - | - | - | - | |
| 15 | Insert Retention (In Shell) | Para. 9.23 & Para. 4.3.6 of this spec. | Visual Examination | ESA/SCC 3401 Para. 9.23.1 | - | Para. 4.3.6 | | |
| 16 | Jackscrew Retention | Para. 9.24 & Para. 4.3.7 of this spec. | Visual Examination | ESA/SCC 3401 Para. 9.24 | - | Para. 4.3.7 | | |
| 17 | High Temperature Measurements | Para. 9.25 | Insulation Resistance | Table 2 Item 1 | Ri | 500 | - | MΩ |
| 18 | Overload Test | Para. 9.26 | Internal Temperature Rated Current Contact Resis. Mated Shell Conductivity Insulation Resistance Voltage Proof Leakage Curr. | ESA/SCC 3401/012 Table 2 Item 3 Table 2 Item 1 Table 2 Item 2 | T Rcr Vd Ri I _L | - | +100 | °C |
| 19 | Maintenance Aging | Para. 9.27 | Visual Examination Contact Retention Contact Insertion & Withdrawal Forces | - Para. 4.3.4 of this spec Para. 4.3.8 of this spec | - | - | - | ESA/SCC 3401 Para. 9.17 Para. 4.3.8 |

NOTES

1. The tests in this table refer to either Chart IV or V and shall be used as applicable.



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTING (CONTINUED)

| NO. | ESA/SCC GENERIC NO. 3401 | | MEASUREMENTS AND INSPECTIONS | | SYMBOL | LIMITS | | UNIT |
|-----|---------------------------------------|---|------------------------------|---------------------------|--------|----------------------------|-----|------|
| | ENVIRONMENTAL AND ENDURANCE TESTS (1) | TEST METHOD AND CONDITIONS | IDENTIFICATION | CONDITIONS | | MIN | MAX | |
| 20 | Engage/Separation Forces | Para. 9.28 & Para. 4.3.9 of this spec. | Force | | | Para. 4.3.9 | | |
| 21 | Oversize Pin Exclusion | Para. 9.29 & Para. 4.3.10 of this spec. | | | | ESA/SCC 3401 Para. 9.29 | | |
| 22 | Probe Damage | Para. 9.30 & Para. 4.3.11 of this spec. | Contact Separation Force | Para. 4.3.9 of this spec. | | Para. 4.3.9 | | |
| 23 | Solderability | Para. 9.31 & Para. 4.3.12 of this spec. | | | | Para. 4.3.12 | | |

NOTES

1. The tests in this table refer to either Chart IV or V and shall be used as applicable.