



**DIODES, MICROWAVE, SILICON,  
SCHOTTKY, MEDIUM BARRIER, MIXER,  
BASED ON TYPES ML40019 TO ML40021,  
ML40150 TO ML40152 AND  
ML40160 TO ML40161  
ESCC Detail Specification No. 5513/006**

**ISSUE 1  
October 2002**



	ESCC Detail Specification		PAGE ii ISSUE 1
---	---------------------------	--	--------------------

### **LEGAL DISCLAIMER AND COPYRIGHT**

European Space Agency, Copyright © 2002. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole in any medium without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.



**europaean space agency  
agence spatiale européenne**

Pages 1 to 23

**DIODES, MICROWAVE, SILICON,  
SCHOTTKY, MEDIUM BARRIER, MIXER,  
BASED ON TYPES ML40019 TO ML40021,  
ML40150 TO ML40152 AND  
ML40160 TO ML40161  
ESA/SCC Detail Specification No. 5513/006**



**space components  
coordination group**

Issue/Rev.	Date	Approved by	
		SCCG Chairman	ESA Director General or his Deputy
Issue 1	May 1993		

**DOCUMENTATION CHANGE NOTICE**

Rev. Letter	Rev. Date	Reference	CHANGE Item	Approved DCR No.

**SCC**ESA/SCC Detail Specification  
No. 5513/006

PAGE 3

ISSUE 1

**TABLE OF CONTENTS**

	<u>Page</u>
<b>1. <u>GENERAL</u></b>	<b>5</b>
1.1 Scope	5
1.2 Type Variants	5
1.3 Maximum Ratings	5
1.4 Parameter Derating Information	5
1.5 Physical Dimensions	5
1.6 Functional Diagram	5
1.7 Handling Precautions	5
<b>2. <u>APPLICABLE DOCUMENTS</u></b>	<b>5</b>
<b>3. <u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u></b>	<b>5</b>
<b>4. <u>REQUIREMENTS</u></b>	<b>14</b>
4.1 General	14
4.2 Deviations from Generic Specification	14
4.2.1 Deviations from Special In-process Controls	14
4.2.2 Deviations from Final Production Tests	14
4.2.3 Deviations from Burn-in and Electrical Measurements	14
4.2.4 Deviations from Qualification Tests	14
4.2.5 Deviations from Lot Acceptance Tests	14
4.3 Mechanical and Environmental Requirements	14
4.3.1 Dimension Check	14
4.3.2 Weight	15
4.3.3 Terminal Strength	15
4.4 Materials and Finishes	16
4.4.1 Case	16
4.4.2 Lead Materials and Finish	16
4.5 Marking	16
4.5.1 General	16
4.5.2 Cathode Identification	16
4.5.3 The SCC Component Number	16
4.5.4 Traceability Information	17
4.6 Electrical Measurements	17
4.6.1 Electrical Measurements at Room Temperature	17
4.6.2 Electrical Measurements at High and Low Temperatures	17
4.6.3 Circuits for Electrical Measurements	17
4.7 Burn-in Tests	17
4.7.1 Parameter Drift Values	17
4.7.2 Conditions for High Temperature Reverse Bias Burn-in	17
4.7.3 Conditions for Power Burn-in	17
4.7.4 Electrical Circuit for High Temperature Reverse Bias and Power Burn-in	17
4.8 Environmental and Endurance Tests	21
4.8.1 Electrical Measurements on Completion of Environmental Tests	21
4.8.2 Electrical Measurements at Intermediate Points and on Completion of Endurance Tests	21
4.8.3 Conditions for Operating Life Tests	21
4.8.4 Electrical Circuits for Operating Life Tests	21
4.9 Total Dose Irradiation Testing	21
4.9.1 Application	21
4.9.2 Bias Conditions	21
4.9.3 Electrical Measurements	21
4.10 Special Testing	21

**TABLES**


		<u>Page</u>
1(a)	Type Variants	6
1(b)	Maximum Ratings	8
2	Electrical Measurements at Room Temperature - D.C. Parameters	18
	Electrical Measurements at Room Temperature - A.C. Parameters	18
3	Electrical Measurements at High and Low Temperatures	19
4	Parameter Drift Values	19
5(a)	Conditions for High Temperature Reverse Bias Burn-in	20
5(b)	Conditions for Power Burn-in	20
5(c)	Conditions for Operating Life Tests	20
6	Electrical Measurements at Intermediate Points and on Completion of Endurance Testing	22
7	Electrical Measurements During and on Completion of Irradiation Testing	23

**FIGURES**

1	Parameter Derating Information	8
2	Physical Dimensions	9
3	Functional Diagram	13
4	Circuits for Electrical Measurements	N/A
5(a)	Electrical Circuit for High Temperature Reverse Bias Burn-in	20
5(b)	Electrical Circuit for Power Burn-in and Operating Life Tests	20
6	Bias Conditions for Irradiation Testing	22

**APPENDICES (Applicable to specific Manufacturers only)**

None.

 <b>SCC</b>	ESA/SCC Detail Specification No. 5513/006	PAGE 5 ISSUE 1
--	--	-------------------

**1. GENERAL**

**1.1 SCOPE**

This specification details the ratings, physical and electrical characteristics, test and inspection data for a Diode, Microwave, Silicon, Schottky, Medium Barrier, Mixer, based on Types ML40019 to ML40021, ML40150 to ML40152 and ML40160 to ML40161. It shall be read in conjunction with ESA/SCC Generic Specification No. 5010, the requirements of which are supplemented herein.

**1.2 TYPE VARIANTS**

Variants of the basic diodes specified herein, which are also covered by this specification are given in Table 1(a).

**1.3 MAXIMUM RATINGS**

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the diodes specified herein, are as scheduled in Table 1(b).

**1.4 PARAMETER DERATING INFORMATION**

The derating information applicable to the diodes specified herein is shown in Figure 1.

**1.5 PHYSICAL DIMENSIONS**

The physical dimensions of the diodes specified herein are shown in Figure 2.

**1.6 FUNCTIONAL DIAGRAM**

The functional diagram, showing lead identification, of the diodes specified herein, is shown in Figure 3.

**1.7 HANDLING PRECAUTIONS**

These devices are susceptible to damage by electrostatic discharge. Therefore, suitable precautions shall be employed for protection during all phases of manufacture, testing, packaging, shipment and any handling.

These components are Categorised as Class 1 with a Minimum Critical Path Failure Voltage of 700V.

**2. APPLICABLE DOCUMENTS**

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESA/SCC Generic Specification No. 5010 for Discrete Microwave Semiconductor Components.
- (b) MIL-STD-750, Test Methods and Procedures for Semiconductor Devices.

**3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS**

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESA/SCC Basic Specification No. 21300 shall apply. In addition, the following symbols are used:-

$E_B$  = Burn-out Energy.

$Z_{IF}$  = I.F. Impedance.



**TABLE 1(a) - TYPE VARIANTS**

(1) VARIANT	(2) BASED ON TYPE	(3) FIGURE	(4) L.O. TEST FREQUENCY LO <sub>f</sub> (GHz)	(5) TOTAL CAPACITANCE C <sub>T</sub> (pF) (MAX.)	(6) NOISE FIGURE NF (dB) (MAX.)	(7) BODY-LID AND LEAD MATERIAL AND FINISH
01	ML40019 - 118	2(a)	3.0	0.78	7.0	A7
02	ML40019 - 119	2(b)	3.0	0.77	7.0	A7-D2
03	ML40019 - 120	2(c)	3.0	0.73	7.0	D2
04	ML40019 - 148	2(d)	3.0	0.81	7.0	A7
05	ML40019 - 186	2(e)	3.0	0.76	7.0	D2
06	ML40019 - 255	2(f)	3.0	0.90	7.0	A7
07	ML40019 - 275	2(g)	3.0	0.95	7.0	A7
08	ML40019 - 276	2(h)	3.0	0.73	7.0	D2
09	ML40020 - 118	2(a)	3.0	0.78	6.5	A7
10	ML40020 - 119	2(b)	3.0	0.77	6.5	A7-D2
11	ML40020 - 120	2(c)	3.0	0.73	6.5	D2
12	ML40020 - 148	2(d)	3.0	0.81	6.5	A7
13	ML40020 - 186	2(e)	3.0	0.76	6.5	D2
14	ML40020 - 255	2(f)	3.0	0.90	6.5	A7
15	ML40020 - 275	2(g)	3.0	0.95	6.5	A7
16	ML40020 - 276	2(h)	3.0	0.73	6.5	D2
17	ML40021 - 118	2(a)	3.0	0.78	6.0	A7
18	ML40021 - 119	2(b)	3.0	0.77	6.0	A7-D2
19	ML40021 - 120	2(c)	3.0	0.73	6.0	D2
20	ML40021 - 148	2(d)	3.0	0.81	6.0	A7
21	ML40021 - 186	2(e)	3.0	0.76	6.0	D2
22	ML40021 - 255	2(f)	3.0	0.90	6.0	A7
23	ML40021 - 275	2(g)	3.0	0.95	6.0	A7
24	ML40021 - 276	2(h)	3.0	0.73	6.0	D2
25	ML40150 - 118	2(a)	9.375	0.43	6.5	A7
26	ML40150 - 119	2(b)	9.375	0.42	6.5	A7-D2
27	ML40150 - 120	2(c)	9.375	0.38	6.5	D2
28	ML40150 - 148	2(d)	9.375	0.46	6.5	A7
29	ML40150 - 186	2(e)	9.375	0.41	6.5	D2
30	ML40150 - 255	2(f)	9.375	0.55	6.5	A7
31	ML40150 - 275	2(g)	9.375	0.60	6.5	A7
32	ML40150 - 276	2(h)	9.375	0.38	6.5	D2





**TABLE 1(a) - TYPE VARIANTS (CONT'D)**


(1) VARIANT	(2) BASED ON TYPE	(3) FIGURE	(4) L.O. TEST FREQUENCY LO <sub>f</sub> (GHz)	(5) TOTAL CAPACITANCE C <sub>T</sub> (pF) (MAX.)	(6) NOISE FIGURE NF (dB) (MAX.)	(7) BODY-LID AND LEAD MATERIAL AND FINISH
33	ML40151 - 118	2(a)	9.375	0.43	7.0	A7
34	ML40151 - 119	2(b)	9.375	0.42	7.0	A7-D2
35	ML40151 - 120	2(c)	9.375	0.38	7.0	D2
36	ML40151 - 148	2(d)	9.375	0.46	7.0	A7
37	ML40151 - 186	2(e)	9.375	0.41	7.0	D2
38	ML40151 - 255	2(f)	9.375	0.55	7.0	A7
39	ML40151 - 275	2(g)	9.375	0.60	7.0	A7
40	ML40151 - 276	2(h)	9.375	0.38	7.0	D2
41	ML40152 - 118	2(a)	9.375	0.43	7.5	A7
42	ML40152 - 119	2(b)	9.375	0.42	7.5	A7-D2
43	ML40152 - 120	2(c)	9.375	0.38	7.5	D2
44	ML40152 - 148	2(d)	9.375	0.46	7.5	A7
45	ML40152 - 186	2(e)	9.375	0.41	7.5	D2
46	ML40152 - 255	2(f)	9.375	0.55	7.5	A7
47	ML40152 - 275	2(g)	9.375	0.60	7.5	A7
48	ML40152 - 276	2(h)	9.375	0.38	7.5	D2
49	ML40160 - 118	2(a)	16	0.38	7.0	A7
50	ML40160 - 119	2(b)	16	0.37	7.0	A7-D2
51	ML40160 - 120	2(c)	16	0.33	7.0	D2
52	ML40160 - 148	2(d)	16	0.41	7.0	A7
53	ML40160 - 186	2(e)	16	0.36	7.0	D2
54	ML40160 - 255	2(f)	16	0.50	7.0	A7
55	ML40160 - 275	2(g)	16	0.55	7.0	A7
56	ML40160 - 276	2(h)	16	0.33	7.0	D2
57	ML40161 - 118	2(a)	16	0.38	7.5	A7
58	ML40161 - 119	2(b)	16	0.37	7.5	A7-D2
59	ML40161 - 120	2(c)	16	0.33	7.5	D2
60	ML40161 - 148	2(d)	16	0.41	7.5	A7
61	ML40161 - 186	2(e)	16	0.36	7.5	D2
62	ML40161 - 255	2(f)	16	0.50	7.5	A7
63	ML40161 - 275	2(g)	16	0.55	7.5	A7
64	ML40161 - 276	2(h)	16	0.33	7.5	D2

**TABLE 1(b) - MAXIMUM RATINGS**

No.	CHARACTERISTIC	SYMBOL	MAXIMUM RATINGS	UNIT	REMARKS
1	D.C. Reverse Voltage	$V_R$	- 3.0	V	
2	D.C. Forward Current	$I_F$	20	mA	Note 1
3	D.C. Power Dissipation	$P_{tot}$	12.5	mW	Note 1
4	Burn-out Energy	$E_B$	5.0	Erg	Note 2
5	Operating Temperature Range	$T_{op}$	- 65 to + 150	°C	$T_{amb}$
6	Storage Temperature Range	$T_{stg}$	- 65 to + 150	°C	
7	Soldering Temperature	$T_{sol}$	+ 230	°C	Note 3

**NOTES**

1. At  $T_{amb} = +25^\circ\text{C}$ . For derating at  $T_{amb} > +25^\circ\text{C}$ , see Figure 1.
2. Quoted for a single discharge of Torry line during the first 2.4ns current flow in the forward direction. General criterion for burn-out energy is a 3.0dB increase in Noise Figure.
3. Duration 5 seconds maximum (at a distance of not less than 1.5mm from the body for Variants 05, 08, 13, 16, 21, 24, 29, 32, 37, 40, 45, 48, 53, 56, 61 and 64) and the same termination shall not be resoldered until 3 minutes have elapsed.

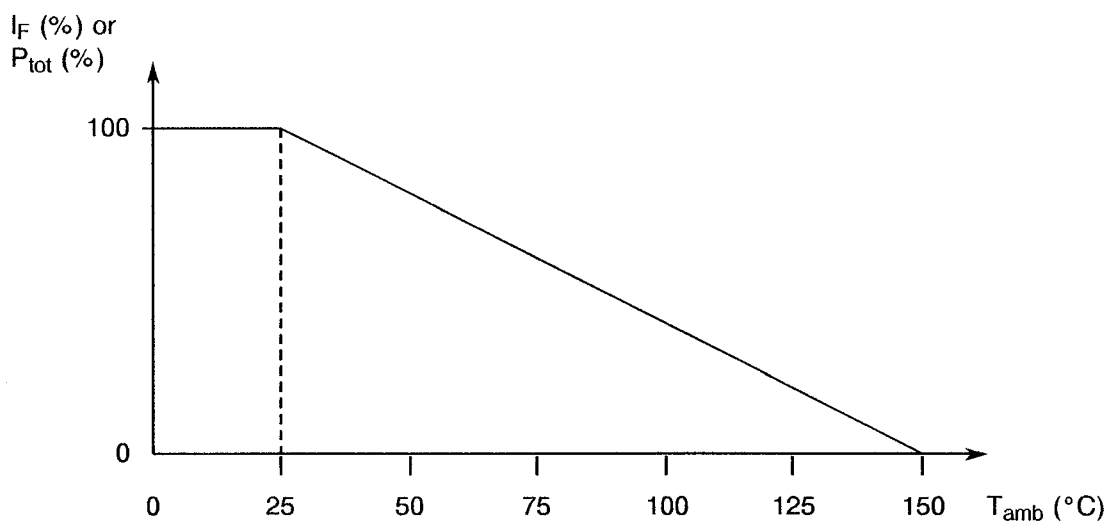**FIGURE 1 - PARAMETER DERATING INFORMATION****Forward Current and Power Dissipation versus Temperature**



**FIGURE 2 - PHYSICAL DIMENSIONS**

FIGURE 2(a) - VARIANTS 01, 09, 17, 25, 33, 41, 49, 57


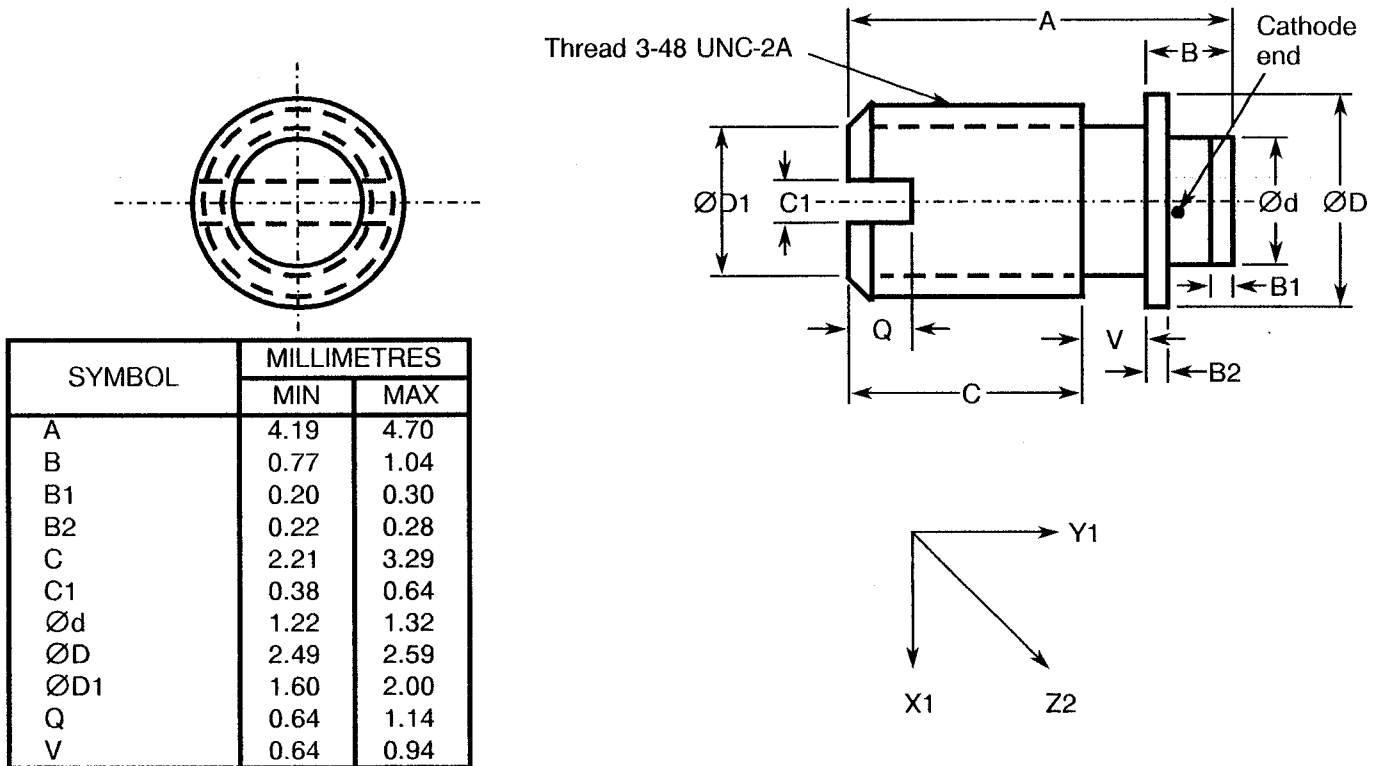




FIGURE 2(b) - VARIANTS 02, 10, 18, 26, 34, 42, 50, 58



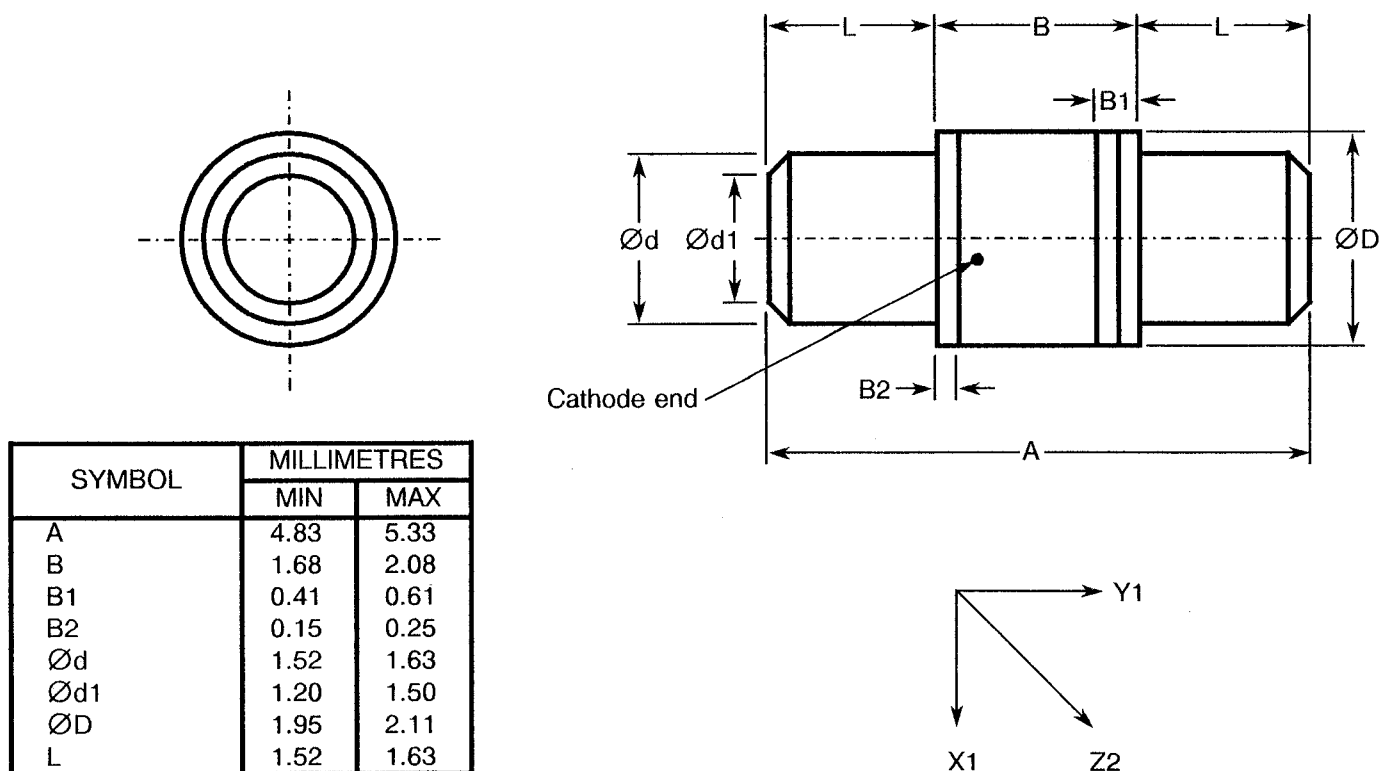


**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**



**FIGURE 2(c) - VARIANTS 03, 11, 19, 27, 35, 43, 51, 59**

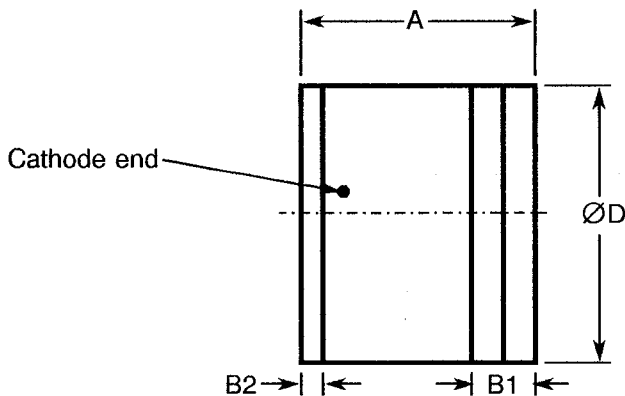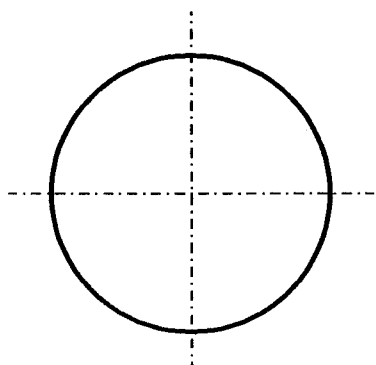


SYMBOL	MILLIMETRES	
	MIN	MAX
A	1.02	1.27
B1	0.23	0.33
B2	0.10	0.15
ØD	1.29	1.40



**FIGURE 2(d) - VARIANTS 04, 12, 20, 28, 36, 44, 52, 60**

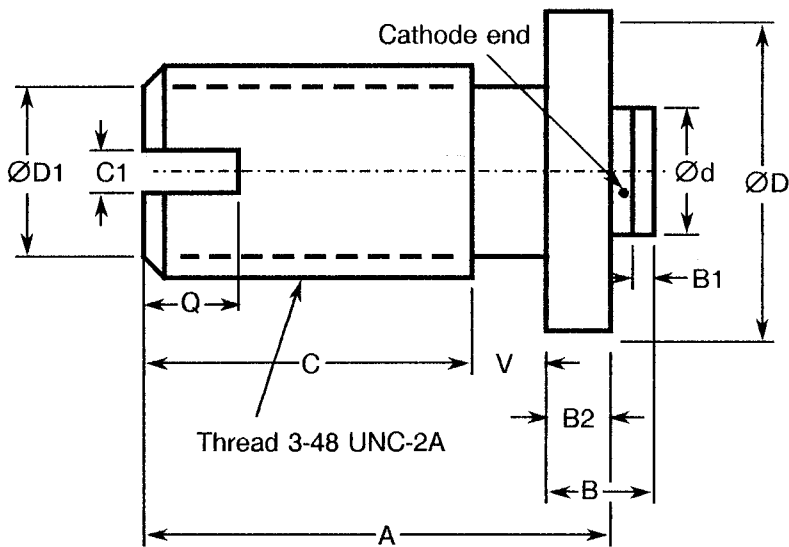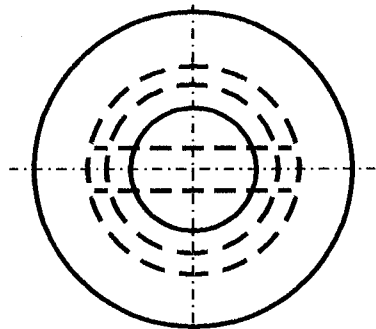


SYMBOL	MILLIMETRES	
	MIN	MAX
A	4.24	4.75
B	1.02	1.32
B1	0.20	0.30
B2	0.46	0.56
C	2.74	3.65
C1	0.38	0.64
Ød	1.22	1.32
ØD	2.87	3.00
ØD1	1.60	2.00
Q	0.89	1.14
V	0.64	0.89



**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**

**FIGURE 2(e) - VARIANTS 05, 13, 21, 29, 37, 45, 53, 61**

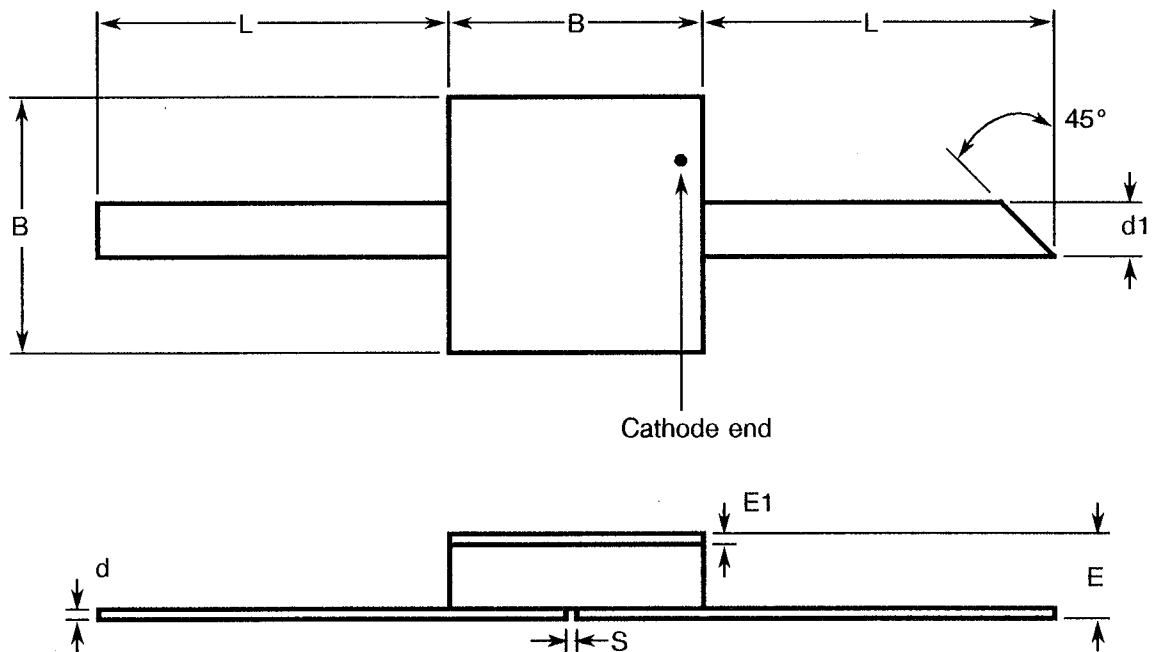

SYMBOL	MILLIMETRES	
	MIN	MAX
B	2.39	2.62
d	0.07	0.15
d1	0.48	0.56
E	0.79	1.12
E1	0.10	0.18
L	3.30	5.84
S	0.10	-






FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2(f) - VARIANTS 06, 14, 22, 30, 38, 46, 54, 62


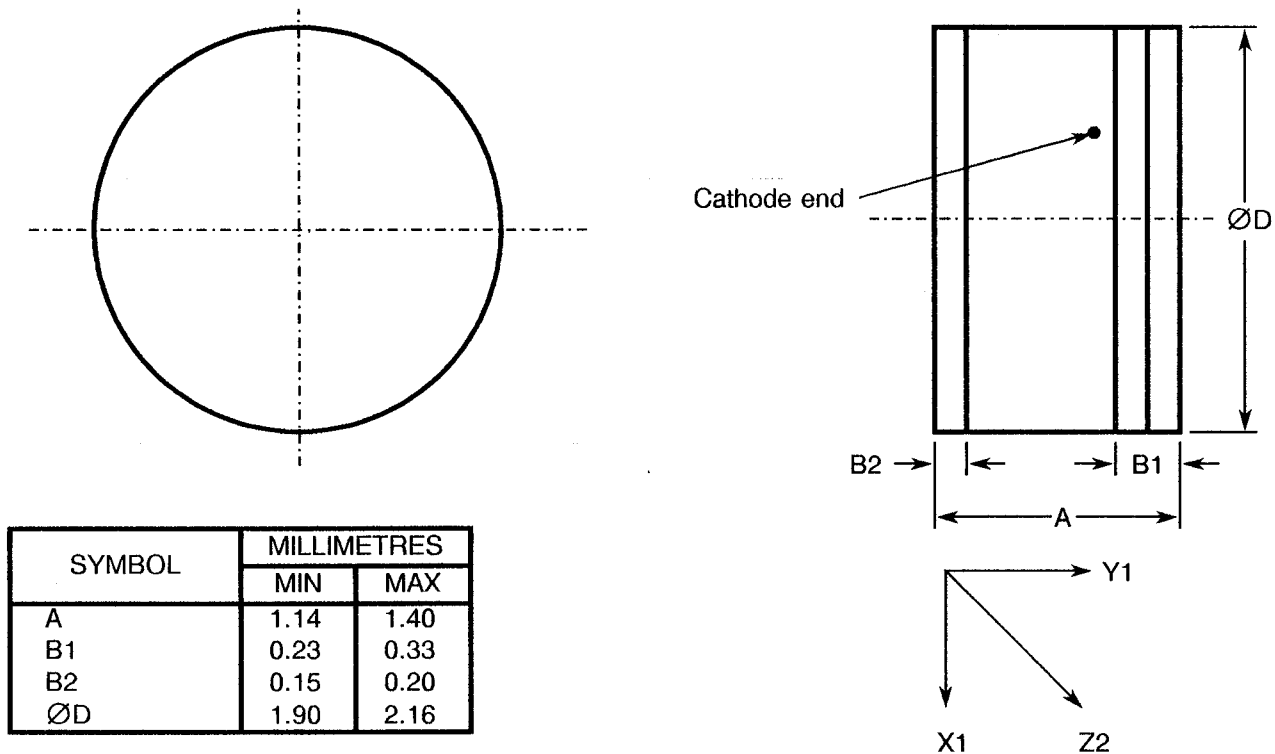



FIGURE 2(g) - VARIANTS 07, 15, 23, 31, 39, 47, 55, 63



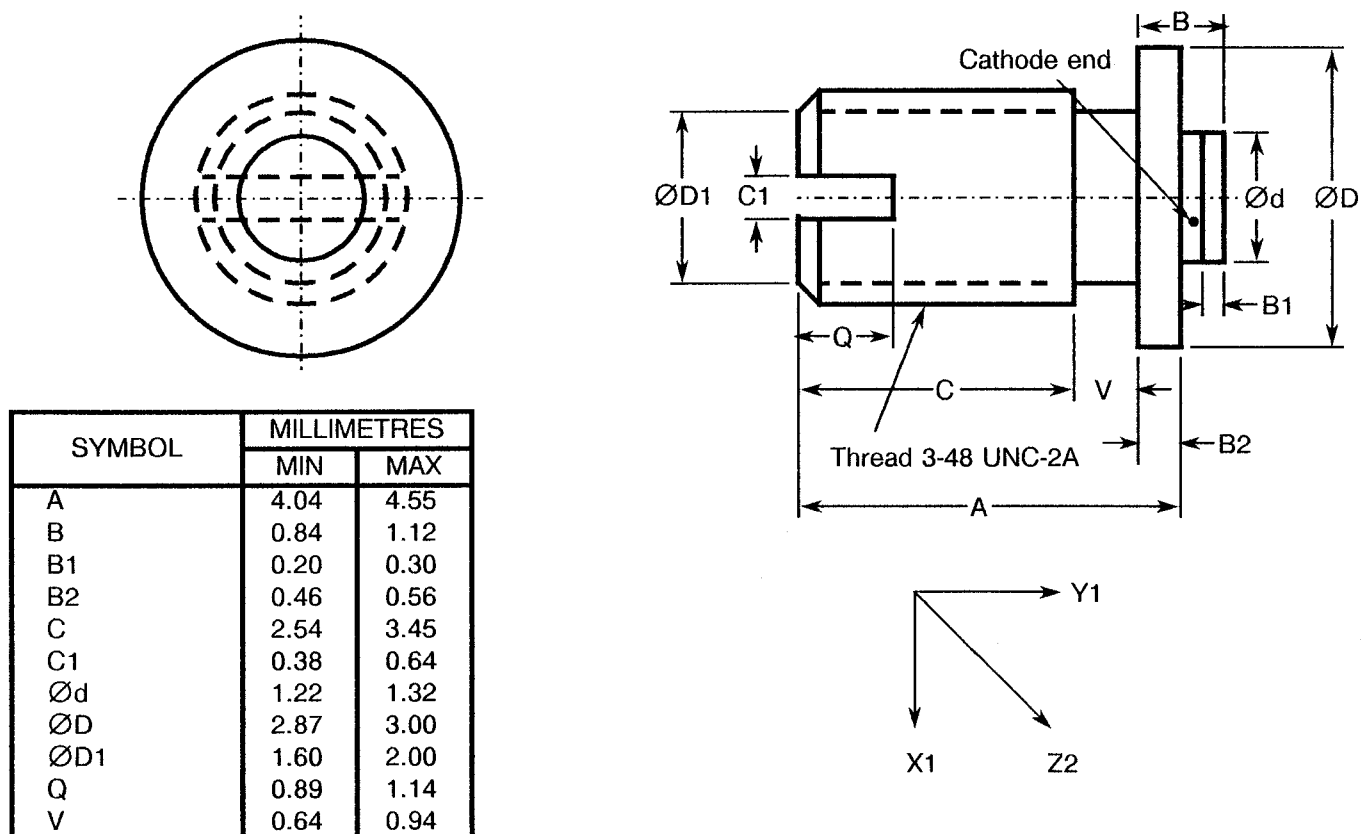


**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**


**FIGURE 2(h) - VARIANTS 08, 16, 24, 32, 40, 48, 56, 64**

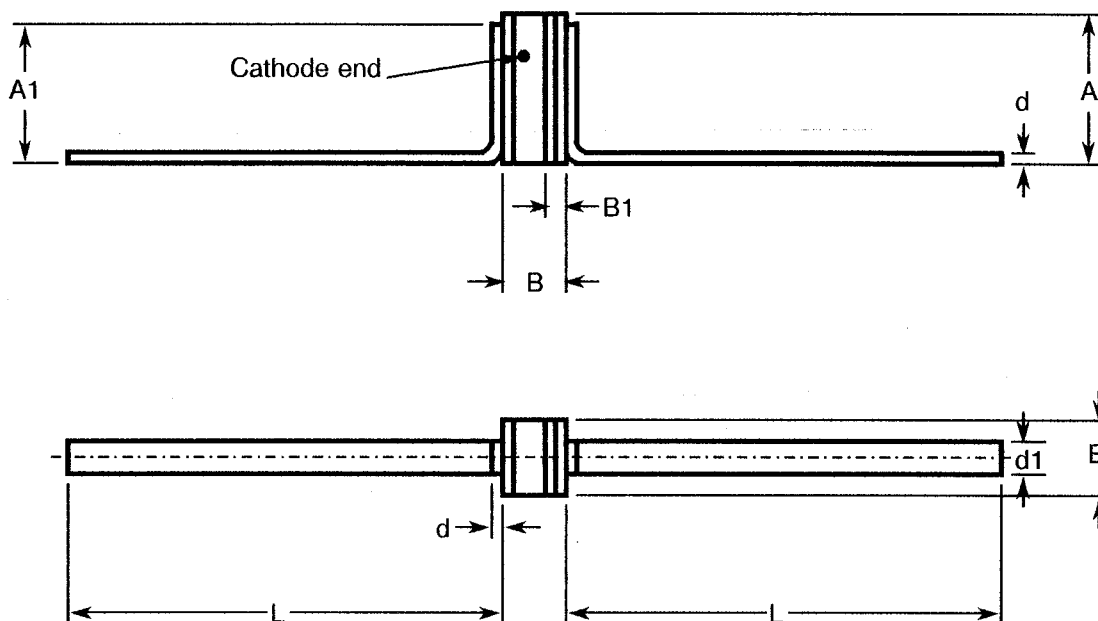

SYMBOL	MILLIMETRES	
	MIN	MAX
A	1.35	2.54
A1	-	2.46
B	1.02	1.27
B1	-	0.38
d	0.07	0.15
d1	0.38	0.64
E	1.29	1.40
L	6.10	12.40





**FIGURE 3 - FUNCTIONAL DIAGRAM**



- 1. Anode
- 2. Cathode

**NOTES**

- 1. The cathode end shall be marked with a black dot or band. The marking will not be on the cathode connection but adjacent to it.

 	ESA/SCC Detail Specification No. 5513/006		PAGE 14 ISSUE 1
--	--	--	--------------------

#### 4. REQUIREMENTS

##### 4.1 GENERAL

The complete requirements for procurement of the diodes specified herein shall be as stated in this specification and ESA/SCC Generic Specification No. 5010 for Discrete Microwave Semiconductor Components. Deviations from the Generic Specification applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESA/SCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

##### 4.2 DEVIATIONS FROM GENERIC SPECIFICATION

###### 4.2.1 Deviations from Special In-process Controls

- (a) Para. 5.2.2, Total Dose Irradiation Testing: Shall be performed during qualification and extension of qualification.
- (b) Para. 5.2.2, Total Dose Irradiation Testing: Shall be performed during procurement on a lot acceptance basis at the total dose irradiation level specified in the purchase order.
- (c) Para. 5.3, Wafer Lot Acceptance: Shall be performed as an S.E.M. Inspection only.

###### 4.2.2 Deviations from Final Production Tests (Chart II)

- (a) Para. 9.14, Vibration, Variable Frequency: Shall not be performed.

###### 4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)

- (a) Para. 7.1.1(a), High Temperature Reverse Bias Burn-in: Shall be performed at 50% of rated  $V_R$ .

###### 4.2.4 Deviations from Qualification Tests (Chart IV)

- (a) Para. 9.23, Special Testing: Shall not be performed.

###### 4.2.5 Deviations from Lot Acceptance Tests (Chart V)

- (a) Para. 9.23, Special Testing: Shall not be performed.

##### 4.3 MECHANICAL AND ENVIRONMENTAL REQUIREMENTS

###### 4.3.1 Dimension Check

The dimensions of the diodes specified herein shall be checked. They shall conform to those shown in Figure 2.



#### 4.3.2 Weight

The maximum weight of the diodes specified herein shall be:

Variant No.	Weight (g)
01, 09, 17, 25, 33, 41, 49, 57	0.14
02, 10, 18, 26, 34, 42, 50, 58	0.12
03, 11, 19, 27, 35, 43, 51, 59	0.014
04, 12, 20, 28, 36, 44, 52, 60	0.15

Variant No.	Weight (g)
05, 13, 21, 29, 37, 45, 53, 61	0.06
06, 14, 22, 30, 38, 46, 54, 62	0.08
07, 15, 23, 31, 39, 47, 55, 63	0.15
08, 16, 24, 32, 40, 48, 56, 64	0.025

#### 4.3.3 Terminal Strength

The requirements for terminal strength testing are specified in Section 9 of ESA/SCC Generic Specification No. 5010. The test conditions shall be as follows:-

(a) **Condition: 'A' (Tension)**

Variants 05, 13, 21, 29, 37, 45, 53 and 61:

- Force: 5.1N.
- Duration: 5 seconds.

Variants 08, 16, 24, 32, 40, 48, 56 and 64:

- Force: 1.22N.
- Duration: 5 seconds.

(b) **Condition: 'D2' (Stud Torque)**

Variants 01, 04, 07, 09, 12, 15, 17, 20, 23, 25, 28, 31, 33, 36, 39, 41, 44, 47, 49, 52, 55, 57, 60 and 63:

- Torque: 42mNm.
- Duration: 5 seconds.

(c) **Condition: Compression**

Variants 02, 06, 10, 14, 18, 22, 26, 30, 34, 38, 42, 46, 50, 54, 58 and 62:

- Force: 50N.
- Duration: 5 seconds.

Variants 01, 03, 04, 07, 09, 11, 12, 15, 17, 19, 20, 23, 25, 27, 28, 31, 33, 35, 36, 39, 41, 43, 44, 47, 49, 51, 52, 55, 57, 59, 60 and 63:

- Force: 10N.
- Duration: 5 seconds.

The compression test shall be performed by applying the specified force to the end-cap by means of a suitable weight applied for the specified time. On completion of the test, a visual examination shall be performed to check for damage to the end-cap or the ceramic body.



4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the diodes specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material shall not guarantee acceptance of the finished product.

4.4.1 Case

The case shall be hermetically sealed and have a ceramic body. The lid shall be welded or preform soldered.

4.4.2 Lead Materials and Finish

- (a) For Variants 02, 10, 18, 26, 34, 42, 50 and 58, the body material shall be Type 'A' with Type '7' finish and the lid material shall be Type 'D' with Type '2' finish, in accordance with the requirements of ESA/SCC Basic Specification No. 23500.
- (b) For Variants 01, 04, 06, 07, 09, 12, 14, 15, 17, 20, 22, 23, 25, 28, 30, 31, 33, 36, 38, 39, 41, 44, 46, 47, 49, 52, 54, 55, 57, 60, 62 and 63, the lead material shall be Type 'A' with Type '7' finish in accordance with the requirements of ESA/SCC Basic Specification No. 23500.
- (c) For Variants 03, 05, 08, 11, 13, 16, 19, 21, 24, 27, 29, 32, 35, 37, 40, 43, 45, 48, 51, 53, 56, 59, 61 and 64, the lead material shall be Type 'D' with Type '2' finish in accordance with the requirements of ESA/SCC Basic Specification No. 23500.

4.5 MARKING

4.5.1 General

The marking of components delivered to this specification shall be in accordance with the requirements of ESA/SCC Basic Specification No. 21700 and the following paragraphs. When the component is too small to accommodate all of the marking specified, as much as space permits shall be marked and the marking information, in full, shall accompany the component in its primary package.

The information to be marked and the order of precedence, shall be as follows:-


- (a) Cathode Identification.
- (b) The SCC Component Number.
- (c) Traceability Information.

4.5.2 Cathode Identification


Cathode identification shall be as shown in Figures 2 and 3 of this specification.

4.5.3 The SCC Component Number

Each component shall bear the SCC Component Number which shall be constituted and marked as follows:

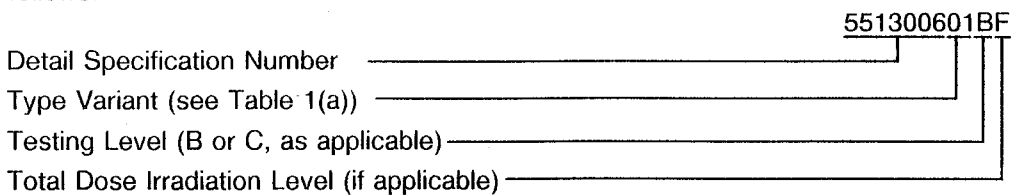

The Total Dose Irradiation Level designation shall be added for those devices for which a sample has been successfully tested to the level in question. For these devices, a code letter shall be added in accordance with the requirements of ESA/SCC Basic Specification No. 22900.

	<p style="text-align: center;">ESA/SCC Detail Specification No. 5513/006</p>	<p style="text-align: right;">PAGE 17 ISSUE 1</p>
--	--	---

4.5.4 Traceability Information

Each component shall be marked in respect of traceability information as defined in ESA/SCC Basic Specification No. 21700.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured at room temperature are scheduled in Table 2. Unless otherwise specified, the measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.

4.6.2 Electrical Measurements at High and Low Temperatures

The parameters to be measured at high and low temperatures are scheduled in Table 3. Unless otherwise specified, the measurements shall be performed at  $T_{amb} = +150(+0-3)$  °C.

4.6.3 Circuits for Electrical Measurements

Not applicable.

4.7 BURN-IN TESTS

Burn-in shall be Category 3 of Chart III(a).

4.7.1 Parameter Drift Values

The parameter drift values applicable to burn-in are specified in Table 4 of this specification. Unless otherwise stated, the measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C. The parameter drift values ( $\Delta$ ) applicable to the scheduled parameters shall not be exceeded. In addition to these drift value requirements for a given parameter, the appropriate limit value specified in Table 2 shall not be exceeded.

4.7.2 Conditions for High Temperature Reverse Bias Burn-in

The requirements for the high temperature reverse bias burn-in are specified in Section 7 of ESA/SCC Generic Specification No. 5010. The conditions for high temperature reverse bias burn-in shall be as specified in Table 5(a) of this specification.

4.7.3 Conditions for Power Burn-in

The requirements for power burn-in are specified in Section 7 of ESA/SCC Generic Specification No. 5010. The conditions for power burn-in shall be as specified in Table 5(b) of this specification.

4.7.4 Electrical Circuits for High Temperature Reverse Bias and Power Burn-in

Circuits for use in performing the H.T.R.B and power burn-in tests are shown in Figures 5(a) and 5(b) of this specification.



**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE - D.C. PARAMETERS**

No.	CHARACTERISTICS	SYMBOL	MIL-STD-750 TEST METHOD	TEST CONDITIONS	LIMITS		UNIT
					MIN.	MAX.	
1	Breakdown Voltage	$V_{(BR)}$	4021	$I_R = 10\mu A$	3.0	-	V
2	Reverse Current	$I_R$	4016	$V_R = -1.5V$	-	500	nA
3	Forward Voltage 1	$V_{F1}$	4011	$I_F = 1.0mA$	-	0.45	V
4	Forward Voltage 2	$V_{F2}$	4011	$I_F = 10mA$	-	1.0	V

**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE - A.C. PARAMETERS**

No.	CHARACTERISTICS	SYMBOL	MIL-STD-750 TEST METHOD	TEST CONDITIONS	LIMITS		UNIT
					MIN.	MAX.	
5	Total Capacitance	$C_T$	4001	$V_R = 0V$ $f = 1.0MHz$	Note 1		pF
6	Noise Figure	NF	4126	I.F. = 30MHz L.O. Power = 0dbm $LO_f = \text{Note 3}$	Note 2		dB
7	I.F. Impedance	$Z_{IF}$	4126	I.F. = 30MHz L.O. Power = 0dbm $LO_f = \text{Note 3}$ Variants 01 to 24 Variants 25 to 64	125 125	250 450	$\Omega$

**NOTES**

1. See Column 5 of Table 1(a).
2. See Column 6 of Table 1(a).
3. See Column 4 of Table 1(a).

**TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES**

No.	CHARACTERISTICS	SYMBOL	SPEC AND/OR TEST METHOD	TEST CONDITIONS	LIMITS		UNIT
					MIN.	MAX.	
2	Reverse Current	$I_R$	As per Table 2	As per Table 2	-	1.0	mA

**TABLE 4 - PARAMETER DRIFT VALUES**

No.	CHARACTERISTICS	SYMBOL	SPEC.AND/OR TEST METHOD	TEST CONDITIONS	CHANGE LIMITS ( $\Delta$ )	UNIT
2	Reverse Current	$I_R$	As per Table 2	As per Table 2	$\pm 10$ (1) or (2) $\pm 100$ (1)	nA %
3	Forward Voltage 1	$V_{F1}$	As per Table 2	As per Table 2	$\pm 10$ (1)	%
4	Forward Voltage 2	$V_{F2}$	As per Table 2	As per Table 2	$\pm 10$ (1)	%
5	Total Capacitance	$C_T$	As per Table 2	As per Table 2	$\pm 10$ (1)	%

**NOTES**

- $\Delta 1 = \Delta 2 = \Delta 3$ .
- Whichever is the greater, referred to the initial measurement.

**FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS**

Not applicable.

**TABLE 5(a) - CONDITIONS FOR HIGH TEMPERATURE REVERSE BIAS BURN-IN**

No.	CHARACTERISTICS	SYMBOL	CONDITIONS	UNIT
1	Ambient Temperature	$T_{amb}$	$+ 150(+ 0 - 3)$	$^{\circ}C$
2	Reverse Voltage	$V_R$	-1.5	V


**TABLE 5(b) - CONDITIONS FOR POWER BURN-IN**

No.	CHARACTERISTICS	SYMBOL	CONDITIONS	UNIT
1	Ambient Temperature	$T_{amb}$	$+ 125(+ 0 - 3)$	$^{\circ}C$
2	Forward Current	$I_F$	4.0	mA


**TABLE 5(c) - CONDITIONS FOR OPERATING LIFE TESTS**


No.	CHARACTERISTICS	SYMBOL	CONDITIONS	UNIT
1	Ambient Temperature 1	$T_{amb1}$	$+ 115(+ 0 - 3)$	$^{\circ}C$
2	Forward Current 1	$I_{F1}$	5.0	mA
3	Ambient Temperature 2	$T_{amb2}$	$+ 125(+ 0 - 3)$	$^{\circ}C$
4	Forward Current 2	$I_{F2}$	4.0	mA

**FIGURE 5(a) - ELECTRICAL CIRCUIT FOR HIGH TEMPERATURE REVERSE BIAS BURN-IN**

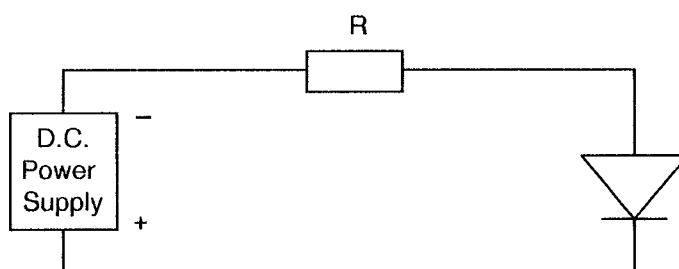

**FIGURE 5(b) - ELECTRICAL CIRCUIT FOR POWER BURN-IN AND OPERATING LIFE TESTS**

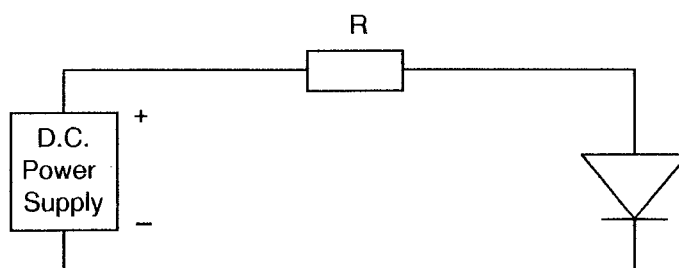

	<p style="text-align: center;">ESA/SCC Detail Specification No. 5513/006</p>	<p>PAGE 21 ISSUE 1</p>
--	--	----------------------------

4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESA/SCC GENERIC SPECIFICATION NO. 5010)

4.8.1 Electrical Measurements on Completion of Environmental Tests

The parameters to be measured on completion of environmental tests are scheduled in Table 2. Unless otherwise stated, the measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.

4.8.2 Electrical Measurements at Intermediate Points and on Completion of Endurance Tests

The parameters to be measured at intermediate points and on completion of endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.

4.8.3 Conditions for Operating Life Tests (Part of Endurance Testing)

The requirements for operating life testing are specified in Section 9 of ESA/SCC Generic Specification No. 5010. The conditions for operating life testing are specified in Table 5(c) of this specification.

4.8.4 Electrical Circuits for Operating Life Tests

The circuit to be used for performance of the operating life test shall be the same as shown in Figure 5(b) for Power Burn-in.

4.9 TOTAL DOSE IRRADIATION TESTING

4.9.1 Application

If specified in Para. 4.2.1 of this specification, total dose irradiation testing shall be performed in accordance with the requirements of ESA/SCC Basic Specification No. 22900.

4.9.2 Bias Conditions

Continuous bias shall be applied during irradiation testing as shown in Figure 6 of this specification.

4.9.3 Electrical Measurements

The parameters to be measured prior to irradiation exposure are scheduled in Table 2 of this specification. Only devices which meet the requirements of Table 2 shall be included in the test sample.


The parameters to be measured during and on completion of irradiation testing are scheduled in Table 7 of this specification.

4.10 SPECIAL TESTING

Not applicable.

**TABLE 6 - ELECTRICAL MEASUREMENTS AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING**

No.	CHARACTERISTICS	SYMBOL	SPEC. AND/OR TEST METHOD	TEST CONDITIONS	LIMITS		UNIT
					MIN.	MAX.	
1	Breakdown Voltage	$V_{(BR)}$	As per Table 2	As per Table 2	As per Table 2		V
2	Reverse Current	$I_R$	As per Table 2	As per Table 2	As per Table 2		$\mu A$
3	Forward Voltage 1	$V_{F1}$	As per Table 2	As per Table 2	As per Table 2		V
4	Forward Voltage 2	$V_{F2}$	As per Table 2	As per Table 2	As per Table 2		V
5	Total Capacitance	$C_T$	As per Table 2	As per Table 2	As per Table 2		pF

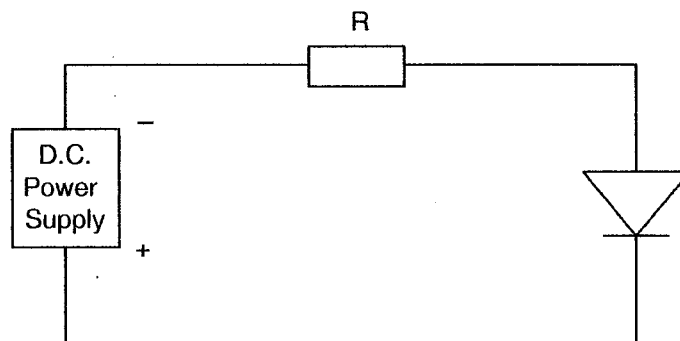**FIGURE 6 - BIAS CONDITIONS FOR IRRADIATION TESTING****NOTES**

1. A reverse bias of  $V_R = -1.5$  shall be applied.





**TABLE 7 - ELECTRICAL MEASUREMENTS DURING AND ON COMPLETION OF IRRADIATION TESTING**

No.	CHARACTERISTICS	SYMBOL	SPEC. AND/OR TEST METHOD	TEST CONDITIONS	CHANGE LIMITS ( $\Delta$ )	UNIT
2	Reverse Current	$I_R$	As per Table 2	As per Table 2	Note 1	nA

**NOTES**

1. The graph given below shall be used to determine the maximum permitted change.

