



Pages 1 to 21

**INTEGRATED CIRCUITS, SILICON MONOLITHIC, ADVANCED
CMOS 1-OF-8 DECODER/DEMULTIPLEXER WITH TTL
COMPATIBLE INPUTS**

BASED ON TYPE 54ACT138

ESCC Detail Specification No. 9408/060

Issue 2	December 2005
---------	---------------



Document Custodian: European Space Agency - see <https://escies.org>

LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2005. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
208	Specification upissued to incorporate editorial and technical changes per DCR.

TABLE OF CONTENTS

<u>1.</u>	<u>GENERAL</u>	<u>5</u>
1.1	Scope	5
1.2	Applicable Documents	5
1.3	Terms, Definitions, Abbreviations, Symbols and Units	5
1.4	The ESCC Component Number and Component Type Variants	5
1.4.1	The ESCC Component Number	5
1.4.2	Component Type Variants	5
1.5	Maximum Ratings	6
1.6	Handling Precautions	6
1.7	Physical Dimensions and Terminal Identification	6
1.8	Functional Diagram	9
1.9	Pin Assignment	9
1.10	Truth Table	9
1.11	Protection Networks	10
<u>2.</u>	<u>REQUIREMENTS</u>	<u>10</u>
2.1	General	10
2.1.1	Deviations from the Generic Specification	11
2.2	Marking	11
2.3	Electrical Measurements at Room, High and Low Temperatures	11
2.3.1	Room Temperature Electrical Measurements	11
2.3.2	High and Low Temperatures Electrical Measurements	13
2.3.3	Notes to Electrical Measurement Tables	15
2.4	Parameter Drift Values	15
2.5	Intermediate and End-point Electrical Measurements	15
2.6	High Temperature Reverse Bias Burn-In Conditions	17
2.6.1	N-Channel HTRB	17
2.6.2	P-Channel HTRB	17
2.7	Power Burn-In Conditions	18
2.8	Operating Life Conditions	18
2.9	Total Dose Radiation Testing	18
2.9.1	Bias Conditions and Total Dose Level for Total Dose Radiation Testing	18
2.9.2	Electrical Measurements for Total Dose Radiation Testing	19
APPENDIX 'A'		21

1. GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics and test and inspection data for the component type variants and/or the range of components specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

1.2 APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. 9000.
- (b) MIL-STD-883, Test Methods and Procedures for Microelectronics.

1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. 21300 shall apply.

1.4 THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS

1.4.1 The ESCC Component Number

The ESCC Component number shall be constituted as follows:

Example: 940806001A

- Detail Specification Reference: 9408060
- Component Type Variant Number: 01 (as required)
- Total Dose Radiation Level letter: A (as required)

1.4.2 Component Type Variants

The component type variants applicable to this specification are as follows:

Variant Number	Based on Type	Case	Terminal Material and /or Finish	Weight max g	Total Dose Radiation Level Letter
01	54ACT138	FP	G2	0.7	A [300kRAD(Si)]
02	54ACT138	FP	G4	0.7	A [300kRAD(Si)]

The terminal material and/or finish shall be in accordance with the requirements of ESCC Basic Specification No. 23500.

The Total Dose Radiation Level letter shall be as defined in ESCC Basic Specification No. 22900. If an alternative radiation test level is specified in the Purchase Order, the letter shall be changed accordingly.

1.5 MAXIMUM RATINGS

The maximum ratings shall not be exceeded at any time during use or storage.

Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the applicable ESCC Generic Specification.

Characteristics	Symbols	Maximum Ratings	Units	Remarks
Supply Voltage	V_{DD}	-0.5 to 6	V	Note 1
Input Voltage	V_{IN}	-0.5 to $V_{DD} + 0.5$	V	Notes 1, 2
Output Voltage	V_{OUT}	-0.5 to $V_{DD} + 0.5$	V	Notes 1, 3
Device Power Dissipation (Continuous)	P_D	500	mW	
Supply Current	I_{DDop}	50	mA	
Operating Temperature Range	T_{op}	-55 to +125	°C	T_{amb}
Storage Temperature Range	T_{stg}	-65 to +150	°C	
Soldering Temperature	T_{sol}	+260	°C	Note 4

NOTES:

1. Device is functional for $2V \leq V_{DD} \leq 5.5V$.
2. Input current limited to $I_{IC} = \pm 20mA$.
3. Output current limited to $I_{OUT} = \pm 50mA$.
4. Duration 10 seconds maximum at a distance of not less than 1.5mm from the device body and the same terminal shall not be resoldered until 3 minutes have elapsed.


1.6 HANDLING PRECAUTIONS

These devices are susceptible to damage by electrostatic discharge. Therefore, suitable precautions shall be employed for protection during all phases of manufacture, testing, packaging, shipment and any handling.

These components are categorised as Class 2 per ESCC Basic Specification No. 23800 with a Minimum Critical Path Failure Voltage of 2000 Volts.

1.7 PHYSICAL DIMENSIONS AND TERMINAL IDENTIFICATION

Flat Package (FP) - 16 Pin

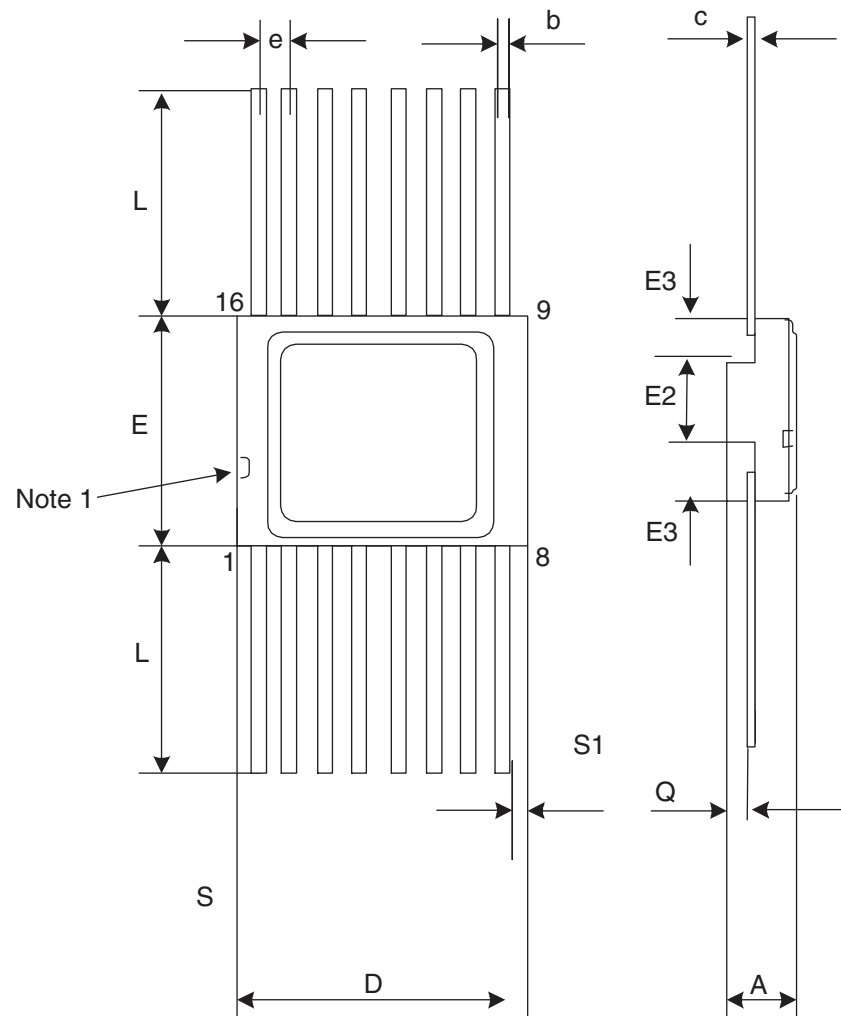


Symbols	Dimensions mm		Notes
	Min	Max	
A	2.31	2.72	
b	0.38	0.48	3
c	0.1	0.18	3
D	9.75	10.13	
E	6.75	7.06	
E2	4.32T YPICAL		
E3	0.76		
e	1.27		2, 4
L	6.35	7.36	3
Q	0.66	1.14	3
S1	0.13		5

NOTES:

1. Index area; a notch or a dot shall be located adjacent to Pin 1 and shall be within the shaded area shown.
2. The true position pin spacing is 1.27mm between centrelines. Each pin centreline shall be located within $\pm 0.13\text{mm}$ of its true longitudinal position relative to Pin 1 and the highest pin number.
3. All terminals.
4. 14 spaces.
5. 4 places.

1.8 FUNCTIONAL DIAGRAM

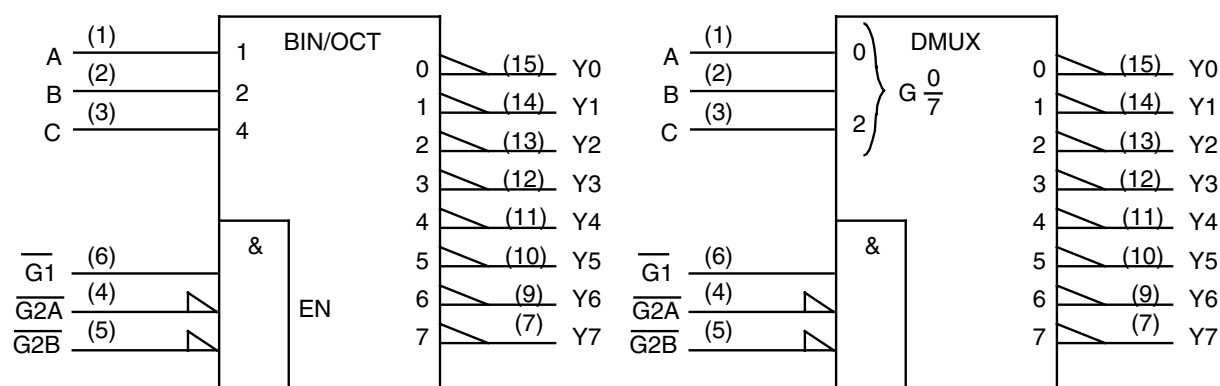

1.9 PIN ASSIGNMENT


Pin	Function	Pin	Function
1	A Input (Select)	9	$\overline{Y6}$ Output
2	B Input (Select)	10	$\overline{Y5}$ Output
3	C Input (Select)	11	$\overline{Y4}$ Output
4	$\overline{G2A}$ Input (Enable)	12	$\overline{Y3}$ Output
5	$\overline{G2B}$ Input (Enable)	13	$\overline{Y2}$ Output
6	$\overline{G1}$ Input (Enable)	14	$\overline{Y1}$ Output
7	$\overline{Y7}$ Output	15	$\overline{Y0}$ Output
8	V_{SS}	16	V_{DD}

1.10 TRUTH TABLE

1. Logic Level Definitions: L = Low Level, H = High Level, X = Don't care
2. Positive Logic: Y = A.B.C.

INPUTS						Outputs							
G1	G2A	G2B	A	B	C	$\overline{Y0}$	$\overline{Y1}$	$\overline{Y2}$	$\overline{Y3}$	$\overline{Y4}$	$\overline{Y5}$	$\overline{Y6}$	$\overline{Y7}$
X	H	X	X	X	X	H	H	H	H	H	H	H	H
X	X	H	X	X	X	H	H	H	H	H	H	H	H
L	X	X	X	X	X	H	H	H	H	H	H	H	H
H	L	L	L	L	L	L	H	H	H	H	H	H	H
H	L	L	H	L	L	H	L	H	H	H	H	H	H
H	L	L	L	H	L	H	H	L	H	H	H	H	H
H	L	L	H	H	L	H	H	H	L	H	H	H	H
H	L	L	L	L	H	H	H	H	H	L	H	H	H
H	L	L	H	L	H	H	H	H	H	H	L	H	H
H	L	L	L	H	H	H	H	H	H	H	H	L	H
H	L	L	H	H	H	H	H	H	H	H	H	H	L

1.11 PROTECTION NETWORKS

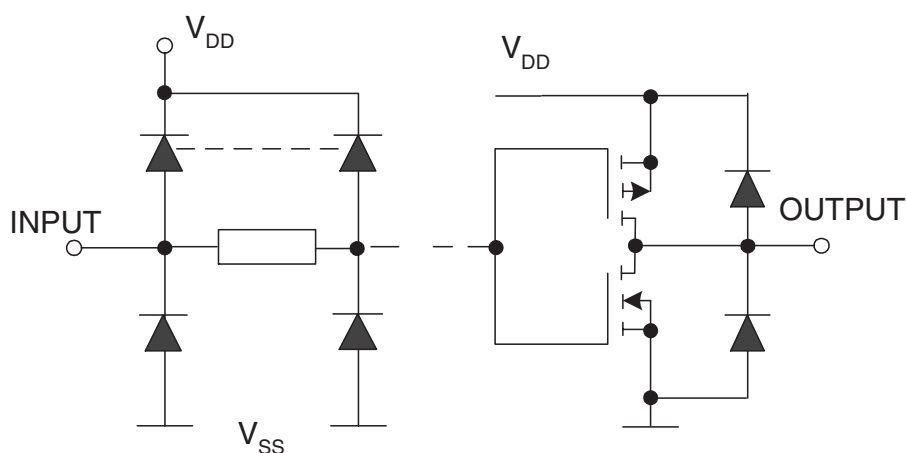

2. REQUIREMENTS

2.1 GENERAL

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component's reliability, are listed in the appendices attached to this specification.

2.1.1 Deviations from the Generic Specification

None.

2.2 MARKING

The marking shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and as follows.

The information to be marked on the component shall be:

- (a) Terminal identification.
- (b) The ESCC qualified components symbol (for ESCC qualified components only).
- (c) The ESCC Component Number.
- (d) Traceability information.

2.3 ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES

Electrical measurements shall be performed at room, high and low temperatures. Consolidated Notes are given after the tables.

2.3.1 Room Temperature Electrical Measurements

The measurements shall be performed at $T_{amb}=+22 \pm 3^{\circ}\text{C}$.

Characteristics	Symbols	MIL-STD-883 Test Method	Test Conditions Note 1	Limits		Units
				Min	Max	
Functional Test 1	-	3014	Verify Truth Table without Load $V_{IL}=0.4\text{V}, V_{IH}=2.4\text{V}$ $V_{DD}=4.5\text{V}, V_{SS}=0\text{V}$ Note 2	-	-	-
Functional Test 2	-	3014	Verify Truth Table without Load $V_{IL}=0.4\text{V}, V_{IH}=2.4\text{V}$ $V_{DD}=5.5\text{V}, V_{SS}=0\text{V}$ Note 2	-	-	-
Quiescent Current	I_{DD}	3005	$V_{IL}=0\text{V}, V_{IH}=5.5\text{V}$ $V_{DD}=5.5\text{V}, V_{SS}=0\text{V}$ Note 3	-	2	μA
Quiescent Current Delta	ΔI_{DD}	3005	V_{IN} (Under Test)=3.4V $V_{DD}=5.5\text{V}, V_{SS}=0\text{V}$	-	1.6	mA
Low Level Input Current	I_{IL}	3009	V_{IN} (Under Test)=0V $V_{DD}=5.5\text{V}, V_{SS}=0\text{V}$	-	-100	nA
High Level Input Current	I_{IH}	3010	V_{IN} (Under Test)=5.5V $V_{DD}=5.5\text{V}, V_{SS}=0\text{V}$	-	100	nA

Characteristics	Symbols	MIL-STD-883 Test Method	Test Conditions Note 1	Limits		Units
				Min	Max	
Low Level Output Voltage 1	V_{OL1}	3007	$V_{IL}=0.8V$, $V_{IH}=2V$ $I_{OL}=50\mu A$ $V_{DD}=4.5V$, $V_{SS}=0V$	-	100	mV
Low Level Output Voltage 2	V_{OL2}	3007	$V_{IL}=0.8V$, $V_{IH}=2V$ $I_{OL}=50\mu A$ $V_{DD}=5.5V$, $V_{SS}=0V$	-	100	mV
Low Level Output Voltage 3	V_{OL3}	3007	$V_{IL}=0.8V$, $V_{IH}=2V$ $I_{OL}=24mA$ $V_{DD}=4.5V$, $V_{SS}=0V$	-	400	mV
Low Level Output Voltage 4	V_{OL4}	3007	$V_{IL}=0.8V$, $V_{IH}=2V$ $I_{OL}=24mA$ $V_{DD}=5.5V$, $V_{SS}=0V$	-	400	mV
Low Level Output Voltage 5	V_{OL5}	3007	$V_{IL}=0.8V$, $V_{IH}=2V$ $I_{OL}=50mA$ $V_{DD}=5.5V$, $V_{SS}=0V$ Note 4	-	1.65	V
High Level Output Voltage 1	V_{OH1}	3006	$V_{IL}=0.8V$, $V_{IH}=2V$ $I_{OH}=-50\mu A$ $V_{DD}=4.5V$, $V_{SS}=0V$	4.4	-	V
High Level Output Voltage 2	V_{OH2}	3006	$V_{IL}=0.8V$, $V_{IH}=2V$ $I_{OH}=-50\mu A$ $V_{DD}=5.5V$, $V_{SS}=0V$	5.4	-	V
High Level Output Voltage 3	V_{OH3}	3006	$V_{IL}=0.8V$, $V_{IH}=2V$ $I_{OH}=-24mA$ $V_{DD}=4.5V$, $V_{SS}=0V$	3.7	-	V
High Level Output Voltage 4	V_{OH4}	3006	$V_{IL}=0.8V$, $V_{IH}=2V$ $I_{OH}=-24mA$ $V_{DD}=5.5V$, $V_{SS}=0V$	4.7	-	V
High Level Output Voltage 5	V_{OH5}	3006	$V_{IL}=0.8V$, $V_{IH}=2V$ $I_{OH}=-50mA$ $V_{DD}=5.5V$, $V_{SS}=0V$ Note 4	3.85	-	V
Negative Input Clamp Voltage (to V_{SS})	V_{IC1}	-	I_{IN} (Under Test)= -1mA V_{DD} =Open, $V_{SS}=0V$ All Other Pins Open	-0.4	-1.5	V
Positive Input Clamp Voltage (to V_{DD})	V_{IC2}	-	I_{IN} (Under Test)= 1mA $V_{DD}=0V$, V_{SS} =Open All Other Pins Open	0.4	1.5	V
Input Capacitance	C_{IN}	3012	V_{IN} (Not Under Test)=0V $V_{DD}=5V$, $V_{SS}=0V$ $f = 100\text{ kHz to }1\text{ MHz}$ Note 5	-	10	pF

Characteristics	Symbols	MIL-STD-883 Test Method	Test Conditions Note 1	Limits		Units
				Min	Max	
Propagation Delay Low to High, A or B or C to Y	t_{PLH1}	3003	$V_{IN}(\text{under test})=\text{Pulse Generator}$ $V_{IN}(\text{remaining inputs})=\text{Truth Table}$ $V_{IL}=0V, V_{IH}=4.5V$ $V_{DD}=4.5V, V_{SS}=0V$ Note 6	1	11	ns
Propagation Delay High to Low, A or B or C to Y	t_{PHL1}	3003	$V_{IN}(\text{under test})=\text{Pulse Generator}$ $V_{IN}(\text{remaining inputs})=\text{Truth Table}$ $V_{IL}=0V, V_{IH}=4.5V$ $V_{DD}=4.5V, V_{SS}=0V$ Note 6	1	11	ns
Propagation Delay Low to High, $\overline{G1}$ or $\overline{G2A}$ or $\overline{G2B}$ to Y	t_{PLH2}	3003	$V_{IN}(\text{under test})=\text{Pulse Generator}$ $V_{IN}(\text{remaining inputs})=\text{Truth Table}$ $V_{IL}=0V, V_{IH}=4.5V$ $V_{DD}=4.5V, V_{SS}=0V$ Note 6	1	12	ns
Propagation Delay High to Low, $\overline{G1}$ or $\overline{G2A}$ or $\overline{G2B}$ to Y	t_{PHL2}	3003	$V_{IN}(\text{under test})=\text{Pulse Generator}$ $V_{IN}(\text{remaining inputs})=\text{Truth Table}$ $V_{IL}=0V, V_{IH}=4.5V$ $V_{DD}=4.5V, V_{SS}=0V$ Note 6	1	12	ns

2.3.2

High and Low Temperatures Electrical Measurements

The measurements shall be performed at $T_{amb}=+125 (+0 -5) ^\circ C$ and $T_{amb}=- 55(+5-0)^\circ C$.

Characteristics	Symbols	MIL-STD-883 Test Method	Test Conditions Note 1	Limits		Units
				Min	Max	
Functional Test 1	-	3014	Verify Truth Table without Load $V_{IL}=0.4V, V_{IH}=2.4V$ $V_{DD}=4.5V, V_{SS}=0V$ Note 2	-	-	-
Functional Test 2	-	3014	Verify Truth Table without Load $V_{IL}=0.4V, V_{IH}=2.4V$ $V_{DD}=5.5V, V_{SS}=0V$ Note 2	-	-	-

Characteristics	Symbols	MIL-STD-883 Test Method	Test Conditions Note 1	Limits		Units
				Min	Max	
Quiescent Current	I_{DD}	3005	$V_{IL}=0V, V_{IH}=5.5V$ $V_{DD}=5.5V, V_{SS}=0V$ Note 3	-	40	μA
Quiescent Current Delta	ΔI_{DD}	3005	V_{IN} (Under Test)=3.4V $V_{DD}=5.5V, V_{SS}=0V$	-	1.6	mA
Low Level Input Current	I_{IL}	3009	V_{IN} (Under Test)=0V $V_{DD}=5.5V, V_{SS}=0V$	-	-1	μA
High Level Input Current	I_{IH}	3010	V_{IN} (Under Test)=5.5V $V_{DD}=5.5V, V_{SS}=0V$	-	1	μA
Low Level Output Voltage 1	V_{OL1}	3007	$V_{IL}=0.8V, V_{IH}=2V$ $I_{OL}=50\mu A$ $V_{DD}=4.5V, V_{SS}=0V$	-	100	mV
Low Level Output Voltage 2	V_{OL2}	3007	$V_{IL}=0.8V, V_{IH}=2V$ $I_{OL}=50\mu A$ $V_{DD}=5.5V, V_{SS}=0V$	-	100	mV
Low Level Output Voltage 3	V_{OL3}	3007	$V_{IL}=0.8V, V_{IH}=2V$ $I_{OL}=24mA$ $V_{DD}=4.5V, V_{SS}=0V$	-	500	mV
Low Level Output Voltage 4	V_{OL4}	3007	$V_{IL}=0.8V, V_{IH}=2V$ $I_{OL}=24mA$ $V_{DD}=5.5V, V_{SS}=0V$	-	500	mV
Low Level Output Voltage 5	V_{OL5}	3007	$V_{IL}=0.8V, V_{IH}=2V$ $I_{OL}=50mA$ $V_{DD}=5.5V, V_{SS}=0V$ Note 4	-	1.65	V
High Level Output Voltage 1	V_{OH1}	3006	$V_{IL}=0.8V, V_{IH}=2V$ $I_{OH}=-50\mu A$ $V_{DD}=4.5V, V_{SS}=0V$	4.4	-	V
High Level Output Voltage 2	V_{OH2}	3006	$V_{IL}=0.8V, V_{IH}=2V$ $I_{OH}=-50\mu A$ $V_{DD}=5.5V, V_{SS}=0V$	5.4	-	V
High Level Output Voltage 3	V_{OH3}	3006	$V_{IL}=0.8V, V_{IH}=2V$ $I_{OH}=-24mA$ $V_{DD}=4.5V, V_{SS}=0V$	3.7	-	V
High Level Output Voltage 4	V_{OH4}	3006	$V_{IL}=0.8V, V_{IH}=2V$ $I_{OH}=-24mA$ $V_{DD}=5.5V, V_{SS}=0V$	4.7	-	V
High Level Output Voltage 5	V_{OH5}	3006	$V_{IL}=0.8V, V_{IH}=2V$ $I_{OH}=-50mA$ $V_{DD}=5.5V, V_{SS}=0V$ Note 4	3.85	-	V

2.3.3 Notes to Electrical Measurement Tables

1. Unless otherwise specified all inputs and outputs shall be tested for each characteristic. Inputs not under test shall be $V_{IN}=V_{SS}$ or V_{DD} and outputs not under test shall be open.
2. Functional tests shall be performed to verify Truth Table with $V_{OH} \geq 0.7V_{DD}$, $V_{OL} \leq 0.3V_{DD}$.
3. Quiescent Current shall be tested using the following input conditions:
 - (a) A Inputs = B Inputs = V_{IH}
 - (b) A Inputs = B Inputs = V_{IL}
4. Test shall be performed on only one output at a time with a duration not to exceed 10ms.
5. Guaranteed but not tested.
6. Measurements shall be performed as a go-no-go test on a 100% basis. Read and record measurements shall be performed on a sample of 5 components.
 The pulse generator shall have the following characteristics:
 $V_{GEN} = 0$ to V_{DD} ; $f = 1$ MHz; t_r and $t_f \leq 3$ ns (10% to 90%); duty cycle = 50%; $R_L = 500\Omega$
 Output load capacitance $C_L = 50$ pF + 5% including scope probe, wiring and stray capacitance without component in the test fixture.
 Propagation delay shall be measured referenced to the 50% input and output voltages. All paths shall be tested.

2.4 PARAMETER DRIFT VALUES

Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3^\circ\text{C}$.

The test methods and test conditions shall be as per the corresponding test defined in Room Temperature Electrical Measurements.

The drift values (Δ) shall not be exceeded for each characteristic specified. The corresponding absolute limit values for each characteristic shall not be exceeded.

Characteristics	Symbols	Limits			Units
		Drift Value Δ	Absolute		
			Min	Max	
Quiescent Current	I _{DD}	±0.3	-	2	μA
Quiescent Current Delta	ΔI _{DD}	±0.4	-	1.6	mA
Low Level Input Current	I _{IL}	±20	-	-100	nA
High Level Input Current	I _{IH}	±20	-	100	nA
Low Level Output Voltage 4	V _{OL4}	±40	-	400	mV
High Level Output Voltage 4	V _{OH4}	±0.2	4.7	-	V

NOTES:

1. Unless otherwise specified all inputs and outputs shall be tested for each characteristic.

2.5 INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3^\circ\text{C}$.

The test methods and test conditions shall be as per the corresponding test defined in Room

Temperature Electrical Measurements.

The drift values (Δ) shall not be exceeded for each characteristic specified. The corresponding absolute limit values for each characteristic shall not be exceeded.

Characteristics	Symbols	Limits			Units
		Drift Value Δ	Absolute		
			Min	Max	
Functional Test 1, 2	-	-	-	-	–
Quiescent Current	I _{DD}	±0.3	-	2	μA
Quiescent Current Delta	ΔI _{DD}	±0.4	-	1.6	mA
Low Level Input Current	I _{IL}	±20	-	-100	nA
High Level Input Current	I _{IH}	±20	-	100	nA
Low Level Output Voltage 1	V _{OL1}	±40	-	100	mV
Low Level Output Voltage 2	V _{OL2}	±40	-	100	mV
Low Level Output Voltage 3	V _{OL3}	±40	-	400	mV
Low Level Output Voltage 4	V _{OL4}	±40	-	400	mV
Low Level Output Voltage 5	V _{OL5}	±40	-	1.65	V
High Level Output Voltage 1	V _{OH1}	±0.2	4.4	-	V
High Level Output Voltage 2	V _{OH2}	±0.2	5.4	-	V
High Level Output Voltage 3	V _{OH3}	±0.2	3.7	-	V
High Level Output Voltage 4	V _{OH4}	±0.2	4.7	-	V
High Level Output Voltage 5	V _{OH5}	±0.2	3.85	-	V

NOTES:

1. Unless otherwise specified all inputs and outputs shall be tested for each characteristic.
2. The drift values (Δ) are applicable to the Operating Life Test only.

2.6 HIGH TEMPERATURE REVERSE BIAS BURN-IN CONDITIONS

2.6.1 N-Channel HTRB

Characteristics	Symbols	Test Conditions	Units
Ambient Temperature	T_{amb}	+125 (+0 -5)	°C
Outputs Y	V_{OUT}	Open or V_{SS}	-
Inputs A, B, C, G1, $\overline{G2A}$, $\overline{G2B}$	V_{IN}	V_{SS}	V
Positive Supply Voltage	V_{DD}	5.5 (+0 -0.5)	V
Negative Supply Voltage	V_{SS}	0	V
Duration	t	72	Hours

NOTES:

1. Input Protection Resistor = 200Ω min to 47kΩ max.
2. Output Load = 200Ω min to 10kΩ max.

2.6.2 P-Channel HTRB

Characteristics	Symbols	Test Conditions	Units
Ambient Temperature	T_{amb}	+125 (+0 -5)	°C
Outputs Y	V_{OUT}	Open or V_{SS}	-
Inputs A, B, C, G1, $\overline{G2A}$, $\overline{G2B}$	V_{IN}	V_{DD}	V
Positive Supply Voltage	V_{DD}	5.5 (+0 -0.5)	V
Negative Supply Voltage	V_{SS}	0	V
Duration	t	72	Hours

NOTES:

1. Input Protection Resistor = 200Ω min to 47kΩ max.
2. Output Load = 200Ω min to 10kΩ max.

2.7 POWER BURN-IN CONDITIONS

Characteristics	Symbols	Test Conditions	Units
Ambient Temperature	T_{amb}	+125 (+0 -5)	°C
Outputs Y	V_{OUT}	Open	V
Input A	V_{IN}	V_{GEN}	V
Input B	V_{IN}	V_{GEN}	V
Input C	V_{IN}	V_{GEN}	V
Inputs $\overline{G2A}$, $\overline{G2B}$	V_{IN}	V_{SS}	V
Input G1	V_{IN}	V_{DD}	V
Pulse Voltage	V_{GEN}	0V to V_{DD}	V
Pulse Frequency Square Wave	f_{GEN}	Input A: 100k $\pm$ 10% Input B: 50k $\pm$ 10% Input C: 25k $\pm$ 10% 50 $\pm$ 15% Duty Cycle $t_r = t_f \leq 8ns/V$	Hz
Positive Supply Voltage	V_{DD}	5.5 (+0 -0.5)	V
Negative Supply Voltage	V_{SS}	0	V

NOTES:

1. Input Protection Resistor = 200 Ω min to 47k Ω max.
2. Output Load = 200 Ω min to 10k Ω max.

2.8 OPERATING LIFE CONDITIONS

The conditions shall be as specified for Power Burn-in.

2.9 TOTAL DOSE RADIATION TESTING

2.9.1 Bias Conditions and Total Dose Level for Total Dose Radiation Testing

Continuous bias shall be applied during irradiation testing as specified below.

The total dose level applied shall be as specified in the component type variant information herein or in the Purchase Order.

Characteristics	Symbols	Test Conditions (Note 1)	Units
Ambient Temperature	T_{amb}	$+22 \pm 3$	$^{\circ}\text{C}$
Outputs Y	V_{OUT}	Open	-
Inputs A, B, C, G1, $\overline{G2A}$, $\overline{G2B}$	V_{IN}	Note 2	V
Positive Supply Voltage	V_{DD}	$5.5 \pm 5\%$	V
Negative Supply Voltage	V_{SS}	0	V

NOTES:

1. Input Protection Resistor = $1\text{k}\Omega \pm 20\%$
2. V_{IN} such that $V_{OUT}=0$ with a maximum at V_{DD} .

2.9.2 Electrical Measurements for Total Dose Radiation Testing

Prior to irradiation testing the devices shall have successfully met Room Temperature Electrical Measurements specified herein.

Unless otherwise stated the measurements shall be performed at $T_{amb} = +22 \pm 3^{\circ}\text{C}$.
The test methods and test conditions shall be as per the corresponding test defined in Room Temperature Electrical Measurements.

The parameters to be measured during and on completion of irradiation testing are shown below.

Unless otherwise specified all inputs and outputs shall be tested for each characteristic.

Characteristics	Symbols	Limits			Units
		Drift Value Δ	Absolute		
			Min	Max	
Functional Test 1, 2	-	-	-	-	—
Quiescent Current	I_{DD}	± 0.3	-	50	μA
Quiescent Current Delta	ΔI_{DD}	± 0.4	-	3.5	mA
Low Level Input Current	I_{IL}	± 20	-	-100	nA
High Level Input Current	I_{IH}	± 20	-	100	nA
Low Level Output Voltage 1	V_{OL1}	± 40	-	100	mV
Low Level Output Voltage 2	V_{OL2}	± 40	-	100	mV
Low Level Output Voltage 3	V_{OL3}	± 40	-	400	mV
Low Level Output Voltage 4	V_{OL4}	± 40	-	400	mV
Low Level Output Voltage 5	V_{OL5}	± 40	-	1.65	V
High Level Output Voltage 1	V_{OH1}	± 0.2	4.4	-	V
High Level Output Voltage 2	V_{OH2}	± 0.2	5.4	-	V
High Level Output Voltage 3	V_{OH3}	± 0.2	3.7	-	V

Characteristics	Symbols	Limits			Units
		Drift Value Δ	Absolute		
			Min	Max	
High Level Output Voltage 4	V _{OH4}	±0.2	4.7	-	V
High Level Output Voltage 5	V _{OH5}	±0.2	3.85	-	V

APPENDIX 'A'

AGREED DEVIATIONS FOR STMICROELECTRONICS (F)

ITEMS AFFECTED	DESCRIPTION OF DEVIATIONS
Deviations from Production Control - Chart F2	Electrostatic Discharge Sensitivity Test Method. These components are categorised as class 2 (2000 V) per MIL-STD-883 Method 3015.
Deviations from Production Control (Wafer Lot Acceptance) - Chart F2	Total Dose Radiation Testing. The test method and procedure shall be as specified in MIL-STD-883 Method 1019 condition A.
Deviations from Screening Tests - Chart F3	External Visual Inspection: The criteria applicable to chip out are those described in MIL-STD-883, Test Method 2009, Paras 3.3.6(b) and 3.3.7(a). High Temperature Reverse Bias Burn-in: The temperature limits of MIL-STD-883, Para. 4.5.8(c) may be used.
Deviations from Qualification and Periodic Tests - Chart F4	External Visual Inspection: The criteria applicable to chip out are those described in MIL-STD-883, Test Method 2009, Paras 3.3.6(b) and 3.3.7(a). Operating Life: The temperature limits of MIL-STD-883, Para. 4.5.8(c) may be used.
Deviations from High and Low Temperatures Electrical Measurements	High and Low Temperatures Electrical Measurements may be considered guaranteed but not tested if successful pilot lot testing has been performed on the wafer lot which includes High and Low Temperatures Electrical Measurements per the Detail Specification. A summary of the pilot lot testing shall be provided if required by the Purchase Order.
Deviations from Room Temperature Electrical Measurements	All AC characteristics (Capacitance and Timings) may be considered guaranteed but not tested if successful pilot lot testing has been performed on the wafer lot which includes AC characteristic measurements per the detail specification. A summary of the pilot lot testing shall be provided if required by the Purchase Order.