



Pages 1 to 37


**RF COAXIAL CONNECTORS, TYPE SMA,
50 OHMS, ADAPTORS AND
CONNECTING PIECES**

ESCC Detail Specification No. 3402/003

**ISSUE 2
April 2010**



Document Custodian: European Space Agency - see <https://escies.org>
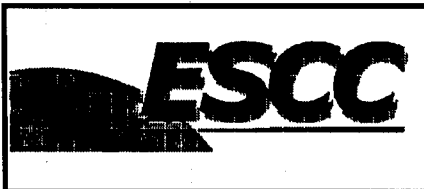
| | | | |
|--|---|--|-------------------|
|  | ESCC Detail Specification No. 3402/003 | | PAGE i ISSUE 2 |
|--|---|--|-------------------|

LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2010. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole in any medium without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.



ESCC Detail Specification
No. 3402/003

PAGE 2
ISSUE 2

DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

| DCR No. | CHANGE DESCRIPTION |
|----------|---|
| 553, 569 | Specification upissued to incorporate editorial and technical changes per DCRs. |



TABLE OF CONTENTS

| | <u>Page</u> |
|---|-------------|
| 1. <u>GENERAL</u> | 5 |
| 1.1 Scope | 5 |
| 1.2 Type Variants | 5 |
| 1.3 Maximum Ratings | 5 |
| 1.4 Parameter Derating Information | 5 |
| 1.5 Physical Dimensions | 5 |
| 1.6 Standard Test Connector Interface | 5 |
| 2. <u>APPLICABLE DOCUMENTS</u> | 13 |
| 3. <u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u> | 13 |
| 4. <u>REQUIREMENTS</u> | 13 |
| 4.1 General | 13 |
| 4.2 Deviations from Generic Specification | 13 |
| 4.2.1 Deviations from Special In-process Controls | 13 |
| 4.2.2 Deviations from Final Production Tests | 13 |
| 4.2.3 Deviations from Burn-in Tests | 13 |
| 4.2.4 Deviations from Qualification Tests | 13 |
| 4.2.5 Deviations from Lot Acceptance Tests | 13 |
| 4.3 Mechanical Requirements | 14 |
| 4.3.1 Dimension Check | 14 |
| 4.3.2 Weight | 14 |
| 4.3.3 Coupling Proof Torque | 14 |
| 4.3.4 Cable Retention Force | 14 |
| 4.3.5 Mating and Unmating Forces | 14 |
| 4.3.6 Endurance | 14 |
| 4.3.7 Residual Magnetism | 14 |
| 4.3.8 Contact Engagement and Separation Forces | 15 |
| 4.3.9 Contact Retention | 15 |
| 4.4 Materials and Finishes | 15 |
| 4.4.1 Beryllium Copper Version Gold Plated | 16 |
| 4.4.2 Stainless Steel Version Electro-passivated | 16 |
| 4.4.3 Stainless Steel Version Gold Plated | 17 |
| 4.4.4 Iron Nickel Gold Plated Hermetic Type | 18 |
| 4.5 Marking | 18 |
| 4.5.1 General | 18 |
| 4.5.2 The ESCC Component Number | 18 |
| 4.5.3 Characteristics | 18 |
| 4.5.4 Traceability Information | 20 |
| 4.5.5 Marking of Small Components | 20 |
| 4.6 Electrical Measurements | 20 |
| 4.6.1 Electrical Measurements at Room Temperature | 20 |
| 4.6.2 Electrical Measurements at High and Low Temperatures | 20 |
| 4.6.3 Circuits for Electrical Measurements | 20 |
| 4.7 Burn-in Tests | 20 |

| | | |
|--|---|---------------------------|
|  | <p style="text-align: center;">ESCC Detail Specification No. 3402/003</p> | <p>PAGE 4 ISSUE 2</p> |
|--|---|---------------------------|

| | <u>Page</u> |
|--|-------------|
| 4.8 Environmental and Endurance Tests | 21 |
| 4.8.1 Measurements and Inspections on Completion of Environmental Tests | 21 |
| 4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests | 21 |
| 4.8.3 Measurements and Inspections on Completion of Endurance Tests | 21 |
| 4.8.4 Conditions for Operating Life Tests | 21 |
| 4.8.5 Electrical Circuits for Operating Life Tests | 21 |
| 4.8.6 Conditions for High Temperature Storage Test | 21 |

TABLES

| | |
|---|-----|
| 1(a) Type Variants | 6 |
| 1(b) Maximum Ratings | 6 |
| 2 Electrical Measurements at Room Temperature | 21 |
| 3 Not applicable | N/A |
| 4 Not applicable | N/A |
| 5 Not applicable | N/A |
| 6 Measurements and Inspections on Completion of Environmental and Endurance Tests | 22 |

FIGURES

| | |
|--|----|
| 1 Parameter Derating Information | 7 |
| 2 Physical Dimensions | 8 |
| 2(a) Connector Interface - Male Contact | 8 |
| 2(a) Connector Interface - Female Contact | 10 |
| 2(b) Variants | 24 |
| 3 Standard Test Connector Interface - Female Contact | 11 |
| 3 Standard Test Connector Interface - Male Contact | 12 |
| 4 Test Pin Configuration | 15 |

APPENDICES (Applicable to specific Manufacturers only)

None.



1. **GENERAL**

1.1 **SCOPE**

This specification details the ratings, physical and electrical characteristics, test and inspection data for RF Coaxial Connectors, Type SMA, 50 Ohms, Adaptors and Connecting Pieces. It shall be read in conjunction with ESCC Generic Specification No.3402, the requirements of which are supplemented herein.

1.2 **TYPE VARIANTS**

A list of the type variants of the connectors specified herein, which are also covered by this specification, is given in Table 1(a).

For each type variant, the full electrical and physical characteristics are given in individual Figures 2(b) at the end of this specification.

1.3 **MAXIMUM RATINGS**

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the connectors specified herein, are as scheduled in Table 1(b).

1.4 **PARAMETER DERATING INFORMATION (FIGURE 1)**

The derating information applicable to the connectors specified herein is shown in Figure 1.

1.5 **PHYSICAL DIMENSIONS**

The physical dimensions of the connectors specified herein are shown in Figures 2(a) and 2(b).

1.6 **STANDARD TEST CONNECTOR INTERFACE**

Whenever gauges are required for mating with the connectors under test, their physical dimensions shall be in accordance with those specified in Figure 3.



TABLE 1(a) - TYPE VARIANTS

| VARIANT | DESCRIPTION |
|---------|---|
| 01 | Straight Adaptor, Male - Male (Note 3) |
| 02 | Straight Adaptor, Male - Female (Note 3) |
| 03 | Straight Adaptor, Female - Female (Note 3) |
| 04 | Straight Bulkhead Adaptor, Female - Female (Note 3) |
| 05 | Elbow Adaptor, Male - Female |
| 06 | T-Adaptor, Female - Female/Male |
| 07 | Hermetic Adaptor, Female - Female |
| 08 | T-Adaptor, Female - Female/Female |
| 09 | Straight Flange Adaptor, Male - Female |
| 10 | Straight Flange Adaptor, Female - Female |
| 11 | Straight Adaptor, Male - Male, Maximum Operating Temperature = +165°C (Note 3) |
| 12 | Straight Adaptor, Male - Female, Maximum Operating Temperature = +165°C (Note 3) |
| 13 | Straight Adaptor, Female - Female, Maximum Operating Temperature = +165°C (Note 3) |
| 14 | Straight Bulkhead Adaptor, Female - Female, Maximum Operating Temperature = +165°C (Note 3) |

NOTES

1. The Variants are described in Figure 2(b).
2. F or finishes, see Para. 4.4.
3. Variants 11, 12, 13 and 14 are High Temperature Capability versions of Variants 01, 02, 03 and 04 respectively.

TABLE 1(b) - MAXIMUM RATINGS

| No. | CHARACTERISTICS | SYMBOL | MAXIMUM RATINGS | UNIT | REMARKS |
|-----|-----------------------------|------------------|------------------------------------|------------------|---------------------------|
| 1 | Peak Power at +25°C | P _{max} | 20 | kW | 1.0μs |
| 2 | Power | P | 2.0 | kW | See Figures 1(a) and 1(b) |
| 3 | Nominal Impedance | Z | 50 | Ω | - |
| 4 | Frequency Range | f | See Figure 2(b) | GHz | - |
| 5 | Operating Voltage | V _{op} | 335 | V _{rms} | - |
| 6 | Operating Temperature Range | T _{op} | See Figure 2(b) | °C | - |
| 7 | Storage Temperature Range | T _{stg} | As per Operating Temperature Range | °C | - |

FIGURE 1 - PARAMETER DERATING INFORMATION

FIGURE 1(a) - POWER VERSUS TEMPERATURE



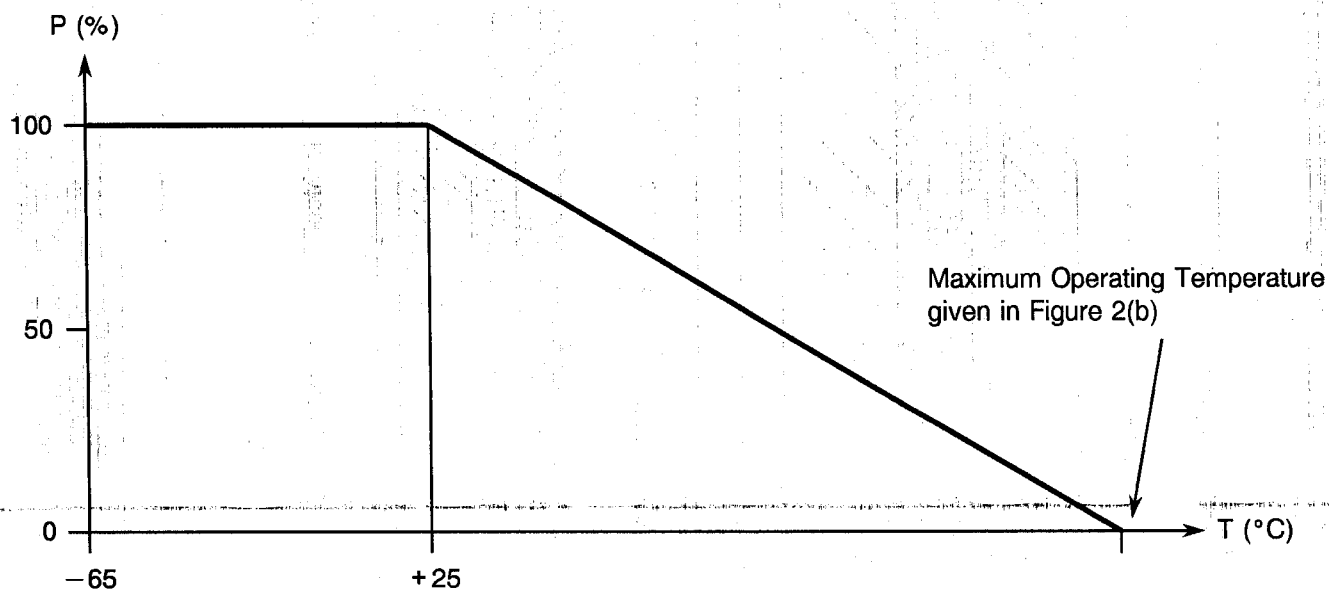


FIGURE 1(b) - POWER VERSUS FREQUENCY

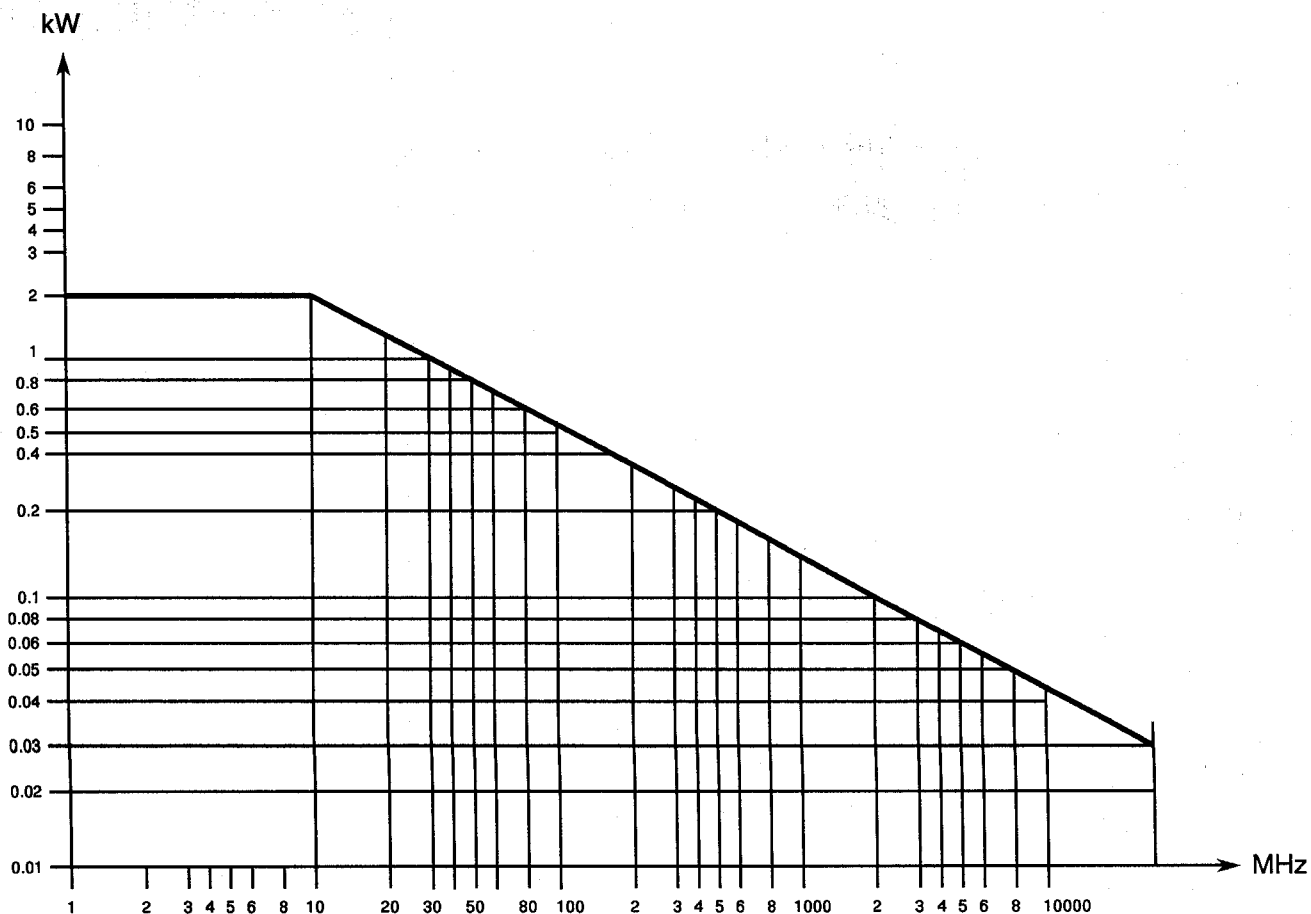

POWER (VSWR in line 1) at $T_{amb} = +40^{\circ}C$.

FIGURE 2 - PHYSICAL DIMENSIONS
FIGURE 2(a) - CONNECTOR INTERFACE - MALE CONTACT

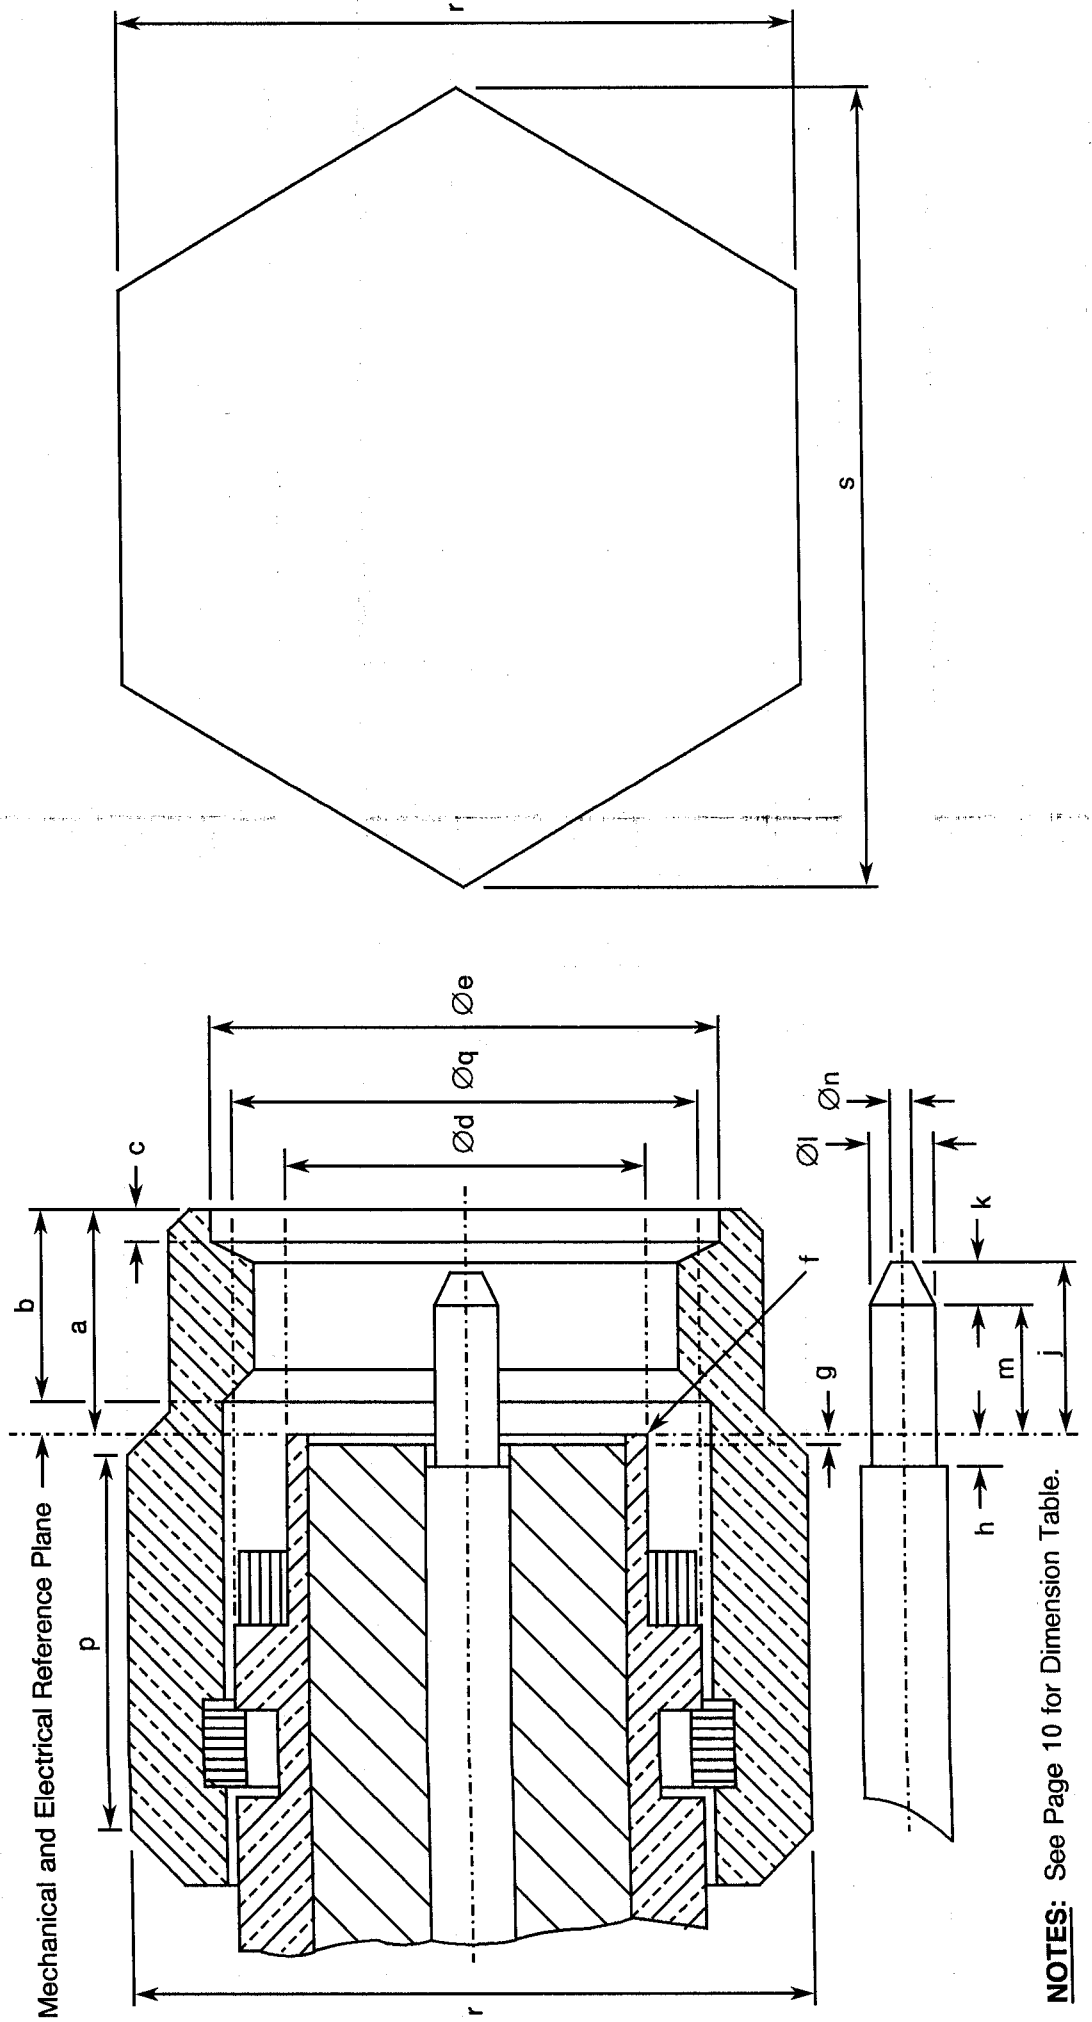

NOTES: See Page 10 for Dimension Table.


PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2(a) - CONNECTOR INTERFACE - MALE CONTACT (CONTINUED)

| SYMBOL | MILLIMETRES | | NOTES |
|--------|-------------|-------|-----------------------|
| | MIN. | MAX. | |
| a | - | 3.43 | |
| b | 2.54 | - | |
| c | 0.38 | 1.14 | |
| Ød | - | 4.592 | |
| Øe | 6.35 | - | |
| f | - | 0.08 | Radius or 45° chamfer |
| g | 0.00 | 0.20 | |
| h | 0.00 | 0.25 | |
| j | - | 2.54 | |
| k | 0.38 | - | |
| Øl | 0.90 | 0.94 | |
| m | 1.27 | - | |
| Øn | - | 0.38 | |
| p | 3.17 | - | |
| Øq | - | - | |
| r | 7.84 | 8.00 | Hexagonal on flat |
| s | - | 9.20 | |


FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2(a) - CONNECTOR INTERFACE (CONTINUED) - FEMALE CONTACT

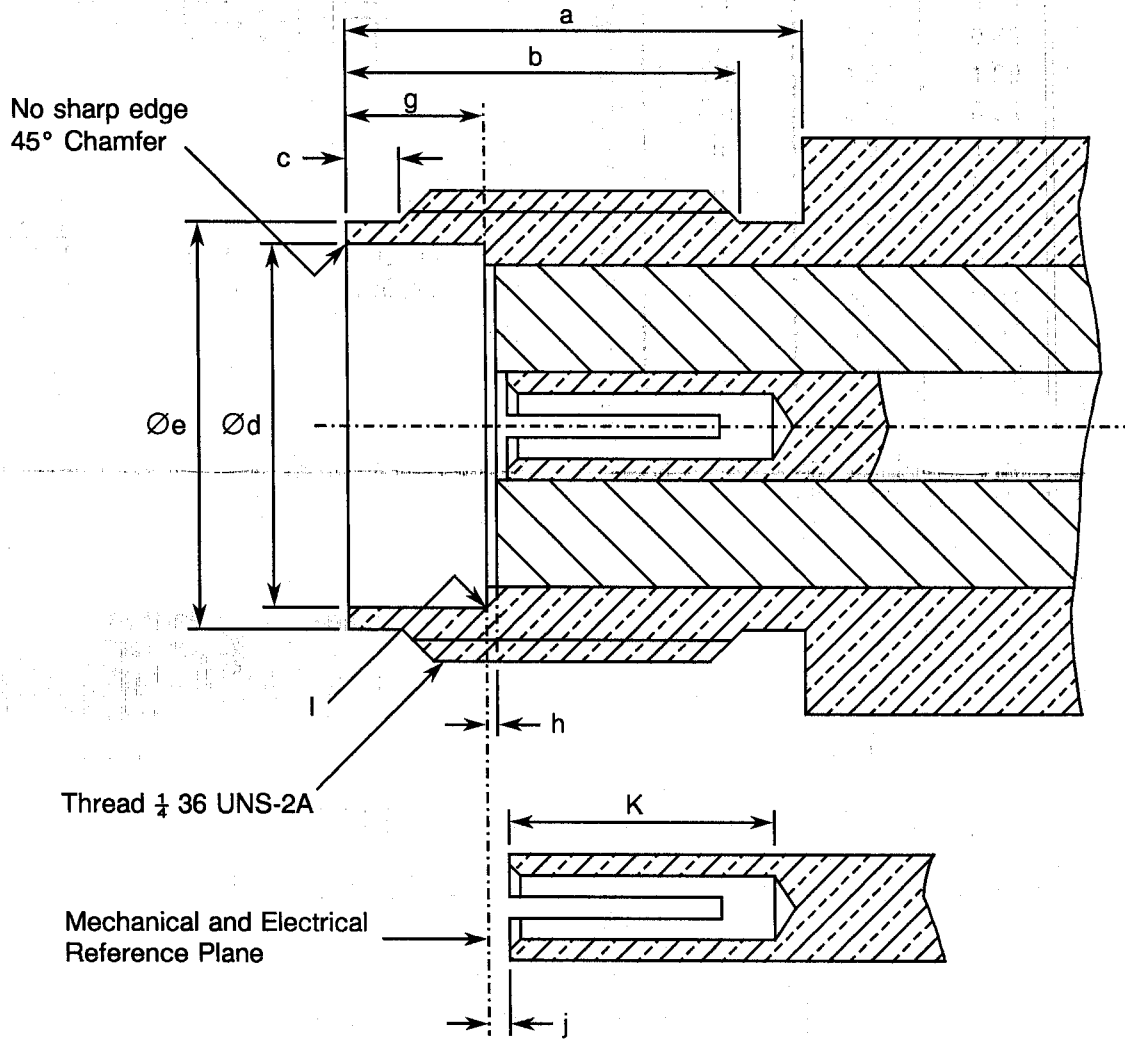


| SYMBOL | MILLIMETRES | | NOTES |
|--------|-------------|------|--------|
| | MIN. | MAX. | |
| a | 5.54 | - | |
| b | 4.32 | - | |
| c | 0.38 | 1.14 | |
| Ød | 4.597 | 4.67 | |
| Øe | 5.28 | 5.49 | |
| g | 1.88 | 1.98 | |
| h | 0.00 | 0.20 | |
| j | 0.00 | 0.25 | |
| K | 2.92 | - | |
| l | - | 0.04 | Radius |

FIGURE 3 - STANDARD TEST CONNECTOR INTERFACE - FEMALE CONTACT

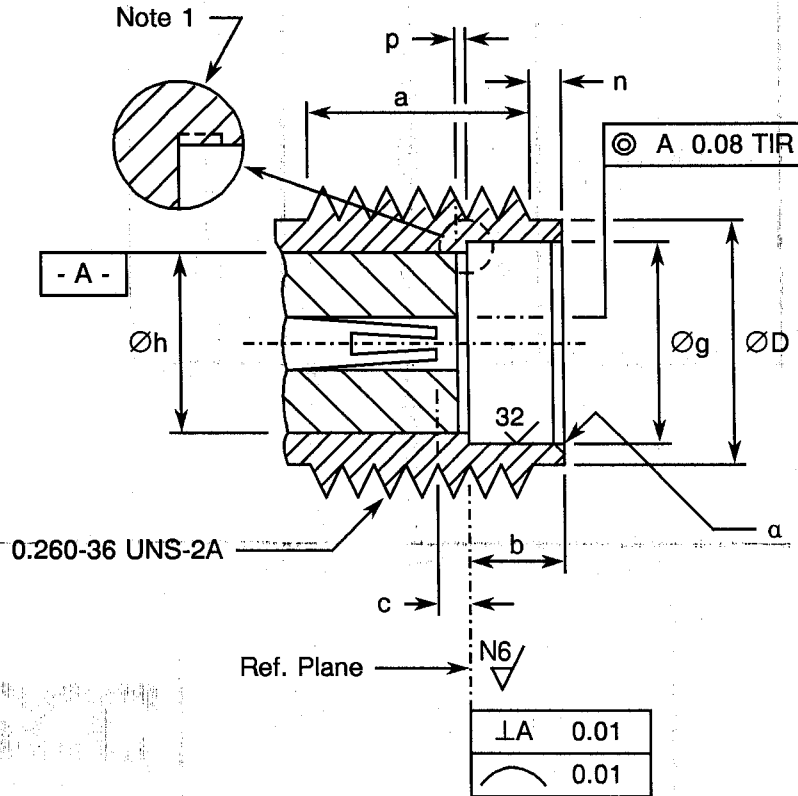

DETAIL OF INNER CONTACT

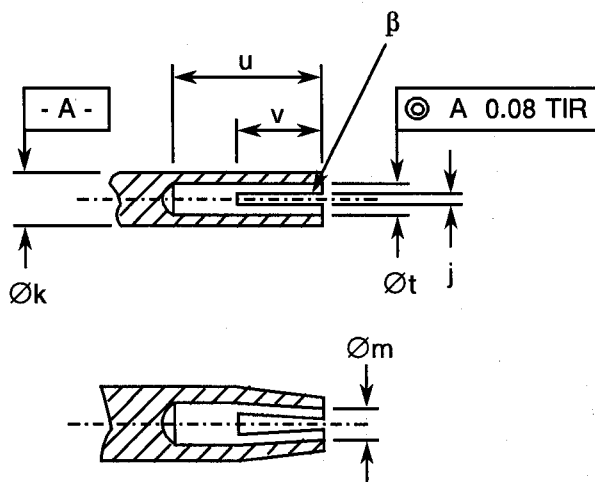


NOTES

- No fillet permitted. Radial undercut 0.20 (max.) deep × 0.89 (max.) long permitted.

| SYMBOL | MILLIMETRES | | NOTES |
|--------|-------------|------|-----------------|
| | MIN. | MAX. | |
| a | 3.81 | - | |
| b | 1.88 | 1.98 | |
| c | 0.00 | 0.08 | Contact recess |
| ØD | 5.28 | 5.49 | |
| Øg | 4.60 | 4.67 | |
| Øh | 4.10 | 4.13 | |
| j | 0.13 | 0.23 | 2 or more slots |
| Øk | 1.27 | 1.29 | |
| Øm | 0.72 | 0.84 | After closing |
| n | 0.38 | 1.14 | |
| p | 0.00 | 0.05 | Insert recess |
| u | 2.54 | - | |
| Øt | 0.94 | 0.99 | |
| v | 1.91 | 2.41 | |
| α | - | 0.25 | 45° Chamfer |
| β | 0.99 | 1.19 | 45° Chamfer |

FIGURE 3 - STANDARD TEST CONNECTOR INTERFACE (CONTINUED) - MALE CONTACT

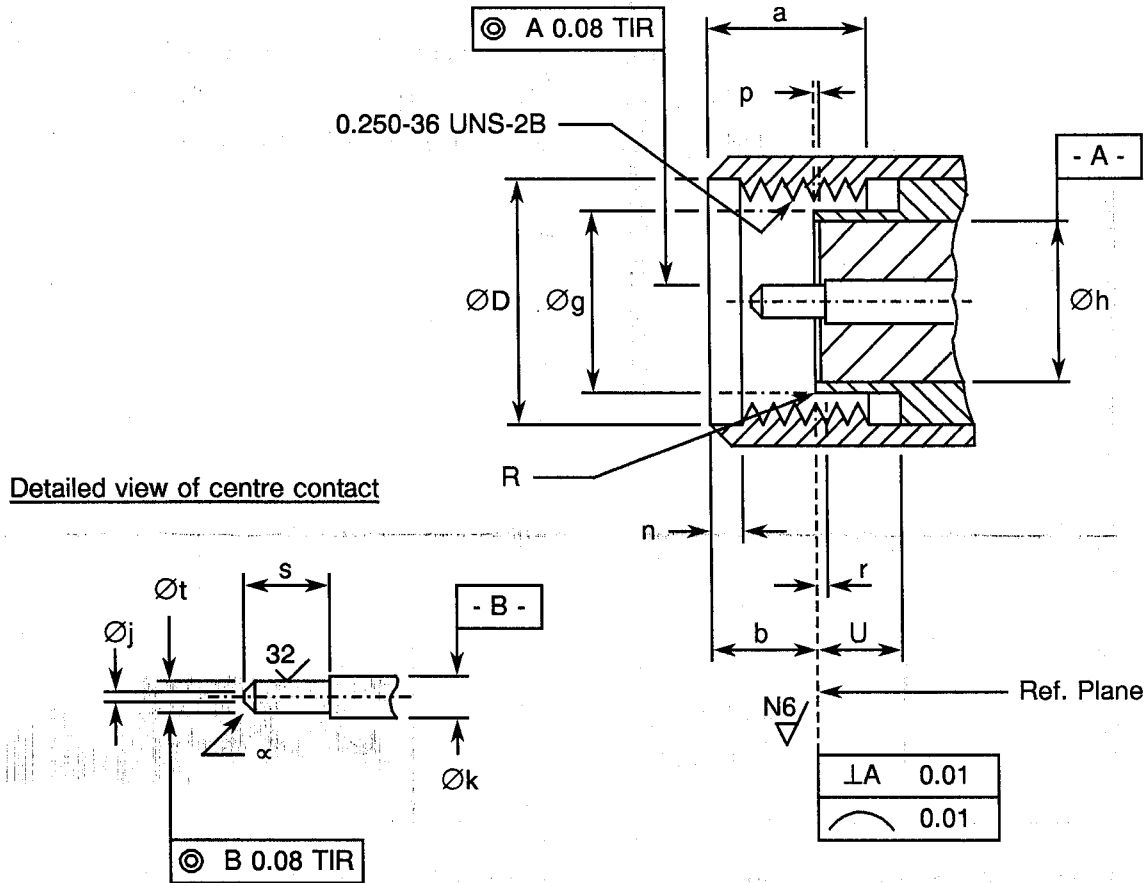

| SYMBOL | MILLIMETRES | | NOTES |
|--------|-------------|------|-----------------|
| | MIN. | MAX. | |
| a | 3.71 | 4.32 | Flat |
| b | 2.59 | 3.35 | |
| ØD | 6.48 | 6.73 | |
| Øg | 4.34 | 4.59 | |
| Øh | 4.10 | 4.13 | |
| Øj | - | 0.38 | |
| Øk | 1.27 | 1.29 | |
| n | 0.64 | 1.14 | |
| p | 0.00 | 0.05 | |
| r | 0.00 | 0.08 | |
| R | - | 0.08 | |
| s | 2.03 | 2.29 | |
| Øt | 0.90 | 0.93 | |
| U | 2.03 | - | |
| α | - | - | 45 ± 3° Chamfer |



2. APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESCC Generic Specification No. 3402 for RF Coaxial Connectors.
- (b) MIL-G-45204, Gold Plating, Electrodeposited.

3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. 21300 shall apply.

4. REQUIREMENTS

4.1 GENERAL

The complete requirements for procurement of the connectors specified herein are stated in this specification and ESCC Generic Specification No. 3402. Deviations from the Generic Specification applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION

4.2.1 Deviations from Special In-process Controls

None.

4.2.2 Deviations from Final Production Tests (Chart II)

None.

4.2.3 Deviations from Burn-in Tests (Chart III)

Not applicable.

4.2.4 Deviations from Qualification Tests (Chart IV)

- (a) Para. 9.14, Cable Retention Force: Not applicable.
- (b) Para. 9.15, Cabling and Crimping Capability: Not applicable.
- (c) Para. 9.22, Soldering Proof: Not applicable.

4.2.5 Deviations from Lot Acceptance Tests (Chart V)

- (a) Para. 9.14, Cable Retention Force: Not applicable.
- (b) Para. 9.15, Cabling and Crimping Capability: Not applicable.



4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the connectors specified herein shall be verified in accordance with the requirements set out in Para. 9.25 of ESCC Generic Specification No. 3402 and shall conform to those shown in Figures 2(a) and 2(b) of this specification.

4.3.2 Weight

The maximum weight of the connectors specified herein shall be as specified in Figure 2(b).

4.3.3 Coupling Proof Torque

The requirements for testing of the coupling proof torque are specified in Section 9 of ESCC Generic Specification No. 3402. The applied torque shall be 170N.cm.

4.3.4 Cable Retention Force

Not applicable.

4.3.5 Mating and Unmating Forces

The applicable measurement requirements are specified in Section 9 of ESCC Generic Specification No. 3402. The maximum torque during mating and unmating shall not exceed 24N.cm.

Whenever a test is performed on mated pairs of connectors, the pairs shall be torqued at 80-120N.cm.

4.3.6 Endurance

The applicable test requirements are specified in Section 9 of ESCC Generic Specification No. 3402. The test conditions shall be as follows:-

(a) Number of cycles : 500 for qualification; 100 for lot acceptance.

(b) Rate : 12 cycles maximum/minute.

4.3.7 Residual Magnetism

The applicable measurement requirements are specified in Section 9 of ESCC Generic Specification No. 3402.

4.3.7.1 Beryllium copper, copper underplate, gold-plated connectors. The maximum allowable value shall not exceed 20 gammas.

4.3.7.2 Beryllium copper, nickel underplate, gold-plated connectors. There are no requirements in respect of residual magnetism. This version is made such that the residual magnetism does not exceed 2000 gammas.

4.3.7.3 Residual magnetism is not applicable to stainless steel versions.

4.3.8 Contact Engagement and Separation Forces

The requirements for these measurements are specified in Section 9 of ESCC Generic Specification No. 3402 and apply to female contacts only.

(a) Oversize Pin

Steel test pin diameter : 0.9525/0.955 mm.
 Insertion depth : 0.76/1.14 mm.
 Number of insertions : 3.


(b) Engagement Force Test (Maximum Diameter Test Pin)

Steel test pin diameter : 0.940/0.942 mm.
 Engagement depth : 1.27/1.91 mm.
 Engagement force : 1360g max.

(c) Separation Force Test (Minimum Diameter Test Pin)

Steel test pin diameter : 0.902/0.904 mm.
 Separation depth : 1.27/1.91 mm.
 Separation force : 28.4g min.

FIGURE 4 - TEST PIN CONFIGURATION

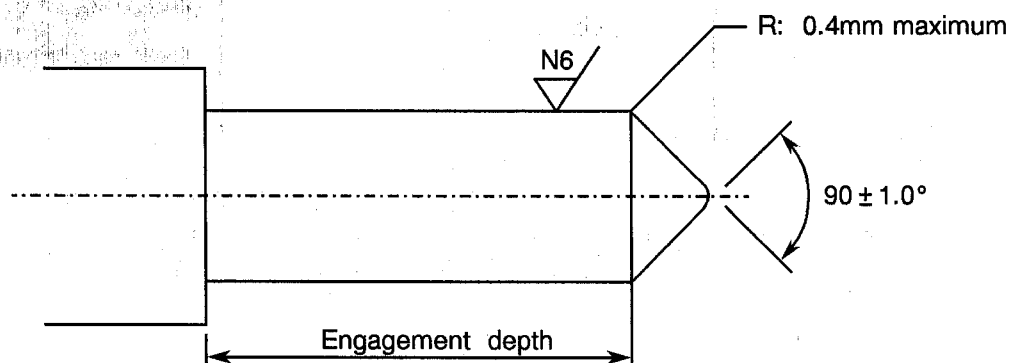

4.3.9 Contact Retention

The requirements for this test are specified in Section 9 of ESCC Generic Specification No. 3402. The test conditions are given in Figure 2(b). After testing, the connector interface dimensions shall be within the limits of Figure 2(a).

4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the connectors specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.



4.4.1 Beryllium Copper Version Gold Plated

(a) Shell, Coupling Nut, Centre Contact

Material : Beryllium copper (or brass for male contact only).

(i) Plating for standard version

Underplate : Nickel, 2.0 μ m minimum.

Plating : Gold, 1.27 μ m minimum, Type 2 Grade C of MIL-G-45204.

(ii) Plating for amagnetic version

Underplate : Copper, 2.5 μ m minimum.

Plating : Gold, 2.5 μ m minimum, Type 2 Grade C of MIL-G-45204.

(b) Inserts

Material : PTFE.

(c) Gaskets

Material : Silicone rubber.

(d) Accessories (ferrule, crimping or solder sleeves and nut)

Material : Brass or copper.

(i) Plating for standard version

Underplate : Nickel, 2.0 μ m minimum.

Plating : Gold, 0.5 μ m minimum, Type 2 Grade C of MIL-G-45204.

(ii) Plating for amagnetic version

Underplate : Copper, 2.5 μ m minimum.

Plating : Gold, 2.5 μ m minimum, Type 2 Grade C of MIL-G-45204.

4.4.2 Stainless Steel Version Electro-passivated

(a) Shell, Coupling Nut

Material : Stainless steel, electro-passivated.

For solder-type connectors: Rear part of shell shall be protected with:

Underplate : Nickel, 2.0 μ m minimum.

Plating : Gold, 1.27 μ m minimum, Type 2 Grade C of MIL-G-45204.

(b) Centre Contact

Material : Beryllium copper (or brass for male contact only).

Underplate : Nickel, 2.0 μ m minimum.

Plating : Gold, 1.27 μ m minimum, Type 2 Grade C of MIL-G-45204.

(c) Inserts

Material : PTFE.

(d) Gaskets

Material : Silicone.



(e) Accessories

- Crimping sleeve
 - Material : Brass or copper.
 - Plating : Nickel, 2.0µm minimum.
- Solder sleeve
 - Material : Brass or copper.
 - Underplate : Nickel, 2.0µm minimum.
 - Plating : Gold, 0.5µm minimum, Type 2 Grade C of MIL-G-45204.
- Nut
 - Material : Stainless steel, electro-passivated.
- Washers
 - Material : Beryllium copper.
 - Plating : Nickel, 2.0µm minimum.

4.4.3 Stainless Steel Version Gold Plated

(a) Shell, Coupling Nut

- Material : Stainless steel.
- Underplate : Nickel, 2.0µm minimum.
- Plating : Gold, 1.27µm minimum, Type 2 Grade C of MIL-G-45204.

(b) Centre Contact

- Material : Beryllium copper (or brass for male contact only).
- Underplate : Nickel, 2.0µm minimum.
- Plating : Gold, 1.27µm minimum, Type 2 Grade C of MIL-G-45204.

(c) Inserts

- Material : PTFE.

(d) Gaskets

- Material : Silicone.

(e) Accessories

- Crimping or solder sleeve
 - Material : Brass or copper.
 - Underplate : Nickel, 2.0µm minimum.
 - Plating : Gold, 0.5µm minimum, Type 2 Grade C of MIL-G-45204.
- Nut
 - Material : Stainless steel.
 - Underplate : Nickel, 2.0µm minimum.
 - Plating : Gold, 0.5µm minimum, Type 2 Grade C of MIL-G-45204.
- Washers
 - Material : Beryllium copper.
 - Underplate : Nickel, 2.0µm minimum.
 - Plating : Gold, 0.5µm minimum, Type 2 Grade C of MIL-G-45204.

4.4.4 Iron Nickel Gold Plated Hermetic Type

(a) **Shell**

Material : Iron.
Underplate : Nickel, 2.0µm minimum.
Plating : Gold, 1.27µm minimum, Type 2 Grade C of MIL-G-45204.

(b) **Centre Contact**

Material : Steel.
Underplate : Nickel, 2.0µm minimum.
Plating : Gold, 1.27µm minimum, Type 2 Grade C of MIL-G-45204.

(c) **Inserts**

Material : Glass.

4.5 MARKING

4.5.1 General

The marking of all components delivered to this specification shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and the following paragraphs. Each component shall be marked in respect of:-

- (a) The ESCC Component Number.
- (b) Characteristics.
- (c) Traceability Information.

4.5.2 The ESCC Component Number

Each component shall bear the SCC Component Number which shall be constituted and marked as follows:-

340200301B

Detail Specification Number _____

Type Variant (see Table 1(a)) _____

Testing Level (B or C, as applicable) _____

4.5.3 Characteristics

Characteristics cover the type of plating/material and 2 different dimensional aspects:-

- (a) Variants of fixed configuration.
- (b) Variants where the rear end (length of contact A and length of insert B) may vary within a range limited by a specified maximum value.

4.5.3.1 Variants of Fixed Configuration

Each component shall be marked in respect of:-

- (a) Type of plating/material.
- (b) Number.

The information shall be constituted and marked as follows:

2 01

Type of plating/material (see Para. 4.5.3.3) _____


Number (shall always be 01) _____

4.5.3.2 Variants where Dimensions A and B of Figure 2(b) are Indicated by a Maximum Only

Each component shall be marked in respect of:-

- (a) Type of plating/material.
- (b) Length and tolerance of centre contact (dimension A) (see Note 4).
- (c) Length and tolerance of insert (dimension B) (see Note 4).

The information shall be constituted and marked as follows:

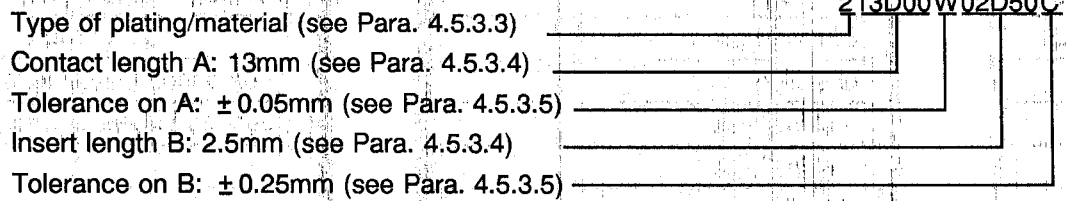

NOTES

1. Dimension A shall always be greater than B. Both values shall always be positive.
2. When dimension B (insert) is flush with the flange (B = 0), the insert length shall be marked '00D00' with the appropriate tolerance.
3. When applicable, Figure 2(b) makes reference to Para. 4.5.3.
4. The length values of the centre contact and insert shall be marked only on the primary package.

4.5.3.3 Type of Plating/Material

The type of plating/material shall be identified by means of the following codes:-

| CODE | TYPE OF PLATING/MATERIAL | PARA. |
|------|---|-------|
| 1 | Beryllium copper gold plated, copper underplate (amagnetic version) | 4.4.1 |
| 2 | Beryllium copper gold plated, nickel underplate (standard version) | 4.4.1 |
| 3 | Stainless steel electro-passivated | 4.4.2 |
| 4 | Stainless steel gold plated | 4.4.3 |

For hermetic types (see Para. 4.4.4), only plating code 2 is available.

4.5.3.4 Length Values

Length values shall be expressed by means of the following codes. The unit quantity for marking shall be millimetres.

| LENGTH VALUE | CODE |
|--------------|-------|
| XX.XX | XXDXX |



4.5.3.5 Tolerance

The tolerances on length values shall be indicated by the letter codes specified hereafter:-

| TOLERANCE (mm) | CODE LETTER |
|----------------|-------------|
| ± 0.05 | W |
| ± 0.10 | B |
| ± 0.25 | C |

4.5.4 Traceability Information

Each component shall be marked in respect of traceability information in accordance with the requirements of ESCC Basic Specification No. 21700.

4.5.5 Marking of Small Components

When it is considered that the component is too small to accommodate the marking as specified above, as much as space permits shall be marked. The order of precedence shall be as specified in Para. 4.5.1. The marking information in full shall accompany each component in its primary package.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured in respect of electrical characteristics are scheduled in Table 2. Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.6.2 Electrical Measurements at High and Low Temperatures (Table 3)

Not applicable.

4.6.3 Circuits for Electrical Measurements

Not applicable.

4.7 BURN-IN TESTS (TABLES 4 AND 5)

Not applicable.

TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE

| No. | CHARACTERISTICS | SYMBOL | SPEC. AND/OR TEST METHOD | TEST CONDITIONS | LIMITS | | UNIT |
|-----|-------------------------------|----------------|--------------------------|-----------------|--------|-----|------|
| | | | | | MIN | MAX | |
| 1 | Insulation Resistance | R _i | ESCC 3402, Para. 9.1 | 500 Vdc | 5000 | - | MΩ |
| 2 | Voltage Proof Leakage Current | I _L | ESCC 3402, Para. 9.2 | See Figure 2(b) | - | 2.0 | mA |

TABLES 3, 4 AND 5

Not applicable.

4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESCC GENERIC SPECIFICATION No. 3402)

4.8.1 Measurements and Inspections on Completion of Environmental Tests

The parameters to be measured on completion of environmental tests are scheduled in Table 6 of this specification. Unless otherwise stated, the measurements shall be performed at T_{amb} = +22 ± 3 °C.

4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests

Not applicable.

4.8.3 Measurements and Inspections on Completion of Endurance Tests

The parameters to be measured on completion of endurance tests are scheduled in Table 6 of this specification. Unless otherwise stated, the measurements shall be performed at T_{amb} = +22 ± 3 °C.

4.8.4 Conditions for Operating Life Tests (Part of Endurance Testing)

Not applicable.

4.8.5 Electrical Circuits for Operating Life Tests

Not applicable.

4.8.6 Conditions for High Temperature Storage Test (Part of Endurance Testing)

The requirements for the high temperature storage test are specified in Section 9 of ESCC Generic Specification No. 3402. The conditions for high temperature storage shall be the maximum operating temperature as specified in Figure 2(b).



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTS

| NO. | ESCC GENERIC SPEC. NO. 3402 | | MEASUREMENTS AND INSPECTIONS | | SYMBOL | LIMITS | | UNIT |
|-----|---------------------------------------|--|--|---|---|-------------|--|-------------------------|
| | ENVIRONMENTAL AND ENDURANCE TESTS (1) | TEST METHOD AND CONDITIONS | IDENTIFICATION | CONDITIONS | | MIN. | MAX. | |
| 01 | Coupling Proof Torque | Para. 9.4 | Final Measurements Interface Dimensions Visual Examination | Para. 9.4 of ESCC 3402 | - - | Figure 2(a) | | - - |
| 02 | Mating and Unmating Forces | Para. 9.5 | During Test Torque | Para. 4.3.5 of this spec. | - | - | 24 | N.cm |
| 03 | Seal Test | Para. 9.7 | Hermeticity Leakage | If applicable As applicable | - - | - | 1.10 ⁻⁸ No Bubbles | cm ³ /s - |
| 04 | External Visual Inspection | Para. 9.8 | External Visual Inspection | Para. 9.8 of ESCC 3402 | - | - | - | - |
| 05 | Contact Resistance | Para. 9.9 6V 10mA | During Test Contact Resistance | Centre Contact Shell Hermetic Centre Contact | - - - | - - | 3.0 2.0 10 | mΩ mΩ mΩ |
| 06 | Vibration | Para. 9.10 Full Engagement | During Test Electrical Measurements Final Measurements Visual Examination Contact Resistance | Last cycle in each direction No open or short circuits No evidence of damage Centre Contact (6V 10mA) | - - - - | - - - | - - 3.0 | - - mΩ |
| 07 | Shock or Bump | Para. 9.11 Full Engagement | Final Measurements Visual Examination Contact Resistance | No evidence of damage Centre Contact (6V 10mA) | - - | - - | - 3.0 | - mΩ |
| 08 | Rapid Change of Temperature | Para. 9.12 | Final Measurements Contact Resistance Voltage Proof Leakage Current Visual Examination | After a recovery period of 24 ± 2 hrs Centre Contact (6V 10mA) Table 2 Item 2 | - - I _L - | - - | 3.0 Table 2 Item 2 | mΩ - |
| 09 | Climatic Sequence | Para. 9.13 | During Test Voltage Proof Final Measurements External Visual Inspection Insulation Resistance Voltage Proof Leakage Current | At Low Air Pressure 0.1X value of Figure 2(b) After final Damp Heat cycle (within 1 to 24 hrs recovery) Para. 9.8 of ESCC 3402 Table 2 Item 1 Table 2 Item 2 | VP - R _i I _L | - - | No flashover or breakdown 200 Table 2 Item 2 | - - MΩ |
| 10 | Cable Retention Force | Para. 9.14 and Para. 4.3.4 of this spec. | Not applicable | | | | | |
| 11 | Cabling and Crimping Capability | Para. 9.15 | Not applicable | | | | | |
| 12 | VSWR or Reflection Coefficient | Para. 9.16 | VSWR | Para. 9.16 of ESCC 3402 | - | Figure 2(b) | | - |
| 13 | Corona Level | Para. 9.17 | Corona | Para. 9.17 of ESCC 3402 | - | Figure 2(b) | | - |

NOTES

1. The tests in this Table refer to either Chart IV or V and shall be used as applicable.



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTS (CONT'D)


| NO. | ESCC GENERIC SPEC. NO. 3402 | | MEASUREMENTS AND INSPECTIONS | | SYMBOL | LIMITS | | UNIT |
|-----|---|--|---|---|-----------------------------------|---------------------------------|--|---|
| | ENVIRONMENTAL AND ENDURANCE TESTS (1) | TEST METHOD AND CONDITIONS | IDENTIFICATION | CONDITIONS | | MIN. | MAX. | |
| 14 | Endurance | Para. 9.18 and Para. 4.3.6 of this spec. | Final Measurements Mating/Unmating Forces Contact Resistance Visual Examination | Para. 4.3.5 of this spec. Centre Contact (6V 10mA) Shell (6V 10mA) Hermetic Centre Contact (6V 10mA) Para. 9.18 of ESCC 3402 | - - - - | - - - - | 24 4.0 3.0 12 | N.cm mΩ mΩ mΩ |
| 15 | RF Insertion Loss | Para. 9.19 | Insertion Loss | Para. 9.19 of ESCC 3402 | - | - | Figure 2(b) | - |
| 16 | Corrosion | Para. 9.20 | Visual Examination | Para. 9.20 of ESCC 3402 No exposure of base metal | - | - | - | - |
| 17 | Residual Magnetism | Para. 9.21 | Magnetism | - | - | - | Para. 4.3.7 | - |
| 18 | Soldering Proof | Para. 9.22 | Not applicable | - | - | - | - | - |
| 19 | RF Leakage | Para. 9.23 | Leakage | - | - | - | Figure 2(b) | - |
| 20 | High Temperature Storage | Para. 9.24 and Para. 4.8.6 of this spec. | Final Measurements Mating/Unmating Forces Insulation Resistance Voltage Proof Leakage Current Contact Retention Visual Examination Contact Resistance External Visual Inspection | Para. 4.3.5 of this spec. Table 2 Item 1 Table 2 Item 2 Para. 4.3.9 of this spec. Centre Contact (6V 10mA) Shell (6V 10mA) Hermetic Centre Contact (6V 10mA) Para. 9.8 of ESCC 3402 | - Ri IL - - - - | - - - - - - - | 24 - Table 2 Item 2 Para. 4.3.9 8.0 7.5 15 | N.cm MΩ - - - mΩ mΩ mΩ |
| 21 | Permanence of Marking | Para. 9.27 | Marking Permanence | Para. 9.27 of ESCC 3402 | - | - | - | - |
| 22 | Plating Thickness (Hermetic Types Only) | Para. 9.29 | Plating Thickness | Para. 5.3.4 of ESCC 3402 | - | - | - | - |

NOTES

1. The tests in this table refer to either Chart IV or V and shall be used as applicable.

FIGURE 2(b) - VARIANTS

VARIANT 01 - STRAIGHT ADAPTOR, MALE - MALE

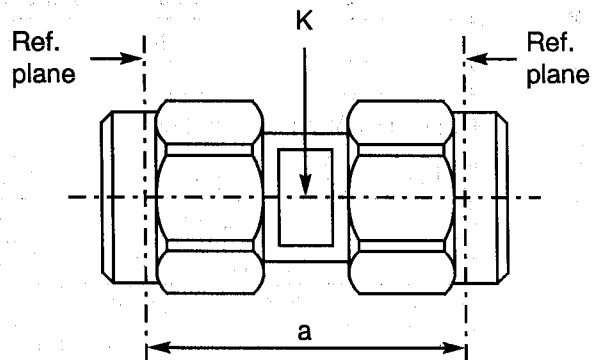

| SYMBOL | MILLIMETRES | | NOTES |
|--------|-------------|-------|---------|
| | MIN. | MAX. | |
| a | 14.90 | 15.10 | |
| K | - | 5.50 | 2 flats |


| ELECTRICAL CHARACTERISTICS | VALUES | UNITS |
|--|--------------------------|-------|
| Frequency range | 0 to 18 | GHz |
| Maximum voltage standing wave ratio (VSWR) | $1.10 + 0.008 f$ (GHz) | |
| Maximum reflection coefficient | $0.047 + 0.0034 f$ (GHz) | |
| Maximum insertion loss | $0.06 \sqrt{f}$ (GHz) | dB |
| RF leakage | $- [95 - f]$ (GHz) | dB |
| Voltage proof | 1000 | Vrms |
| Corona level | Not applicable | Vrms |

| MECHANICAL CHARACTERISTICS | VALUES | UNITS |
|---|----------------|-------|
| Mini centre contact retention force (axial) | 27 | N |
| Mini centre contact retention torque | Not applicable | N.cm |
| Mini cable retention force | Not applicable | N |
| Mini cable retention torque value | Not applicable | N.cm |
| Maximum weight | 4.9 | g |

| OTHER CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Rapid change of temperature - peak value | + 115 | °C |
| Operating temperature range | - 65 to + 105 | °C |
| Maxi leakage (panel sealed connectors) | Not applicable | |
| Maxi leakage (hermetic sealed connector) | Not applicable | |
| Solderability | Not applicable | |
| Soldering proof | Not applicable | |
| Cables used | Not applicable | |

FIGURE 2(b) - VARIANTS (CONTINUED)

VARIANT 02 - STRAIGHT ADAPTOR, MALE - FEMALE

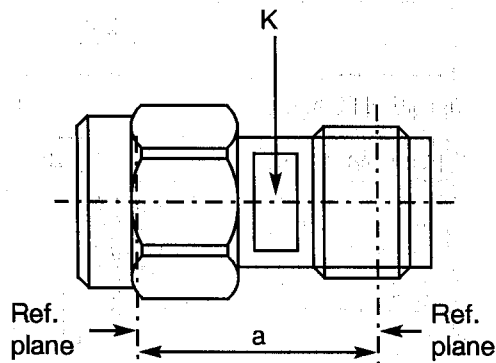

| SYMBOL | MILLIMETRES | | NOTES |
|--------|-------------|-------|---------|
| | MIN. | MAX. | |
| a | 12.40 | 12.65 | |
| K | 5.40 | 5.50 | 2 flats |


| ELECTRICAL CHARACTERISTICS | VALUES | UNITS |
|--|--------------------------|-------|
| Frequency range | 0 to 18 | GHz |
| Maximum voltage standing wave ratio (VSWR) | $1.10 + 0.008 f$ (GHz) | |
| Maximum reflection coefficient | $0.047 + 0.0034 f$ (GHz) | |
| Maximum insertion loss | $0.06 \sqrt{f}$ (GHz) | dB |
| RF leakage | $- [95 - f]$ (GHz) | dB |
| Voltage proof | 1000 | Vrms |
| Corona level | Not applicable | Vrms |

| MECHANICAL CHARACTERISTICS | VALUES | UNITS |
|---|----------------|-------|
| Mini centre contact retention force (axial) | 27 | N |
| Mini centre contact retention torque | Not applicable | N.cm |
| Mini cable retention force | Not applicable | N |
| Mini cable retention torque value | Not applicable | N.cm |
| Maximum weight | 3.5 | g |

| OTHER CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Rapid change of temperature - peak value | + 115 | °C |
| Operating temperature range | - 65 to + 105 | °C |
| Maxi leakage (panel sealed connectors) | Not applicable | |
| Maxi leakage (hermetic sealed connector) | Not applicable | |
| Solderability | Not applicable | |
| Soldering proof | Not applicable | |
| Cables used | Not applicable | |

FIGURE 2(b) - VARIANTS (CONTINUED)

VARIANT 03 - STRAIGHT ADAPTOR, FEMALE - FEMALE

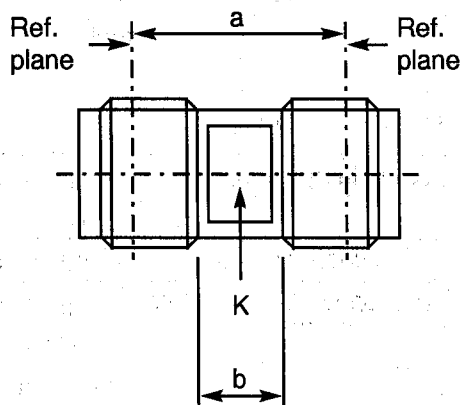

| SYMBOL | MILLIMETRES | | NOTES |
|--------|-------------|-------|---------|
| | MIN. | MAX. | |
| a | 10.10 | 10.30 | |
| b | 4.40 | - | |
| K | 5.40 | 5.50 | 2 flats |


| ELECTRICAL CHARACTERISTICS | VALUES | UNITS |
|--|--------------------------|-------|
| Frequency range | 0 to 18 | GHz |
| Maximum voltage standing wave ratio (VSWR) | $1.10 + 0.008 f$ (GHz) | |
| Maximum reflection coefficient | $0.047 + 0.0034 f$ (GHz) | |
| Maximum insertion loss | $0.06 \sqrt{f}$ (GHz) | dB |
| RF leakage | $- [95 - f]$ (GHz) | dB |
| Voltage proof | 1000 | Vrms |
| Corona level | Not applicable | Vrms |

| MECHANICAL CHARACTERISTICS | VALUES | UNITS |
|---|----------------|-------|
| Mini centre contact retention force (axial) | 27 | N |
| Mini centre contact retention torque | Not applicable | N.cm |
| Mini cable retention force | Not applicable | N |
| Mini cable retention torque value | Not applicable | N.cm |
| Maximum weight | 1.9 | g |

| OTHER CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Rapid change of temperature - peak value | +115 | °C |
| Operating temperature range | -65 to +105 | °C |
| Maxi leakage (panel sealed connectors) | Not applicable | |
| Maxi leakage (hermetic sealed connector) | Not applicable | |
| Solderability | Not applicable | |
| Soldering proof | Not applicable | |
| Cables used | Not applicable | |

FIGURE 2(b) - VARIANTS (CONTINUED)

VARIANT 04 - STRAIGHT BULKHEAD ADAPTOR, FEMALE - FEMALE

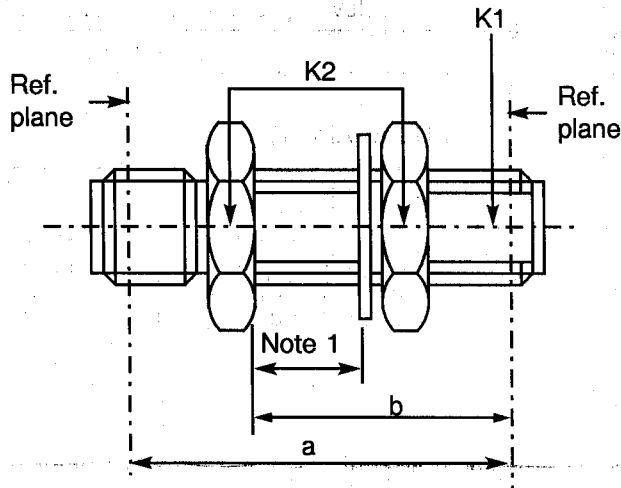

| SYMBOL | MILLIMETRES | | NOTES |
|--------|-------------|-------|--------|
| | MIN. | MAX. | |
| a | - | 18.40 | |
| b | 12.50 | 12.85 | |
| K1 | - | 6.00 | 1 flat |
| K2 | - | 8.00 | Hex. |

NOTES

1. Maximum panel thickness: 6.0mm.


| ELECTRICAL CHARACTERISTICS | VALUES | UNITS |
|--|--------------------------|-------|
| Frequency range | 0 to 18 | GHz |
| Maximum voltage standing wave ratio (VSWR) | $1.10 + 0.008 f$ (GHz) | |
| Maximum reflection coefficient | $0.047 + 0.0034 f$ (GHz) | |
| Maximum insertion loss | $0.06 \sqrt{f}$ (GHz) | dB |
| RF leakage | $- [95 - f$ (GHz)] | dB |
| Voltage proof | 1000 | Vrms |
| Corona level | Not applicable | Vrms |

| MECHANICAL CHARACTERISTICS | VALUES | UNITS |
|---|----------------|-------|
| Mini centre contact retention force (axial) | 27 | N |
| Mini centre contact retention torque | Not applicable | N.cm |
| Mini cable retention force | Not applicable | N |
| Mini cable retention torque value | Not applicable | N.cm |
| Maximum weight | 3.9 | g |

| OTHER CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Rapid change of temperature - peak value | + 115 | °C |
| Operating temperature range | - 65 to + 105 | °C |
| Maxi leakage (panel sealed connectors) | Not applicable | |
| Maxi leakage (hermetic sealed connector) | Not applicable | |
| Solderability | Not applicable | |
| Soldering proof | Not applicable | |
| Cables used | Not applicable | |

FIGURE 2(b) - VARIANTS (CONTINUED)

VARIANT 05 - ELBOW ADAPTOR, MALE - FEMALE

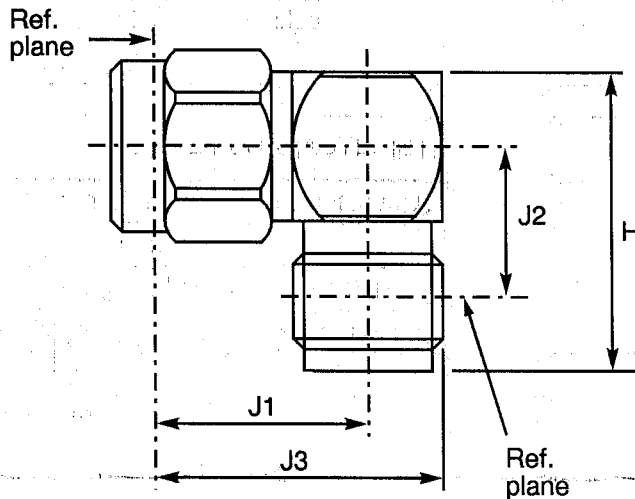

| SYMBOL | MILLIMETRES | |
|--------|-------------|-------|
| | MIN. | MAX. |
| H | 14.20 | 15.90 |
| J1 | 9.10 | 9.50 |
| J2 | 9.10 | 9.50 |
| J3 | 12.20 | 12.95 |

| ELECTRICAL CHARACTERISTICS | VALUES | UNITS |
|--|-------------------------|-------|
| Frequency range | 0 to 12.4 | GHz |
| Maximum voltage standing wave ratio (VSWR) | $1.05 + 0.01 f$ (GHz) | |
| Maximum reflection coefficient | $0.024 + 0.004 f$ (GHz) | |
| Maximum insertion loss | $0.05 \sqrt{f}$ (GHz) | dB |
| RF leakage (1) | $- [95 - f]$ (GHz) | dB |
| Voltage proof | 1000 | Vrms |
| Corona level | Not applicable | Vrms |

NOTES


1. For information only.

| MECHANICAL CHARACTERISTICS | VALUES | UNITS |
|---|----------------|-------|
| Mini centre contact retention force (axial) | 27 | N |
| Mini centre contact retention torque | 2.8 | N.cm |
| Mini cable retention force | Not applicable | N |
| Mini cable retention torque value | Not applicable | N.cm |
| Maximum weight | 4.9 | g |

| OTHER CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Rapid change of temperature - peak value | + 200 | °C |
| Operating temperature range | -65 to +165 | °C |
| Maxi leakage (panel sealed connectors) | Not applicable | |
| Maxi leakage (hermetic sealed connector) | Not applicable | |
| Solderability | Not applicable | |
| Soldering proof | Not applicable | |
| Cables used | Not applicable | |

FIGURE 2(b) - VARIANTS (CONTINUED)

VARIANT 06 - T-ADAPTOR, FEMALE - FEMALE/MALE

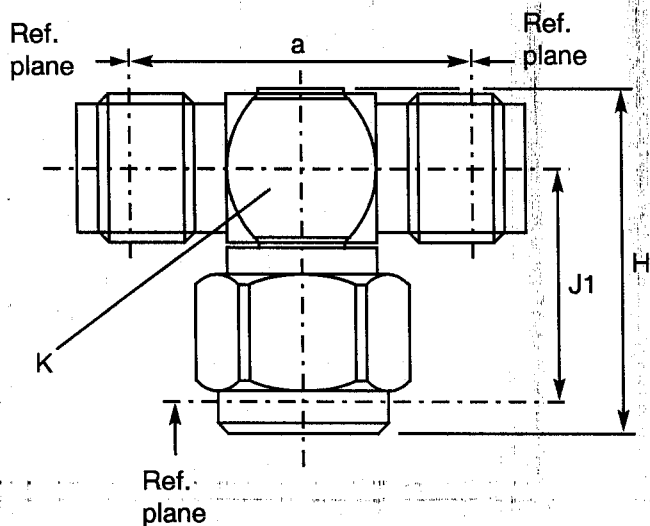

| SYMBOL | MILLIMETRES | | NOTES |
|--------|-------------|-------|-------------|
| | MIN. | MAX. | |
| a | 14.09 | 14.20 | Across flat |
| H | 15.70 | 16.75 | |
| J1 | 9.75 | 10.00 | |
| K | - | 7.00 | |


| ELECTRICAL CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Frequency range | 0 to 12.4 | GHz |
| Maximum voltage standing wave ratio (VSWR) | Not applicable | |
| Maximum reflection coefficient | Not applicable | |
| Maximum insertion loss | Not applicable | dB |
| RF leakage | Not applicable | dB |
| Voltage proof | 1000 | Vrms |
| Corona level | Not applicable | Vrms |

| MECHANICAL CHARACTERISTICS | VALUES | UNITS |
|---|----------------|-------|
| Mini centre contact retention force (axial) | 27 | N |
| Mini centre contact retention torque | 2.8 | N.cm |
| Mini cable retention force | Not applicable | N |
| Mini cable retention torque value | Not applicable | N.cm |
| Maximum weight | 5.9 | g |

| OTHER CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Rapid change of temperature - peak value | + 200 | °C |
| Operating temperature range | - 65 to + 165 | °C |
| Maxi leakage (panel sealed connectors) | Not applicable | |
| Maxi leakage (hermetic sealed connector) | Not applicable | |
| Solderability | Not applicable | |
| Soldering proof | Not applicable | |
| Cables used | Not applicable | |

FIGURE 2(b) - VARIANTS (CONTINUED)

VARIANT 07 - HERMETIC ADAPTOR, FEMALE - FEMALE

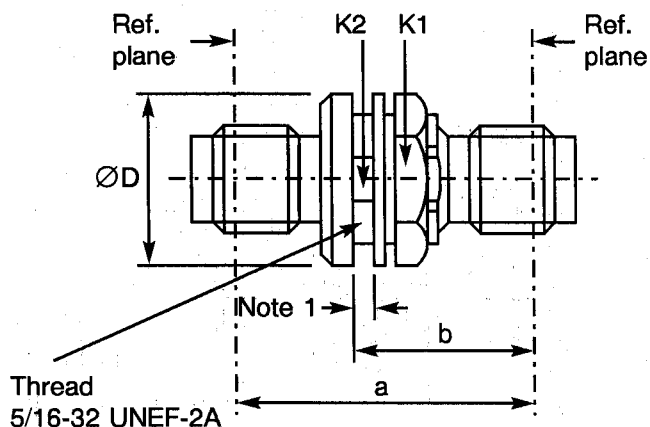

| SYMBOL | MILLIMETRES | | NOTES | |
|--------|-------------|-------|-------|--------|
| | MIN. | MAX. | | |
| a | 18.50 | 18.90 | UNITS | |
| b | 11.70 | 13.20 | | |
| ØD | 12.90 | 14.20 | | |
| K1 | - | 10.00 | | Hex. |
| K2 | - | 7.50 | | 1 flat |

NOTES

1. Maximum panel thickness: 4.30mm.


| ELECTRICAL CHARACTERISTICS | VALUES | UNITS |
|--|--------------------------|-------|
| Frequency range | 0 to 12.4 | GHz |
| Maximum voltage standing wave ratio (VSWR) | $1.10 + 0.015 f$ (GHz) | |
| Maximum reflection coefficient | $0.047 + 0.0063 f$ (GHz) | |
| Maximum insertion loss | $0.15 \sqrt{f}$ (GHz) | dB |
| RF leakage | $- [95 - f]$ (GHz) | dB |
| Voltage proof | 1000 | Vrms |
| Corona level | Not applicable | Vrms |

| MECHANICAL CHARACTERISTICS | VALUES | UNITS |
|---|----------------|-------|
| Mini centre contact retention force (axial) | Not applicable | N |
| Mini centre contact retention torque | Not applicable | N.cm |
| Mini cable retention force | Not applicable | N |
| Mini cable retention torque value | Not applicable | N.cm |
| Maximum weight | 6.5 | g |

| OTHER CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Rapid change of temperature - peak value | + 200 | °C |
| Operating temperature range | - 40 to + 165 | °C |
| Maxi leakage (panel sealed connectors) | Not applicable | |
| Maxi leakage (hermetic sealed connector) | Applicable | |
| Solderability | Applicable | |
| Soldering proof | Not applicable | |
| Cables used | Not applicable | |

FIGURE 2(b) - VARIANTS (CONTINUED)

VARIANT 08 - T-ADAPTOR, FEMALE - FEMALE/FEMALE

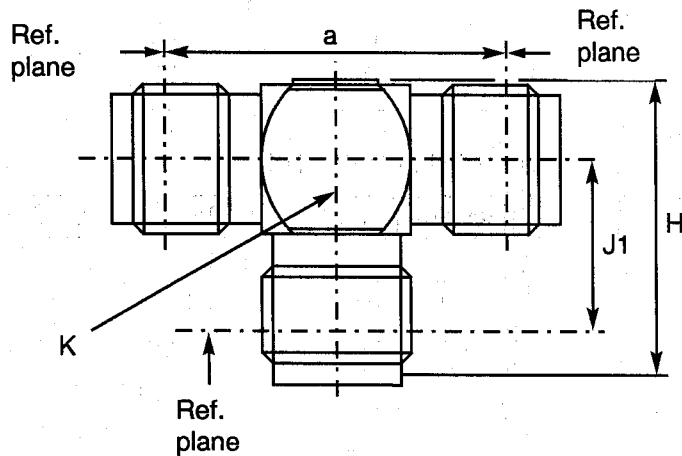

| SYMBOL | MILLIMETRES | | NOTES |
|--------|-------------|-------|---------|
| | MIN. | MAX. | |
| a | 14.00 | 14.20 | |
| H | 13.25 | 13.65 | |
| J1 | 7.90 | 8.20 | |
| K | - | 7.00 | 2 flats |


| ELECTRICAL CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Frequency range | 0 to 12.4 | GHz |
| Maximum voltage standing wave ratio (VSWR) | Not applicable | |
| Maximum reflection coefficient | Not applicable | |
| Maximum insertion loss | Not applicable | dB |
| RF leakage | Not applicable | dB |
| Voltage proof | 1000 | Vrms |
| Corona level | Not applicable | Vrms |

| MECHANICAL CHARACTERISTICS | VALUES | UNITS |
|---|----------------|-------|
| Mini centre contact retention force (axial) | 27 | N |
| Mini centre contact retention torque | Not applicable | N.cm |
| Mini cable retention force | Not applicable | N |
| Mini cable retention torque value | Not applicable | N.cm |
| Maximum weight | 5.9 | g |

| OTHER CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Rapid change of temperature - peak value | +200 | °C |
| Operating temperature range | -65 to +165 | °C |
| Maxi leakage (panel sealed connectors) | Not applicable | |
| Maxi leakage (hermetic sealed connector) | Not applicable | |
| Solderability | Not applicable | |
| Soldering proof | Not applicable | |
| Cables used | Not applicable | |

FIGURE 2(b) - VARIANTS (CONTINUED)

VARIANT 09 - STRAIGHT FLANGE ADAPTOR, MALE - FEMALE

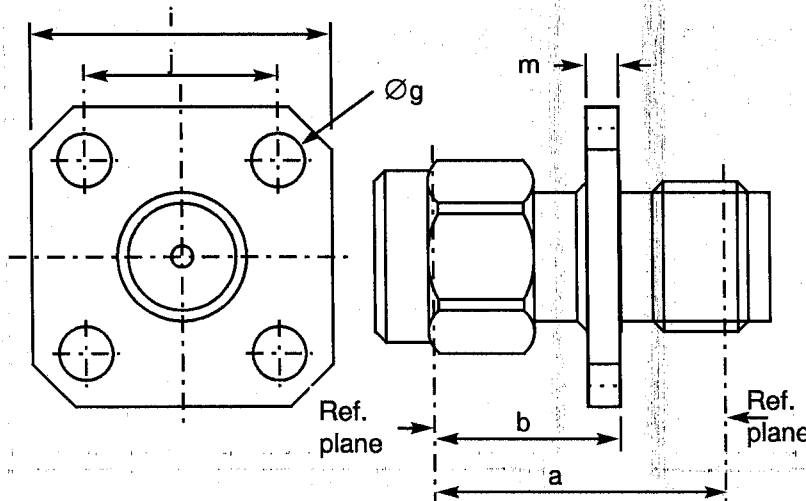

| SYMBOL | MILLIMETRES | | NOTES |
|--------|-------------|-------|---------|
| | MIN. | MAX. | |
| a | 17.05 | 17.10 | 4 holes |
| b | 9.45 | 9.55 | |
| Øg | 2.55 | 2.70 | |
| i | 12.60 | 12.80 | |
| j | 8.59 | 8.69 | |
| m | 1.40 | 1.80 | |

| ELECTRICAL CHARACTERISTICS | VALUES | UNITS |
|--|--------------------------|-------|
| Frequency range | 0 to 18 | GHz |
| Maximum voltage standing wave ratio (VSWR) | $1.10 + 0.008 f$ (GHz) | |
| Maximum reflection coefficient | $0.047 + 0.0034 f$ (GHz) | |
| Maximum insertion loss | $0.06 \sqrt{f}$ (GHz) | dB |
| RF leakage | $- [95 - f]$ (GHz) | dB |
| Voltage proof | 1000 | Vrms |
| Corona level | Not applicable | Vrms |

NOTES


1. For information only.

| MECHANICAL CHARACTERISTICS | VALUES | UNITS |
|---|----------------|-------|
| Mini centre contact retention force (axial) | 27 | N |
| Mini centre contact retention torque | Not applicable | N.cm |
| Mini cable retention force | Not applicable | N |
| Mini cable retention torque value | Not applicable | N.cm |
| Maximum weight | 3.3 | g |

| OTHER CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Rapid change of temperature - peak value | + 115 | °C |
| Operating temperature range | - 65 to + 105 | °C |
| Maxi leakage (panel sealed connectors) | Not applicable | |
| Maxi leakage (hermetic sealed connector) | Not applicable | |
| Solderability | Not applicable | |
| Soldering proof | Not applicable | |
| Cables used | Not applicable | |

FIGURE 2(b) - VARIANTS (CONTINUED)

VARIANT 10 - STRAIGHT FLANGE ADAPTOR, FEMALE - FEMALE

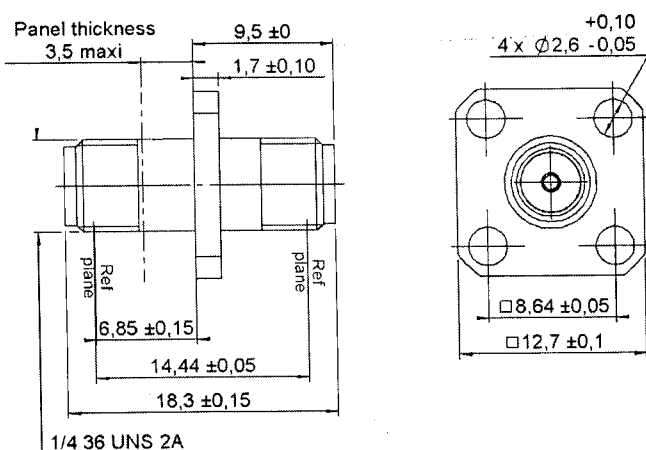

All dimensions are in mm.


| ELECTRICAL CHARACTERISTICS | VALUES | UNITS |
|--|--------------------------|-------|
| Frequency range | 0 to 12.4 | GHz |
| Maximum voltage standing wave ratio (VSWR) | $1.10 + 0.008 f$ (GHz) | |
| Maximum reflection coefficient | $0.047 + 0.0034 f$ (GHz) | |
| Maximum insertion loss | $0.06 \sqrt{f}$ (GHz) | dB |
| RF leakage | $- [95 - f]$ (GHz) | dB |
| Voltage proof | 1000 | Vrms |
| Corona level | Not applicable | Vrms |

| MECHANICAL CHARACTERISTICS | VALUES | UNITS |
|---|----------------|-------|
| Mini centre contact retention force (axial) | 27 | N |
| Mini centre contact retention torque | Not applicable | N.cm |
| Mini cable retention force | Not applicable | N |
| Mini cable retention torque value | Not applicable | N.cm |
| Maximum weight | 4.2 | g |

| OTHER CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Rapid change of temperature - peak value | + 180 | °C |
| Operating temperature range | - 65 to + 165 | °C |
| Maxi leakage (panel sealed connectors) | Not applicable | |
| Maxi leakage (hermetic sealed connector) | Not applicable | |
| Solderability | Not applicable | |
| Soldering proof | Not applicable | |
| Cables used | Not applicable | |

FIGURE 2(b) - VARIANTS (CONTINUED)

VARIANT 11 - STRAIGHT ADAPTOR, MALE - MALE

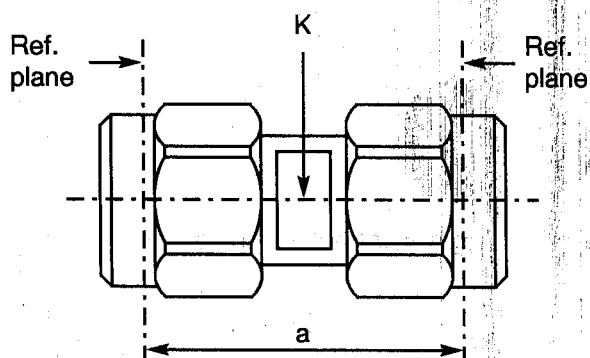

| SYMBOL | MILLIMETRES | | NOTES |
|--------|-------------|-------|---------|
| | MIN. | MAX. | |
| a | 14.90 | 15.10 | |
| K | - | 5.50 | 2 flats |


| ELECTRICAL CHARACTERISTICS | VALUES | UNITS |
|--|--------------------------|-------|
| Frequency range | 0 to 18 | GHz |
| Maximum voltage standing wave ratio (VSWR) | $1.10 + 0.008 f$ (GHz) | |
| Maximum reflection coefficient | $0.047 + 0.0034 f$ (GHz) | |
| Maximum insertion loss | $0.06\sqrt{f}$ (GHz) | dB |
| RF leakage | $- [95 - f]$ (GHz) | dB |
| Voltage proof | 1000 | Vrms |
| Corona level | Not applicable | Vrms |

| MECHANICAL CHARACTERISTICS | VALUES | UNITS |
|---|----------------|-------|
| Mini centre contact retention force (axial) | 27 | N |
| Mini centre contact retention torque | Not applicable | N.cm |
| Mini cable retention force | Not applicable | N |
| Mini cable retention torque value | Not applicable | N.cm |
| Maximum weight | 4.9 | g |

| OTHER CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Rapid change of temperature - peak value | +180 | °C |
| Operating temperature range | -65 to +165 | °C |
| Maxi leakage (panel sealed connectors) | Not applicable | |
| Maxi leakage (hermetic sealed connector) | Not applicable | |
| Solderability | Not applicable | |
| Soldering proof | Not applicable | |
| Cables used | Not applicable | |

FIGURE 2(b) - VARIANTS (CONTINUED)

VARIANT 12 - STRAIGHT ADAPTOR, MALE - FEMALE

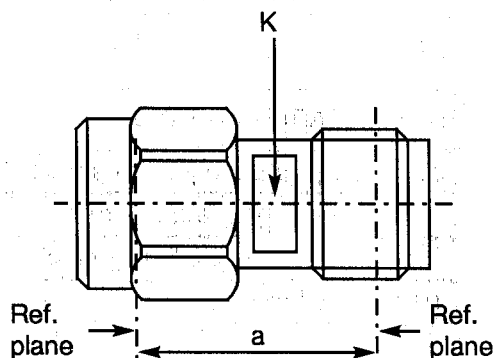

| SYMBOL | MILLIMETRES | | NOTES |
|--------|-------------|-------|---------|
| | MIN. | MAX. | |
| a | 12.40 | 12.65 | |
| K | 5.40 | 5.50 | 2 flats |


| ELECTRICAL CHARACTERISTICS | VALUES | UNITS |
|--|--------------------------|-------|
| Frequency range | 0 to 18 | GHz |
| Maximum voltage standing wave ratio (VSWR) | $1.10 + 0.008 f$ (GHz) | |
| Maximum reflection coefficient | $0.047 + 0.0034 f$ (GHz) | |
| Maximum insertion loss | $0.06 \sqrt{f}$ (GHz) | dB |
| RF leakage | $- [95 - f]$ (GHz) | dB |
| Voltage proof | 1000 | Vrms |
| Corona level | Not applicable | Vrms |

| MECHANICAL CHARACTERISTICS | VALUES | UNITS |
|---|----------------|-------|
| Mini centre contact retention force (axial) | 27 | N |
| Mini centre contact retention torque | Not applicable | N.cm |
| Mini cable retention force | Not applicable | N |
| Mini cable retention torque value | Not applicable | N.cm |
| Maximum weight | 3.5 | g |

| OTHER CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Rapid change of temperature - peak value | + 180 | °C |
| Operating temperature range | - 65 to + 165 | °C |
| Maxi leakage (panel sealed connectors) | Not applicable | |
| Maxi leakage (hermetic sealed connector) | Not applicable | |
| Solderability | Not applicable | |
| Soldering proof | Not applicable | |
| Cables used | Not applicable | |

FIGURE 2(b) - VARIANTS (CONTINUED)

VARIANT 13 - STRAIGHT ADAPTOR, FEMALE - FEMALE

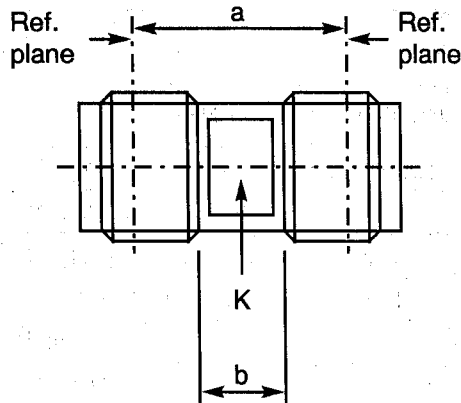

| SYMBOL | MILLIMETRES | | NOTES |
|--------|-------------|-------|---------|
| | MIN. | MAX. | |
| a | 10.10 | 10.30 | |
| b | 4.40 | - | |
| K | 5.40 | 5.50 | 2 flats |


| ELECTRICAL CHARACTERISTICS | VALUES | UNITS |
|--|--------------------------|-------|
| Frequency range | 0 to 18 | GHz |
| Maximum voltage standing wave ratio (VSWR) | $1.10 + 0.008 f$ (GHz) | |
| Maximum reflection coefficient | $0.047 + 0.0034 f$ (GHz) | |
| Maximum insertion loss | $0.06\sqrt{f}$ (GHz) | dB |
| RF leakage | $- [95 - f]$ (GHz) | dB |
| Voltage proof | 1000 | Vrms |
| Corona level | Not applicable | Vrms |

| MECHANICAL CHARACTERISTICS | VALUES | UNITS |
|---|----------------|-------|
| Mini centre contact retention force (axial) | 27 | N |
| Mini centre contact retention torque | Not applicable | N.cm |
| Mini cable retention force | Not applicable | N |
| Mini cable retention torque value | Not applicable | N.cm |
| Maximum weight | 1.9 | g |

| OTHER CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Rapid change of temperature - peak value | + 180 | °C |
| Operating temperature range | - 65 to + 165 | °C |
| Maxi leakage (panel sealed connectors) | Not applicable | |
| Maxi leakage (hermetic sealed connector) | Not applicable | |
| Solderability | Not applicable | |
| Soldering proof | Not applicable | |
| Cables used | Not applicable | |

FIGURE 2(b) - VARIANTS (CONTINUED)

VARIANT 14 - STRAIGHT BULKHEAD ADAPTOR, FEMALE - FEMALE

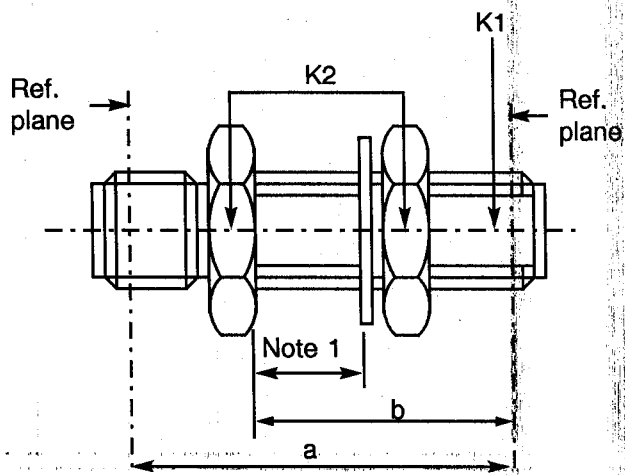

| SYMBOL | MILLIMETRES | | NOTES |
|--------|-------------|-------|--------|
| | MIN. | MAX. | |
| a | - | 18.40 | |
| b | 12.50 | 12.85 | |
| K1 | - | 6.00 | 1 flat |
| K2 | - | 8.00 | Hex. |

NOTES

1. Maximum panel thickness: 6.0mm.

| ELECTRICAL CHARACTERISTICS | VALUES | UNITS |
|--|--------------------------|-------|
| Frequency range | 0 to 18 | GHz |
| Maximum voltage standing wave ratio (VSWR) | $1.10 + 0.008 f$ (GHz) | |
| Maximum reflection coefficient | $0.047 + 0.0034 f$ (GHz) | |
| Maximum insertion loss | $0.06 \sqrt{f}$ (GHz) | dB |
| RF leakage | $- [95 - f]$ (GHz) | dB |
| Voltage proof | 1000 | Vrms |
| Corona level | Not applicable | Vrms |

| MECHANICAL CHARACTERISTICS | VALUES | UNITS |
|---|----------------|-------|
| Mini centre contact retention force (axial) | 27 | N |
| Mini centre contact retention torque | Not applicable | N.cm |
| Mini cable retention force | Not applicable | N |
| Mini cable retention torque value | Not applicable | N.cm |
| Maximum weight | 3.9 | g |

| OTHER CHARACTERISTICS | VALUES | UNITS |
|--|----------------|-------|
| Rapid change of temperature - peak value | +180 | °C |
| Operating temperature range | -65 to +165 | °C |
| Maxi leakage (panel sealed connectors) | Not applicable | |
| Maxi leakage (hermetic sealed connector) | Not applicable | |
| Solderability | Not applicable | |
| Soldering proof | Not applicable | |
| Cables used | Not applicable | |