



europaean space agency  
agence spatiale européenne

Pages 1 /28

**CAPACITORS, FIXED, TUBULAR,  
POROUS TANTALUM CATHODE AND ANODE,  
GELLED ELECTROLYTE, HERMETICALLY SEALED**

**BASED ON TYPE CLR 79**

**ESA/SCC Detail Specification No. 3003/005**



**space components  
coordination group**

Issue/Rev.	Date	Approved by	
		SCCG Chairman	ESA Director General or his Deputy
Issue 2	October 1986	-	-
Revision A	September 1989	<i>[Signature]</i>	<i>[Signature]</i>
Revision 'B'	September 1992	<i>[Signature]</i>	<i>[Signature]</i>




**DOCUMENTATION CHANGE NOTICE**

Rev. Letter	Rev. Date	Reference	CHANGE Item	Approved DCR No.
		<p>This Issue supersedes Issue 1 and its Revision 'A' and incorporates all modifications agreed on the basis of the following DCR's:-</p> <p>P1. Cover page  P2. DCN  P3/4. Table of Contents  P5. Para. 2 : Ref. to MIL-STD-202 added  P6-16. Table 1(a) : Capacitance and voltage combinations replaced by complete CECC range  P21. Para. 4.5.2 : Type variant added  P22. Para. 4.5.3.3 : Table completed to cover CECC voltages  P25. Table 4 : Editorial amendments  P26. Paras 4.8.1 to 4.8.3 : "Electrical Measurements" in titles changed to "Measurements and Inspections"  P27-28. Table 6 : "Electrical Measurements" in title changed to "Measurements and Inspections" and format amended</p>		<p>None  None  None  23269  22442  21021  22442  23269  23223  23223</p>
'A'	Sep. '89	<p>P1. Cover page  P2. DCN  P15. Table 1(a) : New Note 1 added, original Note numbered 2  P18. Figure 2 : Table amended  P21. Para. 4.5.2 : Para. amended</p>		<p>None  None  22579  22579  22579</p>
'B'	Sep. '92	<p>P1. Cover page  P2. DCN  P24. Table 2 : Note added</p>		<p>None  None  22960</p>
		<p>This document has been transferred from hardcopy to electronic format. The content is unchanged but minor differences in presentation exist.</p>		

### TABLE OF CONTENTS

		<u>Page</u>
<b>1.</b>	<b><u>GENERAL</u></b>	<b>5</b>
1.1	Scope	5
1.2	Range of Components	5
1.3	Maximum Ratings	5
1.4	Parameter Derating Information	5
1.5	Physical Dimensions	5
1.6	Functional Diagram	5
<b>2.</b>	<b><u>APPLICABLE DOCUMENTS</u></b>	<b>5</b>
<b>3.</b>	<b><u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u></b>	<b>19</b>
<b>4.</b>	<b><u>REQUIREMENTS</u></b>	<b>19</b>
4.1	General	19
4.2	Deviations from Generic Specification	19
4.2.1	Deviations from Special In-process Controls	19
4.2.2	Deviations from Final Production Tests	19
4.2.3	Deviations from Burn-in Tests	19
4.2.4	Deviations from Qualification, Environmental and Endurance Tests	19
4.2.5	Deviations from Lot Acceptance Tests	19
4.3	Mechanical Requirements	20
4.3.1	Dimension Check	20
4.3.2	Weight	20
4.3.3	Robustness of Terminations	20
4.4	Materials and Finishes	20
4.4.1	Case	20
4.4.2	Leads	20
4.4.3	Sleeving	20
4.5	Marking	21
4.5.1	General	21
4.5.2	The SCC Component Number	21
4.5.3	Electrical Characteristics and Ratings	21
4.5.4	Traceability Information	23
4.6	Electrical Measurements	23
4.6.1	Electrical Measurements at Room Temperature	23
4.6.2	Electrical Measurements at High and Low Temperatures	23
4.6.3	Circuits for Electrical Measurements	23

	<p style="text-align: center;">ESA/SCC Detail Specification No. 3003/005</p>	<p>PAGE 4 ISSUE 2</p>
---	--	---------------------------

	<u>Page</u>
4.7 Selective Level Testing	23
4.7.1 Parameter Drift Values	23
4.7.2 Conditions for Burn-in	23
4.8 Environmental and Endurance Tests	26
4.8.1 Measurements and Inspections on Completion of Environmental Tests	26
4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests	26
4.8.3 Measurements and Inspections on Completion of Endurance Tests	26
4.8.4 Conditions for Operating Life Tests	26

#### **TABLES**

1(a) Range of Components	6
1(b) Maximum Ratings	17
2 Electrical Measurements at Room Temperature	24
3 Electrical Measurements at High and Low Temperatures	24
4 Parameter Drift Values	25
5 Conditions for Burn-in and Operating Life Tests	25
6 Measurements and Inspections on Completion of Environmental Tests and at Intermediate Points during and on Completion of Endurance Testing	27

#### **FIGURES**

1 Parameter Derating Information	17
2 Physical Dimensions	18
3 Functional Diagram	18

#### **APPENDICES (Applicable to specific Manufacturers only)**

None.

**SCC**ESA/SCC Detail Specification  
No. 3003/005

PAGE 5

ISSUE 2

**1. GENERAL****1.1 SCOPE**

This specification details the ratings, physical and electrical characteristics, test and inspection data for Capacitors, Fixed, Tubular, Porous Tantalum, Cathode and Anode, Gelled Electrolyte, Hermetically Sealed, based on Type CLR79. It shall be read in conjunction with ESA/SCC Generic Specification No. 3003, the requirements of which are supplemented herein.

**1.2 RANGE OF COMPONENTS**

The range of capacitors covered by this specification is given in Table 1(a).

**1.3 MAXIMUM RATINGS**

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the capacitors specified herein are scheduled in Table 1(b).

**1.4 PARAMETER DERATING INFORMATION**

The parameter derating information applicable to the capacitors specified herein is shown in Figure 1.

**1.5 PHYSICAL DIMENSIONS**

The physical dimensions of the capacitors specified herein are shown in Figure 2.

**1.6 FUNCTIONAL DIAGRAM**

The functional diagram for the capacitors specified herein is shown in Figure 3.

**2. APPLICABLE DOCUMENTS**

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESA/SCC Generic Specification No. 3003 for Capacitors, Fixed, Tantalum, Non-solid Electrolyte.
- (b) MIL-STD-202, Test Methods for Electronic and Electrical Component Parts.



**SGC**

ESA/SCC Detail Specification  
No. 3003/005

PAGE 6  
ISSUE 2

**TABLE 1(a) - RANGE OF COMPONENTS**

UR Volts	C µF	I <sub>L</sub> (µA) at		DF (%) at 100Hz			ΔC (%)			(Z) (Ω) at 100Hz	Case Size	Max. Weight (g)
		+22°C	+85 / +125 °C	+22°C	+125°C	-55°C	+85°C	+125°C	-55°C			
6.0	30	1.0	2.0	9.0	10	80	10	12	-40	100	A	2.6
6.0	68	1.0	2.0	15	15	120	14	16	-40	60	A	2.6
6.0	140	1.0	3.0	21	21	290	16	16	-40	40	B	6.2
6.0	160	2.0	9.0	41	41	328	16	16	-42	80	A	2.6
6.0	270	1.0	7.0	45	41	352	17	20	-44	25	B	6.2
6.0	330	2.0	8.0	36	36	320	14	16	-44	20	C	11.6
6.0	560	2.0	10	106	106	850	20	20	-68	48	B	6.2
6.0	560	2.0	16	55	50	440	18	20	-64	25	C	11.6
6.0	1200	3.0	14	90	86	720	25	25	-80	20	D	17.7
6.0	1500	5.0	20	172	172	1376	25	25	-90	36	C	11.6
6.0	2200	6.0	24	170	170	1360	25	25	-90	22	D	17.7
6.3	68	1.0	2.0	15	15	120	14	16	-40	60	A	2.6
6.3	120	1.5	3.0	21	21	210	15	16	-41	81	A	2.6
6.3	150	2.0	9.0	34	34	300	16	16	-42	80	A	2.6
6.3	220	1.0	6.5	40	36	320	16	18	-44	30	B	6.2
6.3	470	2.0	10	90	90	720	20	20	-60	46	B	6.2
6.3	560	2.0	10	106	106	850	20	20	-68	48	B	6.2
6.3	560	2.0	16	50	50	440	18	20	-64	25	C	11.6
6.3	1000	3.0	14	72	68	576	25	25	-80	22	D	17.7
6.3	1500	5.0	20	172	172	1375	25	25	-90	36	C	11.6
6.3	1800	6.0	24	136	136	1090	25	30	-90	13	D	17.7
6.3	2200	6.0	24	170	170	1360	25	25	-90	22	D	17.7

**NOTES:** See Page 16.



**SCC**

ESA/SCC Detail Specification  
No. 3003/005

PAGE 7

ISSUE 2

**TABLE 1(a) - RANGE OF COMPONENTS (CONTINUED)**

U <sub>R</sub> Volts	C µF	I <sub>L</sub> (µA) at		DF (%) at 100Hz			ΔC (%)			(Z) (Ω) at 100Hz	Case Size	Max. Weight (g)
		+22°C	+85 / +125 °C	+22°C	+125°C	-55°C	+85°C	+125°C	-55°C			
8.0	25	1.0	2.0	7.5	6.0	60	10.5	12	-40	100	A	2.6
8.0	56	1.0	2.0	14	14	112	14	16	-40	59	A	2.6
8.0	120	2.0	6.0	32	32	300	17.5	20	-44	80	A	2.6
8.0	120	1.0	2.0	20	20	160	17.5	20	-44	50	B	6.2
8.0	220	1.0	7.0	40	36	320	16	18	-44	30	B	6.2
8.0	290	2.0	6.0	34	33	320	17.5	20	-64	25	C	11.6
8.0	430	2.0	10	64	60	420	17.5	20	-64	54	B	6.2
8.0	430	2.0	15	46	42	368	17.5	20	-64	25	C	11.6
8.0	850	3.0	16	60	56	480	25	25	-80	22	D	17.7
10	20	1.0	2.0	6.0	6.0	48	10.5	12	-32	175	A	2.6
10	47	1.0	2.0	13	13	104	14	16	-36	100	A	2.6
10	68	1.5	3.0	21	21	170	15	16	-40	85	A	2.6
10	82	2.0	6.0	25	25	200	16	16	-40	84	A	2.6
10	100	2.0	6.0	30	30	260	16	16	-40	82	A	2.6
10	100	1.0	4.0	15	15	120	14	16	-36	60	B	6.2
10	150	1.0	7.0	30	28	240	14	16	-32	45	B	6.2
10	180	1.0	7.0	30	30	264	14	16	-35	40	B	6.2
10	250	2.0	10	30	30	240	14	16	-40	30	C	11.6
10	300	2.0	10	60	60	480	16	18	-54	52	B	6.2
10	330	2.0	10	65	65	520	17	18	-54	52	B	6.2
10	350	2.0	10	68	68	544	18	18	-60	52	B	6.2

**NOTES:** See Page 16.



ESA/SCC Detail Specification  
No. 3003/005

PAGE 8  
ISSUE 2

**TABLE 1(a) - RANGE OF COMPONENTS (CONTINUED)**

U <sub>R</sub> Volts	C μF	I <sub>L</sub> (μA) at		DF (%) at 100Hz			ΔC (%)			(Z) (Ω) at 100Hz	Case Size	Max. Weight (g)
		+22°C	+85 / +125 °C	+22°C	+125°C	-55°C	+85°C	+125°C	-55°C			
10	390	2.0	10	74	74	592	19	20	-60	54	B	6.2
10	390	2.0	15	44	41	352	18	20	-64	25	C	11.6
10	470	2.0	15	44	44	384	18	20	-65	25	C	11.6
10	680	3.0	16	46	42	368	25	25	-80	20	D	17.7
10	750	3.0	16	50	46	400	25	25	-80	23	D	17.7
10	820	3.0	16	57	53	456	25	25	-80	22	D	17.7
10	850	4.0	16	111	111	888	25	25	-84	36	C	11.6
10	1000	4.0	16	92	92	736	25	25	-80	36	C	11.6
10	1200	5.0	20	137	137	1096	25	25	-80	36	C	11.6
10	1500	7.0	25	114	114	912	30	30	-88	23	D	17.7
10	1800	7.0	25	138	138	1104	30	30	-88	24	D	17.7
15	15	1.0	2.0	5.0	5.0	40	10.5	12	-24	155	A	2.6
15	33	1.0	2.0	10	10	80	14	16	-28	90	A	2.6
15	47	1.5	3.0	20	20	160	16	16	-28	100	A	2.6
15	56	1.5	3.0	22	22	176	16	16	-28	100	A	2.6
15	70	1.0	4.0	13	13	104	14	16	-28	75	B	6.2
15	120	1.0	7.0	25	25	200	14	16	-28	50	B	6.2
15	170	2.0	10	25	25	200	14	16	-32	35	C	11.6
15	220	2.0	10	42	42	340	16	16	-35	62	B	6.2
15	270	2.0	12	55	55	440	18	18	-45	60	B	6.2
15	270	2.0	14	43	40	344	18	20	-56	30	C	11.6

**NOTES:** See Page 16.





ESA/SCC Detail Specification  
No. 3003/005

PAGE 9

ISSUE 2

**TABLE 1(a) - RANGE OF COMPONENTS (CONTINUED)**

U <sub>R</sub> Volts	C µF	I <sub>L</sub> (µA) at		DF (%) at 100Hz			ΔC (%)			(Z) (Ω) at 100Hz	Case Size	Max. Weight (g)
		+22°C	+85 / +125 °C	+22°C	+125°C	-55°C	+85°C	+125°C	-55°C			
15	290	2.0	12	60	60	480	18	18	-54	65	B	6.2
15	540	3.0	18	40	36	320	25	25	-80	23	D	17.7
15	750	6.0	24	95	95	760	25	25	-80	42	C	11.6
15	850	8.0	32	95	95	760	25	25	-80	24	D	17.7
15	1200	8.0	32	103	103	824	25	25	-84	25	D	17.7
16	33	1.0	2.0	10	10	80	14	14	-28	90	A	2.6
16	47	1.5	3.0	20	20	160	16	16	-28	100	A	2.6
16	56	1.5	3.0	22	22	176	16	16	-28	100	A	2.6
16	120	1.0	7.0	25	25	200	14	14	-28	50	B	6.2
16	220	2.0	10	42	42	340	16	16	-35	62	B	6.2
16	270	2.0	12	55	55	440	18	18	-45	60	B	6.2
16	330	2.0	14	40	40	344	18	18	-58	30	C	11.6
16	470	3.0	18	37	33	296	25	25	-75	24	D	17.7
16	560	3.0	18	40	36	320	25	25	-80	23	D	17.7
16	680	5.0	20	80	80	640	25	25	-80	42	C	11.6
16	820	6.0	24	95	95	760	25	25	-80	42	C	11.6
16	1000	8.0	32	92	92	736	25	25	-82	25	D	17.7
16	1200	8.0	32	103	103	824	25	25	-84	25	D	17.7

**NOTES:** See Page 16.



ESA/SCC Detail Specification  
No. 3003/005

PAGE 10  
ISSUE 2

**TABLE 1(a) - RANGE OF COMPONENTS (CONTINUED)**

U <sub>R</sub> Volts	C μF	I <sub>L</sub> (μA) at		DF (%) at 100Hz			ΔC (%)		(Z) (Ω) at 100Hz	Case Size	Max. Weight (g)
		+22°C	+85 / +125 °C	+22°C	+125°C	-55°C	+85°C	+125°C			
25	10	1.0	2.0	4.0	4.0	32	8.0	9.0	220	A	2.6
25	22	1.0	2.0	7.0	7.0	56	10	12	140	A	2.6
25	27	1.5	3.0	11	11	94	12	12	140	A	2.6
25	33	1.5	3.0	13	13	106	14	14	130	A	2.6
25	39	2.0	9.0	16	16	128	16	16	120	A	2.6
25	43	2.0	9.0	18	18	144	16	16	120	A	2.6
25	50	1.0	2.0	11	11	88	13	15	70	B	6.2
25	100	1.0	9.0	21	21	168	13	15	50	B	6.2
25	120	2.0	6.0	21	21	168	13	15	38	C	11.6
25	150	2.0	10	35	32	270	15	15	62	B	6.2
25	160	2.0	10	34	34	290	15	15	60	B	6.2
25	180	2.0	10	35	34	290	14	15	60	B	6.2
25	180	2.0	13	28	28	224	14	15	32	C	11.6
25	220	2.0	13	35	33	280	18	20	33	C	11.6
25	330	3.0	20	30	28	240	25	25	27	D	17.7
25	350	3.0	20	35	32	280	25	25	24	D	17.7
25	390	7.0	28	48	48	384	25	25	48	C	11.6
25	390	3.0	20	35	32	280	25	25	24	D	17.7
25	470	7.0	28	48	48	400	25	25	48	C	11.6
25	560	7.0	28	60	60	480	25	25	48	C	11.6
25	680	8.0	32	60	60	480	25	25	24	D	17.7
25	820	8.0	32	82	82	652	25	25	26	D	17.7
25	850	8.0	32	95	95	760	25	25	26	D	17.7

**NOTES:** See Page 16.



**SGC**

ESA/SCC Detail Specification

No. 3003/005

PAGE 11

ISSUE 2

**TABLE 1(a) - RANGE OF COMPONENTS (CONTINUED)**

U <sub>R</sub> Volts	C μF	I <sub>L</sub> (μA) at		DF (%) at 100Hz			ΔC (%)			(Z) (Ω) at 100Hz	Case Size	Max. Weight (g)
		+22°C	+85 / +125 °C	+22°C	+125°C	-55°C	+85°C	+125°C	-55°C			
30	8.0	1.0	2.0	4.0	4.0	32	8.0	12	-16	275	A	2.6
30	15	1.0	2.0	7.0	7.0	56	10	12	-20	175	A	2.6
30	25	1.5	3.0	11	11	81	12	12	-24	160	A	2.6
30	33	2.0	9.0	12	12	104	10	14	-30	160	A	2.6
30	40	1.0	5.0	10	10	96	10.5	12	-24	65	B	6.2
30	68	1.0	9.0	15	15	120	13	15	-24	60	B	6.2
30	100	2.0	12	17	17	136	10.5	12	-28	40	C	11.6
30	120	2.0	10	30	30	220	15	15	-32	60	B	6.2
30	150	2.0	10	32	32	270	15	15	-35	60	B	6.2
30	150	2.0	12	23	23	184	14	15	-48	35	C	11.6
30	170	2.0	12	34	34	290	15	15	-48	65	B	6.2
30	300	6.0	24	43	43	368	15	15	-60	44	C	11.6
30	300	3.0	20	30	28	240	25	25	-60	31	D	17.7
30	330	6.0	24	45	45	375	25	25	-65	52	C	11.6
30	350	8.0	32	48	48	384	25	25	-70	52	C	11.6
30	390	8.0	32	55	55	440	25	25	-75	52	C	11.6
30	430	8.0	32	60	60	480	25	25	-80	54	C	11.6
30	560	9.0	36	40	40	400	25	30	-80	30	D	17.7

**NOTES:** See Page 16.



**SGC**

ESA/SCC Detail Specification

No. 3003/005

PAGE 12

ISSUE 2

**TABLE 1(a) - RANGE OF COMPONENTS (CONTINUED)**

U <sub>R</sub> Volts	C μF	I <sub>L</sub> (μA) at		DF (%) at 100Hz			ΔC (%)			(Z) (Ω) at 100Hz	Case Size	Max. Weight (g)
		+22°C	+85 / +125 °C	+22°C	+125°C	-55°C	+85°C	+125°C	-55°C			
40	12	1.0	2.0	6.0	6.0	32	8.0	10	-24	234	A	2.6
40	15	1.0	2.0	7.0	7.0	56	10	12	-20	175	A	2.6
40	18	1.5	4.0	10	10	80	12	12	-20	200	A	2.6
40	22	1.5	4.0	11	11	94	12	12	-24	190	A	2.6
40	68	1.0	8.0	15	15	120	13	15	-24	60	B	6.2
40	100	2.0	10	25	25	190	15	15	-40	60	B	6.2
40	120	2.0	12	30	30	220	15	15	-32	62	B	6.2
40	150	2.0	12	23	23	184	14	15	-48	35	C	11.6
40	220	3.0	22	23	22	184	23	23	-58	27	D	17.7
40	270	7.0	28	37	37	344	25	25	-60	52	C	11.6
40	330	8.0	32	43	43	368	25	25	-65	52	C	11.6
40	390	8.0	32	43	43	344	25	25	-75	30	D	17.7
40	470	9.0	36	45	45	360	25	25	-80	30	D	17.7
50	5.0	1.0	2.0	3.0	3.0	28	5.0	6.0	-16	400	A	2.6
50	10	1.0	2.0	4.0	4.0	32	8.0	9.0	-20	250	A	2.6
50	18	1.5	3.0	10	10	80	12	12	-24	200	A	2.6
50	22	2.0	9.0	11	11	94	12	12	-24	190	A	2.6
50	25	1.0	5.0	8.0	8.0	68	10.5	12	-20	95	B	6.2
50	47	1.0	9.0	13	13	104	13	15	-24	70	B	6.2
50	60	2.0	12	12	12	92	10.5	12	-16	45	C	11.6
50	82	2.0	10	15	15	120	14	15	-32	45	C	11.6
50	100	3.0	15	25	25	190	15	15	-40	67	B	6.2

**NOTES:** See Page 16.



**SCC**

ESA/SCC Detail Specification  
No. 3003/005

PAGE 13

ISSUE 2

**TABLE 1(a) - RANGE OF COMPONENTS (CONTINUED)**

U <sub>R</sub> Volts	C μF	I <sub>L</sub> (μA) at		DF (%) at 100Hz			ΔC (%)			(Z) (Ω) at 100Hz	Case Size	Max. Weight (g)
		+22°C	+85 / +125 °C	+22°C	+125°C	-55°C	+85°C	+125°C	-55°C			
50	160	3.0	22	17	17	136	23	23	27	D	17.7	
50	270	8.0	32	37	37	344	25	25	52	C	11.6	
50	350	9.0	36	40	40	320	25	25	30	D	17.7	
50	390	9.0	36	43	43	344	25	25	30	D	17.7	
50	430	10	40	45	45	360	25	25	31	D	17.7	
60	4.0	1.0	2.0	2.8	2.8	28	5.0	6.0	550	A	2.6	
60	8.2	1.0	2.0	4.0	4.0	32	8.0	9.0	275	A	2.6	
60	20	1.0	5.0	7.0	7.0	62	10.5	12	105	B	6.2	
60	39	1.0	9.0	12	12	96	10	12	90	B	6.2	
60	50	2.0	12	10	10	80	10.5	12	50	C	11.6	
60	68	2.0	10	13	13	104	14	15	50	C	11.6	
60	82	2.0	12	22	22	144	15	15	70	B	6.2	
60	140	3.0	22	16	16	128	20	20	28	D	17.7	
60	220	8.0	32	37	37	344	25	25	55	C	11.6	
60	270	9.0	36	26	26	186	25	25	33	D	17.7	
60	330	10	40	32	32	248	25	25	31	D	17.7	

**NOTES:** See Page 16.



**SGC**

ESA/SCC Detail Specification  
No. 3003/005

PAGE 14

ISSUE 2

**TABLE 1(a) - RANGE OF COMPONENTS (CONTINUED)**

U <sub>R</sub> Volts	C μF	I <sub>L</sub> (μA) at		DF (%) at 100Hz			ΔC (%)			(Z) (Ω) at 100Hz	Case Size	Max. Weight (g)
		+22°C	+85 / +125 °C	+22°C	+125°C	-55°C	+85°C	+125°C	-55°C			
63	10	1.0	2.0	4.0	4.0	32	8.0	9.0	-20	250	A	2.6
63	12	2.0	4.0	7.0	7.0	67	8.0	9.0	-20	233	A	2.6
63	15	2.0	9.0	8.0	8.0	72	9.0	9.0	-22	220	A	2.6
63	47	1.0	9.0	13	13	104	13	15	-24	70	B	6.2
63	56	2.0	12	18	18	112	14	15	-26	72	B	6.2
63	82	2.0	12	22	22	144	15	15	-36	70	B	6.2
63	100	2.0	11	18	18	144	14	15	-37	42	C	11.6
63	120	3.0	18	20	20	160	18	18	-40	49	C	11.6
63	150	3.0	22	17	17	136	20	20	-45	27	D	17.7
63	220	8.0	32	37	37	344	25	25	-50	55	C	11.6
63	270	9.0	36	26	26	186	24	25	-70	33	D	17.7
63	330	10	40	32	32	248	25	25	-72	31	D	17.7
75	3.5	1.0	2.0	2.5	2.5	24	5.0	6.0	-16	650	A	2.6
75	6.8	1.0	2.0	3.0	3.0	24	8.0	9.0	-20	300	A	2.6
75	8.2	1.5	3.0	6.0	6.0	36	9.0	9.0	-22	280	A	2.6
75	9.0	2.0	4.0	6.0	6.0	39	9.0	9.0	-22	280	A	2.6
75	15	1.0	5.0	6.0	6.0	56	8.0	9.0	-16	150	B	6.2
75	33	1.0	9.0	10	10	80	10	12	-24	90	B	6.2
75	40	2.0	12	9.0	9.0	72	10.5	12	-16	60	C	11.6
75	43	2.0	10	15	15	124	10.5	12	-24	89	B	6.2
75	47	2.0	10	15	15	124	14	14	-30	87	B	6.2

**NOTES:** See Page 16.



**SGC**

ESA/SCC Detail Specification  
No. 3003/005

PAGE 15

ISSUE 2

**TABLE 1(a) - RANGE OF COMPONENTS (CONTINUED)**

U <sub>R</sub> Volts	C µF	I <sub>L</sub> (µA) at		DF (%) at 100Hz			ΔC (%)			(Z) (Ω) at 100Hz	Case Size	Max. Weight (g)
		+22°C	+85 / +125 °C	+22°C	+125°C	-55°C	+85°C	+125°C	-55°C			
75	56	2.0	12	18	18	144	15	15	-30	84	B	6.2
75	56	2.0	10	11	11	88	14	15	-28	60	C	11.6
75	68	2.0	12	21	21	168	15	15	-36	86	B	6.2
75	68	2.0	10	13	13	104	14	15	-30	50	C	11.6
75	82	2.0	10	15	15	120	15	15	-32	45	C	11.6
75	100	8.0	32	19	19	150	17	18	-36	60	C	11.6
75	110	3.0	24	11	11	96	20	20	-35	29	D	17.7
75	120	3.0	24	12	12	96	20	20	-36	28	D	17.7
75	150	9.0	36	25	25	200	20	20	-40	60	C	11.6
75	150	9.0	36	17	17	136	21	22	-48	30	D	17.7
75	180	9.0	36	28	28	280	22	22	-50	60	C	11.6
75	220	10	40	37	37	296	22	22	-60	32	D	17.7
75	250	10	40	40	40	320	25	25	-68	33	D	17.7
100	4.7	1.0	2.0	3.0	3.0	24	7.0	8.0	-16	500	A	2.6
100	5.6	2.0	5.0	6.0	6.0	36	8.0	8.0	-17	475	A	2.6
100	22	1.0	9.0	8.0	8.0	64	8.0	8.0	-16	100	B	6.2
100	30	3.0	15	10	10	90	8.0	8.0	-16	99	B	6.2
100	30	2.0	12	7.0	7.0	56	8.0	8.0	-16	80	C	11.6
100	33	3.0	15	14	14	92	8.0	8.0	-16	95	B	6.2
100	33	2.0	10	7.0	7.0	58	8.0	8.0	-16	93	C	11.6
100	39	2.0	12	10	10	90	12	12	-24	92	B	6.2
100	39	2.0	10	8.0	8.0	64	8.0	8.0	-16	90	C	11.6

**NOTES:** See Page 16.



**TABLE 1(a) - RANGE OF COMPONENTS (CONTINUED)**

U <sub>R</sub> Volts	C μF	I <sub>L</sub> (μA) at		DF (%) at 100Hz			ΔC (%)			(Z) (Ω) at 100Hz	Case Size	Max. Weight (g)
		+22°C	+85 / +125 °C	+22°C	+125°C	-55°C	+85°C	+125°C	-55°C			
100	43	2.0	10	8.0	8.0	68	8.0	8.0	-20	70	C	11.6
100	47	2.0	10	9.0	9.0	72	10	10	-23	70	C	11.6
100	56	2.0	10	11	11	88	14	15	-28	60	C	11.6
100	68	10	40	15	15	118	15	15	-30	60	C	11.6
100	68	3.0	26	8.0	8.0	64	15	15	-24	42	D	17.7
100	82	3.0	24	10	10	80	18	18	-24	39	D	17.7
100	86	3.0	24	10	10	80	18	18	-24	30	D	17.7
100	100	3.0	24	11	11	88	20	20	-35	36	D	17.7
125	2.7	1.0	2.0	3.0	3.0	24	7.0	8.0	-16	780	A	2.6
125	3.3	1.0	2.0	3.0	3.0	24	7.0	8.0	-16	600	A	2.6
125	3.6	1.0	2.0	3.0	3.0	24	7.0	8.0	-16	600	A	2.6
125	3.9	2.0	5.0	3.5	3.5	28	8.0	8.0	-16	557	A	2.6
125	14	1.0	7.0	6.0	6.0	48	7.0	8.0	-16	167	B	6.2
125	15	1.0	7.0	6.0	6.0	48	7.0	8.0	-16	167	B	6.2
125	18	2.0	10	8.0	8.0	56	8.0	8.0	-16	133	B	6.2
125	25	2.0	10	6.0	6.0	48	7.0	8.0	-16	93	C	11.6
125	39	2.0	10	8.0	8.0	64	8.0	8.0	-16	90	C	11.6
125	47	2.0	10	9.0	9.0	72	10	10	-23	70	C	11.6
125	56	3.0	28	6.0	6.0	48	15	15	-25	47	D	17.7
125	68	3.0	26	8.0	8.0	64	15	15	-24	42	D	17.7
125	82	3.0	24	10	10	80	18	18	-24	39	D	17.7

**NOTES**

1. Refer to Figure 2 for Type Variant Number assigned to case size.
2. All capacitors are available with a tolerance of ±10 and ±20%.






**TABLE 1(b) - MAXIMUM RATINGS**

No.	CHARACTERISTICS	SYMBOL	LIMITS		UNIT	REMARKS
			MIN.	MAX.		
1	Rated Voltage	$U_R$	See Table 1(a)		V	
2	Surge Voltage	$U_S$	-	$1.15U_R$	V	
3	Operating Temperature Range	$T_{amb}$	- 55	+ 125	°C	For derating, see Figure 1
4	Storage Temperature Range	$T_{amb}$	- 55	+ 125	°C	
5	Maximum Soldering Temperature	$T_L$	-	+ 260	°C	Soldering time: $t_L \leq 5$ seconds (1)

**NOTES**

- 3.0mm from body on negative side and 3.0mm from weld on positive side.


**FIGURE 1 - PARAMETER DERATING INFORMATION**

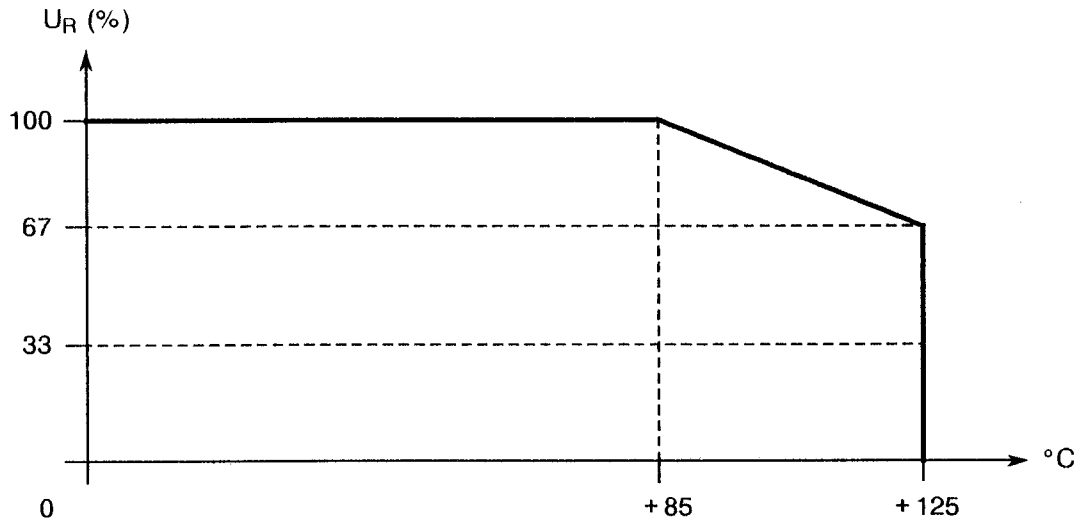

Rated Voltage versus Ambient Temperature



**FIGURE 2 - PHYSICAL DIMENSIONS**

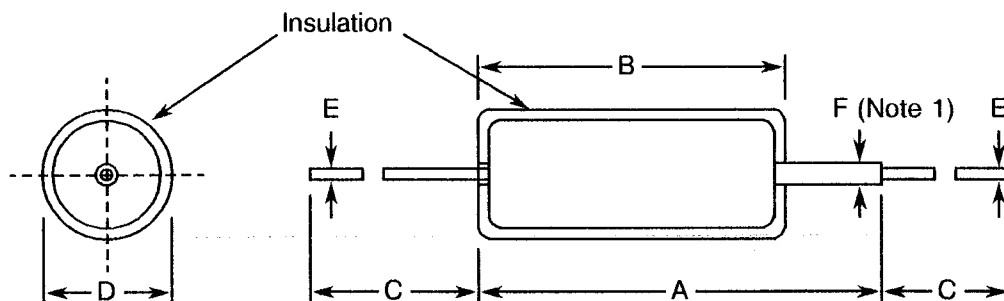



VARIANT	CASE SIZE	MILLIMETRES						
		A MAX.	B MAX.	C MIN.	D MAX.	E		F MAX.
						MIN.	MAX.	
02	A	18.00	12.43	30.00	5.60	0.59	0.70	1.60
03	B	23.00	17.20	30.00	7.60	0.59	0.70	1.60
04	C	26.00	20.40	30.00	10.00	0.59	0.70	1.60
05	D	34.00	27.90	30.00	10.00	0.59	0.70	1.60

**NOTES**

1. The anode lead-out stub must not be bent.

**FIGURE 3 - FUNCTIONAL DIAGRAM**

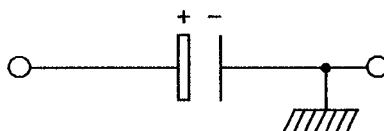

	<p style="text-align: center;">ESA/SCC Detail Specification No. 3003/005</p>	<p>PAGE 19 ISSUE 2</p>
---	--	----------------------------

**3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS**

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESA/SCC Basic Specification No. 21300 shall apply.

**4. REQUIREMENTS**

**4.1 GENERAL**

The complete requirements for procurement of the capacitors specified herein are stated in this specification and ESA/SCC Generic Specification No. 3003 for Capacitors, Fixed, Tantalum, Non-solid Electrolyte. Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESA/SCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

**4.2 DEVIATIONS FROM GENERIC SPECIFICATION**

**4.2.1 Deviations from Special In-process Controls**

Not applicable.

**4.2.2 Deviations from Final Production Tests (Chart II)**

None.

**4.2.3 Deviations from Burn-in Tests (Chart III)**


None.

**4.2.4 Deviations from Qualification, Environmental and Endurance Tests (Chart IV)**

None.

**4.2.5 Deviations from Lot Acceptance Tests (Chart V)**

None.

	ESA/SCC Detail Specification No. 3003/005	PAGE 20 ISSUE 2
---	--	--------------------

#### 4.3 MECHANICAL REQUIREMENTS

##### 4.3.1 Dimension Check

The dimensions of the capacitors specified herein shall be verified in accordance with the requirements set out in Para. 9.4 of ESA/SCC Generic Specification No. 3003 and shall conform to those shown in Figure 2 of this specification.

##### 4.3.2 Weight

The maximum weight of the capacitors specified herein shall be as specified in Table 1(a).

##### 4.3.3 Robustness of Terminations

The requirements and test conditions for robustness of terminations are specified in Section 9 of ESA/SCC Generic Specification No. 3003.

#### 4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the capacitors specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

##### 4.4.1 Case

Tantalum, hermetically sealed.

##### 4.4.2 Leads

The capacitors shall be equipped with electrically welded, solder-coated (Type '3' of ESA/SCC Basic Specification No. 23500) nickel leads which shall be free from non-conductive and foreign materials.

##### 4.4.3 Sleeving

Sleeving shall be of a non-fungus nutrient material (cardboard shall not be used). The material shall not soften, creep or shrink to the extent that it causes any part of the cylindrical case to become uncovered at any test temperature specified herein. At any cross-section, the maximum thickness of the sleeving shall not exceed twice the minimum thickness of the sleeves.



4.5 MARKING

4.5.1 General


The marking of all components delivered to this specification shall be in accordance with the requirements of ESA/SCC Basic Specification No. 21700 and the following paragraphs.

These components being too small to accommodate the marking as specified hereafter, the marking information in full shall accompany each component in its primary package. Such marking shall comprise:-

- (a) The SCC Component Number.
- (b) Characteristics and Ratings.
- (c) Traceability Information.

4.5.3 The SCC Component Number

The SCC Component Number shall be constituted and marked as follows:-

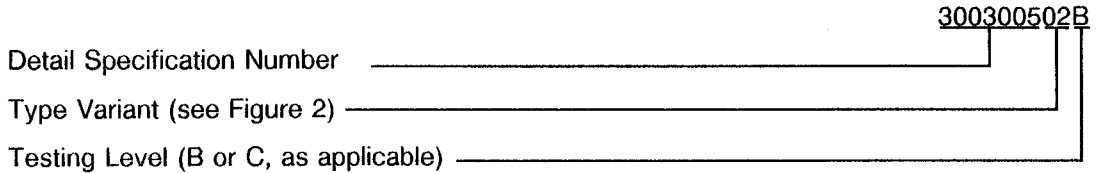


4.5.3 Electrical Characteristics and Ratings

The electrical characteristics and ratings to be marked in the following order of precedence are:-

- (a) Capacitance Value.
- (b) Tolerance.
- (c) Rated Voltage.
- (d) Polarity.

The information shall be constituted and marked as follows:-

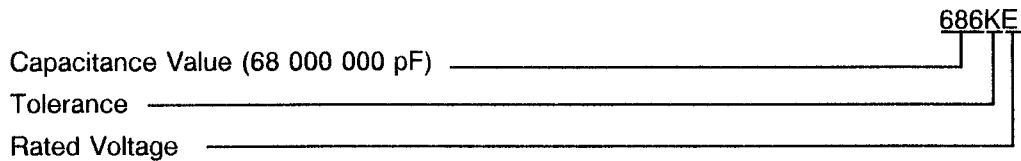

#### 4.5.3.1 Capacitance Value

The capacitance values shall be expressed by means of the following codes. The unit quantity for marking shall be picofarads.

Capacitance Value	Code
XX10 <sup>5</sup>	XX5
XX10 <sup>6</sup>	XX6
XX10 <sup>7</sup>	XX7
XX10 <sup>8</sup>	XX8
XX10 <sup>9</sup>	XX9

#### 4.5.3.2 Tolerance

The tolerance on capacitance values shall be indicated by the letter codes specified hereafter.

Tolerance (%)	Code Letter
± 10	K
± 20	M



#### 4.5.3.3 Rated Voltage

The rated voltage shall be indicated by the code letter specified hereafter.

Rated Voltage (V)	Code Letter
6	Z
6.3	A
8	C
10	D
15	G
16	E
25	F
30	H
40	J
50	K
60	M
63	L
75	P
100	Q
125	R

#### 4.5.3.4 Polarity

Polarity shall be defined by a '+' on that end of the body of a capacitor where the positive lead protrudes.

 	<p style="text-align: center;">ESA/SCC Detail Specification No. 3003/005</p>		<p>PAGE 23 ISSUE 2</p>
--	--	--	----------------------------

4.5.4 Traceability Information

Traceability information shall be marked in accordance with the requirements of ESA/SCC Basic Specification No. 21700.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured at room temperature are scheduled in Table 2. The measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.

4.6.2 Electrical Measurements at High and Low Temperatures

The parameters to be measured at high and low temperatures are scheduled in Table 3.

4.6.3 Circuits for Electrical Measurements (Figure 4)

Not applicable.

4.7 SELECTIVE LEVEL TESTING

4.7.1 Parameter Drift Values

The parameter drift values applicable to burn-in are specified in Table 4 of this specification. Unless otherwise stated, measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C. The parameter drift values ( $\Delta$ ) applicable to the parameters scheduled shall not be exceeded. In addition to these drift value requirements for a given parameter, the appropriate limit value specified in Table 2 shall not be exceeded.

4.7.2 Conditions for Burn-in

The requirements for burn-in are specified in Section 7 of ESA/SCC Generic Specification No. 3003. The conditions for burn-in shall be as specified in Table 5 of this specification. On completion of burn-in, a recovery period of  $24 \pm 2$  hours is necessary before the end-measurements.

**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE**

No.	Characteristics	Symbol	Spec. and/or Test Method	Test Conditions	Limits		Unit
					Min.	Max.	
1	D.C. Leakage	$I_L$	ESA/SCC Gen. Spec. 3003	Para. 9.2.1.1	See Table 1(a)		$\mu A$
2	Capacitance Value	C	ESA/SCC Gen. Spec. 3003	Para. 9.2.1.2	See Table 1(a)		$\mu F$
3	Dissipation Factor	DF	ESA/SCC Gen. Spec. 3003	Para. 9.2.1.3	See Table 1(a)		%

**NOTES**

- Measurements shall be made in the order shown. On completion of electrical measurements of Chart III and LAT3, all capacitors shall be discharged through 470 $\Omega$  resistors for 5 seconds followed by short circuit for 2 minutes.

**TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES (NOTE 1)**

No.	Characteristics	Symbol	Spec. and/or Test Method	Test Conditions	Limits		Unit
					Min.	Max.	
1	D.C. Leakage	$I_L$	ESA/SCC Gen. Spec. 3003	+ 22 $\pm$ 3 °C	See Table 1(a)		$\mu A$
2	Capacitance	C					$\mu F$
3	Dissipation Factor (Note 2)	DF					%
4	Impedance	Z	ESA/SCC Gen. Spec. 3003	- 55( + 0 - 5 ) °C	See Table 1(a)		$\Omega$
5	Capacitance	C					$\mu F$
6	D.C. Leakage	$I_L$	ESA/SCC Gen. Spec. 3003	+ 22 $\pm$ 3 °C	See Table 1(a)		$\mu A$
7	Capacitance	C					$\mu F$
8	Dissipation Factor (Note 2)	DF					%
9	D.C. Leakage	$I_L$	ESA/SCC Gen. Spec. 3003	+ 85( + 3 - 0 ) °C	See Table 1(a)		$\mu A$
10	Capacitance	C					$\mu F$
11	Dissipation Factor	DF					%
12	D.C. Leakage (Note 3)	$I_L$	ESA/SCC Gen. Spec. 3003	+ 125( + 5 - 0 ) °C	See Table 1(a)		$\mu A$
13	Capacitance	C					$\mu F$
14	Dissipation Factor	DF					%
15	D.C. Leakage	$I_L$	ESA/SCC Gen. Spec. 3003	+ 22 $\pm$ 3 °C	See Table 1(a)		$\mu A$
16	Capacitance	C					$\mu F$
17	Dissipation Factor	DF					%

Measurements shall be made in the order shown. Capacitors shall be brought to thermal stability before the measurements are made. Thermal Stability will have been reached when no further change in capacitance is observed between 2 successive measurements made at 15 minute intervals.

**NOTES**

- Inspection Level II, single sampling, AQL = 2.5%, for each capacitance value. Each capacitance value shall be considered as constituting a complete lot.
- Measurements 1, 2, 3 and 6, 7, 8 shall not be performed during burn-in.
- Derated voltage shall be applied for this measurement.



**TABLE 4 - PARAMETER DRIFT VALUES**

No.	Characteristics	Symbol	Spec. and/or Test Method	Test Conditions	Change Limits ( $\Delta$ )	Unit
1	D.C. Leakage Change	$\frac{\Delta I_L}{I_L}$	ESA/SCC Gen. Spec. No. 3003  MIL-STD-202	Para. 9.2.1.1  Method 305	+ 200 % of measured value or - 100 % value or + (25% + 0.05 $\mu$ A) (1) of limit value	
2	Capacitance Change	$\frac{\Delta C}{C}$	ESA/SCC Gen. Spec. No. 3003	Para. 9.2.1.2	$\pm 5.0$	%

**NOTES**


- Whichever is smaller.
- Leakage currents need not be recorded when less than, or equal to:
  - 0.5 $\mu$ A for case sizes A and B.
  - 0.8 $\mu$ A for case size C.
  - 1.4 $\mu$ A for case size D.

**TABLE 5 - CONDITIONS FOR BURN-IN AND OPERATING LIFE TESTS**

No.	Characteristic	Symbol	Condition	Unit
1	Ambient Temperature	$T_{amb}$	+ 85	$^{\circ}$ C
2	Test Voltage	$U_R$	Rated voltage (Note 1)	V

**NOTES**

- See Table 1(a).

	<p style="text-align: center;">ESA/SCC Detail Specification No. 3003/005</p>		<p>PAGE 26 ISSUE 2</p>
---	--	--	----------------------------

4.8 ENVIRONMENTAL AND ENDURANCE TESTS

4.8.1 Measurements and Inspections on Completion of Environmental Tests

The parameters to be measured on completion of environmental tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.

4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests

The parameters to be measured at intermediate points during endurance tests are scheduled in Table 6.

4.8.3 Measurements and Inspections on Completion of Endurance Tests

The parameters to be measured on completion of endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.

4.8.4 Conditions for Operating Life Tests (Part of Endurance Testing)

The requirements for operating life testing are specified in Section 9 of ESA/SCC Generic Specification No. 3003. The conditions for operating life testing shall be as specified in Table 5 of this specification.



**TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING**

NO.	ESA/SCC GENERIC SPEC. NO. 3003		MEASUREMENTS AND INSPECTIONS		SYMBOL	LIMITS		UNIT
	ENVIRONMENTAL AND ENDURANCE TESTS (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN.	MAX.	
01	Rapid Change of Temperature	Para. 9.5	D.C. Leakage Capacitance Change	Table 2, Item 1 Table 2, Item 2	$I_L$ $\frac{\Delta C}{C}$	2.5 × Limit Table 1(a) - 15	+ 15	%
			Dissipation Factor	Table 2, Item 3	DF	1.5 × Limit Table 1(a)		
02	Vibration	Para. 9.6	Visual Inspection	-				
03	Shock	Para. 9.7	Visual Inspection	-				
04	Climatic Sequence	Para. 9.17	D.C. Leakage Capacitance Change	Table 2, Item 1 Table 2, Item 2	$I_L$ $\frac{\Delta C}{C}$	2.5 × Limit Table 1(a) - 15	+ 15	%
			Dissipation Factor Seal Test Ext. Visual Inspection	Table 2, Item 3 Gen. 3003, Para. 9.1.2 Gen. 3003, Para. 9.3	DF	1.5 × Limit Table 1(a) Gen. 3003 Para. 9.1.2		
05	Solderability	Para. 9.8	Visual Inspection	-				
06	Robustness of Terminations	Para. 9.9	Visual Inspection	-				
07	Resistance to Soldering Heat	Para. 9.10	Visual Inspection	-				
08	Damp Heat, Steady State	Para. 9.11	D.C. Leakage Capacitance Change	Table 2, Item 1 Table 2, Item 2	$I_L$ $\frac{\Delta C}{C}$	2 × Limit Table 1(a) - 10	+ 10	%
			Dissipation Factor Insulation Resistance	Table 2, Item 3 Gen. 3003, Para. 9.2.1.4	DF Ri	1.5 × Limit Table 1(a) 100	-	MΩ
09	Cold Test	Para. 9.12	D.C. Leakage Capacitance Change	Table 2, Item 1 Table 2, Item 2	$I_L$ $\frac{\Delta C}{C}$	2 × Limit Table 1(a) - 5.0	+ 5.0	%
			Dissipation Factor Seal Test Visual Examination	Table 2, Item 3 Gen. 3003, Para. 9.1.2 Gen. 3003, Para. 9.3	DF	1.5 × Limit Table 1(a) Gen. 3003 Para. 9.1.2		

**NOTES**

1. The tests in this Table refer to either Chart IV or V and shall be used as applicable.



**TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING (CONT'D)**

NO.	ESA/SCC GENERIC SPEC. NO. 3003		MEASUREMENTS AND INSPECTIONS		SYMBOL	LIMITS		UNIT
	ENVIRONMENTAL AND ENDURANCE TESTS (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN.	MAX.	
10	Low Air Pressure	Para. 9.13 U <sub>R</sub> applied during last minute	Visual Inspection	-		No flash-over, arcing or signs of damage		
11	Surge Voltage	Para. 9.14	Visual Inspection	-				
12	Reverse Voltage	Para. 9.15	D.C. Leakage Capacitance Change  Dissipation Factor Seal Test Ext. Visual Inspection	Table 2, Item 1 Table 2, Item 2  Table 2, Item 3 Gen 3003, Para. 9.1.2 Gen 3003, Para. 9.3	I <sub>L</sub> ΔC C DF	2.5 × Limit Table 1(a) - 15	+ 15	%
13	Life Test	Para. 9.16	D.C. Leakage Capacitance Change  Dissipation Factor Insulation Resistance Seal Test Ext. Visual Inspection	At 500, 1000 & 2000 hours and after 24 hours recovery Table 2, Item 1 Table 2, Item 2  Table 2, Item 3 Gen. 3003, Para. 9.2.1.4 Gen 3003, Para. 9.1.2 Gen 3003, Para. 9.3	I <sub>L</sub> ΔC C DF Ri	2.5 × Limit Table 1(a) - 10	+ 10	%
14	High and Low Temperature Measurements	Para. 9.2.3	Electrical Measurements	Table 3		Table 3		
15	Electrical Measurements	Para. 9.2.4	Electrical Measurements Ext. Visual Inspection	Table 2 Gen 3003, Para. 9.3		Table 2		

**NOTES**

1. The tests in this Table refer to either Chart IV or V and shall be used as applicable.