



europaean space agency
agence spatiale européenne

Pages 1 to 17





DIODES, FAST-SWITCHING,

BASED ON TYPE 1N4148-1

ESA/SCC Detail Specification No. 5101/023



**space components
coordination group**

Issue/Rev.	Date	Approved by	
		SCCG Chairman	ESA Director General or his Deputy
Issue 2	June 1998		
Revision 'A'	April 1999		



DOCUMENTATION CHANGE NOTICE

Rev. Letter	Rev. Date	Reference	CHANGE Item	Approved DCR No.
		This Issue supersedes Issue 1 and incorporates all modifications defined in Revision 'A' to Issue 1 and the changes agreed in the following DCRs:-		
		Cover page		None
		DCN		None
		Table 1(b)	: No. 1, Characteristics and Symbol amended : No. 2, In Remarks "Note 1" deleted and Remarks added : No. 3, Characteristics and Symbol amended and "At + 25°C" deleted from Remarks : No. 4, In Remarks, Pulse Time amended : No. 5, Maximum Ratings amended : No. 7, Remarks deleted and "Note 2" added : New No. 8 added : New Note 2 added	221443 221443 221443 221443 221443 221443 221443
		Figure 1	: Chart and Undertitle amended	221443
		Para. 4.2.2	: New Deviation "(d)" added and all subsequent items renumbered : New Deviation "(g)" added	221443 221443
		Para. 4.5.1	: Existing text deleted and new text added	221443
		Para. 4.5.2	: Title and text amended	221443
		Para. 4.5.5	: Deleted in toto	221443
		Table 2 D.C.	: No. 1, Characteristics, Symbol and Limit amended : No. 2, New No. 2 added and Nos. 2 to 4 renumbered : Old Nos. 2 and 3, "D.C. Method" added to Conditions : No. 5, Renumbered as "11" and moved to Table 2 A.C.	221443 221443 221443 221443
		Table 2 A.C.	: No. 6, Characteristics, Symbol and Conditions amended : No. 7, New No. 7 added and existing No. 7 renumbered as "9" : No. 8, Test Method, Conditions and Limits amended : New No. 9, Characteristics and Conditions amended : No. 10, New No. 10 added : No. 11, added from Table 2 D.C. No. 5 with Symbol, Conditions, Limits and Units amended	221443 221443 221443 221443 221443
		Table 3	: New Notes 2 and 3 added : Renumbered as "3(a)" and Title amended : New No. 1 added : No. 2 renumbered as "3" and Conditions and Limits amended : New No. 4 added : Note 1 added	221443 221443 221443 221443 221443
		Table 3(b)	: New Table added	221443
		Table 4	: First No. 1, Characteristics and Symbol amended : First No. 3, Renumbered as "4" and Characteristics amended : Second Nos. 1 and 3 deleted	221443 221443 221443
		Table 5(b)	: No. 1, New No. 1 added : Existing No. 1 renumbered as "2" and complete entry amended : Old No. 2, Renumbered as "3" and Characteristics and Conditions amended : Old No. 3 deleted	221443 221443 221443
		Table 6	: "Change Limits (Δ)" column added : First No. 1, Characteristics, Symbol and Limits amended : First No. 3, Renumbered as "4" : Second Nos. 1 and 3 deleted	221443 221443 221443 221443
		Appendix 'A'	: Appendix added	221443
'A'	Apr. '99	P1. Cover page P2. DCN P13. Table 4 P16. Table 6	: No. 4, No, Characteristic and Symbol corrected : No. 4, No, Characteristic and Symbol corrected	None None 23908 23908




	ESA/SCC Detail Specification No. 5101/023		PAGE 3 ISSUE 2
---	--	--	-------------------

TABLE OF CONTENTS

		<u>Page</u>
1.	<u>GENERAL</u>	5
1.1	Scope	5
1.2	Component Type Variants	5
1.3	Maximum Ratings	5
1.4	Parameter Derating Information	5
1.5	Physical Dimensions	5
1.6	Functional Diagram	5
1.7	High Temperature Test Precautions	5
1.8	Handling Precautions	5
2.	<u>APPLICABLE DOCUMENTS</u>	5
3.	<u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u>	5
4.	<u>REQUIREMENTS</u>	9
4.1	General	9
4.2	Deviations from Generic Specification	9
4.2.1	Deviations from Special In-process Controls	9
4.2.2	Deviations from Final Production Tests	9
4.2.3	Deviations from Burn-in and Electrical Measurements	9
4.2.4	Deviations from Qualification Tests	9
4.2.5	Deviations from Lot Acceptance Tests	10
4.3	Mechanical Requirements	10
4.3.1	Dimension Check	10
4.3.2	Weight	10
4.3.3	Terminal Strength	10
4.4	Materials and Finishes	10
4.4.1	Case	10
4.4.2	Lead Material and Finish	10
4.5	Marking	10
4.5.1	General	10
4.5.2	Polarity	11
4.5.3	The SCC Component Number	11
4.5.4	Traceability Information	11
4.6	Electrical Measurements	11
4.6.1	Electrical Measurements at Room Temperature	11
4.6.2	Electrical Measurements at High and Low Temperatures	11
4.6.3	Circuits for Electrical Measurements	11
4.7	Burn-in Tests	11
4.7.1	Parameter Drift Values	11
4.7.2	Conditions for H.T.R.B. and Power Burn-in	11
4.7.3	Electrical Circuits for H.T.R.B. and Power Burn-in	11
4.8	Environmental and Endurance Tests	15
4.8.1	Electrical Measurements on Completion of Environmental Tests	15
4.8.2	Electrical Measurements at Intermediate Points and on Completion of Endurance Tests	15
4.8.3	Conditions for Operating Life Tests	15
4.8.4	Electrical Circuits for Operating Life Tests	15
4.8.5	Conditions for High Temperature Storage Test	15

 	ESA/SCC Detail Specification No. 5101/023		PAGE 4 ISSUE 2
---	--	--	-------------------

TABLES

		<u>Page</u>
1(a)	Type Variants	6
1(b)	Maximum Ratings	6
2	Electrical Measurements at Room Temperature - D.C. Parameters	12
	Electrical Measurements at Room Temperature - A.C. Parameters	12
3(a)	Electrical Measurements at High Temperature	13
3(b)	Electrical Measurements at Low Temperature	13
4	Parameter Drift Values	13
5(a)	Conditions for High Temperature Reverse Bias Burn-in	14
5(b)	Conditions for Power Burn-in and Operating Life Tests	14
6	Electrical Measurements at Intermediate Points and on Completion of Endurance Testing	16

FIGURES

1	Parameter Derating Information	7
2	Physical Dimensions	8
3	Functional Diagram	8
4	Circuits for Electrical Measurements	13
5(a)	Electrical Circuit for High Temperature Reverse Bias Burn-in	14
5(b)	Electrical Circuit for Power Burn-in and Operating Life Tests	14

APPENDICES (Applicable to specific Manufacturers only)

'A'	Agreed Deviations for MICROSEMI (IRL)	17
-----	---------------------------------------	----

**1. GENERAL****1.1 SCOPE**

This specification details the ratings, physical and electrical characteristics, test and inspection data for Diodes, Fast-Switching, based on Type 1N4148-1. It shall be read in conjunction with ESA/SCC Generic Specification No. 5000, the requirements of which are supplemented herein.

1.2 COMPONENT TYPE VARIANTS

Variants of the basic type diodes specified herein, which are also covered by this specification, are given in Table 1(a).

1.3 MAXIMUM RATINGS

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the diodes specified herein, are as scheduled in Table 1(b).

1.4 PARAMETER DERATING INFORMATION

The parameter derating information applicable to the diodes specified herein, is shown in Figure 1.

1.5 PHYSICAL DIMENSIONS

The physical dimensions of the diodes specified herein, are shown in Figure 2.

1.6 FUNCTIONAL DIAGRAM

The functional diagram, showing lead identification, of the diodes specified herein, is shown in Figure 3.

1.7 HIGH TEMPERATURE TEST PRECAUTIONS

For tin-lead plated or solder-dipped lead finish, all tests to be performed at a temperature that exceeds +125°C shall be carried out in 100% inert atmosphere.

1.8 HANDLING PRECAUTIONS

These components are susceptible to damage by electrostatic discharge. Therefore, suitable precautions shall be employed for protection during all phases of manufacture, testing, shipment and any handling.

These components are categorised as Class 3 with a Minimum Critical Path Failure Voltage of 6500V.

2. APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESA/SCC Generic Specification No. 5000 for Discrete Semiconductors.
- (b) MIL-STD-750, Test Methods and Procedures for Semiconductor Devices.
- (c) MIL-STD-202, Test Methods for Electronic and Electrical Component Parts.

3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESA/SCC Basic Specification No. 21300 shall apply.

**TABLE 1(a) - TYPE VARIANTS**

VARIANT	BASED ON TYPE	LEAD MATERIAL AND FINISH
01	1N4148-1	C3 or C4
02	1N4148-1	L3 or L4

TABLE 1(b) - MAXIMUM RATINGS


No.	CHARACTERISTICS	SYMBOL	MAXIMUM RATING	UNIT	REMARKS
1	Working Peak Reverse Voltage	V_{RWM}	75	V(pk)	
2	Total Power Dissipation	P_{tot}	500	mW	At $T_{amb} \leq +25^{\circ}C$
3	Average Output Rectified Current	I_O	200	mA	Note 1
4	Forward Surge Current	I_{FSM}	2.0	A	Pulse: 1/120s at $+25^{\circ}C$
5	Operating Temperature Range	T_{op}	-65 to +175	$^{\circ}C$	T_{amb}
6	Storage Temperature Range	T_{stg}	-65 to +175	$^{\circ}C$	
7	Soldering Temperature	T_{sol}	+260	$^{\circ}C$	Note 2
8	Thermal Resistance (Junction to Lead)	$R_{TH(J-L)}$	+250	$^{\circ}C/W$	

NOTES

1. At $T_{amb} \leq +25^{\circ}C$. For derating at $T_{amb} > +25^{\circ}C$, see Figure 1.
2. Duration 10 seconds maximum at a distance of not less than 1.5mm from the device body and the same lead shall not be resoldered until 3 minutes have elapsed.




FIGURE 1 - PARAMETER DERATING INFORMATION

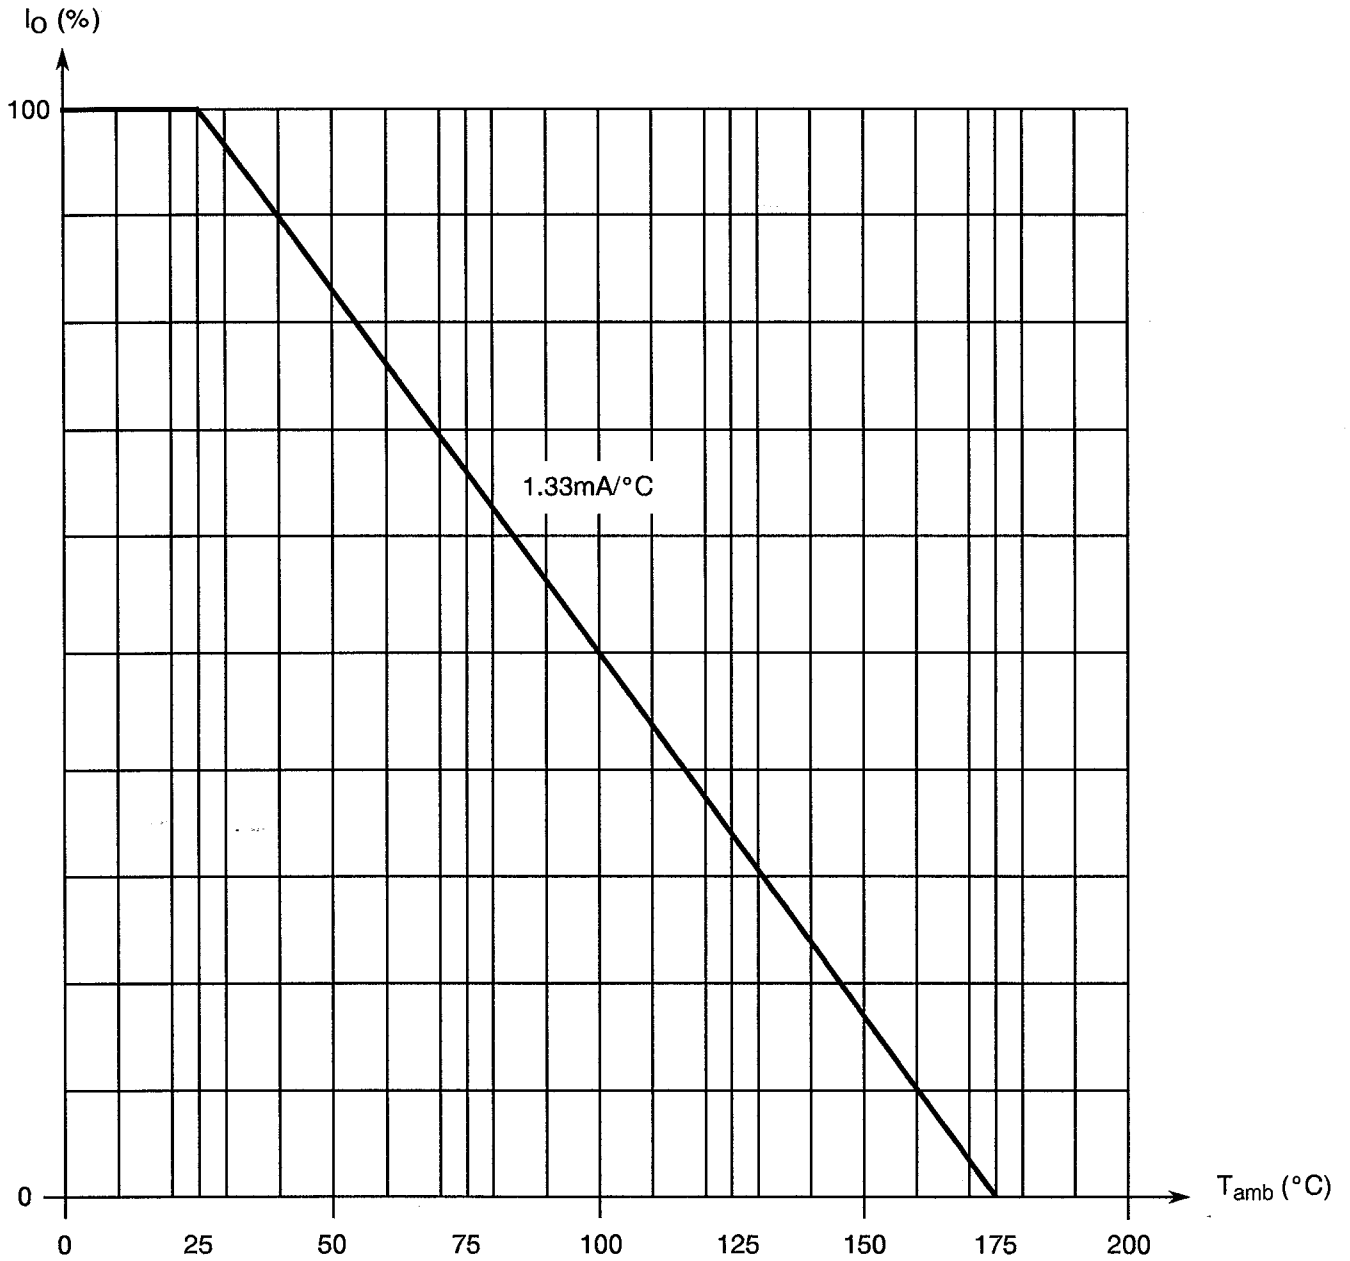

Average Output Rectified Current versus Temperature

FIGURE 2 - PHYSICAL DIMENSIONS

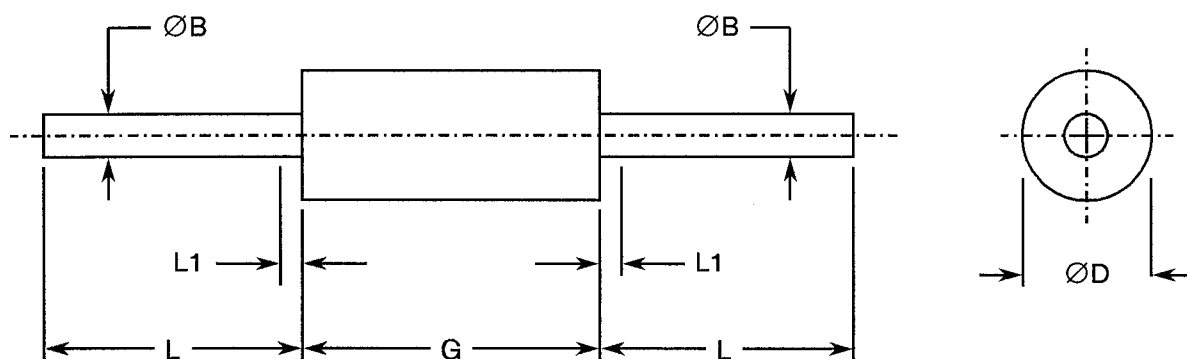


SYMBOL	MILLIMETRES		NOTES
	MIN.	MAX.	
ØB	0.458	0.558	-
ØD	1.53	2.28	1
G	3.05	5.08	1
L	12.70	-	-
L1	-	1.27	2

NOTES


1. Package contour optional within cylinder of diameter ØD and length G. Slugs, if any, shall be included within this cylinder but shall not be subject to the minimum limit of ØD.
2. Lead diameter not controlled in this zone to allow for flash, lead finish build-up, and minor irregularities other than slugs.

FIGURE 3 - FUNCTIONAL DIAGRAM

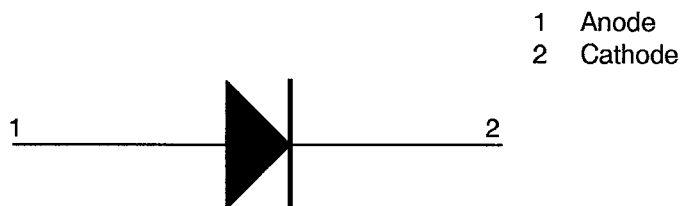

NOTES

1. The cathode end shall be marked with a coloured ring.

	ESA/SCC Detail Specification No. 5101/023	PAGE 9 ISSUE 2
---	--	-------------------

4. REQUIREMENTS

4.1 GENERAL

The complete requirements for procurement of the diodes specified herein shall be as stated in this specification and ESA/SCC Generic Specification No. 5000 for Discrete Semiconductors. Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESA/SCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION

4.2.1 Deviations from Special In-process Controls

None.

4.2.2 Deviations from Final Production Tests (Chart II)

- (a) Para. 9.2.1, Bond Strength Test: Not applicable.
- (b) Para. 9.2.2, Die Shear Test: Not applicable.
- (c) Para. 9.5.1, Thermal Shock Test: Shall be performed in accordance with Test Method 107, Condition 'B' of MIL-STD-202.
- (d) At any time following Para. 9.5.1, Thermal Shock Test, Thermal Impedance measurements shall be performed in accordance with MIL-STD-750, Test Method 3101 as specified in Table 2, No. 11.
- (e) Para. 9.6, Constant Acceleration: Not applicable.
- (f) Para. 9.7, Particle Impact Noise Detection (PIND) Test: Not applicable.
- (g) Immediately following Para. 9.9.3, Electrical Measurements at Room Temperature, a Surge Current test shall be performed on a sample basis, LTPD=7 or lower, in accordance with MIL-STD-750, Test Method 4066 using the following conditions:

- $I_{FSM} = 2.0A(pk)$
 10 surges at a rate of 1 per minute maximum and of duration 1/100 or 1/120 seconds.


Before and after Surge Current application, the sample devices shall be electronically tested in accordance with Table 6 of this specification.

4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)

- (a) Para. 9.8.1, Seal Test, Fine Leak: Not applicable.
- (b) Para. 9.8.2, Seal Test, Gross Leak: Shall be performed in accordance with Test Method 1071, Condition 'E' of MIL-STD-750.
- (c) Para. 9.12, Radiographic Inspection: Not applicable.

4.2.4 Deviations from Qualification Tests (Chart IV)

- (a) Para. 9.2.3, Bond Strength Test: Not applicable.
- (b) Para. 9.2.4, Die Shear Test: Not applicable.
- (c) Para. 9.8.1, Seal Test, Fine Leak: Not applicable.
- (d) Para. 9.8.2, Seal Test, Gross Leak: Shall be performed in accordance with Test Method 1071, Condition 'E' of MIL-STD-750.
- (e) Para. 9.15, Constant Acceleration: Not applicable.

	<p style="text-align: center;">ESA/SCC Detail Specification No. 5101/023</p>	<p style="text-align: right;">PAGE 10 ISSUE 2</p>
---	--	---

4.2.5 Deviations from Lot Acceptance Tests (Chart V)

- (a) Para. 9.8.1, Seal Test, Fine Leak: Not applicable.
- (b) Para. 9.8.2, Seal Test, Gross Leak: Shall be performed in accordance with Test Method 1071, Condition 'E' of MIL-STD-750.
- (c) Para. 9.15, Constant Acceleration: Not applicable.

4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the diodes specified herein shall be checked. They shall conform to those shown in Figure 2.

4.3.2 Weight

The maximum weight of the diodes specified herein shall be 0.2 grammes.

4.3.3 Terminal Strength

The requirements for terminal strength testing are specified in Section 9 of ESA/SCC Generic Specification No. 5000. The test conditions shall be as follows:-

- Test Condition : 'A'.
- Applied Force : 5.0 Newtons.
- Duration : 10 seconds.

4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the diodes specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

4.4.1 Case

Glass, hermetically sealed.

4.4.2 Lead Material and Finish

The lead material shall be Type 'C' or Type 'L' with Type '3 or 4' finish in accordance with the requirements of ESA/SCC Basic Specification No. 23500. (See Table 1(a) for Type Variants).

4.5 MARKING

4.5.1 General

The marking of all components delivered to this specification shall be in accordance with the requirements of ESA/SCC Basic Specification No. 21700 and the following paragraphs. When the component is too small to accommodate all of the marking specified, as much as space permits shall be marked and the marking information, in full, shall accompany the component in its primary package.

The information to be marked and the order of precedence, shall be as follows:-


- (a) Polarity.
- (b) The SCC Component Number.
- (c) Traceability Information.

4.5.2 Polarity

Polarity shall be as shown in Figure 3.

4.5.3 The SCC Component Number

Each component shall bear the SCC Component Number which shall be constituted and marked as follows:

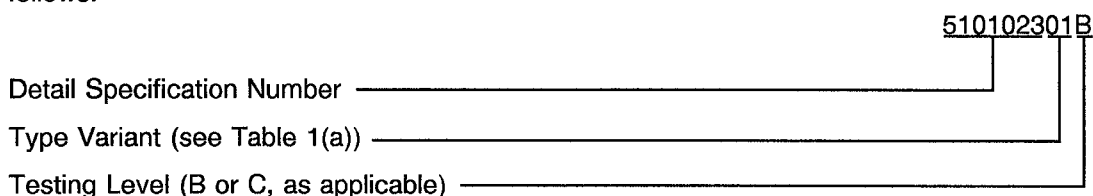

4.5.4 Traceability Information

Each component shall be marked in respect of traceability information as defined in ESA/SCC Basic Specification No. 21700.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured at room temperature are scheduled in Table 2. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.6.2 Electrical Measurements at High and Low Temperatures

The parameters to be measured at high and low temperatures are scheduled in Table 3.

4.6.3 Circuits for Electrical Measurements

Circuits for use in performing electrical measurements listed in Tables 2 and 3 are shown in Figure 4.

4.7 BURN-IN TESTS

4.7.1 Parameter Drift Values

The parameter drift values applicable to burn-in are specified in Table 4 of this specification. Unless otherwise stated, measurements shall be performed at $T_{amb} = +22 \pm 3$ °C. The parameter drift values (Δ) applicable to the scheduled parameters shall not be exceeded. In addition to these drift value requirements for a given parameter, the appropriate limit value specified in Table 2 shall not be exceeded.

4.7.2 Conditions for H.T.R.B. and Power Burn-in

The requirements for H.T.R.B. and Power Burn-in are specified in Section 7 of ESA/SCC Generic Specification No. 5000. The conditions for H.T.R.B. and Power Burn-in shall be as specified in Tables 5(a) and 5(b) of this specification.

4.7.3 Electrical Circuits for H.T.R.B. and Power Burn-in

Circuits for use in performing the H.T.R.B. and Power Burn-in tests are shown in Figures 5(a) and 5(b) of this specification.



TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE - D.C. PARAMETERS

No.	CHARACTERISTICS	SYMBOL	MIL-STD-750 TEST METHOD	TEST CONDITIONS	LIMITS		UNIT
					MIN.	MAX.	
1	D.C. Forward Voltage 1	V_{F1}	4011	$I_F = 10\text{mA}$	-	0.8	V
2	D.C. Forward Voltage 2	V_{F2}	4011	$I_F = 100\text{mA}$	-	1.2	V
3	D.C. Reverse Current 1	I_{R1}	4016	D.C. Method $V_R = -20\text{V}$	-	25	nA
4	D.C. Reverse Current 2	I_{R2}	4016	D.C. Method $V_R = -75\text{V}$	-	0.5	μA
5	D.C. Breakdown Voltage	$V_{(BR)}$	4021	$I_R = -100\mu\text{A}$	100	-	V

TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE - A.C. PARAMETERS

No.	CHARACTERISTICS	SYMBOL	MIL-STD-750 TEST METHOD	TEST CONDITIONS	LIMITS		UNIT
					MIN.	MAX.	
6	Capacitance 1	C_{O1}	4001	$V_R = 0\text{V}$ $V_{sig} = 50\text{mV(p-p)}$ $f = 1.0\text{MHz}$ (Note 1)	-	4.0	pF
7	Capacitance 2	C_{O2}	4001	$V_R = -1.5\text{V}$ $V_{sig} = 50\text{mV(p-p)}$ $f = 1.0\text{MHz}$ (Note 1)	-	2.8	pF
8	Reverse Recovery Time	t_{rr}	4031, Condition 'A'	$I_F = I_R = 10\text{mA}$ $R_L = 100\Omega \pm 5\%$ $C \geq 1.0\text{nF}$ $I_{rr} = 1.0\text{mA}$ $R = 1000\Omega$ (Note 1)	-	5.0	ns
9	Forward Recovery Time	t_{fr}	4026	$I_F = 50\text{mA}$ (Notes 1 and 2)	-	20	ns
10	Forward Recovery Voltage	V_{fr}	4026	$I_F = 50\text{mA}$ (Notes 1 and 2)	-	5.0	V(pk)
11	Thermal Impedance	$Z_{TH(J-C)}$	3101	$I_H = 300$ to 500 mA $t_H = 10\text{ms}$ $I_M = 1.0$ to 10 mA $t_{MD} = 70\mu\text{s max.}$ (Note 3)	-	70	$^{\circ}\text{C/W}$

NOTES

1. Measurements shall be performed on a sample basis LTPD = 7 or less.
2. Forward Recovery Time (t_{fr}) shall be measured as the interval between zero time and the point where the pulse has decreased to 110% of the steady-state value of V_F when $I_F = 50\text{mA}$. The maximum rise time of the response detector shall be 1.0ns. The maximum Forward Recovery Voltage (V_{fr}) shall be measured during the forward recovery interval.
3. During Chart II only.

TABLE 3(a) - ELECTRICAL MEASUREMENTS AT HIGH TEMPERATURE

No.	CHARACTERISTICS	SYMBOL	MIL-STD-750 TEST METHOD	TEST CONDITIONS (Note 1)	LIMITS		UNIT
					MIN.	MAX.	
1	D.C. Forward Voltage 1	V_{F1}	4011	$I_F = 10\text{mA}$	-	0.8	V
3	D.C. Reverse Current 1	I_{R1}	4016	D.C. Method $V_R = -20\text{V}$	-	35	μA
4	D.C. Reverse Current 2	I_{R2}	4016	D.C. Method $V_R = -75\text{V}$	-	75	μA

NOTES

1. $T_{\text{amb}} = +150^\circ\text{C}$.

TABLE 3(b) - ELECTRICAL MEASUREMENTS AT LOW TEMPERATURE

No.	CHARACTERISTICS	SYMBOL	MIL-STD-750 TEST METHOD	TEST CONDITIONS (Note 1)	LIMITS		UNIT
					MIN.	MAX.	
2	D.C. Forward Voltage 2	V_{F2}	4011	$I_F = 100\text{mA}$	-	1.3	V

NOTES

1. $T_{\text{amb}} = -55^\circ\text{C}$.

FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS

Not applicable.

TABLE 4 - PARAMETER DRIFT VALUES

No.	CHARACTERISTICS	SYMBOL	SPEC. AND/OR TEST METHOD	TEST CONDITIONS	CHANGE LIMITS (Δ)	UNIT
1	D.C. Forward Voltage 1	V_{F1}	As per Table 2	As per Table 2	± 50	mV
3	D.C. Reverse Current 1	I_{R1}	As per Table 2	As per Table 2	± 15 or (1) ± 100	nA %

NOTES

1. Whichever is greater.

TABLE 5(a) - CONDITIONS FOR HIGH TEMPERATURE REVERSE BIAS BURN-IN

No.	CHARACTERISTICS	SYMBOL	CONDITION	UNIT
1	Ambient Temperature	T_{amb}	+ 150	°C
2	Reverse Voltage	V_R	- 75 (Note 1)	V
3	Duration	t	72	hrs

NOTES

1. At the end of the H.T.R.B. Burn-in, T_{amb} shall be decreased to room temperature and the reverse-bias shall remain applied until T_{amb} is less than +35°C.

TABLE 5(b) - CONDITIONS FOR POWER BURN-IN AND OPERATING LIFE TESTS

No.	CHARACTERISTICS	SYMBOL	CONDITION	UNIT
1	Ambient Temperature	T_{amb}	MIL-STD-750	°C
2	Working Peak Reverse Voltage	V_{RWM}	75	V(pk)
3	Average Output Rectified Current	I_O	200 f = 50 to 60 Hz	mA

FIGURE 5(a) - ELECTRICAL CIRCUIT FOR HIGH TEMPERATURE REVERSE BIAS BURN-IN

Not applicable.

FIGURE 5(b) - ELECTRICAL CIRCUIT FOR POWER BURN-IN AND OPERATING LIFE TESTS

Not applicable.



- 4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESA/SCC GENERIC SPECIFICATION NO. 5000)
- 4.8.1 Electrical Measurements on Completion of Environmental Tests
The parameters to be measured on completion of environmental tests are scheduled in Table 2. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.
- 4.8.2 Electrical Measurements at Intermediate Points and on Completion of Endurance Tests
The parameters to be measured at intermediate points and on completion of endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.
- 4.8.3 Conditions for Operating Life Tests (Part of Endurance Testing)
The requirements for operating life testing are specified in Section 9 of ESA/SCC Generic Specification No. 5000. The conditions for operating life testing shall be the same as specified in Table 5(b) for the burn-in test.
- 4.8.4 Electrical Circuits for Operating Life Tests
The circuit to be used for performance of the operating life tests shall be the same as shown in Figure 5(b) for burn-in.
- 4.8.5 Conditions for High Temperature Storage Test (Part of Endurance Testing)
The requirements for the high temperature storage test are specified in ESA/SCC Generic Specification No. 5000. The temperature to be applied shall be the maximum storage temperature specified in Table 1(b) of this specification.



 SCC	ESA/SCC Detail Specification No. 5101/023	Rev. 'A'	PAGE 16 ISSUE 2
--	--	----------	--------------------

TABLE 6 - ELECTRICAL MEASUREMENTS AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING

No.	CHARACTERISTICS	SYMBOL	SPEC. AND/OR TEST METHOD	TEST CONDITIONS	CHANGE LIMITS (Δ)	LIMITS		UNIT
						Min.	Max.	
1	D.C. Forward Voltage 1	V_{F1}	As per Table 2	As per Table 2	$\pm 50\text{mV}$	-	0.8	V
3	D.C. Reverse Current 1	I_{R1}	As per Table 2	As per Table 2	$\pm 20\text{nA}$ or (1) $\pm 100\%$	-	25	nA

NOTES

1. Whichever is greater, referred to initial value.

	<p style="text-align: center;">ESA/SCC Detail Specification No. 5101/023</p>		<p>PAGE 17 ISSUE 2</p>
---	--	--	----------------------------

APPENDIX 'A'

Page 1 of 1

AGREED DEVIATIONS FOR MICROSEMI (IRL)

ITEMS AFFECTED	DESCRIPTION OF DEVIATIONS
Table 2, No. 11 of this specification	The maximum limit for $Z_{TH(J-C)}$ in screening shall be derived by means of Lot Normal testing on each die lot being processed and shall not exceed 30°C/W.