



europaean space agency
agence spatiale europeenne

Pages 1 to 16





R.F. LOADS, FIXED, COAXIAL,

0 - 22 GHz

ESA/SCC Detail Specification No. 3403/006



**space components
coordination group**

| Issue/Rev. | Date | Approved by | |
|--------------|---------------|--|---|
| | | SCCG Chairman | ESA Director General or his Deputy |
| Issue 2 | October 1999 |  |  |
| Revision 'A' | February 2002 |  |  |
| | | | |
| | | | |



DOCUMENTATION CHANGE NOTICE

| Rev. Letter | Rev. Date | Reference | CHANGE Item | Approved DCR No. |
|-------------|-----------|--|---|------------------|
| | | This Issue supersedes Issue 1 and incorporates all modifications defined in Revisions 'A', 'B' and 'C' to Issue 1 and the changes agreed in the following DCRs:- | | |
| | | Cover page | | None |
| | | DCN | | None |
| | | Para. 1.2 | : Text completed | 23917 |
| | | Para. 2 | : Items (b) and (c) Titles amended | 221458 |
| | | | : Item (d) deleted and (e) renumbered as "(d)" | 23917 |
| | | Table 1(a) | : Frequency Range columns amended for VSWR | 221458 |
| | | | : Contact Types specified for Variants 01 and 02 | 221458 |
| | | | : Variant 03 added | 221458 |
| | | Table 1(b) | : Nos. 1, 7 and 8, Variants added | 221458 |
| | | | : Note 2 amended | 221458 |
| | | Figure 1 | : Derating added for Variant 03 | 221458 |
| | | Figure 2 | : Variant 03 added to Drawing and Table | 221458 |
| | | Figure 3 | : New Figure 3 entry added | 23917 |
| | | Para. 3 | : Symbol and definition for RL deleted | 23917 |
| | | Para. 4.3.2 | : In Title and text, "Mass" corrected to weight | 23917 |
| | | | : Text extended for Variant 03 | 221458 |
| | | Para. 4.3.3 | : Text extended for Variant 03 | 221458 |
| | | Para. 4.3.4 | : Title and text amended | 221458 |
| | | Para. 4.3.5 | : Title amended | 221458 |
| | | Para. 4.4.2 | : Finish amended | 221457 |
| | | Para. 4.5.1 | : Existing text deleted and new text added | 23917 |
| | | Para. 4.5.2 | : Testing Level text completed | 23917 |
| | | Para. 4.7.2 | : In the second sentence, "5" amended to "5(a)" | 23917 |
| | | Table 2 | : No. 2, Characteristics and Symbol standardised | 23917 |
| | | Figure 4 | : New entry added and existing Figure 3 included | 23917 |
| | | Table 4 | : No. 2, Characteristics and Symbol Standardised | 23917 |
| | | Table 5 | : Renumbered as "5(a)" | 23917 |
| | | | : Duration deleted | 23917 |
| | | Table 5(b) | : Added from existing Table 7 and Duration deleted | 23917 |
| | | | : No. 1, Limits amended | 221458 |
| | | Figure 5(a) | : New entry added | 23917 |
| | | Figure 5(b) | : Added from existing Figure 4 | 23917 |
| | | Para. 4.8.4 | : In the second sentence, "7" amended to "5(b)" | 23917 |
| | | Para. 4.8.5 | : "Not applicable" deleted and text added | 23917 |
| | | Para. 4.8.6 | : Paragraph deleted in toto | 23917 |
| | | Table 6 | : Nos. 1 and 2, under Test Methods and Conditions, "3" amended to "4" | 23917 |
| | | | : No. 8, under Test Methods and Conditions, "7" and "4" amended to 5(b) | 23917 |
| | | | : No. 10, Limits amended | 221458 |
| | | | : Where necessary, "VSWR" and "RL" amended | 23917 |
| | | Table 7 | : Table deleted in toto | 23917 |
| 'A' | Feb. '02 | Cover page | | None |
| | | DCN | | None |
| | | P6. Table 1(a) | : New values for VSWR inserted for Variant 01 | 221621 |
| | | P9. Para. 4.2.3 | : Item (a) added | 221668 |

TABLE OF CONTENTS

| | <u>Page</u> |
|--|-------------|
| 1. <u>GENERAL</u> | 5 |
| 1.1 Scope | 5 |
| 1.2 Component Type Variants | 5 |
| 1.3 Maximum Ratings | 5 |
| 1.4 Parameter Derating Information | 5 |
| 1.5 Physical Dimensions | 5 |
| 2. <u>APPLICABLE DOCUMENTS</u> | 5 |
| 3. <u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u> | 5 |
| 4. <u>REQUIREMENTS</u> | 9 |
| 4.1 General | 9 |
| 4.2 Deviations from Generic Specification | 9 |
| 4.2.1 Deviations from Special In-process Controls | 9 |
| 4.2.2 Deviations from Final Production Tests | 9 |
| 4.2.3 Deviations from Burn-in and Electrical Measurements | 9 |
| 4.2.4 Deviations from Qualification Tests | 9 |
| 4.2.5 Deviations from Lot Acceptance Tests | 9 |
| 4.3 Mechanical Requirements | 9 |
| 4.3.1 Dimension Check | 9 |
| 4.3.2 Weight | 9 |
| 4.3.3 Coupling Proof Torque | 9 |
| 4.3.4 Mating and Unmating Forces | 9 |
| 4.3.5 Contact Engagement and Separation Forces | 10 |
| 4.4 Materials and Finishes | 10 |
| 4.4.1 Body and Coupling Nut | 10 |
| 4.4.2 Centre Contact | 10 |
| 4.4.3 Inserts | 10 |
| 4.5 Marking | 10 |
| 4.5.1 General | 10 |
| 4.5.2 The SCC Component Number | 10 |
| 4.5.3 Traceability Information | 10 |
| 4.6 Electrical Measurements | 11 |
| 4.6.1 Electrical Measurements at Room Temperature | 11 |
| 4.6.2 Electrical Measurements at High and Low Temperatures | 11 |
| 4.6.3 Circuits for Electrical Measurements | 11 |
| 4.7 Burn-in and Electrical Measurements | 11 |
| 4.7.1 Parameter Drift Values | 11 |
| 4.7.2 Conditions for Burn-in | 11 |
| 4.7.3 Electrical Circuits for Burn-in | 11 |
| 4.8 Environmental and Endurance Tests | 14 |
| 4.8.1 Measurements and Inspections on Completion of Environmental Tests | 14 |
| 4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests | 14 |
| 4.8.3 Measurements and Inspections on Completion of Endurance Tests | 14 |
| 4.8.4 Conditions for Operating Life Tests | 14 |
| 4.8.5 Electrical Circuits for Operating Life Tests | 14 |

TABLES


| | | |
|------|---|----|
| 1(a) | Type Variants | 6 |
| 1(b) | Maximum Ratings | 6 |
| 2 | Electrical Measurements at Room Temperature | 12 |
| 3 | Electrical Measurements at High and Low Temperatures | 12 |
| 4 | Parameter Drift Values | 13 |
| 5(a) | Conditions for Burn-in | 13 |
| 5(b) | Conditions for Operating Life Testing | 13 |
| 6 | Measurements and Inspections on Completion of Environmental and Endurance Testing | 15 |

FIGURES

| | | |
|------|--------------------------------------|----|
| 1 | Parameter Derating Information | 7 |
| 2 | Physical Dimensions | 8 |
| 3 | Functional Diagram | 8 |
| 4 | Circuits for Electrical Measurements | 12 |
| 5(a) | Schematic for Burn-in | 13 |
| 5(b) | Schematic for Operating Life Testing | 13 |

APPENDICES (Applicable to specific Manufacturers only)

None.

| | | |
|--|--|---------------------------|
|  | <p style="text-align: center;">ESA/SCC Detail Specification No. 3403/006</p> | <p>PAGE 5 ISSUE 2</p> |
|--|--|---------------------------|

1. **GENERAL**

1.1 **SCOPE**

This specification details the ratings, physical and electrical characteristics, test and inspection data for R.F. Loads, Fixed, Coaxial, 0 - 22 GHz. It shall be read in conjunction with ESA/SCC Generic Specification No. 3403, the requirements of which are supplemented herein.

1.2 **COMPONENT TYPE VARIANTS**

Variants of the basic type loads specified herein, which are also covered by this specification, are given in Table 1(a).

1.3 **MAXIMUM RATINGS**

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the loads specified herein, are scheduled in Table 1(b).

1.4 **PARAMETER DERATING INFORMATION**

The derating information for the loads specified herein is shown in Figure 1.

1.5 **PHYSICAL DIMENSIONS**

The physical dimensions of the loads specified herein are shown in Figure 2.

2. **APPLICABLE DOCUMENTS**

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESA/SCC Generic Specification No. 3403, Attenuators and Loads, RF, Coaxial, Fixed.
- (b) ESA/SCC Detail Specification No. 3402/003, RF Coaxial Connectors, Type SMA, 50 Ohms, Adaptors and Connecting Pieces.
- (c) ESA/SCC Detail Specification No. 3402/008, RF Coaxial Connectors, Type TNC, 50 Ohms (Male Contact).
- (d) MIL-G-45204, Gold-plating, Electro-deposited.

3. **TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS**

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESA/SCC Basic Specification No. 21300 shall apply. In addition, the following symbols are used:-

E = RF Leakage.

**TABLE 1(a) - TYPE VARIANTS**

| (1) Variant No. | (2) Contact Type | (3) VSWR Frequency Range (GHz) | | | | |
|--------------------|---------------------|--------------------------------------|---------------|----------------|---------------|-------------|
| | | dc < f ≤ 4.0 | 4.0 < f ≤ 8.0 | 8.0 < f < 12.4 | 12.4 < f ≤ 18 | 18 < f ≤ 22 |
| 01 | Male SMA | 1.05 | 1.15 | 1.15 | 1.20 | 1.30 |
| 02 | Female SMA | 1.05 | 1.15 | 1.15 | 1.20 | 1.25 |
| 03 | Male TNC | 1.08 | 1.10 | 1.15 | 1.20 | - |


TABLE 1(b) - MAXIMUM RATINGS

| No. | Characteristics | Symbol | Maximum Ratings | Unit | Remarks |
|-----|--|------------------|-------------------------|------|---------|
| 1 | R.F. Power Variants 01 to 02 Variant 03 | P | 1.0 2.0 | W | Note 1 |
| 2 | Peak Power | P _p | 100 | W | Note 2 |
| 3 | Operating Temperature Range | T _{op} | -55 to +125 | °C | |
| 4 | Storage Temperature Range | T _{stg} | -55 to +125 | °C | |
| 5 | Frequency Range | f | dc to 22 | GHz | |
| 6 | Impedance | Z | 48 to 52 | Ω | |
| 7 | RF Leakage Variants 01 to 02 Variant 03 | E | -85 -(80dB - f(GHz)) | dB | |
| 8 | Coupling Nut Torque Variants 01 to 02 Variant 03 | T _q | 120 265 | N.cm | |


NOTES

- See Figure 1.
- Duration 1.0μs, 1% Duty Cycle.

FIGURE 1 - PARAMETER DERATING INFORMATION

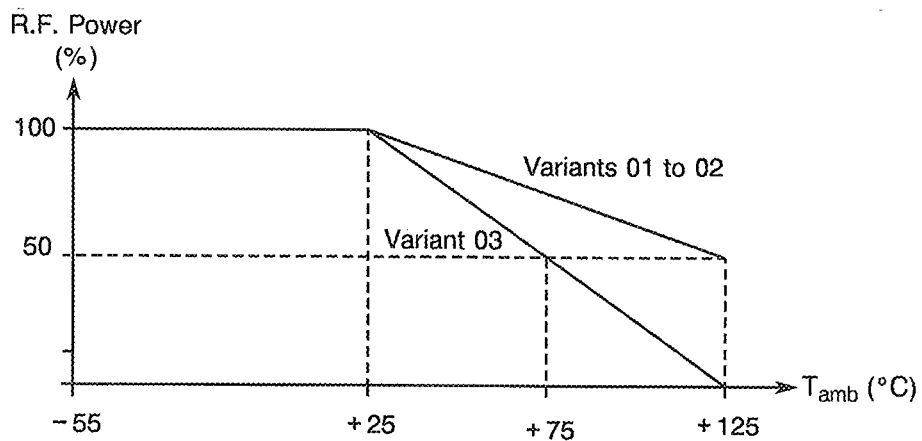

RF Power versus Temperature

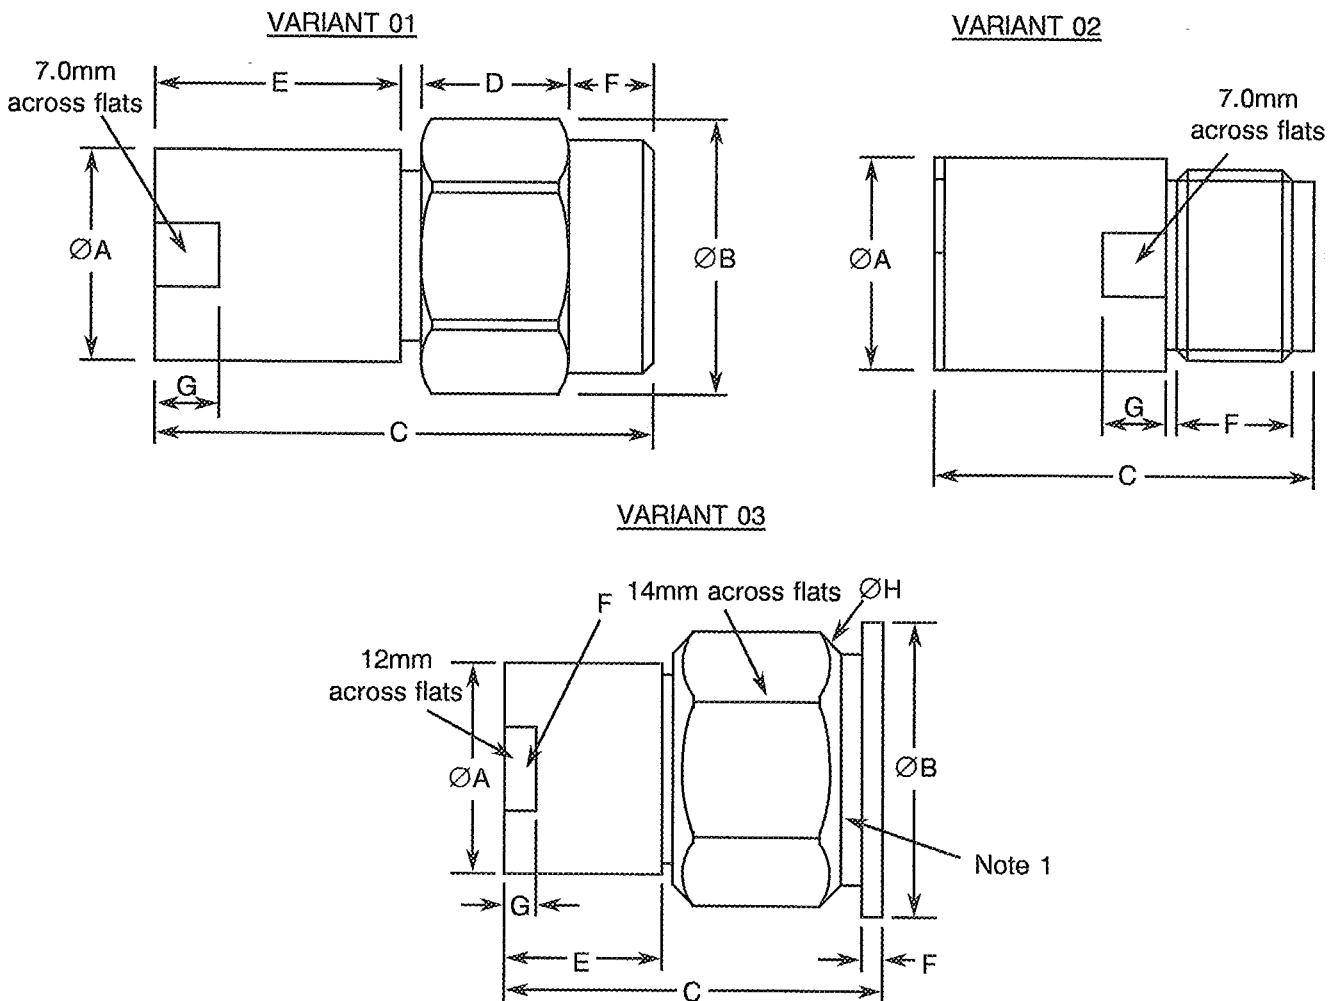FIGURE 2 - PHYSICAL DIMENSIONS


Reference plane (See ESA/SCC Detail Specification No. 3402/001 for Variant 01)
 (See ESA/SCC Detail Specification No. 3402/002 for Variant 02)
 (See ESA/SCC Detail Specification No. 3402/008 for Variant 03)

| SYMBOL | MILLIMETRES | | | | | |
|--------|-------------|------|------------|------|------------|-------|
| | VARIANT 01 | | VARIANT 02 | | VARIANT 03 | |
| | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. |
| ØA | - | 7.7 | - | 7.7 | 12.95 | 13.05 |
| ØB | 7.8 | 8.0 | - | - | 15.90 | 16.00 |
| C | - | 16.5 | - | 14.3 | - | 25.00 |
| D | - | 5.9 | - | - | - | - |
| E | - | 8.0 | - | - | 9.15 | 9.45 |
| F | - | 2.6 | 3.9 | - | 1.80 | 2.20 |
| G | 1.9 | 2.3 | 1.9 | 2.3 | 2.5 | 3.00 |
| ØH | - | - | - | - | 0.90 | 1.00 |

NOTES

1. 3 holes 120° apart on Ø13.80(+0.2-0.0) mm.

FIGURE 3 - FUNCTIONAL DIAGRAM

Not applicable.



4. REQUIREMENTS

4.1 GENERAL

The complete requirements for procurement of the components specified herein shall be as stated in this specification and ESA/SCC Generic Specification No. 3403. Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESA/SCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION

4.2.1 Deviations from Special In-process Controls

None.

4.2.2 Deviations from Final Production Tests (Chart II)

None.

4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)

(a) Para. 9.6.3, Electrical Measurements at High and Low Temperature: Shall not be performed.

4.2.4 Deviations from Qualification Tests (Chart IV)

(a) Para. 9.14, Operating Life: Test frequency shall be 18GHz.

(b) Para. 9.16, R.F. Leakage Test: Shall be performed.

4.2.5 Deviations from Lot Acceptance Tests (Chart V)

None.

4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the loads specified herein shall be verified in accordance with the requirements set out in Para. 9.20 of ESA/SCC Generic Specification No. 3403. They shall conform to those shown in Figure 2 of this specification.

4.3.2 Weight

The maximum weight of the loads specified herein shall be 5.0 grammes for Variants 01 and 02 and 23 grammes for Variant 03.

4.3.3 Coupling Proof Torque

The requirements for testing of the coupling proof torque are specified in Section 9 of ESA/SCC Generic Specification No. 3403. The applied torque shall be 170N.cm for Variants 01 and 02 and 339N.cm for Variant 03.

4.3.4 Mating and Unmating Forces

The applicable measurement requirements are specified in Section 9 of ESA/SCC Generic Specification No. 3403. The maximum torque during mating and unmating shall not exceed 24N.cm for Variants 01 and 02 and 22.6N.cm for Variant 03. Whenever a test is performed with mated connectors, the connector/load shall be torqued as specified in Table 1(b).

4.3.5 Contact Engagement and Separation Force (Variant 02 Only)

The requirements for this test are specified in Section 9 of ESA/SCC Generic Specification No. 3402 and apply to female contacts only.

Female contacts shall be capable of meeting the requirements of Para. 4.3.8(c) of ESA/SCC Detail Specification No. 3402/003.

4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the components specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

4.4.1 Body and Coupling Nut

Electro-passivated amagnetic stainless steel.

4.4.2 Centre Contact

Material: Beryllium copper.

Underplate: Nickel, 2.0µm minimum

Plating: Gold, 1.27µm minimum, Type 2 Grade C of MIL-G-45204.

4.4.3 Inserts

PTFE.

4.5 MARKING

4.5.1 General

The marking of all components delivered to this specification shall be in accordance with with the requirements of ESA/SCC Basic Specification No. 21700 and the following paragraphs. When the component is too small to accommodate all of the marking specified, as much as space permits shall be marked and the marking information, in full, shall accompany the component in its primary package.

The information to be marked and the order of precedence, shall be as follows:-

- (a) The SCC Component Number.
- (b) Traceability Information.


4.5.2 The SCC Component Number

The SCC Component Number shall be constituted and marked as follows:

| | | |
|---------------------------------------|--|------------|
| Detail Specification Number | | 340300601B |
| Type Variant (see Table 1(a)) | | |
| Testing Level (B or C, as applicable) | | |

4.5.3 Traceability Information

Traceability information shall be marked in accordance with the requirements of ESA/SCC Basic Specification No. 21700.

| | | |
|--|--|---|
|  | <p style="text-align: center;">ESA/SCC Detail Specification No. 3403/006</p> | <p style="text-align: right;">PAGE 11 ISSUE 2</p> |
|--|--|---|

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured at room temperature are scheduled in Table 2. Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.6.2 Electrical Measurements at High and Low Temperatures

The parameters to be measured at high and low temperatures are scheduled in Table 3.

4.6.3 Circuits for Electrical Measurements

Circuits for electrical measurements are given in ESA/SCC Generic Specification No. 3403.

4.7 BURN-IN AND ELECTRICAL MEASUREMENTS

4.7.1 Parameter Drift Values

The parameter drift values applicable to burn-in are specified in Table 4 of this specification. Unless otherwise stated, measurements shall be performed at $T_{amb} = +22 \pm 3$ °C. The parameter drift values (Δ) applicable to the parameters scheduled, shall not be exceeded. In addition to these drift value requirements for a given parameter, the appropriate limit value specified in Table 2 shall not be exceeded.

4.7.2 Conditions for Burn-in

The requirements for burn-in are specified in Section 7 of ESA/SCC Generic Specification No. 3403. The conditions for burn-in shall be as specified in Table 5(a) of this specification.

On completion of burn-in, a recovery period of 24 ± 2 hours is necessary before performance of the end measurements.

4.7.3 Electrical Circuits for Burn-in (Figure 5(a))

Not applicable.

TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE

| No. | Characteristics | Symbol | Spec. and Test Method | Test Conditions | Limits | | Unit |
|-----|-----------------------------|--------|--|-----------------|----------------|------|----------|
| | | | | | Min. | Max. | |
| 1 | Resistance | R | ESA/SCC Gen. Spec. No. 3403 Para. 9.6.1.4 | Para. 9.6.1.4 | 48 | 52 | Ω |
| 2 | Voltage Standing Wave Ratio | VSWR | ESA/SCC Gen. Spec. No. 3403 Para. 9.6.1.1 | Para. 9.6.1.1 | See Table 1(a) | | - |


TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES

| No. | Characteristics | Symbol | Spec. and Test Method | Test Conditions | Limits | | Unit |
|-----|------------------|------------|--|--------------------------------|--------|-------------|---------------------------|
| | | | | | Min. | Max. | |
| 1 | Resistance Drift | ΔR | ESA/SCC Gen. Spec. No. 3403 Para. 9.6.1.4 | Para. 9.6.3 (Notes 1 and 2) | - | 3.10^{-4} | $\Omega/\Omega/^{\circ}C$ |

NOTES

1. Measurement to be made on 2 samples only. If 1 failure occurs, the complete lot shall be measured.
2. This measurement shall be made at 2.0, 12.4 and 22 GHz, at both temperatures, -55 and $+125^{\circ}C$

FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS

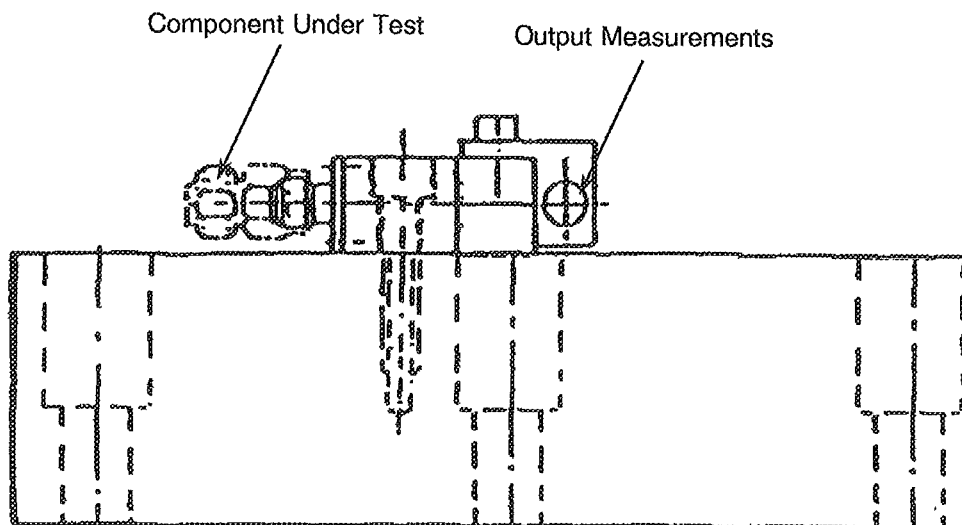

Schematic for Vibration and Shock or Bump

TABLE 4 - PARAMETER DRIFT VALUES

| No. | Characteristics | Symbol | Spec. and/or Test Method | Conditions | Change Limits (Δ) | Unit |
|-----|------------------------------------|----------------------------|--------------------------|----------------|----------------------------|------------|
| 1 | Resistance Change | ΔR | As per Table 2 | As per Table 2 | 250 | m Ω |
| 2 | Voltage Standing Wave Ratio Change | $\frac{\Delta VSWR}{VSWR}$ | As per Table 2 | As per Table 2 | ± 2.0 | % |

TABLE 5(a) - CONDITIONS FOR BURN-IN

| No. | Characteristics | Symbol | Condition | Unit |
|-----|------------------|--------|------------|--------------------|
| 1 | Input Power | P | 0 | W |
| 2 | High Temperature | T | +125(+0-3) | $^{\circ}\text{C}$ |


TABLE 5(b) - CONDITIONS FOR OPERATING LIFE TESTING

| No. | Characteristics | Symbol | Limits | Unit |
|-----|-----------------|-----------|-------------------|--------------------|
| 1 | RF Power | P_{in} | Table 1(b) Item 1 | W |
| 2 | Frequency | f | 18 | GHz |
| 3 | Temperature | T_{amb} | +25 | $^{\circ}\text{C}$ |

FIGURE 5(a) - SCHEMATIC FOR BURN-IN

Not applicable.

FIGURE 5(b) - SCHEMATIC FOR OPERATING LIFE TESTING

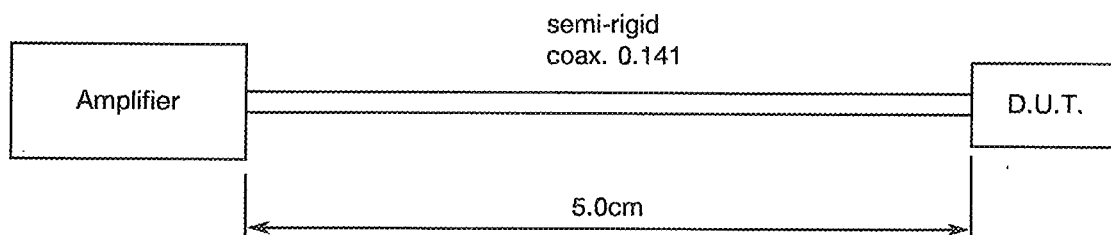

| | | |
|--|--|----------------------------|
| | <p style="text-align: center;">ESA/SCC Detail Specification No. 3403/006</p> | <p>PAGE 14 ISSUE 2</p> |
|--|--|----------------------------|

4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESA/SCC GENERIC SPECIFICATION No. 3403)

4.8.1 Measurements and Inspections on Completion of Environmental Tests

The parameters to be measured and inspections to be performed on completion of environmental tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3 \text{ }^\circ\text{C}$.

4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests

Not applicable.

4.8.3 Measurements and Inspections on Completion of Endurance Tests

The parameters to be measured and inspections to be performed on completion of endurance testing are as scheduled in Table 6 of this specification. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3 \text{ }^\circ\text{C}$.

4.8.4 Conditions for Operating Life Tests (Part of Endurance Testing)

The requirements for operating life testing are specified in Section 9 of ESA/SCC Generic Specification No. 3403. The conditions for operating life testing shall be as specified in Table 5(b) of this specification.

4.8.5 Electrical Circuits for Operating Life Tests

The electrical circuit for operating life testing is given in Figure 5(b).



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTING

| No. | ESA/SCC GENERIC SPEC. NO. 3403 | | MEASUREMENTS AND INSPECTIONS | | SYMBOL | LIMITS | | UNIT |
|-----|---|--|--|---|--|--|---------------------------------|------|
| | ENVIRONMENTAL AND ENDURANCE TESTS (1) | TEST METHOD AND CONDITIONS | IDENTIFICATION | CONDITIONS | | MIN. | MAX. | |
| 01 | Vibration | Para. 9.7 and Figure 4 of this spec. | Initial Measurements Resistance Voltage Standing Wave Ratio During Last Cycle Intermittent Contact Final Measurements Visual Examination Resistance Change Voltage Standing Wave Ratio Change | Table 2 Item 1 Table 2 Item 2 >0.5ms. No open or short circuits No damage Table 2 Item 1 Table 2 Item 2 | R VSWR - - ΔR ΔVSWR | Record Values Record Values - - - - -2.0 +2.0 | mΩ % | |
| 02 | Shock or Bump | Para. 9.8 and Figure 4 of this spec. | Initial Measurements Resistance Voltage Standing Wave Ratio Final Measurements Visual Examination Resistance Change Voltage Standing Wave Ratio Change | Table 2 Item 1 Table 2 Item 2 No damage Table 2 Item 1 Table 2 Item 2 | R VSWR - ΔR ΔVSWR | Item 01 Value Item 01 Value - - - - -2.0 +2.0 | mΩ % | |
| 03 | Rapid Change of Temperature | Para. 9.9 | Initial Measurements Resistance Voltage Standing Wave Ratio Final Measurements Visual Examination Resistance Change Voltage Standing Wave Ratio Change | Table 2 Item 1 Table 2 Item 2 After recovery time of 24 ± 2 hrs No damage Table 2 Item 1 Table 2 Item 2 | R VSWR - ΔR ΔVSWR | Record Values Record Values - - - - -2.0 +2.0 | mΩ % | |
| 04 | Climatic Sequence | Para. 9.10 Dry Heat Cold Test | Resistance Drift Resistance Drift Final Measurements Visual Inspection Resistance Change Voltage Standing Wave Ratio Change | Table 3 Item 1 at +125°C Table 3 Item 1 at -55°C After recovery time between 1 hr and 24 hrs ESA/SCC Basic Spec. No. 20500 Table 2 Item 1 Table 2 Item 2 | ΔR ΔR - ΔR ΔVSWR | Table 3 Item 1 Table 3 Item 1 - - - - -2.0 +2.0 | mΩ % | |
| 05 | Coupling Proof Torque | Para. 9.11 and Para. 4.3.3 of this spec. | Interface Dimensions | ESA/SCC No. 3402 Para. 9.4 Variant 01 Variant 02 | - - | Fig. 2 of 3402/001 Fig 2 of 3402/002 | - | |
| 06 | Mating and Unmating Forces | Para. 9.12 and Para. 4.3.4 of this spec | Torque | ESA/SCC No. 3402 Para. 9 5 | - | Para. 4.3.4 | N.cm | |
| 07 | Connector Repeatability (Not applicable to Loads) | Para. 9.13 | Not applicable | | | | | |
| 08 | Operating Life | Para. 9.14 and Para. 4.2.4, Table 5(b) and Figure 5(b) of this spec. | Initial Measurements Resistance Voltage Standing Wave Ratio Final Measurements Visual Examination Resistance Change Voltage Standing Wave Ratio Change | Table 2 Item 1 Table 2 Item 2 No damage Table 2 Item 1 Table 2 Item 2 | R VSWR - ΔR ΔVSWR | Record Values Record Values - - - - -2.0 +2.0 | mΩ % | |

NOTES

1. The tests in this table refer to either Chart IV or V and shall be used as applicable.

TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTING (CONT'D)

| No. | ESA/SCC GENERIC SPEC. NO. 3403 | | MEASUREMENTS AND INSPECTIONS | | SYMBOL | LIMITS | | UNIT |
|-----|---|--|---|---|--------|-------------------|------|------|
| | ENVIRONMENTAL AND ENDURANCE TESTS (1) | TEST METHOD AND CONDITIONS | IDENTIFICATION | CONDITIONS | | MIN. | MAX. | |
| 09 | Residual Magnetism (Copper Underplate only) | Para. 9.15 | Not applicable | | | | | |
| 10 | RF Leakage | Para. 9.16 and Para. 4.2.4 of this spec. | RF Leakage | Para. 9.16 | E | Table 1(b) Item 7 | | dB |
| 11 | Peak Power | Para. 9.17 and Table 1(b) of this spec. | Final Measurements Resistance | Table 2 Item 1 | R | Table 2 Item 1 | | |
| 12 | Power Sensitivity (Attenuators only) | Para. 9.18 | Not applicable | | | | | |
| 13 | Corrosion | Para. 9.19 | Final Measurements Visual Examination | After drying at +40°C for 24 hours No base metal | - | - | - | - |
| 14 | Permanence of Marking | Para. 9.21 | Final Measurements Visual Examination | No corrosion or obliteration of marking | - | - | - | - |

NOTES

1. The tests in this table refer to either Chart IV or V and shall be used as applicable.