



europaean space agency  
agence spatiale européenne

Pages 1 to 33

**INTEGRATED CIRCUITS, SILICON MONOLITHIC,  
BIPOLAR ARITHMETIC LOGIC UNITS/FUNCTION  
GENERATOR,  
BASED ON TYPE 54LS181**

**ESA/SCC Detail Specification No. 9202/005**



**space components  
coordination group**

Issue/Rev.	Date	Approved by	
		SCCG Chairman	ESA Director General or his Deputy
Issue 4	March 1994	<i>P. Ponomarev</i>	<i>J. L. ...</i>

**DOCUMENTATION CHANGE NOTICE**

Rev. Letter	Rev. Date	Reference	CHANGE Item	Approved DCR No.
		This issue supersedes Issue 3 and incorporates all modifications defined in Revisions 'A', 'B', 'C' and 'D' to Issue 3 and the following DCR's:-		
		Cover page		None
		DCN		None
		Table 1(a)	: Lead Material and/or Finish amended for existing Variants	221106
			: Variants 11 and 12 added	221106
		Table 1(b)	: No. 2, in Remarks, Note No. amended to "1"	23573
			: No. 3, in Remarks, Note No. amended to "2"	23573
			: No. 6, existing temperature specified for FP/DIP, new temperature and Note reference added for CCP	23573
			: Note 1 renumbered as "2"	23573
			: Note 2 renumbered as "3" and text amended	23573
			: Note 3 renumbered as "1"	23573
			: New Note 4 added	23573
		Figures 2(a), (b)	: Drawing and Table amended	221106
		Figure 2(c)	: Reference to Note 6 amended to "Note 10"	23519
			: Imperial Dimensions deleted	22881
			: Note references corrected	221106
		Figure 2(d)	: New figure added	221106
		Notes to Figures	: Existing Notes deleted and new Notes added	221106
		Figure 3(a)	: Figure for chip carrier package added	221106
			: Original subtitle deleted, and new subtitles added above both drawings	221106
			: Comparison table added	221106
			: Note 1 added	221106
		Figure 3(b)	: Note 4 added	23519
		Para. 4.2.2	: PIND deviation deleted, "None" added	21048
		Para. 4.2.4	: Deviation deleted, "None" added	22919
		Para. 4.2.5	: Deviation deleted, "None" added	22919
		Para. 4.3.2	: FP/DIP weights amended	221047
			: Weight for CCP added	221106
		Para. 4.4.2	: Paragraph rewritten	221106
		Para. 4.5.2	: Paragraph rewritten	221106
		Para. 4.5.3	: Paragraph standardised	23519
		Para. 4.6.3	: "...and functional test sequence..." deleted	23519
		Para. 4.7.1	: "T <sub>amb</sub> " added before "... +22 ± 3°C"	23519
		Paras. 4.7.2 & 4.7.3	: In title and paragraph, "burn-in" amended to read "power burn-in"	23519
		Figure 4(h)	: Note 1 amended	23573
		Para. 4.8	: Title amended	23519



## TABLE OF CONTENTS

	<u>Page</u>
<b>1. GENERAL</b>	<b>5</b>
1.1 Scope	5
1.2 Component Type Variants	5
1.3 Maximum Ratings	5
1.4 Parameter Derating Information	5
1.5 Physical Dimensions	5
1.6 Pin Assignment	5
1.7 Truth Table	5
1.8 Circuit Schematic	5
1.9 Functional Diagram	5
<b>2. APPLICABLE DOCUMENTS</b>	<b>17</b>
<b>3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</b>	<b>17</b>
<b>4. REQUIREMENTS</b>	<b>17</b>
4.1 General	17
4.2 Deviations from Generic Specification	17
4.2.1 Deviations from Special In-process Controls	17
4.2.2 Deviations from Final Production Tests	17
4.2.3 Deviations from Burn-in Tests	17
4.2.4 Deviations from Qualification Tests	17
4.2.5 Deviations from Lot Acceptance Tests	17
4.3 Mechanical Requirements	18
4.3.1 Dimension Check	18
4.3.2 Weight	18
4.4 Materials and Finishes	18
4.4.1 Case	18
4.4.2 Lead Material and Finish	18
4.5 Marking	18
4.5.1 General	18
4.5.2 Lead Identification	18
4.5.3 The SCC Component Number	19
4.5.4 Traceability Information	19
4.6 Electrical Measurements	19
4.6.1 Electrical Measurements at Room Temperature	19
4.6.2 Electrical Measurements at High and Low Temperatures	19
4.6.3 Circuits for Electrical Measurements	19
4.7 Burn-in Tests	19
4.7.1 Parameter Drift Values	19
4.7.2 Conditions for Power Burn-in	19
4.7.3 Electrical Circuits for Power Burn-in	19
4.8 Environmental and Endurance Tests	31
4.8.1 Electrical Measurements on Completion of Environmental Tests	31
4.8.2 Electrical Measurements at Intermediate Points during Endurance Tests	31
4.8.3 Electrical Measurements on Completion of Endurance Tests	31
4.8.4 Conditions for Operating Life Tests	31
4.8.5 Electrical Circuits for Operating Life Tests	31
4.8.6 Conditions for High Temperature Storage Test	31

<b><u>TABLES</u></b>		<u>Page</u>
1(a)	Type Variants	6
1(b)	Maximum Ratings	6
2	Electrical Measurements at Room Temperature, D.C. Parameters	20
	Electrical Measurements at Room Temperature, A.C. Parameters	22
3	Electrical Measurements at High and Low Temperatures	24
4	Parameter Drift Values	29
5	Conditions for Power Burn-in and Operating Life Test	29
6	Electrical Measurements on Completion of Environmental Tests and at Intermediate Points and on Completion of Endurance Tests	32
<b><u>FIGURES</u></b>		
1	Not applicable	N/A
2	Physical Dimensions	7
3(a)	Pin Assignment	12
3(b)	Truth Table	13
3(c)	Circuit Schematic	15
3(d)	Functional Diagram	16
4	Circuits for Electrical Measurements	26
5	Electrical Circuit for Power Burn-in and Operating Life Test	30
<b><u>APPENDICES (Applicable to specific Manufacturers only)</u></b>		
'A'	Agreed Deviations for Texas Instruments (F)	33



1. **GENERAL**

1.1 **SCOPE**

This specification details the ratings, physical and electrical characteristics, test and inspection data for a silicon monolithic, low power bipolar Schottky Arithmetic Logic Unit/Function Generator, based on Type 54LS181. It shall be read in conjunction with ESA/SCC Generic Specification No. 9000, the requirements of which are supplemented herein.

1.2 **COMPONENT TYPE VARIANTS**

Variants of the basic type integrated circuits specified herein, which are also covered by this specification, are given in Table 1(a).

1.3 **MAXIMUM RATINGS**

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the integrated circuits specified herein, are as scheduled in Table 1(b).

1.4 **PARAMETER DERATING INFORMATION (FIGURE 1)**

Not applicable.

1.5 **PHYSICAL DIMENSIONS**

The physical dimensions of the integrated circuits specified herein are shown in Figure 2.

1.6 **PIN ASSIGNMENT**

As per Figure 3(a).

1.7 **TRUTH TABLE**

As per Figure 3(b).

1.8 **CIRCUIT SCHEMATIC**

As per Figure 3(c).

1.9 **FUNCTIONAL DIAGRAM**

As per Figure 3(d).

**TABLE 1(a) - TYPE VARIANTS**

VARIANT	CASE	FIGURE	LEAD MATERIAL AND/OR FINISH
01	FLAT	2(a)	D7
02	FLAT	2(a)	G4
05	DIL	2(b)	D7
06	DIL	2(b)	G4
07	DIL	2(c)	D7
08	DIL	2(c)	D3 or D4
11	CCP	2(d)	7
12	CCP	2(d)	4

**TABLE 1(b) - MAXIMUM RATINGS**

No.	CHARACTERISTICS	SYMBOL	MAXIMUM RATINGS	UNIT	REMARKS
1	Supply Voltage	$V_{CC}$	- 0.5 to 7.0	V	-
2	Input Voltage	$V_{IN}$	- 0.5 to 7.0	V	Note 1
3	Device Dissipation	$P_D$	192.5	mWdc	Note 2
4	Operating Temperature Range	$T_{op}$	- 55 to + 125	°C	-
5	Storage Temperature Range	$T_{stg}$	- 65 to + 150	°C	-
6	Soldering Temperature For FP and DIP For CCP	$T_{sol}$	+ 265 + 245	°C	Note 3 Note 4


**NOTES**

1. Input current limited to - 18mA.
2. Must withstand added  $P_D$  due to short circuit conditions (i.e.  $I_{OS}$ ) at one output for 5 seconds.
3. Duration 10 seconds maximum at a distance of not less than 1.5mm from the device body and the same lead shall not be resoldered until 3 minutes have elapsed.
4. Duration 5 seconds maximum and the same terminal shall not be resoldered until 3 minutes have elapsed.



**FIGURE 2 - PHYSICAL DIMENSIONS**

**FIGURE 2(a) - FLAT PACKAGE, 24-PIN**

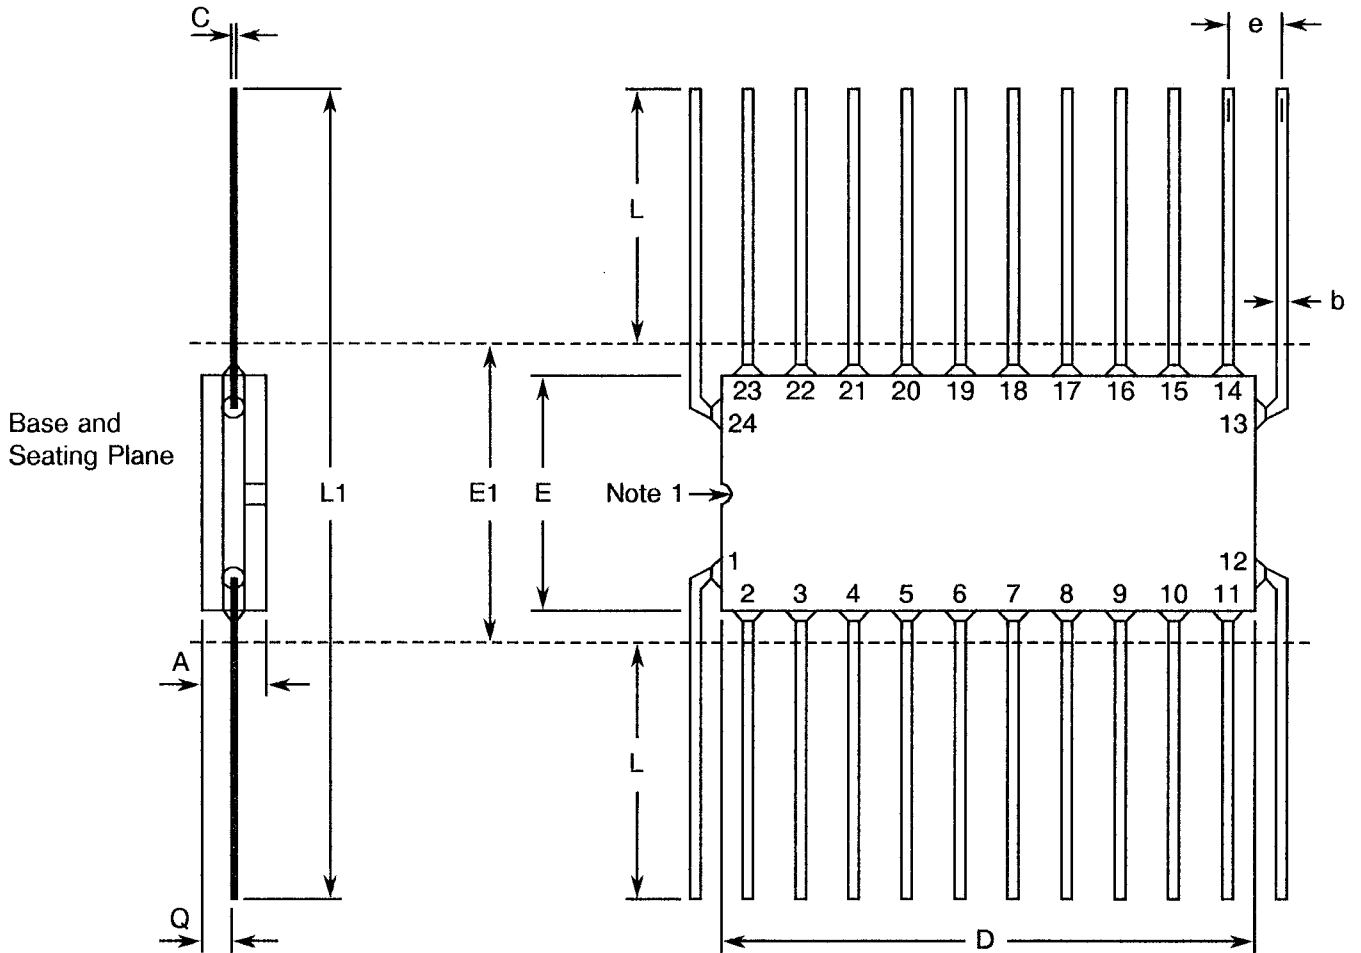


SYMBOL	MILLIMETRES		NOTES
	MIN	MAX	
A	1.39	2.16	
b	0.38	0.56	8
C	0.08	0.23	8
D	12.30	-	
E	8.50	10.10	
E1	10.16 TYPICAL		4
e	1.27 TYPICAL		5, 9
L	6.98	10.16	
L1	24.13	30.48	
Q	0.25	1.02	2

**NOTES:** See Page 11.



**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**

**FIGURE 2(b) - DUAL-IN-LINE PACKAGE, 24-PIN**

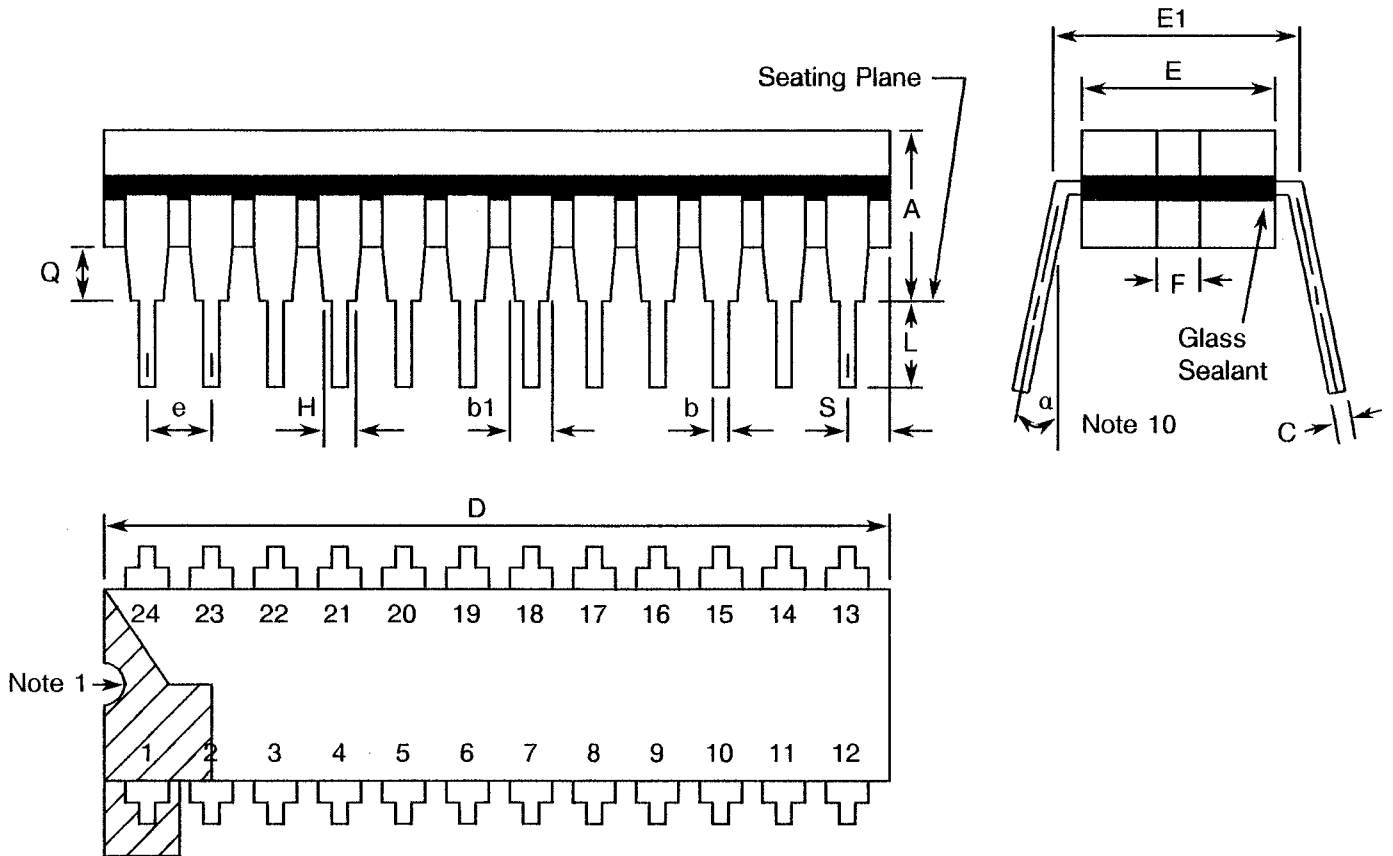


SYMBOL	MILLIMETRES		NOTES
	MIN	MAX	
A	3.80	5.70	
b	0.38	0.66	8
b1	-	1.78	8
C	0.20	0.44	8
D	31.40	32.80	4
E	13.10	14.20	4
E1	15.00	15.50	
e	2.54 TYPICAL		6, 9
F	1.27 TYPICAL		
H	0.69	-	8
L	3.18	5.08	8
Q	0.51	-	3
S	-	2.54	7
a	0°	15°	10

**NOTES:** See Page 11.



**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**

**FIGURE 2(c) - DUAL-IN-LINE PACKAGE, 24-PIN**

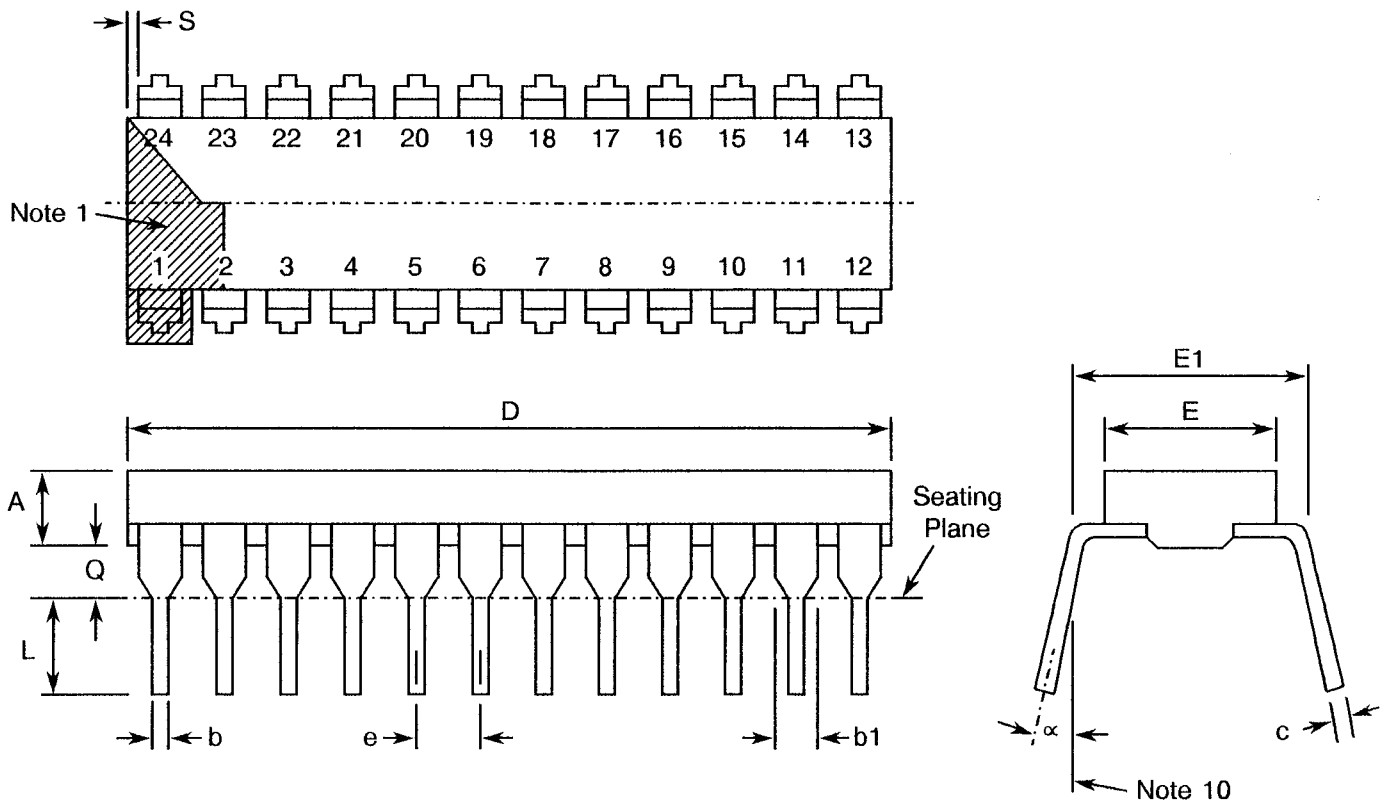


SYMBOL	MILLIMETRES		NOTES
	MIN.	MAX.	
A	-	5.08	-
b	0.38	0.58	8
b1	0.76	1.78	8
c	0.20	0.30	8
D	31.40	32.80	-
E	13.10	14.22	-
E1	15.00	15.50	4
e	2.54 TYPICAL		6, 9
L	3.18	5.08	-
Q	0.51	2.03	3
S	1.52	2.54	7
α	0°	15°	10

**NOTES:** See Page 11.




**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**

**FIGURE 2(d) - SQUARE CHIP CARRIER PACKAGE, 28-TERMINAL**

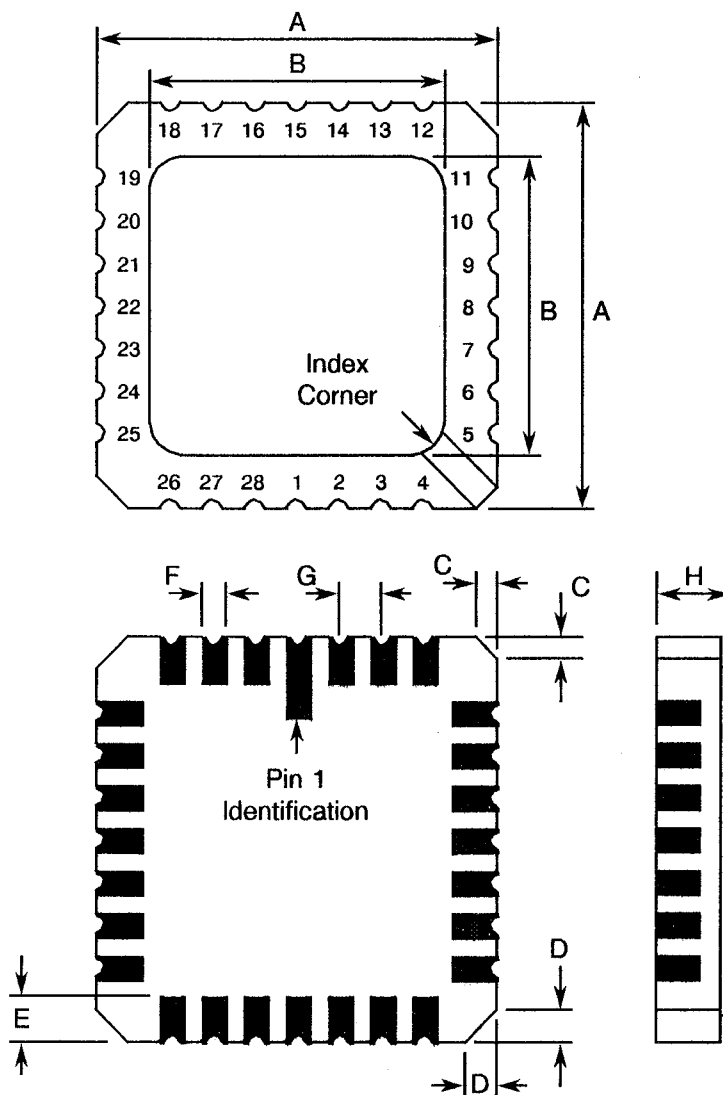

SYMBOL	MILLIMETRES		NOTES
	MIN.	MAX.	
A	11.23	11.63	
B	10.31	11.63	
C	0.25	0.51	11
D	0.89	1.14	12
E	1.14	1.40	8
F	0.56	0.71	8
G	1.27 TYPICAL		5, 9
H	1.63	2.54	

**NOTES:** See Page 11.

	<p style="text-align: center;">ESA/SCC Detail Specification No. 9202/005</p>	<p>PAGE 11 ISSUE 4</p>
---	--	----------------------------

**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**

**NOTES TO FIGURES 2(a) TO 2(d)**


1. Index area: a notch or dot shall be located adjacent to Pin 1 and shall be within the shaded area shown. For chip carrier packages, the index shall be as shown in Figure 2(d).
2. Dimension Q shall be measured at the point of exit of the lead from the body.
3. Dimension Q shall be measured from the seating plane to the base plane.
4. This dimension allows for off-centre lids, meniscus and glass overrun.
5. The true position pin or terminal spacing is 1.27mm between centrelines. Each pin or terminal centreline shall be located within  $\pm 0.13\text{mm}$  of its true longitudinal position relative to Pins 1 and the highest pin number.
6. The true position pin spacing is 2.54mm between centrelines. Each pin centreline shall be located within  $\pm 0.25\text{mm}$  of its true longitudinal position relative to Pins 1 and the highest pin number.
7. Applies to all 4 corners.
8. All leads or terminals.
9. 22 spaces for flat and dual-in-line packages.  
24 spaces for chip carrier packages.
10. Lead centre when  $\alpha$  is  $0^\circ$ .
11. Index corner only - 2 dimensions.
12. 3 non-index corners - 6 dimensions.




**FIGURE 3(a) - PIN ASSIGNMENT**

DUAL-IN-LINE AND FLAT PACKAGE

CHIP CARRIER PACKAGE

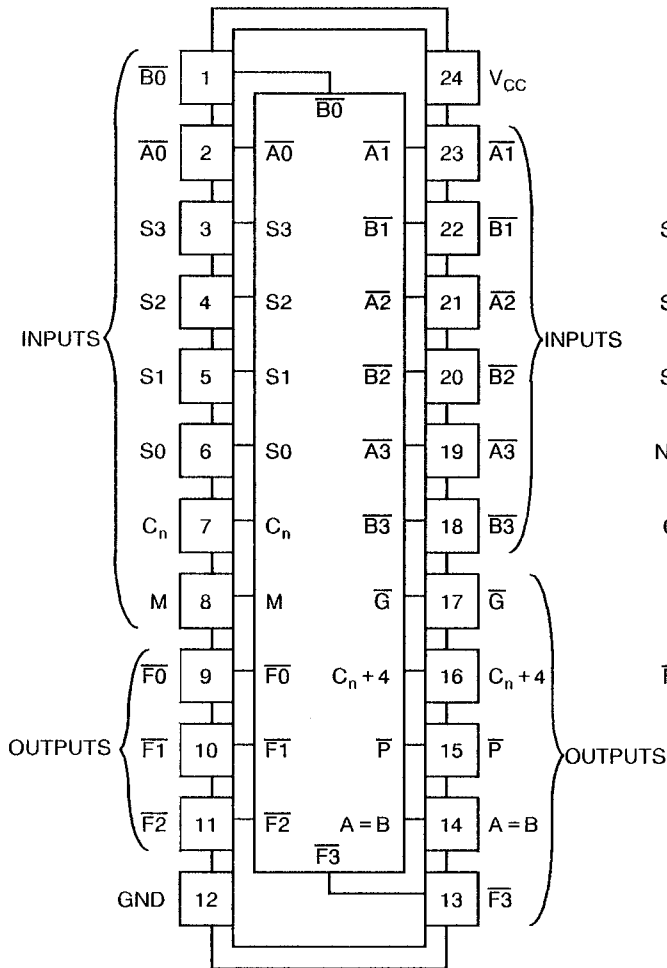

(TOP VIEW)

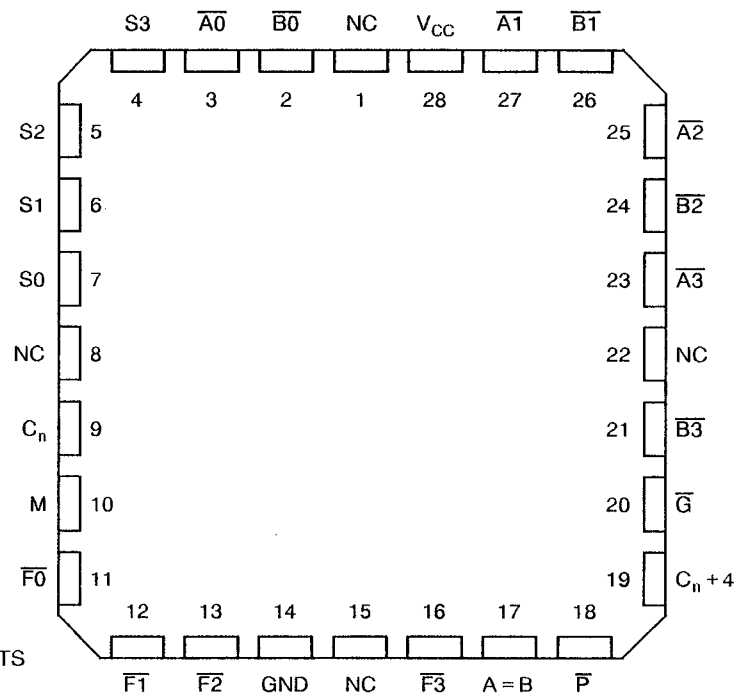

(TOP VIEW)

PIN DESIGNATIONS

DESIGNATION	PIN Nos.	FUNCTION
$\overline{A3}, \overline{A2}, \overline{A1}, \overline{A0}$	19, 21, 23, 2	Word A inputs
$\overline{B3}, \overline{B2}, \overline{B1}, \overline{B0}$	18, 20, 22, 1	Word B inputs
S3, S2, S1, S0	3, 4, 5, 6	Function-select inputs
$C_n$	7	Inv. carry input
M	8	Mode control input
$\overline{F3}, \overline{F2}, \overline{F1}, \overline{F0}$	13, 11, 10, 9	Function output

DESIGNATION	PIN Nos.	FUNCTION
A = B	14	Comparator output
$\overline{P}$	15	Carry propagate output
$C_n + 4$	16	Inv. carry output
$\overline{G}$	17	Carry generate output
V <sub>CC</sub>	24	Supply voltage
GND	12	Ground

**NOTES**

1. See next page for pin comparison table.

**FIGURE 3(a) - PIN ASSIGNMENT (CONTINUED)**

FLAT PACKAGE AND DUAL-IN-LINE TO CHIP CARRIER PIN ASSIGNMENT

FLAT PACKAGE AND

DUAL-IN-LINE PIN OUTS    1   2   3   4   5   6   7   8   9   10   11   12   13   14   15   16   17   18   19   20   21   22   23   24

CHIP CARRIER PIN OUTS   2   3   4   5   6   7   9   10   11   12   13   14   16   17   18   19   20   21   23   24   25   26   27   28

**NOTES**

1. All references throughout this specification relate to FLAT/DIL packages only.

**FIGURE 3(b) - TRUTH TABLE AND LOGIC EQUATIONS**

FUNCTION	SELECTION S3, S2, S1, S0	ACTIVE HIGH DATA (1)		
		M = H LOGIC FUNCTIONS	M = L; ARITHMETIC OPERATIONS	
			$C_n = L$ $C_n + 1 = H$	$C_n = H$ $C_n + 0 = L$
0	L L L L	$F = \bar{A}$	$F = A$	$F = A + 1$
1	L L L H	$F = \overline{A+B}$	$F = A + B$	$F = (A + B) + 1$
2	L L H L	$F = \bar{A}B$	$F = A + \bar{B}$	$F = (A + \bar{B}) + 1$
3	L L H H	$F = 0$	$F = -1$ (2's compl.)	$F = \text{Zero}$
4	L H L L	$F = \overline{AB}$	$F = A + \bar{A}B$	$F = A + \bar{A}B + 1$
5	L H L H	$F = \bar{B}$	$F = (A + B) + \bar{A}B$	$F = (A + \bar{B}) + \bar{A}B + 1$
6	L H H L	$F = A \oplus B$	$F = A - B - 1$	$F = A - B$
7 (2)	L H H H	$F = \bar{A}\bar{B}$	$F = \bar{A}\bar{B} - 1$	$F = \bar{A}\bar{B}$
8	H L L L	$F = \bar{A} + B$	$F = A + AB$	$F = A + AB + 1$
9	H L L H	$F = \overline{A \oplus B}$	$F = A + B$	$F = A + B + 1$
10	H L H L	$F = B$	$F = (A + \bar{B}) + AB$	$F = (A + \bar{B}) + AB + 1$
11	H L H H	$F = AB$	$F = AB - 1$	$F = AB$
12	H H L L	$F = 1$	$F = A + A$ (3)	$F = A + A + 1$
13	H H L H	$F = A + \bar{B}$	$F = (A + B) + A$	$F = (A + B) + A + 1$
14	H H H L	$F = A + B$	$F = (A + \bar{B}) + A$	$F = (A + \bar{B}) + A + 1$
15	H H H H	$F = A$	$F = A - 1$	$F = A$

**NOTES**

1. The table shown applies for positive logic. If negative logic is used, active high data becomes active low data.

2. This device (ALU) can be used as a comparator when placed in the subtract mode (i.e., S3, S2, S1, S0 are at logic levels L H H L respectively) and the following expressions are valid:

Active high data

When  $C_n$  is high and  $C_n + 4$  is high, then  $A \leq B$

When  $C_n$  is high and  $C_n + 4$  is low, then  $A > B$

When  $C_n$  is low and  $C_n + 4$  is high, then  $A < B$

When  $C_n$  is low and  $C_n + 4$  is low, then  $A \geq B$

3. Each bit is shifted to the next more significant position.

4. Logic Level Definitions: L = Low Level, H = High Level.



**FIGURE 3(b) - TRUTH TABLE AND LOGIC EQUATIONS (CONTINUED)**

FUNCTION	SELECTION S3, S2, S1, S0	ACTIVE LOW DATA (1)		
		M = H LOGIC FUNCTIONS	M = L; ARITHMETIC OPERATIONS	
			C <sub>n</sub> = 0 = L	C <sub>n</sub> = 1 = H
0	L L L L	$F = \bar{A}$	$F = A - 1$	$F = A$
1	L L L H	$F = \overline{AB}$	$F = AB - 1$	$F = AB$
2	L L H L	$F = \bar{A} + B$	$F = \overline{AB} - 1$	$F = \overline{AB}$
3	L L H H	$F = 1$	$F = -1$ (2's compl.)	$F = \text{Zero}$
4	L H L L	$F = \overline{A + B}$	$F = A + (A + \bar{B})$	$F = A + (A + \bar{B}) + 1$
5	L H L H	$F = \bar{B}$	$F = AB + (A + \bar{B})$	$F = AB + (A + \bar{B}) + 1$
6 (2)	L H H L	$F = \overline{A \oplus B}$	$F = A - B - 1$	$F = A - B$
7	L H H H	$F = A + \bar{B}$	$F = A + \bar{B}$	$F = (A + \bar{B}) + 1$
8	H L L L	$F = \overline{AB}$	$F = A + (A + B)$	$F = A + (A + B) + 1$
9	H L L H	$F = A \oplus B$	$F = A + B$	$F = A + B + 1$
10	H L H L	$F = B$	$F = \overline{AB} + (A + B)$	$F = \overline{AB} + (A + B) + 1$
11	H L H H	$F = A + B$	$F = A + B$	$F = (A + B) + 1$
12	H H L L	$F = 0$	$F = A + A$ (3)	$F = A + A + 1$
13	H H L H	$F = \overline{AB}$	$F = AB + A$	$F = AB + A + 1$
14	H H H L	$F = AB$	$F = \overline{AB} + A$	$F = \overline{AB} + A + 1$
15	H H H H	$F = A$	$F = A$	$F = A + 1$

**NOTES**

- The table shown applies for negative logic. If positive logic is used, active low data becomes active high data.
- This device (ALU) can be used as a comparator when placed in the subtract mode (i.e., S3, S2, S1, S0 are at logic levels L H H L respectively) and the following expressions are valid:

Active low data

When C<sub>n</sub> is low and C<sub>n</sub> + 4 is low, then A ≤ B

When C<sub>n</sub> is low and C<sub>n</sub> + 4 is high, then A > B


When C<sub>n</sub> is high and C<sub>n</sub> + 4 is low, then A < B

When C<sub>n</sub> is high and C<sub>n</sub> + 4 is high, then A ≥ B

- Each bit is shifted to the next more significant position.
- Logic Level Definitions: L = Low Level, H = High Level.



**FIGURE 3(c) - CIRCUIT SCHEMATIC**

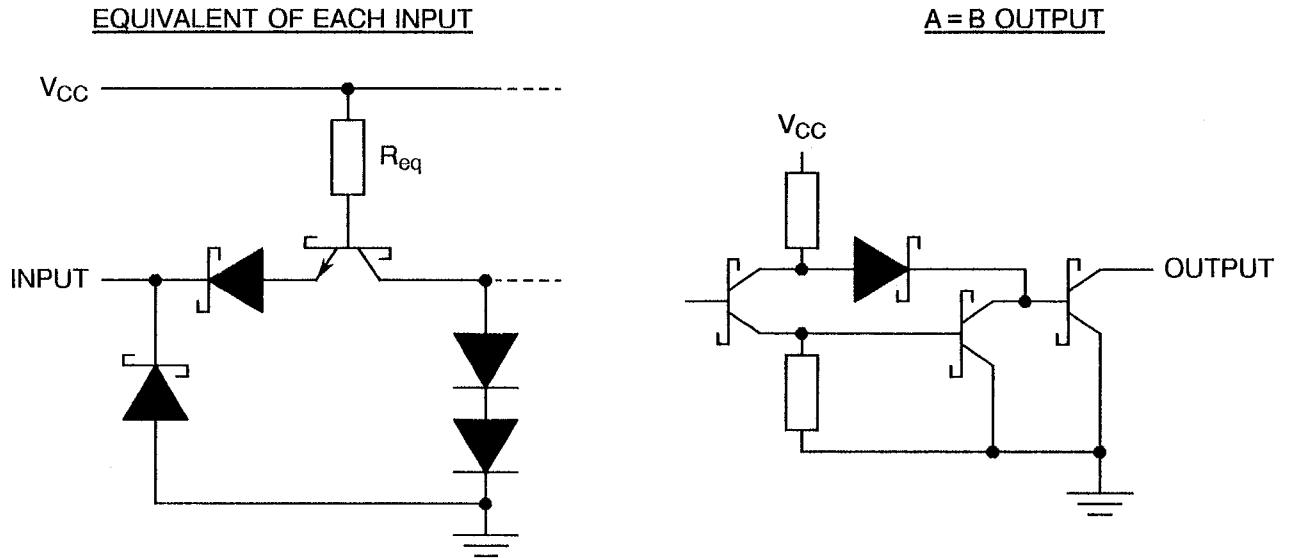

**NOTES**

- 1. Mode control :  $R_{eq} = 17k\Omega$  NOM.
- Any  $\bar{A}$  or  $\bar{B}$  :  $R_{eq} = 5.67k\Omega$  NOM.
- Any S :  $R_{eq} = 4.25k\Omega$  NOM.
- $C_n$  :  $R_{eq} = 2.86k\Omega$  NOM.

**TYPICAL OF ALL OUTPUTS  
EXCEPT A = B**


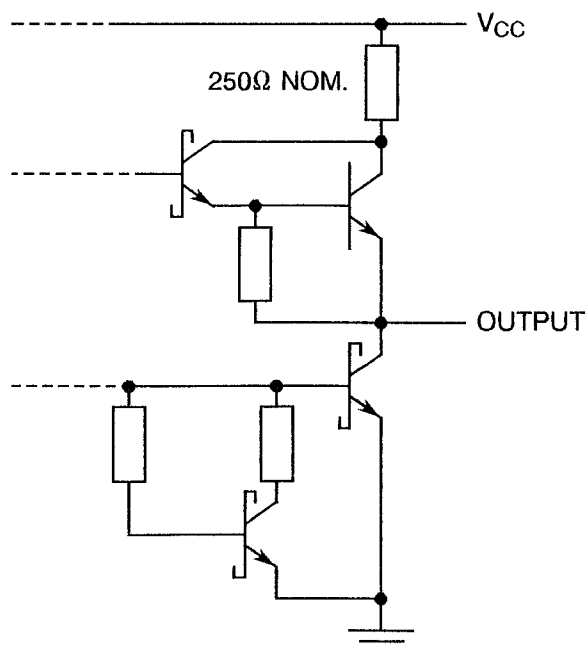





FIGURE 3(d) - FUNCTIONAL DIAGRAM



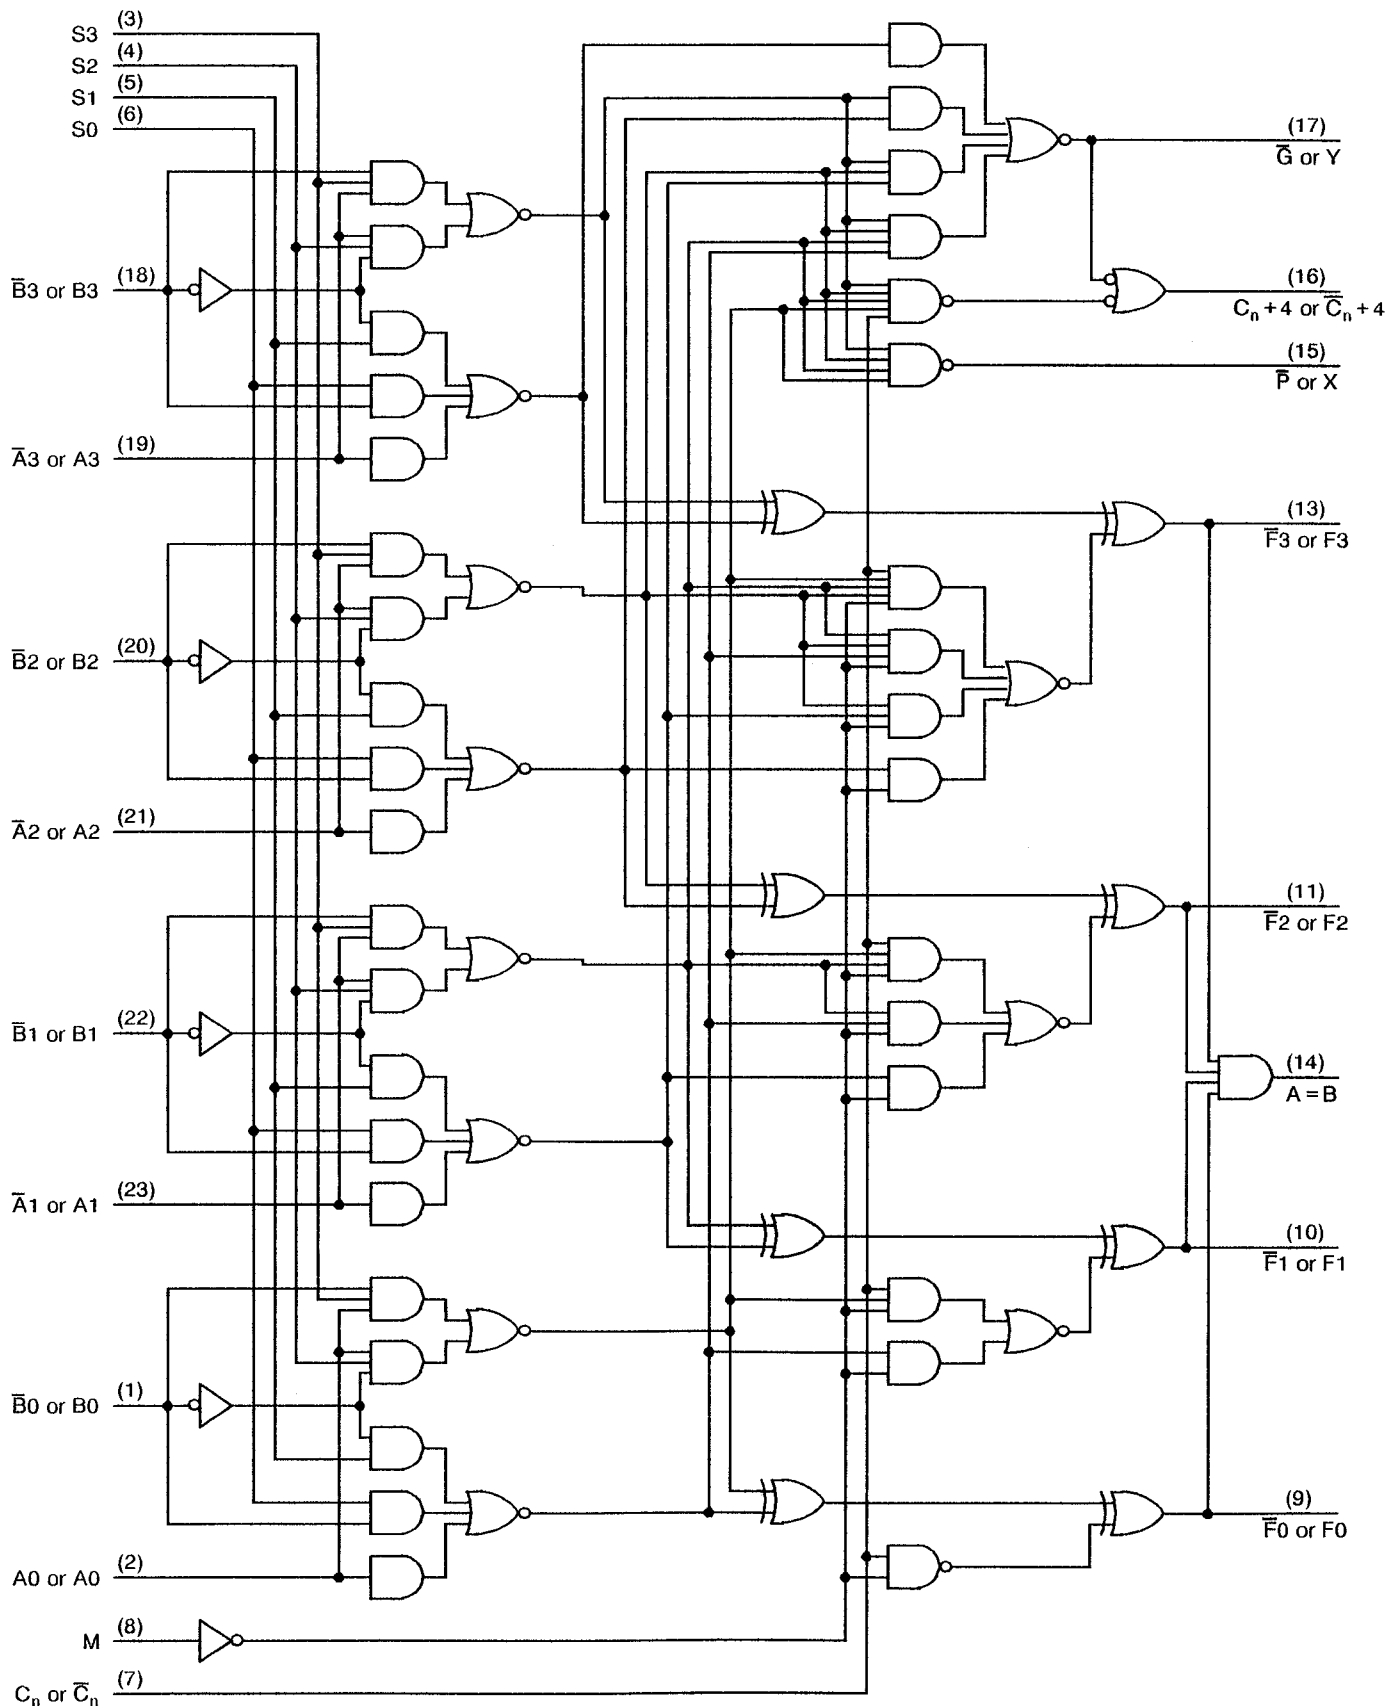

	<p style="text-align: center;">ESA/SCC Detail Specification No. 9202/005</p>	<p style="text-align: right;">PAGE 17 ISSUE 4</p>
---	--	---

**2. APPLICABLE DOCUMENTS**

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESA/SCC Generic Specification No. 9000 for Integrated Circuits.
- (b) MIL-STD-883, Test Methods and Procedures for Micro-electronics.

**3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS**

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESA/SCC Basic Specification No. 21300 shall apply. In addition, the following abbreviations are used:-

- $V_{IC}$  = Input Clamp Voltage.
- $I_{CC}$  = Supply Current.
- $V_{CC}$  = Supply Voltage.

**4. REQUIREMENTS**

**4.1 GENERAL**

The complete requirements for procurement of the integrated circuits specified herein are stated in this specification and ESA/SCC Generic Specification No. 9000 for Integrated Circuits. Deviations from the Generic Specification applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESA/SCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

**4.2 DEVIATIONS FROM GENERIC SPECIFICATION**

**4.2.1 Deviations from Special In-process Controls**

None.

**4.2.2 Deviations from Final Production Tests (Chart II)**

None.

**4.2.3 Deviations from Burn-in Tests (Chart III)**



- (a) Para. 7.1.1(a), "High Temperature Reverse Bias" test and subsequent electrical measurements related to this test shall be omitted.
- (b) Para. 9.9.2, "Electrical Measurements at High and Low Temperatures": Only a test result summary, based on go-no-go tests and presented in histogram form is required.

**4.2.4 Deviations from Qualification Tests (Chart IV)**

None.

**4.2.5 Deviations from Lot Acceptance Tests (Chart V)**

None.

 	ESA/SCC Detail Specification No. 9202/005		PAGE 18 ISSUE 4
---	--	--	--------------------

#### 4.3 MECHANICAL REQUIREMENTS

##### 4.3.1 Dimension Check

The dimensions of the integrated circuits specified herein shall be checked. They shall conform to those shown in Figure 2.

##### 4.3.2 Weight

The maximum weight of the integrated circuits specified herein shall be 1.2 grammes for the flat package, 8.0 grammes for the dual-in-line package and 0.8 grammes for the chip carrier package.

#### 4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the integrated circuits specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

##### 4.4.1 Case

The case shall be hermetically sealed and have a metal body with hard glass seals or a ceramic body and the lids shall be welded, brazed, preform-soldered or glass frit-sealed.

##### 4.4.2 Lead Material and Finish

For dual-in-line and flat packages, the material shall be either Type 'D' or Type 'G' with either Type '3 or 4', Type '4' or Type '7' finish in accordance with the requirements of ESA/SCC Basic Specification No. 23500. For chip carrier packages, the finish shall be either Type '4' or Type '7' in accordance with the requirements of ESA/SCC Basic Specification No. 23500. (See Table 1(a) for Type Variants).

#### 4.5 MARKING

##### 4.5.1 General

The marking of all components delivered to this specification shall be in accordance with the requirements of ESA/SCC Basic Specification No. 21700. Each component shall be marked in respect of:-


- (a) Lead Identification.
- (b) The SCC Component Number.
- (c) Traceability Information.

##### 4.5.2 Lead Identification

For dual-in-line and flat packages, an index shall be located at the top of the package in the position defined in Note 1 to Figure 2 or, alternatively, a tab may be used to identify Pin No. 1. The pin numbering must be read with the index or tab on the left-hand side. For chip carrier packages, the index shall be as defined by Figure 2(d).

4.5.3 The SCC Component Number

Each component shall bear the SCC Component Number which shall be constituted and marked as follows:

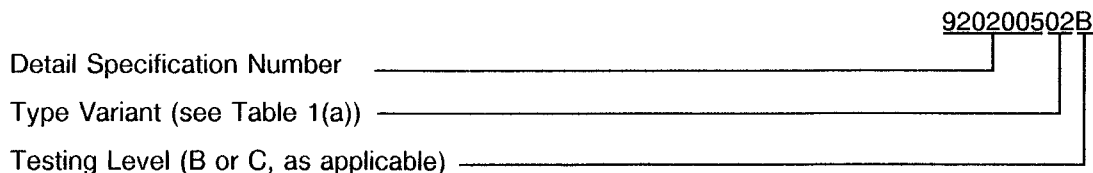

4.5.4 Traceability Information

Each component shall be marked in respect of traceability information in accordance with the requirements of ESA/SCC Basic Specification No. 21700.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured in respect of electrical characteristics are scheduled in Table 2. Unless otherwise specified, the measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.

4.6.2 Electrical Measurements at High and Low Temperatures

The parameters to be measured at high and low temperatures are scheduled in Table 3. The measurements shall be performed at  $T_{amb} = +125$ °C and  $-55$ °C respectively.

4.6.3 Circuits for Electrical Measurements

Circuits for use in performing the electrical measurements listed in Tables 2 and 3 of this specification are shown in Figure 4.

4.7 BURN-IN TESTS

4.7.1 Parameter Drift Values

The parameter drift values applicable to burn-in are specified in Table 4 of this specification. Unless otherwise stated, measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C. The parameter drift values ( $\Delta$ ) applicable to the parameters scheduled, shall not be exceeded. In addition to these drift value requirements, the appropriate limit value specified for a given parameter in Table 2 shall not be exceeded.

4.7.2 Conditions for Power Burn-in

The requirements for power burn-in are specified in Section 7 of ESA/SCC Generic Specification No. 9000. The conditions for power burn-in shall be as specified in Table 5 of this specification.

4.7.3 Electrical Circuits for Power Burn-in

Circuits for use in performing the power burn-in tests are shown in Figure 5 of this specification.



**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE - D.C. PARAMETERS**

No.	CHARACTERISTICS	SYMBOL	TEST METHOD MIL-STD 883	TEST FIG.	TEST CONDITIONS (PINS UNDER TEST)	LIMITS		UNIT
						MIN	MAX	
1	Functional Test	-	-	3(b)	Verify Truth Table with Load. Note 1	-	-	-
2	Input Current High Level Mode Input	$I_{IH1}$	3010	4(a)	$V_{CC} = 5.5V, V_{IN} = 2.7V$ (Pin 8)	-	20	$\mu A$
3	Input Current High Level Mode Input (Max. Input Voltage)	$I_{IH2}$	3010	4(a)	$V_{CC} = 5.5V, V_{IN} = 5.5V$ (Pin 8)	-	100	$\mu A$
4 to 11	Input Current to High Level $\bar{A}$ or $\bar{B}$ Input	$I_{IH3}$	3010	4(a)	$V_{CC} = 5.5V, V_{IN} = 2.7V$ (Pins 1-2-18-19-20-21-22-23)	-	60	$\mu A$
12 to 19	Input Current to High Level $\bar{A}$ or $\bar{B}$ Input (Max. Input Voltage)	$I_{IH4}$	3010	4(a)	$V_{CC} = 5.5V, V_{IN} = 5.5V$ (Pins 1-2-18-19-20-21-22-23)	-	300	$\mu A$
20 to 23	Input Current to High Level S Input	$I_{IH5}$	3010	4(a)	$V_{CC} = 5.5V, V_{IN} = 2.7V$ (Pins 3-4-5-6)	-	80	$\mu A$
24 to 27	Input Current to High Level S Input (Max. Input Voltage)	$I_{IH6}$	3010	4(a)	$V_{CC} = 5.5V, V_{IN} = 5.5V$ (Pins 3-4-5-6)	-	400	$\mu A$
28	Input Current High Level Carry Input	$I_{IH7}$	3010	4(a)	$V_{CC} = 5.5V, V_{IN} = 2.7V$ (Pin 7)	-	100	$\mu A$
29	Input Current High Level Carry Input (Max. Input Voltage)	$I_{IH8}$	3010	4(a)	$V_{CC} = 5.5V, V_{IN} = 5.5V$ (Pin 7)	-	500	$\mu A$
30 to 43	Input Clamp Voltage	$V_{IC}$	3009	4(b)	$V_{CC} = 4.5V, I_{IN} = -18mA$ Note 2 (Pins 1-2-3-4-5-6-7-8-18-19-20-21-22-23)	-	-1.5	V
44	Input Current Low Level Mode Input	$I_{IL1}$	3009	4(c)	$V_{CC} = 5.5V, V_{IN} = 0.4V$ (Pin 8)	-	-0.4	mA

**NOTES:** See Page 23.

**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE - D.C. PARAMETERS (CONT'D)**

No.	CHARACTERISTICS	SYMBOL	TEST METHOD MIL-STD 883	TEST FIG.	TEST CONDITIONS (PINS UNDER TEST)	LIMITS		UNIT
						MIN	MAX	
45 to 52	Input Current to Low Level $\bar{A}$ or $\bar{B}$ Input	$I_{IL2}$	3009	4(c)	$V_{CC} = 5.5V, V_{IN} = 0.4V$ (Pins 1-2-18-19-20-21-22-23)	-	- 1.2	mA
53 to 56	Input Current to Low Level S Input	$I_{IL3}$	3009	4(c)	$V_{CC} = 5.5V, V_{IN} = 0.4V$ (Pins 3-4-5-6)	-	- 1.6	mA
57	Input Current Low Level Carry Input	$I_{IL4}$	3009	4(c)	$V_{CC} = 5.5V, V_{IN} = 0.4V$ (Pin 7)	-	- 2.0	mA
58 to 65	Output Voltage to Low Level All Outputs	$V_{OL1}$	3007	4(d)	$V_{CC} = 4.5V, V_{IL} = 0.7V$ $V_{IH} = 2.0V, I_{OL} = 4.0mA$ (Pins 9-10-11-13-14-15-16-17)	-	0.4	V
66	Output Voltage Low Level Output $\bar{G}$	$V_{OL2}$	3007	4(d)	$V_{CC} = 4.5V, V_{IL} = 0.7V$ $V_{IH} = 2.0V, I_{OL} = 16mA$ (Pin 17)	-	0.7	V
67	Output Voltage Low Level Output $\bar{P}$	$V_{OL3}$	3007	4(d)	$V_{CC} = 4.5V, V_{IL} = 0.7V$ $V_{IH} = 2.0V, I_{OL} = 8.0mA$ (Pin 15)	-	0.6	V
68 to 74	Output Voltage to High Level any Output except A = B	$V_{OH}$	3006	4(e)	$V_{CC} = 4.5V, V_{IL} = 0.7V$ $V_{IH} = 2.0V, I_{OH} = - 400\mu A$ (Pins 9-10-11-13-15-16-17)	2.5	-	V
75	Output Current High Level A = B Output	$I_{OH}$	3006	4(e)	$V_{CC} = 4.5V, V_{IL} = 0.7V$ $V_{IH} = 2.0V, V_{OH} = 5.5V$ (Pin 14)	-	100	$\mu A$
76 to 82	Short Circuit to Output Current any Output except A = B	$I_{OS}$	3011	4(f)	$V_{CC} = 5.5V$ Note 3 (Pins 9-10-11-13-15-16-17)	- 6.0	- 40	mA
83	Supply Current	$I_{CC1}$	3005	4(g)	$V_{CC} = 5.5V$ S0 thru S3, M and $\bar{A}$ inputs at 4.5V, all other inputs at GND (Pin 24)	-	32	mA
84	Supply Current	$I_{CC2}$	3005	4(g)	$V_{CC} = 5.5V$ S0 thru S3, M inputs at 4.5V, all other inputs at GND (Pin 24)	-	35	mA

**NOTES:** See Page 23.



**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE - A.C. PARAMETERS**

No.	CHARACTERISTICS	SYMBOL	TEST METHOD MIL-STD 883	TEST FIG.	TEST CONDITIONS (PINS UNDER TEST) (NOTE 6)	LIMITS		UNIT
						MIN	MAX	
85 to 86	Propagation Delay, from $C_n$ to $C_n + 4$	$t_{PLH}$	3003	4(h)	$V_{CC} = 5.0V$ $R_L = 2.0k\Omega$ , $C_L = 15pF$	-	27	ns
		$t_{PHL}$				-	20	
87 to 102	Propagation Delay, from any $\bar{A}$ or $\bar{B}$ to $C_n + 4$	$t_{PLH}$	3003	4(h)	$V_{CC} = 5.0V$ $R_L = 2.0k\Omega$ , $C_L = 15pF$ $M = 0V$ , $S_0 = S_3 = 4.5V$ $S_1 = S_2 = 0V$ (SUM mode)	-	38	ns
		$t_{PHL}$				-	38	
103 to 118	Propagation Delay, from any $\bar{A}$ or $\bar{B}$ to $C_n + 4$	$t_{PLH}$	3003	4(h)	$V_{CC} = 5.0V$ $R_L = 2.0k\Omega$ , $C_L = 15pF$ $M = 0V$ , $S_0 = S_3 = 0V$ $S_1 = S_2 = 4.5V$ (DIFF mode)	-	41	ns
		$t_{PHL}$				-	41	
119 to 126	Propagation Delay, from $C_n$ to any $\bar{F}$	$t_{PLH}$	3003	4(h)	$V_{CC} = 5.0V$ $R_L = 2.0k\Omega$ , $C_L = 15pF$ $M = 0V$ (SUM or DIFF mode)	-	26	ns
		$t_{PHL}$				-	20	
127 to 142	Propagation Delay, from any $\bar{A}$ or $\bar{B}$ to $\bar{G}$	$t_{PLH}$	3003	4(h)	$V_{CC} = 5.0V$ $R_L = 2.0k\Omega$ , $C_L = 15pF$ $M = 0V$ , $S_0 = S_3 = 4.5V$ $S_1 = S_2 = 0V$ (SUM mode)	-	29	ns
		$t_{PHL}$				-	23	
143 to 158	Propagation Delay, from any $\bar{A}$ or $\bar{B}$ to $\bar{G}$	$t_{PLH}$	3003	4(h)	$V_{CC} = 5.0V$ $R_L = 2.0k\Omega$ , $C_L = 15pF$ $M = 0V$ , $S_0 = S_3 = 0V$ $S_1 = S_2 = 4.5V$ (DIFF mode)	-	32	ns
		$t_{PHL}$				-	32	
159 to 174	Propagation Delay, from any $\bar{A}$ or $\bar{B}$ to $\bar{P}$	$t_{PLH}$	3003	4(h)	$V_{CC} = 5.0V$ $R_L = 2.0k\Omega$ , $C_L = 15pF$ $M = 0V$ , $S_0 = S_3 = 4.5V$ $S_1 = S_2 = 0V$ (SUM mode)	-	30	ns
		$t_{PHL}$				-	30	
175 to 186	Propagation Delay, from any $\bar{A}$ or $\bar{B}$ to $\bar{P}$	$t_{PLH}$	3003	4(h)	$V_{CC} = 5.0V$ $R_L = 2.0k\Omega$ , $C_L = 15pF$ $M = 0V$ , $S_0 = S_3 = 0V$ $S_1 = S_2 = 4.5V$ (DIFF mode)	-	30	ns
		$t_{PHL}$				-	33	

**NOTES:** See Page 23.

**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE - A.C. PARAMETERS (CONT'D)**

No.	CHARACTERISTICS	SYMBOL	TEST METHOD MIL-STD 883	TEST FIG.	TEST CONDITIONS (PINS UNDER TEST) (NOTE 6)	LIMITS		UNIT
						MIN	MAX	
187 to 190	Propagation Delay, from $\bar{A}_i$ or $\bar{B}_i$ to $\bar{F}_i$	$t_{PLH}$	3003	4(h)	$V_{CC} = 5.0V$ $R_L = 2.0k\Omega$ , $C_L = 15pF$ $M = 0V$ , $S_0 = S_3 = 4.5V$ $S_1 = S_2 = 0V$ (SUM mode)	-	32	ns
		$t_{PHL}$				-	20	
191 to 194	Propagation Delay, from $\bar{A}_i$ or $\bar{B}_i$ to $\bar{F}_i$	$t_{PLH}$	3003	4(h)	$V_{CC} = 5.0V$ $R_L = 2.0k\Omega$ , $C_L = 15pF$ $M = 0V$ , $S_0 = S_3 = 0V$ $S_1 = S_2 = 4.5V$ (DIFF mode)	-	32	ns
		$t_{PHL}$				-	32	
195 to 198	Propagation Delay, from $\bar{A}_i$ or $\bar{B}_i$ to $\bar{F}_i$	$t_{PLH}$	3003	4(h)	$V_{CC} = 5.0V$ $R_L = 2.0k\Omega$ , $C_L = 15pF$ $M = 4.5V$ (Logic mode)	-	33	ns
		$t_{PHL}$				-	38	
199 to 214	Propagation Delay, from $\bar{A}$ or $\bar{B}$ to $A = B$	$t_{PLH}$	3003	4(h)	$V_{CC} = 5.0V$ $R_L = 2.0k\Omega$ , $C_L = 15pF$ $M = 0V$ , $S_0 = S_3 = 0V$ $S_1 = S_2 = 4.5V$ (DIFF mode)	-	50	ns
		$t_{PHL}$				-	62	

**NOTES**

- Go-no-go test with  $V_{IL} = 0.3V$ ;  $V_{IH} = 3.0V$ ; trip point 1.5V.
- All inputs and outputs not under test shall be open.
- No more than one output should be shorted at a time, and only for 1 second maximum.
- $t_{PLH}$  = Propagation delay time, low to high level output.  
 $t_{PHL}$  = Propagation delay time, high to low level output.
- In  $A_i$ ,  $B_i$  and  $F_i$ :  $i = 0, 1, 2, 3$ .
- Propagation delay measurements shall be performed as a go-no-go test on a 100% basis. Read-and-record measurements shall be performed on an LTPD7 sample basis following the Chart III Burn-in Test.



**TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES,  
+ 125(+ 0 - 5) °C AND - 55(+ 5 - 0) °C**

No.	CHARACTERISTICS	SYMBOL	TEST METHOD MIL-STD 883	TEST FIG.	TEST CONDITIONS (PINS UNDER TEST)	LIMITS		UNIT
						MIN	MAX	
1	Functional Test	-	-	3(b)	Verify Truth Table with Load. Note 1	-	-	-
2	Input Current High Level Mode Input	I <sub>IH1</sub>	3010	4(a)	V <sub>CC</sub> = 5.5V, V <sub>IN</sub> = 2.7V (Pin 8)	-	20	μA
3	Input Current High Level Mode Input (Max. Input Voltage)	I <sub>IH2</sub>	3010	4(a)	V <sub>CC</sub> = 5.5V, V <sub>IN</sub> = 5.5V (Pin 8)	-	100	μA
4 to 11	Input Current High Level A or B Input	I <sub>IH3</sub>	3010	4(a)	V <sub>CC</sub> = 5.5V, V <sub>IN</sub> = 2.7V (Pins 1-2-18-19-20-21-22-23)	-	60	μA
12 to 19	Input Current High Level A or B Input (Max. Input Voltage)	I <sub>IH4</sub>	3010	4(a)	V <sub>CC</sub> = 5.5V, V <sub>IN</sub> = 5.5V (Pins 1-2-18-19-20-21-22-23)	-	300	μA
20 to 23	Input Current High Level S Input	I <sub>IH5</sub>	3010	4(a)	V <sub>CC</sub> = 5.5V, V <sub>IN</sub> = 2.7V (Pins 3-4-5-6)	-	80	μA
24 to 27	Input Current High Level S Input (Max. Input Voltage)	I <sub>IH6</sub>	3010	4(a)	V <sub>CC</sub> = 5.5V, V <sub>IN</sub> = 5.5V (Pins 3-4-5-6)	-	400	μA
28	Input Current High Level Carry Input	I <sub>IH7</sub>	3010	4(a)	V <sub>CC</sub> = 5.5V, V <sub>IN</sub> = 2.7V (Pin 7)	-	100	μA
29	Input Current High Level Carry Input (Max. Input Voltage)	I <sub>IH8</sub>	3010	4(a)	V <sub>CC</sub> = 5.5V, V <sub>IN</sub> = 5.5V (Pin 7)	-	500	μA
30 to 43	Input Clamp Voltage	V <sub>IC</sub>	3009	4(b)	V <sub>CC</sub> = 4.5V, I <sub>IN</sub> = - 18mA Note 2 (Pins 1-2-3-4-5-6-7-8-18-19-20-21-22-23)	-	- 1.5	V
44	Input Current Low Level Mode Input	I <sub>IL1</sub>	3009	4(c)	V <sub>CC</sub> = 5.5V, V <sub>IN</sub> = 0.4V (Pin 8)	-	- 0.4	mA

**NOTES:** See Page 23.





**TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES,  
+ 125(+ 0 - 5) °C AND - 55(+ 5 - 0) °C (CONT'D)**


No.	CHARACTERISTICS	SYMBOL	TEST METHOD MIL-STD 883	TEST FIG.	TEST CONDITIONS (PINS UNDER TEST)	LIMITS		UNIT
						MIN	MAX	
45 to 52	Input Current to Low Level A or B Input	$I_{IL2}$	3009	4(c)	$V_{CC} = 5.5V, V_{IN} = 0.4V$ (Pins 1-2-18-19-20-21-22-23)	-	- 1.2	mA
53 to 56	Input Current to Low Level S Input	$I_{IL3}$	3009	4(c)	$V_{CC} = 5.5V, V_{IN} = 0.4V$ (Pins 3-4-5-6)	-	- 1.6	mA
57	Input Current Low Level Carry Input	$I_{IL4}$	3009	4(c)	$V_{CC} = 5.5V, V_{IN} = 0.4V$ (Pin 7)	-	- 2.0	mA
58 to 65	Output Voltage to Low Level All Outputs	$V_{OL1}$	3007	4(d)	$V_{CC} = 4.5V, V_{IL} = 0.7V$ $V_{IH} = 2.0V, I_{OL} = 4.0mA$ (Pins 9-10-11-13-14-15-16-17)	-	0.4	V
66	Output Voltage Low Level Output G	$V_{OL2}$	3007	4(d)	$V_{CC} = 4.5V, V_{IL} = 0.7V$ $V_{IH} = 2.0V, I_{OL} = 16mA$ (Pin 17)	-	0.7	V
67	Output Voltage Low Level Output P	$V_{OL3}$	3007	4(d)	$V_{CC} = 4.5V, V_{IL} = 0.7V$ $V_{IH} = 2.0V, I_{OL} = 8.0mA$ (Pin 15)	-	0.6	V
68 to 74	Output Voltage to High Level any Output except A = B	$V_{OH}$	3006	4(e)	$V_{CC} = 4.5V, V_{IL} = 0.7V$ $V_{IH} = 2.0V, I_{OH} = - 400\mu A$ (Pins 9-10-11-13-15-16-17)	2.5	-	V
75	Output Current High Level A = B Output	$I_{OH}$	3006	4(e)	$V_{CC} = 4.5V, V_{IL} = 0.7V$ $V_{IH} = 2.0V, V_{OH} = 5.5V$ (Pin 14)	-	100	$\mu A$
76 to 82	Short Circuit to Output Current any Output except A = B	$I_{OS}$	3011	4(f)	$V_{CC} = 5.5V$ Note 3 (Pins 9-10-11-13-15-16-17)	- 6.0	- 40	mA
83	Supply Current	$I_{CC1}$	3005	4(g)	$V_{CC} = 5.5V$ S0 thru S3, M and $\bar{A}$ inputs at 4.5V, all other inputs at GND (Pin 24)	-	32	mA
84	Supply Current	$I_{CC2}$	3005	4(g)	$V_{CC} = 5.5V$ S0 thru S3, M inputs at 4.5V, all other inputs at GND (Pin 24)	-	35	mA

**NOTES:** See Page 23.



**FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS**


FIGURE 4(a) - HIGH LEVEL INPUT CURRENT

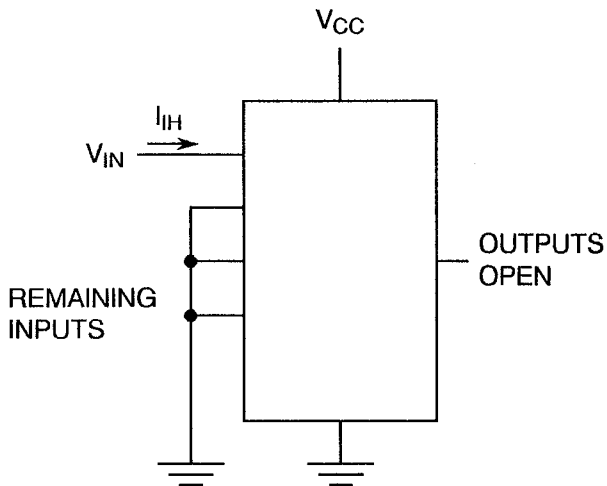

**NOTES**

1. Each input to be tested separately.


FIGURE 4(b) - INPUT CLAMP VOLTAGE

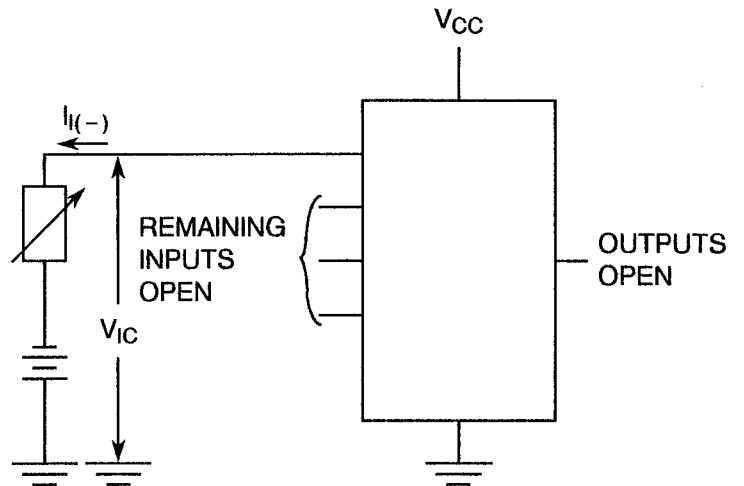

**NOTES**

1. Each input to be tested separately.


FIGURE 4(c) - LOW LEVEL INPUT CURRENT

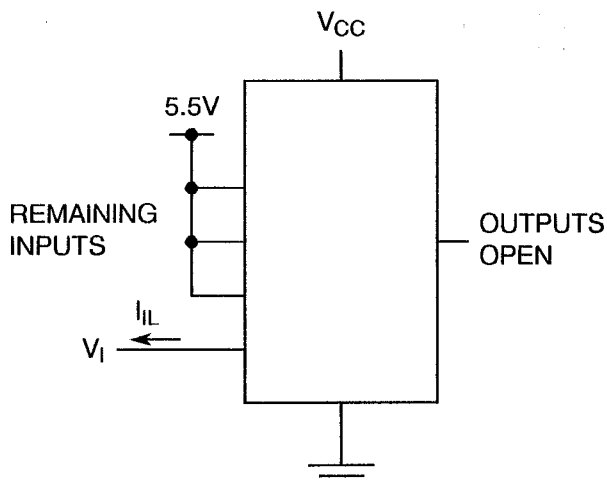

**NOTES**

1. Each input to be tested separately.

FIGURE 4(d) - LOW LEVEL OUTPUT VOLTAGE

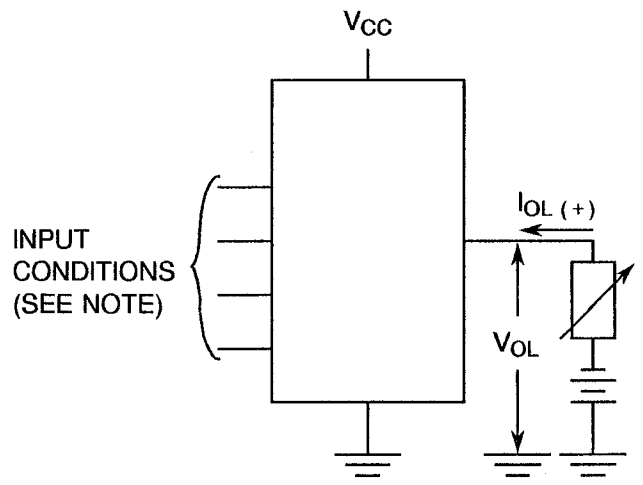

**NOTES**


1. Test per Truth Table.



**FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS (CONTINUED)**


FIGURE 4(e) - HIGH LEVEL OUTPUT VOLTAGE

FIGURE 4(f) - SHORT CIRCUIT OUTPUT CURRENT

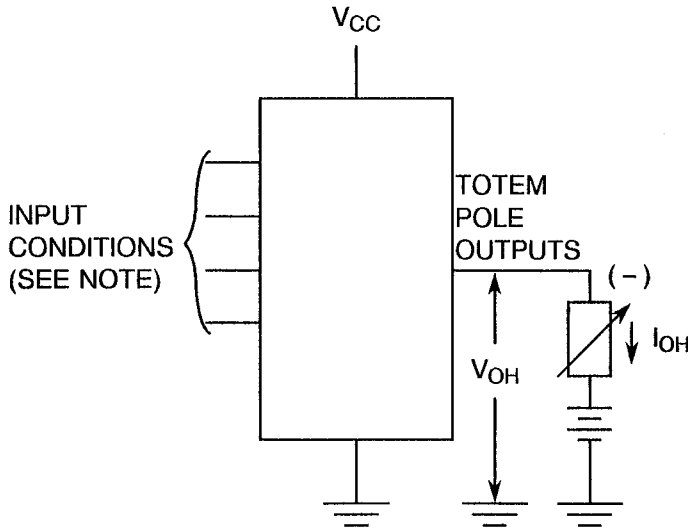

**NOTES**


1. Test per Truth Table.

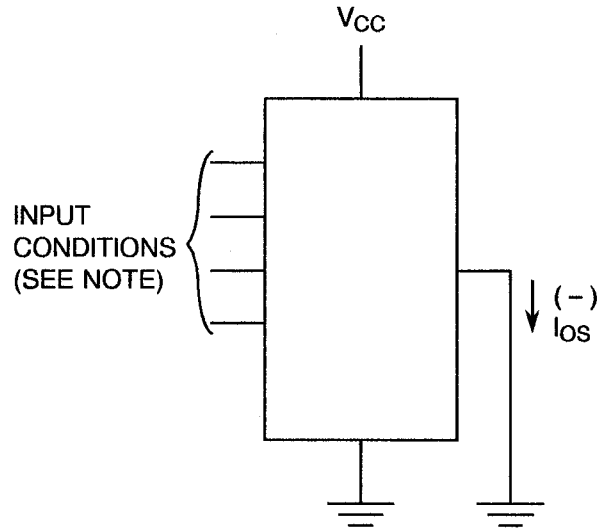

**NOTES**

1. No more than one output should be shorted at a time.
2. Test per Truth Table.

FIGURE 4(g) - SUPPLY CURRENT

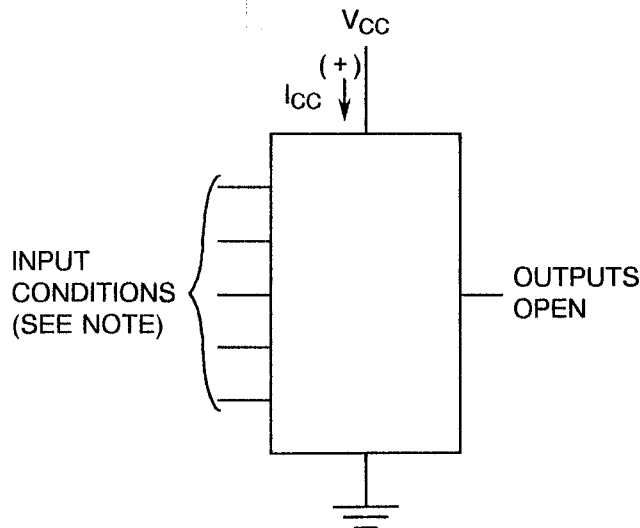


**NOTES**

1.  $I_{CC1}$  is measured with S0 thru S3, M and  $\bar{A}$  inputs at 4.5V, all other inputs at GND.  
 $I_{CC2}$  is measured with S0 thru S3 and M inputs at 4.5V, all other inputs at GND.




FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS (CONTINUED)

FIGURE 4(h) - DYNAMIC TEST AND SWITCHING WAVEFORMS

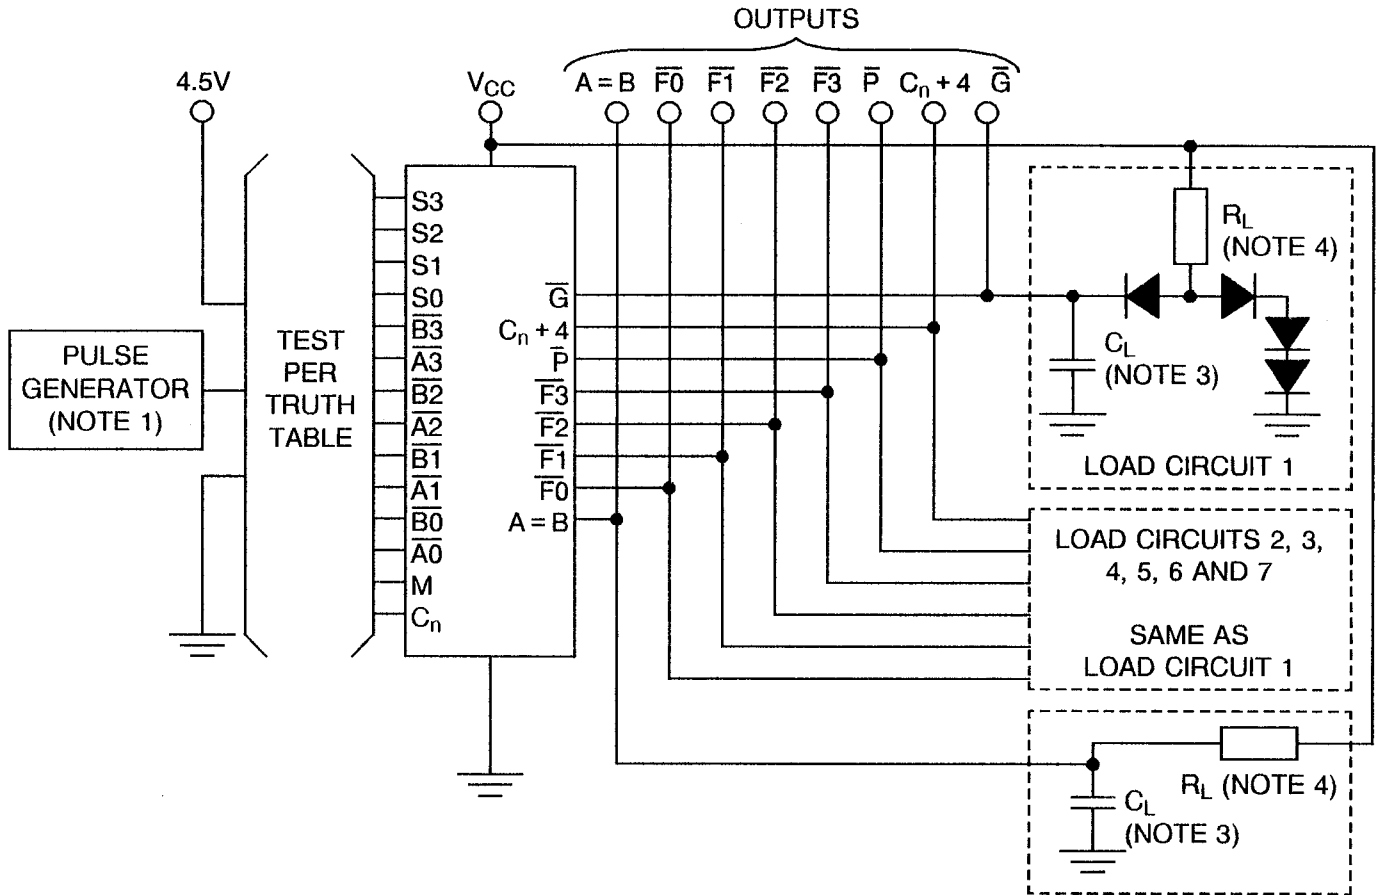

VOLTAGE WAVEFORMS

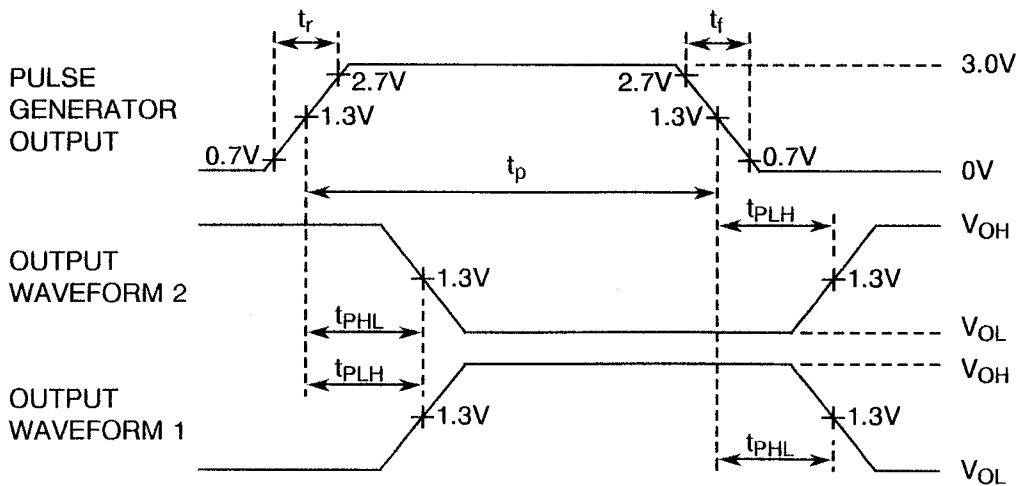

NOTES

1. The pulse generator has the following characteristics:  $t_r \leq 15\text{ns}$ ,  $t_f \leq 6.0\text{ns}$ ,  $t_p = 0.5\mu\text{s}$ ,  $\text{PRR} = 1.0\text{MHz} \pm 10\%$ ,  $Z_{\text{OUT}} = 50\Omega$ .
2. All diodes are 1N916 or 1N3064.
3.  $C_L = 15\text{pF} \pm 10\%$  including probe and jig capacitance.
4.  $R_L = 2.0\text{k}\Omega \pm 5\%$ .

**TABLE 4 - PARAMETER DRIFT VALUES**

No.	CHARACTERISTICS	SYMBOL	SPEC. AND/OR TEST METHOD	TEST CONDITIONS	CHANGE LIMITS ( $\Delta$ )	UNIT
2	Input Current High Level 1	$I_{IH1}$	As per Table 2	As per Table 2	$\pm 0.5$ or (1) $\pm 20$	$\mu A$ %
44	Input Current Low Level	$I_{IL}$	As per Table 2	As per Table 2	$\pm 18$	$\mu A$
58 to 65	Output Voltage Low Level	$V_{OL1}$	As per Table 2	As per Table 2	$\pm 60$	mV
68 to 74	Output Voltage High Level	$V_{OH}$	As per Table 2	As per Table 2	$\pm 240$	mV

**NOTES**

1. Whichever is greater, referred to the initial value.

**TABLE 5 - CONDITIONS FOR POWER BURN-IN AND OPERATING LIFE TEST**


No.	CHARACTERISTICS	SYMBOL	CONDITION	UNIT
1	Ambient Temperature	$T_{amb}$	+ 125(+ 0 – 5)	$^{\circ}C$
2	Power Supply Voltage	$V_{CC}$	+ 5(+ 0.5 – 0)	V
3	Pulse Voltage	$V_{GEN}$	0.5 max. to 3.0 min.	V
4	Frequency	f	100 (Note 1)	Hz
5	Fan-out	-	10	-
6	Rise Time	$t_r$	50 max.	$\mu s$
7	Fall Time	$t_f$	50 max.	$\mu s$
8	Duty Cycle	-	20 min.	%

**NOTES**

1. Tolerance  $\pm 10\%$ .




**FIGURE 5 - ELECTRICAL CIRCUIT FOR POWER BURN-IN AND OPERATING LIFE TEST**

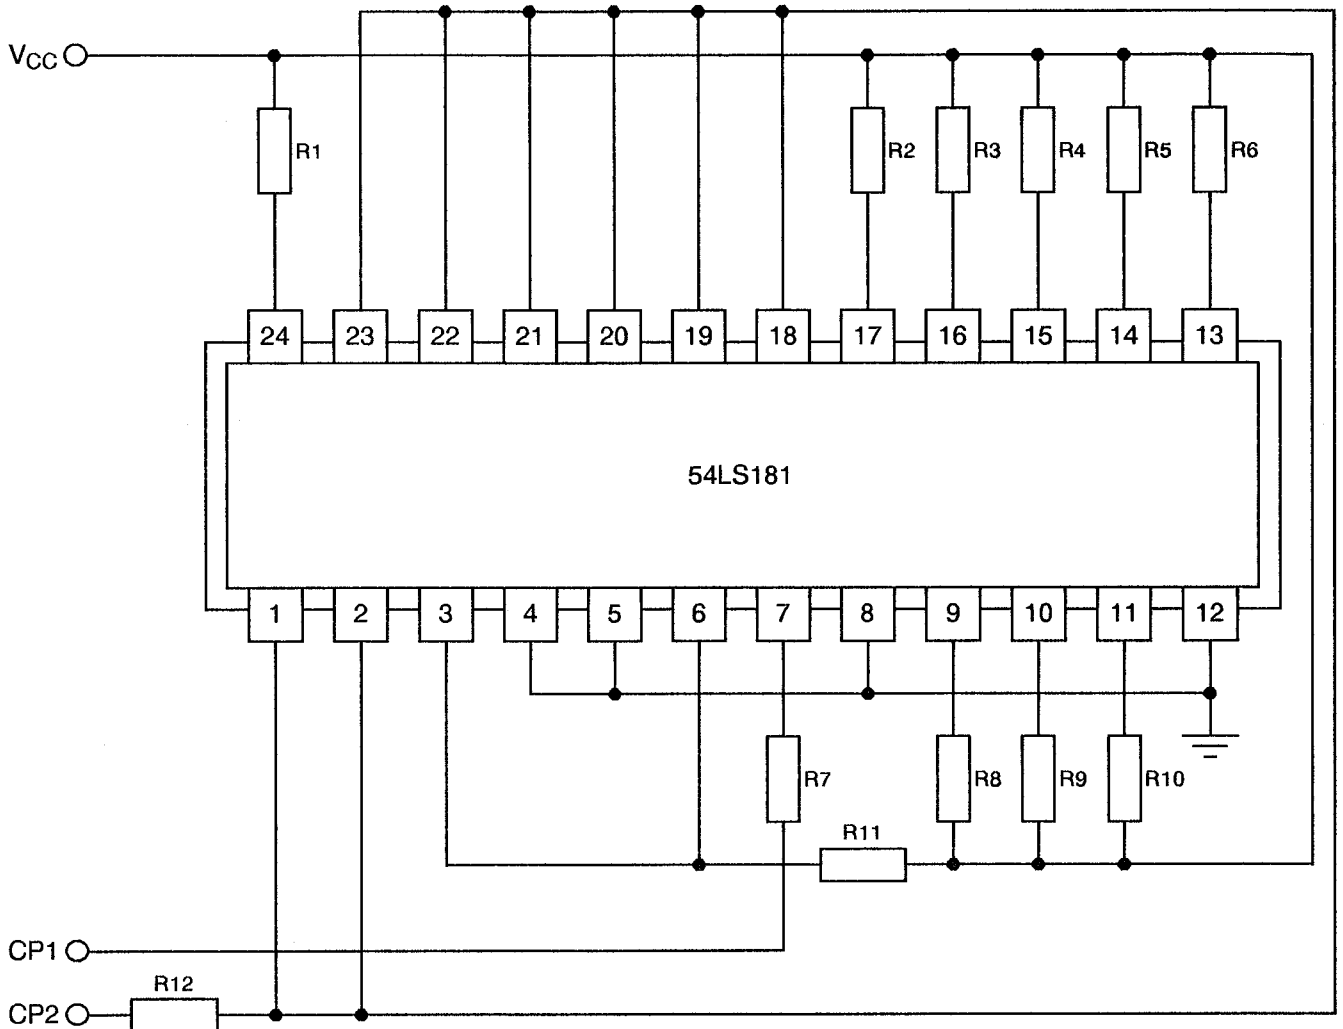

**NOTES**

1.  $R1 = 5.0\Omega \pm 5\%$ .
2.  $R7 = 27\Omega \pm 5\%$ .
3.  $R2 \text{ thru } R6 = R8 \text{ thru } R11 = 1.0k\Omega \pm 5\%$ .
4.  $R12 = 82\Omega \pm 5\%$ .
5.  $CP2 = \text{Same as } CP1 \text{ delayed by } 1/2 \text{ cycle and synchronised with } CP1$ .





4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESA/SCC GENERIC SPECIFICATION NO. 9000)

4.8.1 Electrical Measurements on Completion of Environmental Tests

The parameters to be measured on completion of environmental tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.

4.8.2 Electrical Measurements at Intermediate Points during Endurance Tests

The parameters to be measured at intermediate points during endurance tests are as scheduled in Table 6 of this specification.

4.8.3 Electrical Measurements on Completion of Endurance Tests

The parameters to be measured on completion of endurance testing are as scheduled in Table 6 of this specification. Unless otherwise stated, the measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.

4.8.4 Conditions for Operating Life Tests

The requirements for operating life testing are specified in Section 9 of ESA/SCC Generic Specification No. 9000. The conditions for operating life testing shall be as specified in Table 5 of this specification.

4.8.5 Electrical Circuits for Operating Life Tests

Circuits for use in performing the operating life tests are shown in Figure 5.

4.8.6 Conditions for High Temperature Storage Test

The requirements for the high temperature storage test are specified in ESA/SCC Generic Specification No. 9000. The conditions for high temperature storage shall be  $T_{amb} = +150(+0-5)$  °C.

**TABLE 6 - ELECTRICAL MEASUREMENTS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTS**

No.	CHARACTERISTICS	SYMBOL	SPEC. AND/OR TEST METHOD	TEST CONDITIONS	CHANGE LIMITS		UNIT
					(Δ)	ABSOLUTE	
2	Input Current High Level	$I_{IH1}$	As per Table 2	As per Table 2	± 1.0	-	μA
3	Input Current High Level	$I_{IH2}$	As per Table 2	As per Table 2	-	100	μA
44	Input Current Low Level	$I_{IL1}$	As per Table 2	As per Table 2	± 12	-	μA
58 to 65	Output Voltage Low Level	$V_{OL1}$	As per Table 2	As per Table 2	± 60	-	mV
68 to 74	Output Voltage High Level	$V_{OH}$	As per Table 2	As per Table 2	± 240	-	mV
83	Supply Current	$I_{CC1}$	As per Table 2	As per Table 2	± 20	-	%
84	Supply Current	$I_{CC2}$	As per Table 2	As per Table 2	± 20	-	%





APPENDIX 'A'

AGREED DEVIATIONS FOR TEXAS INSTRUMENTS (F)

ITEMS AFFECTED	DESCRIPTION OF DEVIATIONS
Para. 4.2.1	Scanning Electron Microscope (SEM) Inspection may be performed using TIF document TIF 3.61.610.001.
Para. 4.2.2	Prior to Die Shear Test TIF may perform a Radiographic Inspection on the randomly chosen samples to be subjected to this test, using TIF document TIF 50.42-3002.
Para. 4.2.3	Radiographic Inspection may be performed using TIF document TIF 50.42-3002.