



europaean space agency  
agence spatiale européenne

Pages 1 to 30

**INTEGRATED CIRCUITS, SILICON MONOLITHIC,  
LOW POWER BIPOLAR SCHOTTKY DUAL  
D-FLIP-FLOP WITH PRESET AND CLEAR,  
BASED ON TYPE 54LS74A**

**ESA/SCC Detail Specification No. 9203/013**



**space components  
coordination group**

Issue/Rev.	Date	Approved by	
		SCCG Chairman	ESA Director General or his Deputy
Issue 5	October 1991	-	
Revision 'A'	July 1992		
Revision 'B'	January 1995		



**SCC**

ESA/SCC Detail Specification  
No. 9203/013

Rev. 'B'

PAGE 2

ISSUE 5

**DOCUMENTATION CHANGE NOTICE**

Rev. Letter	Rev. Date	Reference	CHANGE Item	Approved DCR No.
		<p>This issue supersedes Issue 4 and incorporates all modifications agreed on the basis of the following DCR's:  Cover page  DCN  Table 1(a) : Variants 11 and 12 added  Figures 2(a), (b), (c) : Imperial dimensions deleted  Figure 2(d) : New figure  Figures 2(a) to (d) : - Title of the notes amended  - Note 1, last sentence added  - Note 8, 'or terminals' added  - Note 9, rewritten  - Notes 11 and 12, new notes  Figure 3(a) : - Title added  - Figure for chip carrier package added  - Comparison table added  - Note 1 added  Figure 3(c) : Note 1, 'and in ohms' deleted  Para 4.2.2 : Text amended (PIND deleted)  Para 4.2.4 : Deviation replaced by 'None'  Para 4.2.5 : Deviation replaced by 'None'  Para 4.3.2 : Para rewritten  Para 4.4.2 : Para rewritten  Para 4.5.2 : Para rewritten  Table 6 : 'ditto' changed into 'As per Table 2'  Appendix 'A' : Last item about Table 3 added</p>		<p>None  None  22881  22881  22881  22881  22881  22881  22881  22881  22881  21048  22919  22919  23460  22881  22881  None  22910</p>
'A'	July '92	P1. P2. P3. P8. P9. P17. P17. P17. P17. P28.	<p>Cover Page  DCN  Table of Contents : Amended as relevant  Figure 2(b) : Reference to Note 6 changed to Note 10  Figure 2(c) : Reference to Note 6 changed to Note 10  : Min. value of 'L' amended  Para. 4.5.3 : Wording amended  Para. 4.6.3 : 'and functional test sequence' deleted  Para. 4.7.2 : 'power' added before 'burn-in'  Para. 4.7.3 : 'power' added before 'burn-in'  Para. 4.8 : Title amended</p>	<p>None  None  None  23519  23519  None  23519  23519  23519  23519  23519</p>
'B'	Jan. '95	P1. P2. P6. P7. P8. P16. P25.	<p>Cover Page  DCN  Table 1(b) : Nos. 2 and 3, Notes reference changed to "1" and "2" respectively.  : No. 6, Entry amended to include DIL and FP  : Notes renumbered to "2", "3" and "1" respectively and resequenced  : Old Note 2, new Note 3 amended  : New Note 4 added  Figure 2(a) : Drawing and Table amended  Figure 2(b) : Drawing and Table amended  Para. 4.3.2 : Maximum weights amended  Figure 4(h) : Note 1 corrected</p>	<p>None  None  23573  23573  23573  23573  221033  221033  221047  23573</p>

**SCC**

ESA/SCC Detail Specification

No. 9203/013


Rev. 'A'

PAGE 3

ISSUE 5

**TABLE OF CONTENTS**

	<u>Page</u>
<b>1. <u>GENERAL</u></b>	<b>5</b>
1.1 Scope	5
1.2 Component Type Variants	5
1.3 Maximum Ratings	5
1.4 Parameter Derating Information	5
1.5 Physical Dimensions	5
1.6 Pin Assignment	5
1.7 Truth Table	5
1.8 Circuit Schematic	5
1.9 Functional Diagram	5
<b>2. <u>APPLICABLE DOCUMENTS</u></b>	<b>15</b>
<b>3. <u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u></b>	<b>15</b>
<b>4. <u>REQUIREMENTS</u></b>	<b>15</b>
4.1 General	15
4.2 Deviations from Generic Specification	15
4.2.1 Deviations from Special In-process Controls	15
4.2.2 Deviations from Final Production Tests	15
4.2.3 Deviations from Burn-in and Electrical Measurements	15
4.2.4 Deviations from Qualification Tests	15
4.2.5 Deviations from Lot Acceptance Tests	16
4.3 Mechanical Requirements	16
4.3.1 Dimension Check	16
4.3.2 Weight	16
4.4 Materials and Finishes	16
4.4.1 Case	16
4.4.2 Lead Materials and Finish	16
4.5 Marking	16
4.5.1 General	16
4.5.2 Lead Identification	16
4.5.3 The SCC Component Number	17
4.5.4 Traceability Information	17
4.6 Electrical Measurements	17
4.6.1 Electrical Measurements at Room Temperature	17
4.6.2 Electrical Measurements at High and Low Temperatures	17
4.6.3 Circuits for Electrical Measurements	17
4.7 Burn-in Tests	17
4.7.1 Parameter Drift Values	17
4.7.2 Conditions for Power Burn-in	17
4.7.3 Electrical Circuits for Power Burn-in	17
4.8 Environmental and Endurance Tests	28
4.8.1 Electrical Measurements on Completion of Environmental Tests	28
4.8.2 Electrical Measurements at Intermediate Points during Endurance Tests	28
4.8.3 Electrical Measurements on Completion of Endurance Tests	28
4.8.4 Conditions for Operating Life Test	28
4.8.5 Electrical Circuits for Operating Life Test	28
4.8.6 Conditions for High Temperature Storage Test	28

	<p style="text-align: center;">ESA/SCC Detail Specification No. 9203/013</p>		<p>PAGE 4 ISSUE 5</p>
--	--	--	---------------------------

Page

**TABLES**


1(a)	Type Variants	6
1(b)	Maximum Ratings	6
2	Electrical Measurements at Room Temperature - D.C. Parameters	18
	Electrical Measurements at Room Temperature - A.C. Parameters	20
3	Electrical Measurements at High and Low Temperatures	21
4	Parameter Drift Values	26
5	Conditions for Power Burn-in and Operating Life Test	26
6	Electrical Measurements on Completion of Environmental Tests and at Intermediate Points and on Completion of Endurance Testing	29

**FIGURES**

1	Not applicable	N.A.
2	Physical Dimensions	7
3(a)	Pin Assignment	12
3(b)	Truth Table	12
3(c)	Circuit Schematic	13
3(d)	Functional Diagram	14
4	Circuits for Electrical Measurements	23
5	Electrical Circuit for Power Burn-in and Operating Life Test	27

**APPENDICES (Applicable to specific Manufacturers only)**

'A'	Agreed Deviations for Texas Instruments (F)	30
-----	---	----

	ESA/SCC Detail Specification No. 9203/013	PAGE 5 ISSUE 5
---	--	-------------------

1. **GENERAL**

1.1 **SCOPE**

This Specification details the ratings, physical and electrical characteristics, test and inspection data for a silicon monolithic, low power bipolar Schottky, Dual D-Flip-Flop with preset and clear, based on Type 54LS74A. It shall be read in conjunction with ESA/SCC Generic Specification No. 9000, the requirements of which are supplemented herein.

1.2 **COMPONENT TYPE VARIANTS**

Variants of the basic type integrated circuits specified herein, which are also covered by this specification, are given in Table 1(a).

1.3 **MAXIMUM RATINGS**

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the integrated circuits specified herein, are as scheduled in Table 1(b).

1.4 **PARAMETER DERATING INFORMATION** (Figure 1)

Not applicable.

1.5 **PHYSICAL DIMENSIONS**

The physical dimensions of the integrated circuits specified herein are shown in Figure 2.

1.6 **PIN ASSIGNMENT**

As per Figure 3(a).

1.7 **TRUTH TABLE**

As per Figure 3(b).

1.8 **CIRCUIT SCHEMATIC**

As per Figure 3(c).

1.9 **FUNCTIONAL DIAGRAM**

As per Figure 3(d).

**TABLE 1(a) - TYPE VARIANTS**

Variant	Case	Figure	Lead Material and/or Finish
01	FLAT	2(a)	D7
02	FLAT	2(a)	G4
05	DIL	2(b)	D7
06	DIL	2(b)	G4
07	DIL	2(c)	D7
08	DIL	2(c)	D3 or D4
11	CCP	2(d)	7
12	CCP	2(d)	4

**TABLE 1(b) - MAXIMUM RATINGS**

No.	Characteristics	Symbol	Maximum Ratings	Unit	Remarks
1	Supply Voltage	$V_{CC}$	-0.5 to 7.0	V	
2	Input Voltage	$V_{IN}$	-0.5 to 7.0	V	Note 1
3	Device Dissipation	$P_D$	44	mWdc	Note 2
4	Operating Temperature Range	$T_{op}$	-55 to +125	°C	
5	Storage Temperature Range	$T_{stg}$	-65 to +150	°C	
6	Soldering Temperature For FP and DIL For CCP	$T_{sol}$	+265 +245	°C	Note 3 Note 4


**NOTES**

1. Input current limited to -18mA.
2. Must withstand added PD due to short circuit conditions (i.e. IOS) at one output for 5 seconds.
3. Duration 10 seconds maximum at a distance of not less than 1.5mm from the device body and the same lead shall not be resoldered until 3 minutes have elapsed.
4. Duration 5 seconds maximum and the same terminal shall not be resoldered until 3 minutes have elapsed.



**FIGURE 2 - PHYSICAL DIMENSIONS**

**FIGURE 2(a) - FLAT PACKAGE**

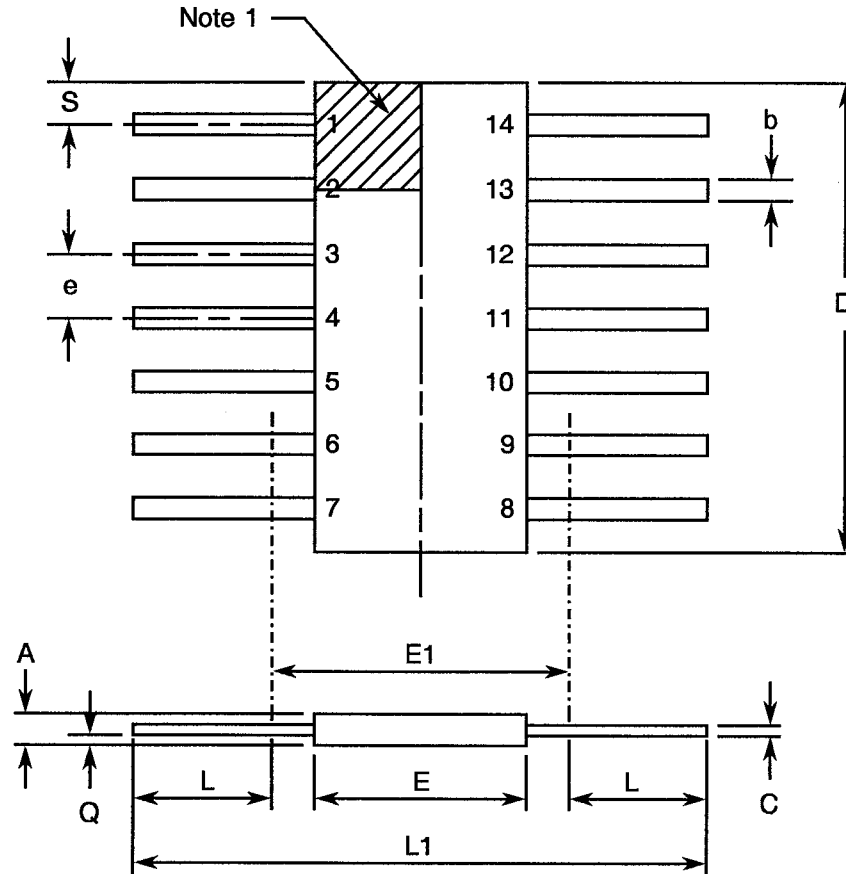


SYMBOL	MILLIMETRES		NOTES
	MIN	MAX	
A	1.27	2.03	
b	0.38	0.56	8
C	0.08	0.23	8
D	8.56	8.89	4
E	5.97	6.73	
E1	7.00 TYPICAL		4
e	1.27 TYPICAL		5, 9
L	6.86	8.00	8
L1	21.34	21.84	
Q	0.51	1.02	2
S	0.25	0.64	7

**NOTES:** See Page 11.



**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**

**FIGURE 2(b) - DUAL-IN-LINE PACKAGE**

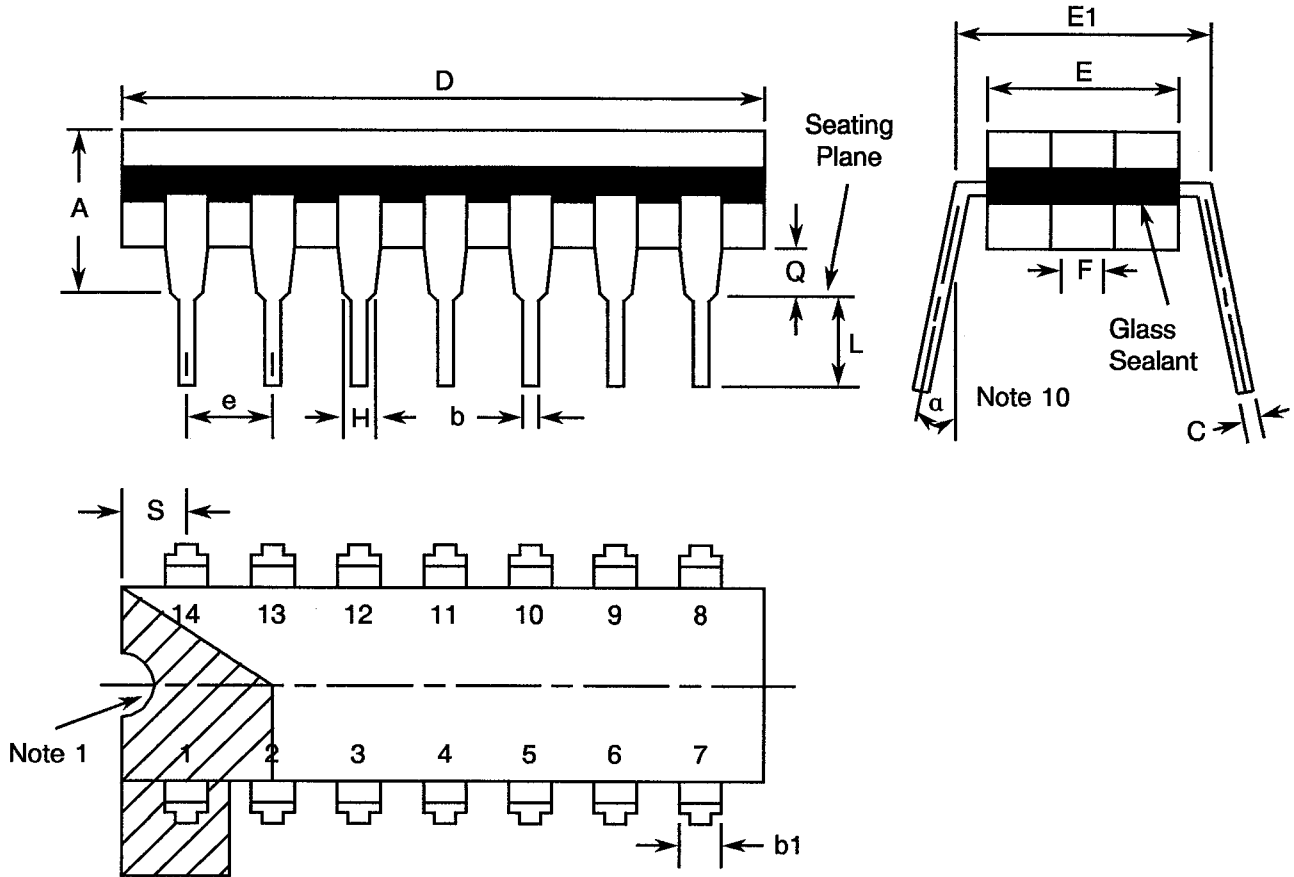

SYMBOL	MILLIMETRES		NOTES
	MIN	MAX	
A	-	5.08	
b	0.38	0.66	8
b1	-	1.78	8
C	0.20	0.44	8
D	19.18	19.94	4
E	6.22	7.62	4
E1	7.37	8.13	
e	2.54 TYPICAL		6, 9
F	1.27 TYPICAL		
H	0.76	-	8
L	3.30	5.08	8
Q	0.51	-	3
S	1.78	2.54	7
alpha	0°	15°	10


**NOTES:** See Page 11.





**FIGURE 2 - PHYSICAL DIMENSIONS**

**FIGURE 2(c) - DUAL-IN-LINE PACKAGE**

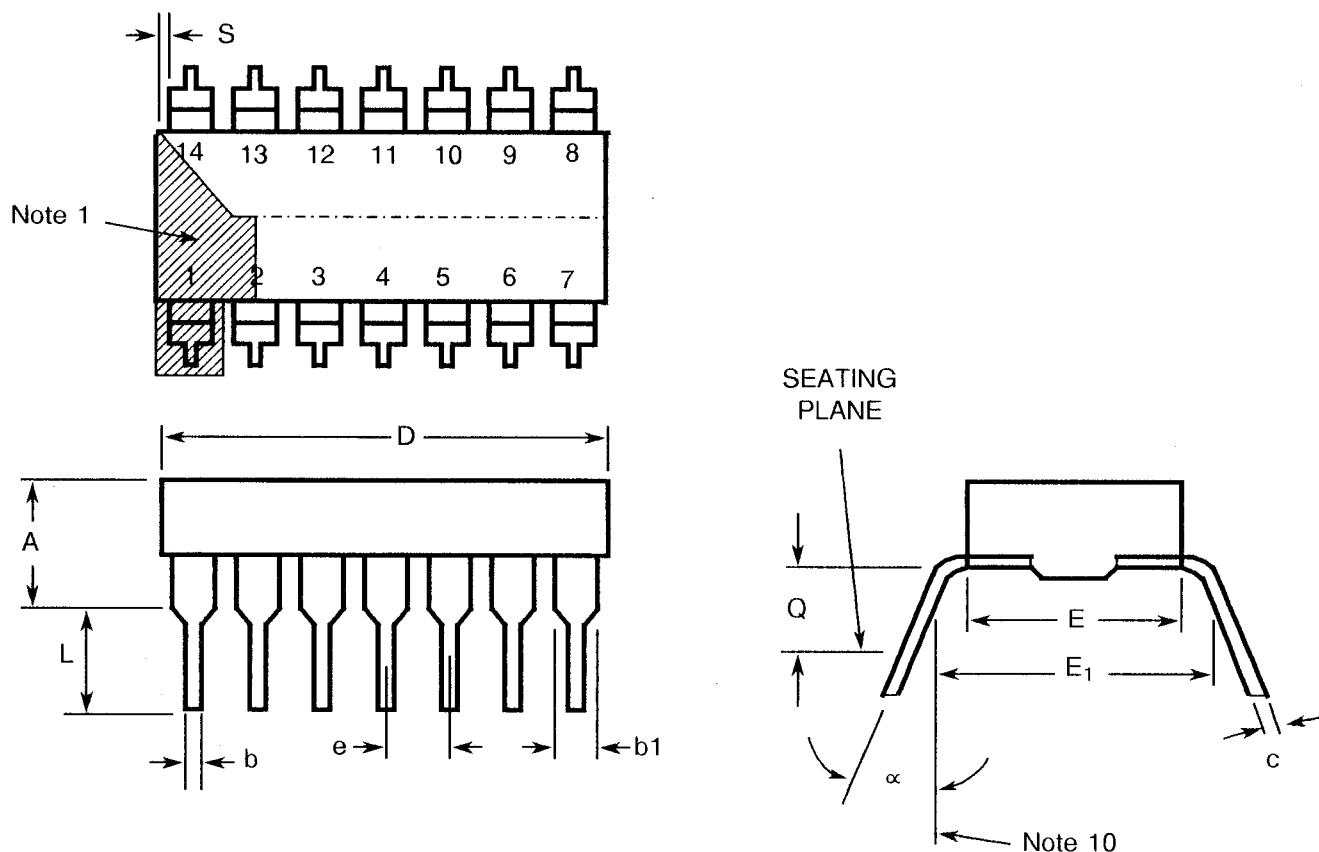


SYMBOL	MILLIMETRES		NOTES
	MIN.	MAX.	
A	-	5.08	
b	0.36	0.58	8
b <sub>1</sub>	0.76	1.78	8
c	0.20	0.38	8
D	16.26	19.96	
E	5.59	7.87	
E <sub>1</sub>	7.37	8.13	4
e	2.54 Typical		6, 9
L	3.18	5.08	
Q	0.38	2.03	3
S	0.25	1.35	7
α	0°	15°	10

**NOTES:** See Page 11.





**FIGURE 2 - PHYSICAL DIMENSIONS (Continued)**

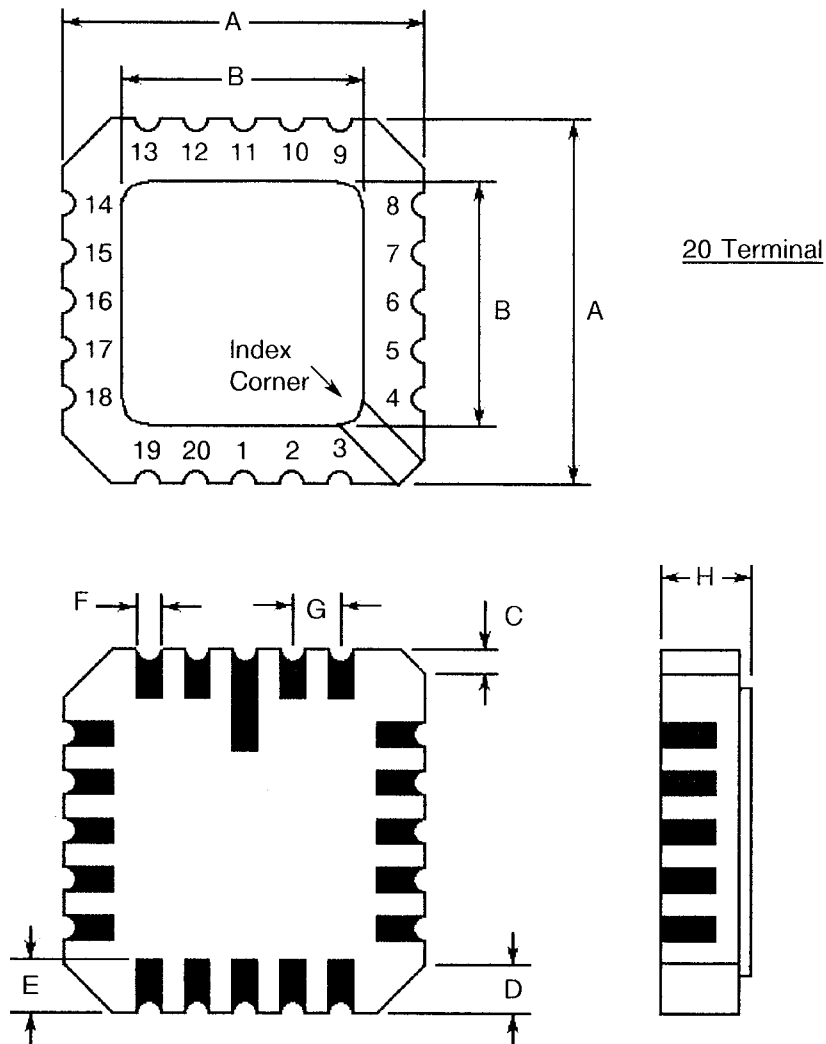**FIGURE 2(d) - SQUARE CHIP CARRIER PACKAGE (3 LAYER BASE)**



Symbol	Millimetres		Notes
	Min.	Max.	
A	8.687	9.093	
B	7.798	9.093	
C	0.250	0.510	11
D	0.889	1.143	12
E	1.140	1.400	8
F	0.559	0.712	8
G	1.27 Typical		5, 9
H	1.630	2.540	

**NOTES:** See Page 11.


		<p style="text-align: center;">ESA/SCC Detail Specification No. 9203/013</p>	<p>PAGE 11 ISSUE 5</p>
--	--	--	----------------------------

**FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)**

**NOTES TO FIGURES 2(a) to 2(d)**

1. Index area; a notch or a dot shall be located adjacent to Pin 1 and shall be within the shaded area shown. For chip carrier packages, the index shall be as shown in Figure 2(d).
2. Dimension Q shall be measured at the point of exit of the lead from the body.
3. Dimension Q shall be measured from the seating plane to the base plane.
4. This dimension allows for off-centre lids, meniscus and glass overrun.
5. The true position pin spacing is 1.27mm between centrelines. Each pin centreline shall be located within  $\pm 0.13\text{mm}$  of its true longitudinal position relative to Pins 1 and 14 .
6. The true position pin spacing is 2.54mm between centrelines. Each pin centreline shall be located within  $\pm 0.25\text{mm}$  of its true longitudinal position relative to Pins 1 and 14.
7. Applies to all four corners.
8. All leads or terminals.
9. 12 spaces for flat and dual-in-line packages.  
16 spaces for chip carrier packages.
10. Lead centre when  $\alpha$  is  $0^\circ$ .
11. Index corner only - 2 dimensions.
12. 3 non-index corners - 6 dimensions.

**FIGURE 3 (a) - PIN ASSIGNMENT**

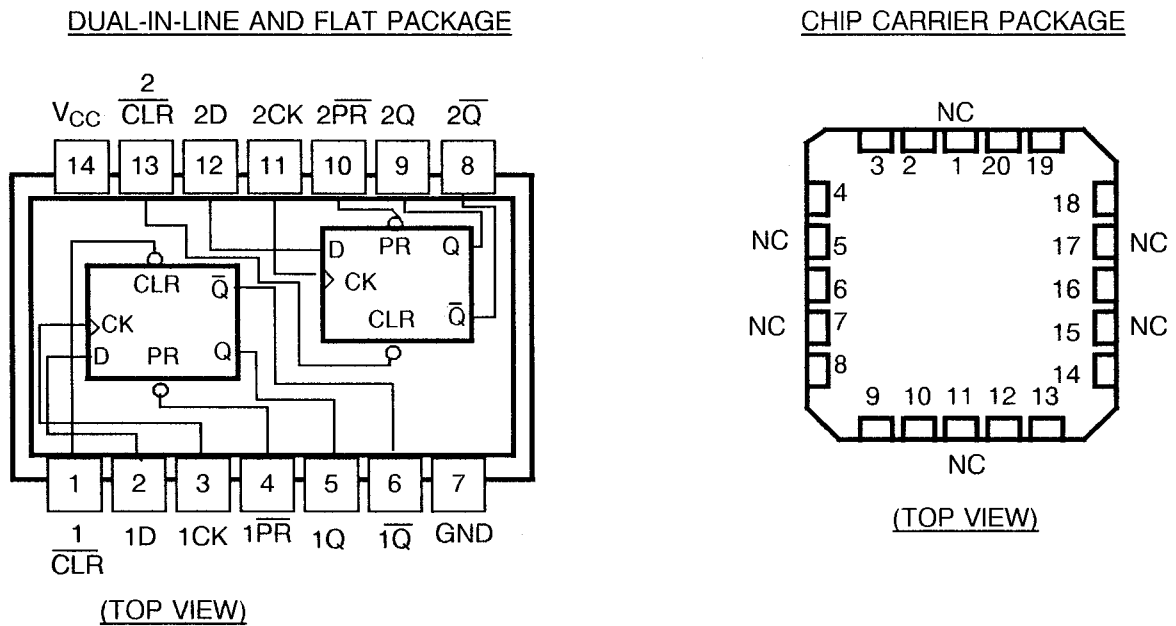

FLAT PACKAGE AND DUAL-IN-LINE TO CHIP CARRIER PIN ASSIGNMENT

FLAT PACKAGE AND DUAL-IN-LINE PIN OUTS	1 2 3 4 5 6 7 8 9 10 11 12 13 14
CHIP CARRIER PIN OUTS	2 3 4 6 8 9 10 12 13 14 16 18 19 20

**NOTES** 1. All references throughout this specification relate to FLAT/DIL packages only.

**FIGURE 3(b) - TRUTH TABLE**  
Function Table (each Flip Flop)


INPUTS				OUTPUTS	
PRESET	CLEAR	CLOCK	D	Q	Q-bar
L	H	X	X	H	L
H	L	X	X	L	H
L	L	X	X	H*	H*
H	H	↑	H	H	L
H	H	↑	L	L	H
H	H	L	X	Q <sub>0</sub>	Q <sub>0</sub> -bar

**NOTES**

- H = high level (steady state), L = low level (steady state), X = Irrelevant, Q<sub>0</sub> = level of Q before indicated steady-state input conditions were established, ↑ = transition from low to high level, \* = Nonstable configuration, it will not persist when clear and preset return to high level.




FIGURE 3(c) - CIRCUIT SCHEMATIC

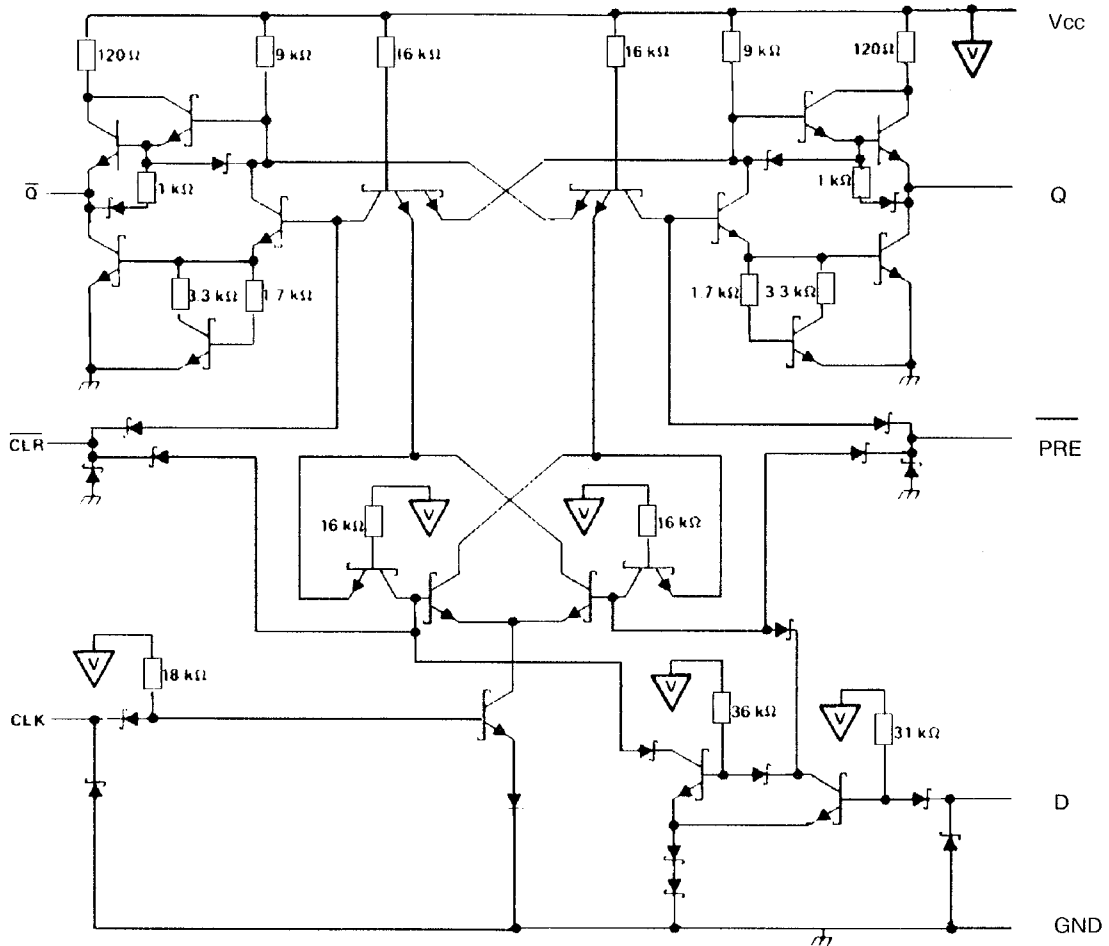


**NOTES**

1. Resistor values are nominal

**FIGURE 3(d) - FUNCTIONAL DIAGRAM**  
(Each Flip-Flop)

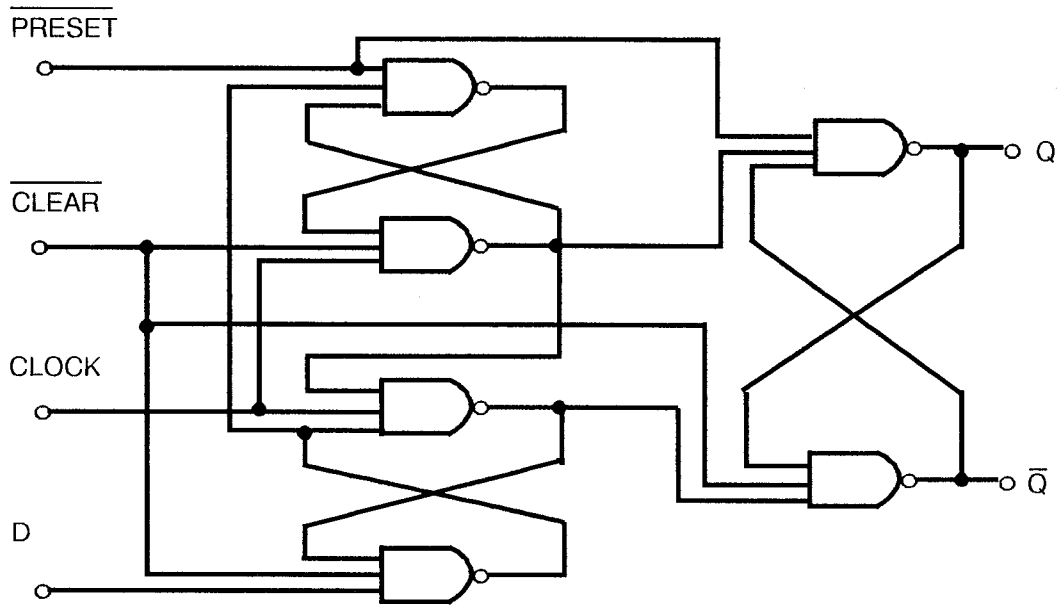

	ESA/SCC Detail Specification No. 9203/013	PAGE 15 ISSUE 5
---	--	--------------------

**2. APPLICABLE DOCUMENTS**

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESA/SCC Generic Specification No. 9000 for Integrated Circuits.
- (b) MIL-STD-883, Test Methods and Procedures for Micro-electronics.

**3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS**

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESA/SCC Basic Specification No. 21300 shall apply. In addition, the following abbreviations are used:

$V_{IC}$  = Input Clamp Voltage

$V_{CC}$  = Supply Voltage

**4. REQUIREMENTS**

**4.1 GENERAL**

The complete requirements for procurement of the integrated circuits specified herein shall be as stated in this specification and ESA/SCC Generic Specification No. 9000 for Integrated Circuits. Deviations from the Generic Specification applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESA/SCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

**4.2 DEVIATIONS FROM GENERIC SPECIFICATION**

**4.2.1 Deviations from Special In-process Control**

None.

**4.2.2 Deviations from Final Production Tests (Chart II)**

None.

**4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)**

(a) Para. 7.1.1(a), High Temperature Reverse Bias test and subsequent electrical measurements related to this test shall be omitted.

(b) Para. 9.9.2, Electrical Measurements at High and Low Temperatures: Only a test result summary, based on go-no-go tests and presented in histogram form is required.

**4.2.4 Deviations from Qualification Tests (Chart IV)**

None.

**4.2.5 Deviations from Lot Acceptance Tests (Chart V)**

None.

**4.3 MECHANICAL REQUIREMENTS****4.3.1 Dimension Check**

The dimensions of the integrated circuits specified herein shall be checked. They shall conform to those shown in Figure 2.

**4.3.2 Weight**

The maximum weight of the integrated circuits specified herein shall be 0.7 grammes for the flat package, 2.2 grammes for the dual-in-line package and 0.6 grammes for the chip carrier package.

**4.4 MATERIALS AND FINISHES**

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the integrated circuits specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

**4.4.1 Case**

The case shall be hermetically sealed and have a metal body with hard glass seals or a ceramic body and the lids shall be welded, brazed, preform-soldered or glass frit-sealed.

**4.4.2 Lead Material and Finish**

For dual-in-line and flat packages, the material shall be either Type 'D' or Type 'G' with either Type '3' or '4', Type '4' or Type '7' finish in accordance with the requirements of ESA/SCC Basic Specification No. 23500. For chip carrier packages, the finish shall be either Type '4' or Type '7' in accordance with the requirements of ESA/SCC Basic Specification No. 23500. (See Table 1(a) for Type Variants).

**4.5 MARKING****4.5.1 General**

The marking of all components delivered to this specification shall be in accordance with the requirements of ESA/SCC Basic Specification No. 21700. Each component shall be marked in respect of:-

- (a) Lead Identification.
- (b) The SCC Component Number.
- (c) Traceability Information.

**4.5.2 Lead Identification**


For dual-in-line and flat packages, an index shall be located at the top of the package in the position defined in Note 1 to Figure 2 or, alternatively, a tab may be used to identify Pin No. 1. The pin numbering must be read with the index or tab on the left-hand side. For chip carrier packages, the index shall be as defined by Figure 2(d).





4.5.3 The SCC Component Number

Each component shall bear the SCC Component Number which shall be constituted and marked as follows:-

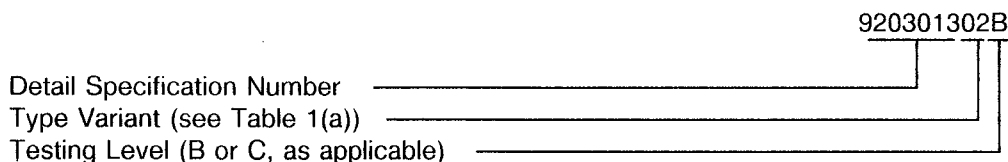

4.5.4 Traceability Information

Each component shall be marked in respect of traceability information in accordance with the requirements of ESA/SCC Basic Specification No. 21700.

4.6 ELECTRICAL CHARACTERISTICS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured in respect of electrical characteristics are scheduled in Table 2. Unless otherwise specified, the measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.

4.6.2 Electrical Measurements at High and Low Temperatures

The parameters to be measured at high and low temperatures are scheduled in Table 3. The measurements shall be performed at  $T_{amb} = +125$  and  $-55$  °C respectively.

4.6.3 Circuits for Electrical Measurements

Circuits for use in performing the electrical measurements listed in Tables 2 and 3 of this specification are shown in Figure 4.

4.7 BURN-IN TESTS

4.7.1 Parameter Drift Values

The parameter drift values applicable to burn-in are specified in Table 4 of this specification. Unless otherwise stated, measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C. The parameter drift values ( $\Delta$ ) applicable to the parameters scheduled shall not be exceeded. In addition to these drift value requirements, the appropriate limit value specified for a given parameter in Table 2 shall not be exceeded.

4.7.2 Conditions for Power Burn-in

The requirements for power burn-in are specified in Section 7 of ESA/SCC Generic Specification No. 9000. The conditions for power burn-in shall be as specified in Table 5 of this specification.

4.7.3 Electrical Circuits for Power Burn-in

Circuits for use in performing the power burn-in test are shown in Figure 5 of this specification.

**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE - D.C. PARAMETERS**

No.	Characteristics	Symbol	Test Method MIL-STD-883	Test Fig.	Test Conditions (Pins under Test)	Limits		Unit
						Min.	Max.	
1	Functional Test	-	-	3(b)	Verify Truth Table with Load. Note 1	-	-	-
2 to 3	Input Current High Level at D Input	$I_{IH1}$	3010	4(a)	$V_{CC} = 5.5V$ , $V_{IN} = 2.7V$ (Pins 2-12) Note 7	-	20	$\mu A$
4 to 5	Input Current High Level at D Input (Max. Input Voltage)	$I_{IH2}$	3010	4(a)	$V_{CC} = 5.5V$ , $V_{IN} = 7.0V$ (Pins 2-12) Note 7	-	100	$\mu A$
6 to 9	Input Current High Level at Clear or Preset	$I_{IH3}$	3010	4(a)	$V_{CC} = 5.5V$ , $V_{IN} = 2.7V$ (Pins 1-4-10-13) Note 7	-	40	$\mu A$
10 to 13	Input Current High Level at Clear or Preset (Max. Input Voltage)	$I_{IH4}$	3010	4(a)	$V_{CC} = 5.5V$ , $V_{IN} = 7.0V$ (Pins 1-4-10-13) Note 7	-	200	$\mu A$
14 to 15	Input Current High Level at Clock	$I_{IH5}$	3010	4(a)	$V_{CC} = 5.5V$ , $V_{IN} = 2.7V$ (Pins 3-11) Note 7	-	20	$\mu A$
16 to 17	Input Current High Level at Clock (Max. Input Voltage)	$I_{IH6}$	3010	4(a)	$V_{CC} = 5.5V$ , $V_{IN} = 7.0V$ (Pins 3-11) Note 7	-	100	$\mu A$
18 to 25	Input Clamp Voltage	$V_{IC}$	3009	4(b)	$V_{CC} = 4.5V$ , $I_{IN} = -18mA$ (Pins 1-2-3-4-10-11-12-13) Note 2	-	-1.5	V
26 to 29	Input Current Low Level at D or Clock	$I_{IL1}$	3009	4(c)	$V_{CC} = 5.5V$ , $V_{IN} = 0.4V$ (Pins 2-3-11-12) Note 8	-	-400	$\mu A$
30 to 33	Input Current Low Level at Clear or Preset	$I_{IL2}$	3009	4(c)	$V_{CC} = 5.5V$ , $V_{IN} = 0.4V$ (Pins 1-4-10-13) Note 8	-	-800	$\mu A$
34 to 37	Output Voltage Low Level	$V_{OL}$	3007	4(d)	$V_{CC} = 4.5V$ , $V_{IH} = 2.0V$ $I_{OL} = 4mA$ , $V_{IL} = 0.7V$ (Pins 5-6-8-9)	-	0.4	V

**NOTES:** See Page 20.

**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE - D.C. PARAMETERS (CONTINUED)**

No.	Characteristics	Symbol	Test Method MIL-STD-883	Test Fig.	Test Conditions (Pins under Test)	Limits		Unit
						Min.	Max.	
38 to 41	Output Voltage High Level	$V_{OH}$	3006	4(e)	$V_{CC} = 4.5V$ , $V_{IH} = 2.0V$ $V_{IL} = 0.7V$ , $I_{OH} = -400\mu A$ (Pins 5-6-8-9)	2.5	-	V
42 to 45	Output Current Short Circuit	$I_{OS}$	3011	4(f)	$V_{CC} = 5.5V$ (Pins 5-6-8-9) Note 3	-15	-100	mA
46 to 47	Supply Current	$I_{CC}$	3005	4(g)	$V_{CC} = 5.5V$ , Note 4 (Pin 14)	-	8	mA

**NOTES:** See Page 20.

**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE - A.C. PARAMETERS**

No.	Characteristics	Symbol	Test Method MIL-STD-883	Test Fig.	Test Conditions (Pins under Test) (Note 6)	Limits		Unit
						Min.	Max.	
48 to 51	Propagation Delay Low to High Level from Clock, <u>Clear</u> or <u>Preset</u>	$t_{PLH}$	3003	4(h)	$V_{CC} = 5.0V$ $R_L = 2k\Omega$ $C_L = 15pF$  (Pins 5-6-8-9)	-	25	ns
52 to 54	Propagation Delay High to Low Level from Clock, <u>Clear</u> or <u>Preset</u>	$t_{PHL1}$				-	40	
55 to 56	Maximum Clock Frequency	$f_{max}$	-	4(h)	$V_{CC} = 5.5V$ $R_L = 2k\Omega$ $C_L = 15pF$ (Pins 3-11) Note 5	25	-	MHz

**NOTES**

1. Go-no-go test with  $V_{IL} = 0.3V$ ;  $V_{IH} = 3.0V$ ; trip point 1.5V.
2. All inputs and outputs not under test shall be open.
3. No more than one output shall be shorted at a time, and only for 1 second maximum.
4. With all outputs open,  $I_{CC}$  is measured, after a momentary Ground, at 'D', Clock and Preset; then with 'D', Clock and Clear grounded.
5. This parameter shall be measured only when required by purchase order. In any case, the Manufacturer shall guarantee that the devices meet this requirement.
6. Propagation delay measurements shall be performed as a go-no-go test on a 100% basis. Read-and-record measurements shall be performed on an LTPD7 sample basis following the Chart III burn-in test.
7.  $I_{IH}$  Input Conditions:-
 

<u>Input under Test</u>	<u>Conditions</u>
<u>Clear</u>	<u>Preset</u> , Clock and D inputs at 5.5V.
<u>Preset</u>	<u>Clear</u> and D inputs at 5.5V, Clock input from Ground to 5.5V.
Clock	<u>Preset</u> and D inputs at 5.5V, <u>Clear</u> input grounded.
D	<u>Preset</u> and Clock inputs at 5.5V, <u>Clear</u> input grounded.
8.  $I_{IL}$  Input Conditions:-
 

<u>Input under Test</u>	<u>Conditions</u>
<u>Clear</u>	<u>Preset</u> , Clock and D inputs at 5.5V.
<u>Preset</u>	<u>Clear</u> and Clock inputs at 5.5V, D input grounded.
Clock	<u>Clear</u> input at 5.5V, <u>Preset</u> and D inputs grounded.
D	Clock and <u>Clear</u> inputs at 5.5V, <u>Preset</u> input grounded.

**TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES,  
+ 125°C AND -55°C**

No.	Characteristics	Symbol	Test Method MIL-STD-883	Test Fig.	Test Conditions (Pins under Test)	Limits		Unit
						Min.	Max.	
1	Functional Test	-	-	3(b)	Verify Truth Table with Load. Note 1	-	-	-
2 to 3	Input Current High Level at D Input	$I_{IH1}$	3010	4(a)	$V_{CC} = 5.5V$ , $V_{IN} = 2.7V$ (Pins 2-12) Note 7	-	20	$\mu A$
4 to 5	Input Current High Level at D Input (Max. Input Voltage)	$I_{IH2}$	3010	4(a)	$V_{CC} = 5.5V$ , $V_{IN} = 7.0V$ (Pins 2-12) Note 7	-	100	$\mu A$
6 to 9	Input Current High Level at Clear or Preset	$I_{IH3}$	3010	4(a)	$V_{CC} = 5.5V$ , $V_{IN} = 2.7V$ (Pins 1-4-10-13) Note 7	-	40	$\mu A$
10 to 13	Input Current High Level at Clear or Preset (Max. Input Voltage)	$I_{IH4}$	3010	4(a)	$V_{CC} = 5.5V$ , $V_{IN} = 7.0V$ (Pins 1-4-10-13) Note 7	-	200	$\mu A$
14 to 15	Input Current High Level at Clock	$I_{IH5}$	3010	4(a)	$V_{CC} = 5.5V$ , $V_{IN} = 2.7V$ (Pins 3-11) Note 7	-	20	$\mu A$
16 to 17	Input Current High Level at Clock (Max. Input Voltage)	$I_{IH6}$	3010	4(a)	$V_{CC} = 5.5V$ , $V_{IN} = 7.0V$ (Pins 3-11) Note 7	-	100	$\mu A$
18 to 25	Input Clamp Voltage	$V_{IC}$	3009	4(b)	$V_{CC} = 4.5V$ , $I_{IN} = -18mA$ (Pins 1-2-3-4-10-11-12-13) Note 2	-	-1.5	V
26 to 29	Input Current Low Level at D or Clock	$I_{IL1}$	3009	4(c)	$V_{CC} = 5.5V$ , $V_{IN} = 0.4V$ (Pins 2-3-11-12) Note 8	-	-400	$\mu A$
30 to 33	Input Current Low Level at Clear or Preset	$I_{IL2}$	3009	4(c)	$V_{CC} = 5.5V$ , $V_{IN} = 0.4V$ (Pins 1-4-10-13) Note 8	-	-800	$\mu A$
34 to 37	Output Voltage Low Level	$V_{OL}$	3007	4(d)	$V_{CC} = 4.5V$ , $V_{IH} = 2.0V$ $I_{OL} = 4mA$ , $V_{IL} = 0.7V$ (Pins 5-6-8-9)	-	0.4	V

**NOTES:** See Page 20.

**TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES,  
+ 125°C AND -55°C (CONTINUED)**


No.	Characteristics	Symbol	Test Method MIL-STD-883	Test Fig.	Test Conditions (Pins under Test)	Limits		Unit
						Min.	Max.	
38 to 41	Output Voltage High Level	$V_{OH}$	3006	4(e)	$V_{CC} = 4.5V$ , $V_{IH} = 2.0V$ $V_{IL} = 0.7V$ , $I_{OH} = -400\mu A$ (Pins 5-6-8-9)	2.5	-	V
42 to 45	Output Current Short Circuit	$I_{OS}$	3011	4(f)	$V_{CC} = 5.5V$ (Pins 5-6-8-9) Note 3	-15	-100	mA
46 to 47	Supply Current (per Flip-Flop)	$I_{CC}$	3005	4(g)	$V_{CC} = 5.5V$ , (Pin 14) Note 4	-	8	mA

**NOTES:** See Page 20.




**FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS**

FIGURE 4(a) - INPUT CURRENT HIGH LEVEL

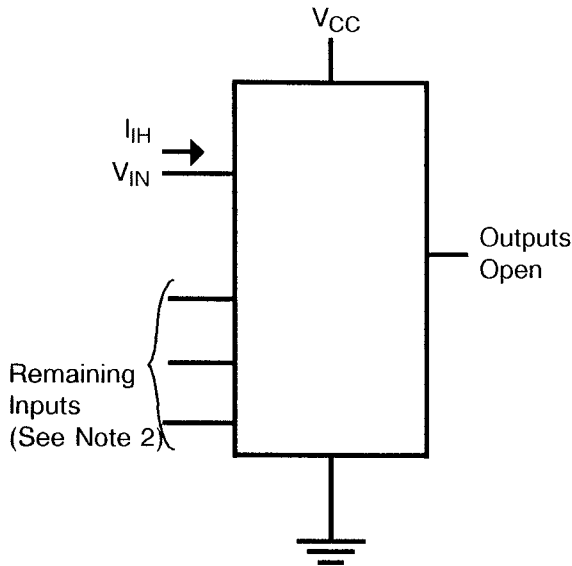


- NOTES**
1. Each input is tested separately.
  2. See Note 7 on Page 20.

FIGURE 4(b) - INPUT CLAMP VOLTAGE

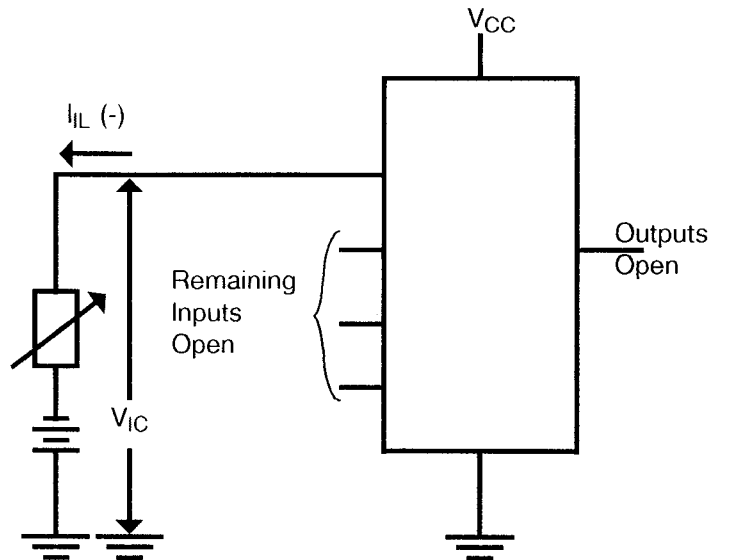


- NOTES**
1. Each input is tested separately.

FIGURE 4(c) - LOW LEVEL INPUT CURRENT

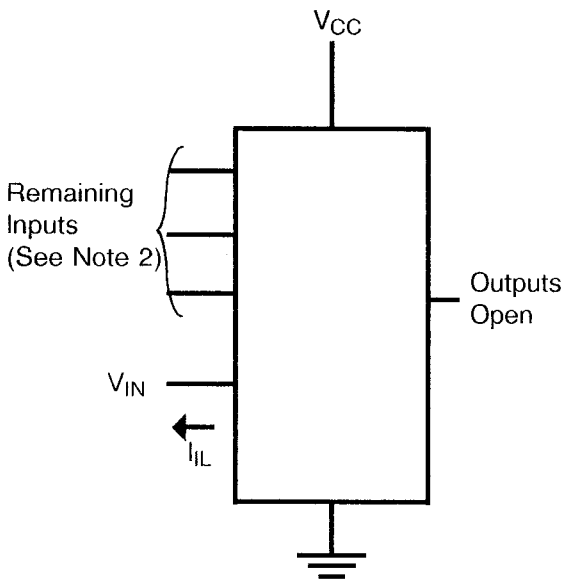


- NOTES**
1. Each input is tested separately.
  2. See Note 8 on Page 20.


FIGURE 4(d) - LOW LEVEL OUTPUT VOLTAGE

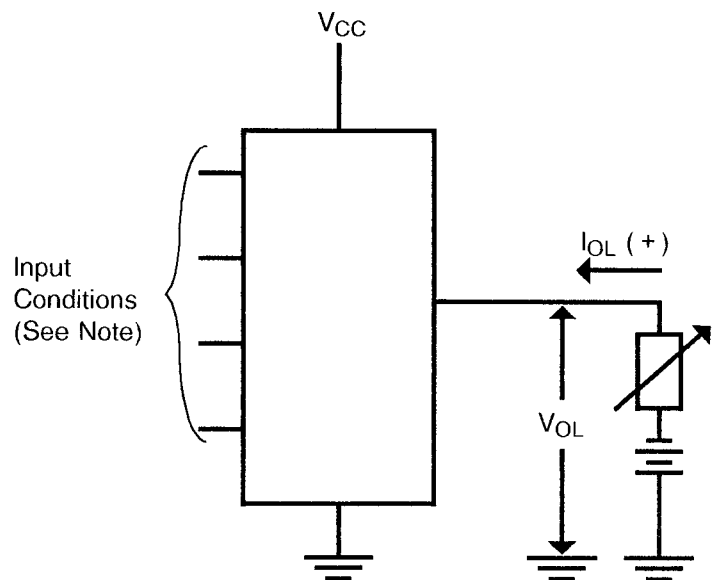


- NOTES**
1. Test per truth table.

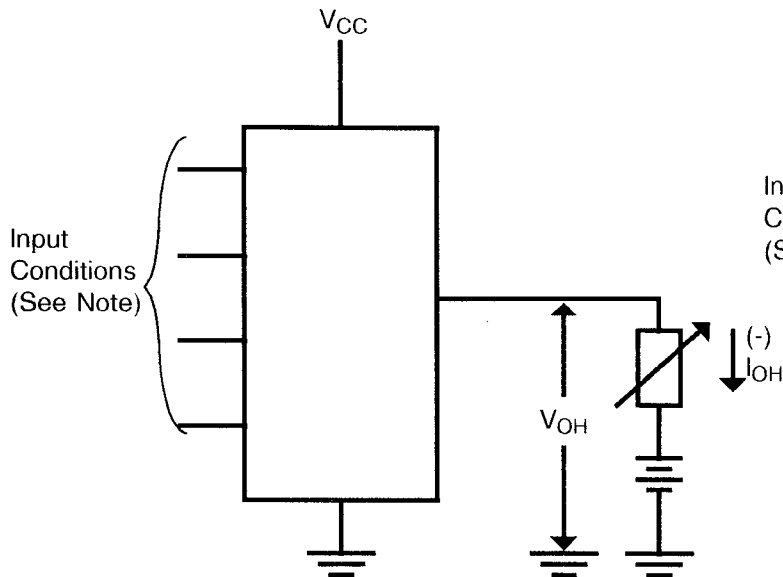**FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS (CONTINUED)**
**FIGURE 4(e) - HIGH LEVEL OUTPUT VOLTAGE**
**FIGURE 4(f) - SHORT CIRCUIT OUTPUT CURRENT**

**NOTES**

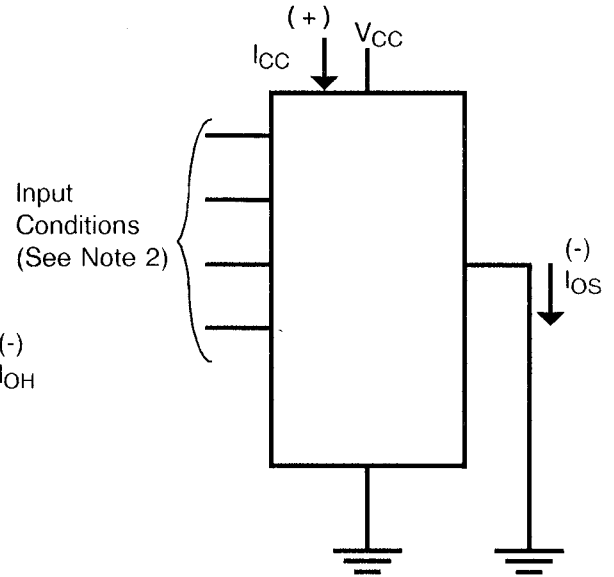1. Test per truth table.


**NOTES**

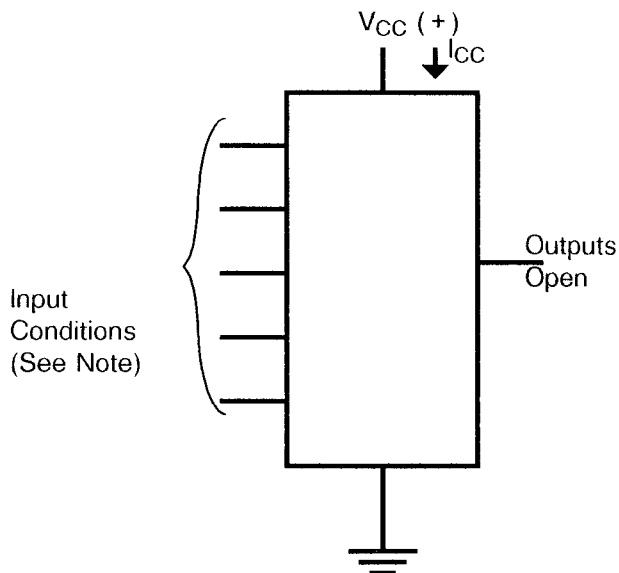1. No more than one output should be shorted at a time.
2. For  $\bar{Q}$  measurements:  $\overline{\text{Preset}} = 4.5\text{V}$ , all other inputs at ground.  
For Q measurement:  $\overline{\text{Preset}} = 0$ , Clock and D = 0,  $\overline{\text{Clear}} = 4.5\text{V}$ .

**FIGURE 4(g) - SUPPLY CURRENT**

**NOTES**


1. See Note 4 on Page 20.






**FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS (CONTINUED)**

**FIGURE 4(h) - DYNAMIC TEST AND SWITCHING WAVEFORMS**

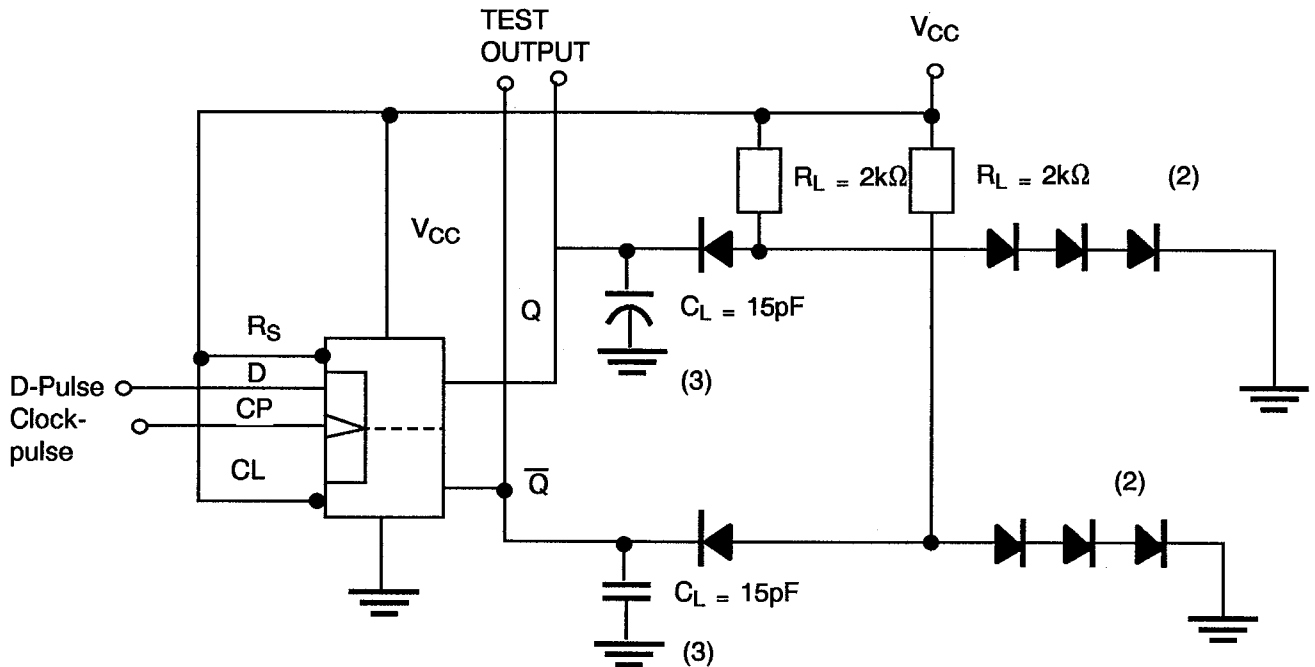

**VOLTAGE WAVEFORMS**

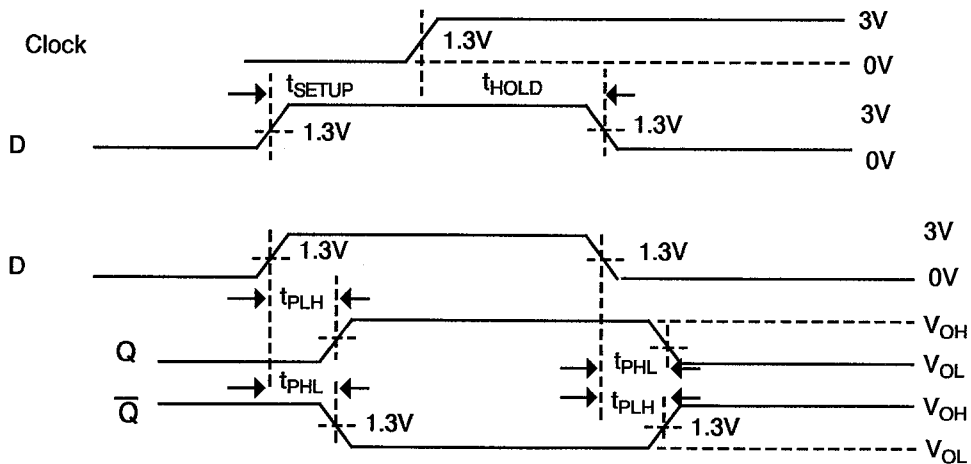

**NOTES**

1. The generator has the following characteristics:  $V_{gen} = 3.0 \pm 0.2V$ ,  $t_r < 6ns$ ,  $t_f < 15ns$ ,  $t_p = 0.5\mu s$ ,  $PRR = 1MHz$ ,  $Z_{out} = 50\Omega$ .
2. All diodes are In 916 or In 3064.
3.  $C_L = 15pF \pm 5\%$  including scope probe, wiring and stray capacitance without package in test fixture.
4. Each flip-flop tested separately.

**TABLE 4 - PARAMETER DRIFT VALUES**

No.	Characteristics	Symbol	Spec. and/or Test Method	Test Conditions	Change Limits ( $\Delta$ )	Unit
2, 3 14, 15	Input Current High Level 1	$I_{IH1}$	As per Table 2	As per Table 2	$\pm 0.5$ or $\pm 20$ (1)	$\mu A$ %
26 to 29	Input Current Low Level	$I_{IL}$	As per Table 2	As per Table 2	$\pm 18$	$\mu A$
34 to 37	Output Voltage Low Level	$V_{OL}$	As per Table 2	As per Table 2	$\pm 60$	mV
38 to 41	Output Voltage High Level	$V_{OH}$	As per Table 2	As per Table 2	$\pm 240$	mV

**NOTES** 1. Whichever is greater, referred to the initial value.


**TABLE 5 - CONDITIONS FOR POWER BURN-IN AND OPERATING LIFE TEST**

No.	Characteristics	Symbol	Condition	Unit
1	Ambient Temperature	$T_{amb}$	+ 125(+ 0-5)	$^{\circ}C$
2	Power Supply Voltage	$V_{CC}$	+5(+ 0.5-0)	V
3	Pulse Voltage	$V_{GEN}$	0.5 max to 3.0 min	V
4	Frequency	f	100 (Note 1)	Hz
5	Fan-out	-	10	-
6	Rise Time	$t_r$	50 max.	$\mu s$
7	Fall Time	$t_f$	50 max.	$\mu s$
8	Duty Cycle	-	20 min.	%

**NOTES** 1. Tolerance  $\pm 10\%$ .



**FIGURE 5 - ELECTRICAL CIRCUIT FOR POWER BURN-IN AND OPERATING LIFE TEST**

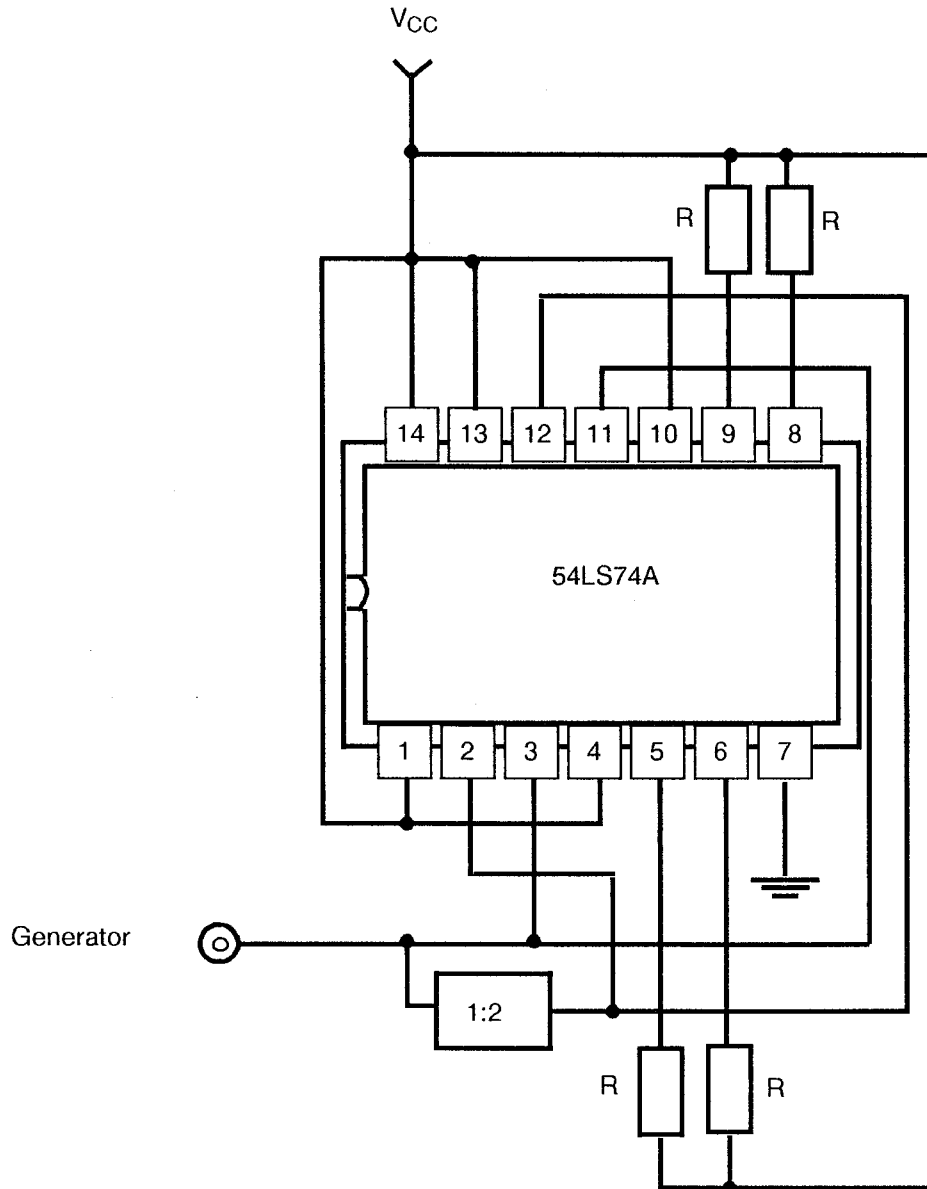

**NOTES**

1. R = 1.2kΩ.



4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESA/SCC GENERIC SPECIFICATION No. 9000)

4.8.1 Electrical Measurements on Completion of Environmental Tests

The parameters to be measured on completion of environmental tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.

4.8.2 Electrical Measurements at Intermediate Points during Endurance Tests

The parameters to be measured at intermediate points during endurance tests are as scheduled in Table 6 of this specification.

4.8.3 Electrical Measurements on Completion of Endurance Tests

The parameters to be measured on completion of endurance testing are as scheduled in Table 6 of this specification. Unless otherwise stated, the measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.

4.8.4 Conditions for Operating Life Test

The requirements for operating life testing are specified in Section 9 of ESA/SCC Generic Specification No. 9000. The conditions for operating life testing shall be as specified in Table 5 of this specification.

4.8.5 Electrical Circuits for Operating Life Test

Circuits for use in performing the operating life test are shown in Figure 5.

4.8.6 Conditions for High Temperature Storage Test

The requirements for high temperature storage test are specified in ESA/SCC Generic Specification No. 9000. The conditions for high temperature storage shall be  $T_{amb} = +150(+0-5)$  °C.

**TABLE 6 - ELECTRICAL MEASUREMENTS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTS**

No.	Characteristics	Symbol	Spec. and/or Test Method	Test Conditions	Change Limits		Unit
					( $\Delta$ )	Absolute	
2, 3 14, 15	Input Current High Level 1	$I_{IH1}$	As per Table 2	As per Table 2	$\pm 1.0$	-	$\mu A$
4,5 16, 17	Input Current High Level 2 (Max. Input Voltage)	$I_{IH2}$	As per Table 2	As per Table 2	-	100	$\mu A$
26 to 29	Input Current Low Level	$I_{IL}$	As per Table 2	As per Table 2	$\pm 12$	-	$\mu A$
34 to 37	Output Voltage Low Level	$V_{OL}$	As per Table 2	As per Table 2	$\pm 60$	-	mV
38 to 41	Output Voltage High Level	$V_{OH}$	As per Table 2	As per Table 2	$\pm 240$	-	mV
46 to 47	Supply Current	$I_{CC}$	As per Table 2	As per Table 2	$\pm 20$	-	%

**ESC**ESA/SCC Detail Specification  
No. 9203/013

PAGE 30

ISSUE 5

**APPENDIX 'A'**

Page 1 of 1

**AGREED DEVIATIONS FOR TEXAS INSTRUMENTS (FRANCE)**

ITEMS AFFECTED	DESCRIPTION OF DEVIATIONS
Para. 4.2.1	Scanning Electron Microscope (S.E.M.) Inspection may be performed using TIF document TIF 3.61.610.001.
Para. 4.2.2	Prior to Die Shear Test TIF may perform a Radiographic Inspection on the randomly chosen samples to be subjected to this test, using TIF document TIF 50.42-3002.
Para. 4.2.3	Radiographic Inspection may be performed using TIF document TIF 50.42-3002.
Table 3, Tests 34 to 41	Electrical measurement may be performed with $V_{IL} = 600\text{mV}$ for $V_{OL}$ and $V_{OH}$ testing.