



Pages 1 to 39

COILS, RF AND POWER, FIXED

ESCC Generic Specification No. 3201

Issue 4	April 2007
---------	------------



Document Custodian: European Space Agency - see <https://escies.org>

LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2007. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
326	Specification upissued to incorporate editorial changes as per DCR

TABLE OF CONTENTS

<u>1.</u>	<u>INTRODUCTION</u>	<u>7</u>
1.1	Scope	7
1.2	Applicability	7
<u>2.</u>	<u>APPLICABLE DOCUMENTS</u>	<u>7</u>
2.1	ESCC Specifications	7
2.2	Other (Reference) Documents	8
2.3	Order of Precedence	8
<u>3.</u>	<u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u>	<u>8</u>
<u>4.</u>	<u>REQUIREMENTS</u>	<u>8</u>
4.1	General	8
4.1.1	Specifications	8
4.1.2	Conditions and Methods of Test	8
4.1.3	Manufacturer's Responsibility for Performance of Tests and Inspections	9
4.1.4	Inspection Rights	9
4.1.5	Pre-encapsulation Inspection	9
4.2	Qualification Approval Requirements on a Manufacturer	9
4.3	Deliverable Components	9
4.3.1	Lot Failure	9
4.3.2	Testing and Lot Acceptance Levels	10
4.4	Marking	10
4.5	Materials and Finishes	10
<u>5.</u>	<u>PRODUCTION CONTROL</u>	<u>10</u>
5.1	General	10
5.2	Special In-process Controls	10
<u>6.</u>	<u>FINAL PRODUCTION CONTROL</u>	<u>11</u>
6.1	General	11
6.2	Test Methods and Conditions	12
6.3	Documentation	12
<u>7.</u>	<u>BURN-IN AND ELECTRICAL MEASUREMENTS</u>	<u>12</u>
7.1	General	12
7.1.1	Conditions of Test	12
7.1.2	Data Points	12
7.2	Failure Criteria	12
7.2.1	Parameter Drift Failure	12
7.2.2	Parameter Limit Failure	13
7.2.3	Other Failures	13
7.3	Failed Components	13
7.4	Lot Failure	13
7.4.1	Lot Failure during 100% Testing	13
7.4.2	Lot Failure during Sample Testing	13
7.5	Documentation	13
<u>8.</u>	<u>QUALIFICATION APPROVAL AND LOT ACCEPTANCE TESTS</u>	<u>14</u>
8.1	Qualification Testing	14
8.1.1	General	14
8.1.2	Distribution within the Qualification Test Lot	14

8.2	Lot Acceptance Testing	14
8.2.1	General	14
8.2.2	Distribution within the Sample for Lot Acceptance Testing	14
8.2.3	Lot Acceptance Level 3 Testing (LA3)	15
8.2.4	Lot Acceptance Level 2 Testing (LA2)	15
8.2.5	Lot Acceptance Level 1 Testing (LA1)	15
8.3	Failure Criteria	16
8.3.1	Environmental and Mechanical Test Failures	16
8.3.2	Electrical Failures	16
8.3.3	Other Failures	16
8.4	Failed Components	16
8.5	Lot Failure	16
8.6	Documentation	16
9.	<u>TEST METHODS AND PROCEDURES</u>	<u>21</u>
9.1	Internal Visual Inspection	21
9.2	Thermal Shock	21
9.3	Electrical Measurements	21
9.3.1	General	21
9.3.1.1	Inductance	21
9.3.1.2	Q Factor	22
9.3.1.3	Self-resonant Frequency	22
9.3.1.4	DC Resistance	22
9.3.1.5	Dielectric Withstanding Voltage	22
9.3.1.6	Insulation Resistance	23
9.3.2	Parameter Drift Value Measurements	24
9.3.3	Electrical Measurements at High and Low Temperatures	24
9.3.4	Electrical Measurements at Room Temperature	24
9.3.5	Electrical Measurements during Endurance Testing	24
9.4	Radiographic Inspection	24
9.5	External Visual Inspection	24
9.6	Dimension Check	24
9.7	Solderability	24
9.7.1	For Cylindrical Coils	24
9.7.2	For SMD Coils	25
9.7.2.1	Procedure	25
9.7.2.2	Final Examination	25
9.8	Barometric Pressure	25
9.9	Temperature Rise	26
9.10	Overload	28
9.11	Resistance to Soldering Heat	28
9.12	Terminal Strength	29
9.12.1	For Cylindrical Coils	29
9.12.2	For SMD Coils	29
9.13	Permanence of Marking	29
9.14	Low Temperature Storage	29
9.15	Vibration	30
9.16	Shock (Specified pulse)	30
9.17	Immersion	31
9.18	Moisture Resistance	31
9.19	Operating Life	32
9.19.1	Operating Life during Qualification Testing	32
9.19.2	Operating Life during Acceptance Testing	32
9.20	Final Assembly	33

<u>10.</u>	<u>DATA DOCUMENTATION</u>	<u>33</u>
10.1	General	33
10.1.1	Qualification Approval	34
10.1.2	Testing Level B	34
10.1.2.1	Qualified Components	34
10.1.2.2	Unqualified Components	34
10.1.3	Testing Level C	34
10.1.3.1	Qualified Components	34
10.1.3.2	Unqualified Components	34
10.1.4	Data Retention/Data Access	34
10.2	Cover Sheet(s)	35
10.3	List of Equipment Used	35
10.4	List of Test References	35
10.5	Special In-Process Control Data	35
10.6	Final Production Test Data (CHART II)	35
10.7	Burn-in and Electrical Measurement Data (CHART III)	35
10.7.1	Testing Level B	35
10.7.2	Testing Level C	36
10.8	Qualification Test Data (CHART IV)	36
10.9	Lot Acceptance Test Data (CHART V)	36
10.9.1	Testing Level B	36
10.9.2	Testing Level C	36
10.10	Failed Component List and Failure Analysis Report	36
10.11	Certificate of Conformity	37
<u>11.</u>	<u>DELIVERY</u>	<u>37</u>
<u>12.</u>	<u>PACKAGING AND DESPATCH</u>	<u>37</u>
APPENDIX A		38

1. **INTRODUCTION**

1.1 **SCOPE**

This specification defines the general requirements for the qualification approval, procurement, including lot acceptance testing, and delivery of Coils, RF and Power, Fixed for space applications.

This specification contains the appropriate inspection and test schedules and also specifies the data documentation requirements.

1.2 **APPLICABILITY**

This specification is primarily applicable to the granting of qualification approval to a component in accordance with ESCC Basic Specification No. 20100 and the procurement of such components from qualified Manufacturers.

2. **APPLICABLE DOCUMENTS**

The following documents form part of, and shall be read in conjunction with, this specification. The relevant issues shall be those in effect on the date of placing the Purchase Order.

2.1 **ESCC SPECIFICATIONS**

No. 20100,	Requirements for the Qualification of Standard Electronic Components for Space Application.
No. 20400,	Internal Visual Inspection.
No. 20500,	External Visual Inspection.
No. 20600,	Preservation, Packaging and Despatch of ESCC Electronic Components.
No. 20900,	Radiographic Inspection.
No. 21300,	Terms, Definitions, Abbreviations, Symbols and Units.
No. 21700,	General Requirements for the Marking of ESCC Components.
No. 22800,	ESCC Non-conformance Control System.
No. 23500,	Lead Materials and Finishes for Components for Space Application.
No. 24600,	Minimum Quality System Requirements
No. 24800,	Resistance to Solvents of Marking, Materials and Finishes.

With the exception of ESCC Basic Specifications Nos. 20100, 21700, 22800 and 24600, where Manufacturers' specifications are equivalent to, or more stringent than, the ESCC Basic Specifications listed above, they may be used in place of the latter, subject to the approval of the appropriate Qualifying Space Agency.

Such replacements shall be clearly identified in the applicable Process Identification Document (PID) and listed in an appendix to the appropriate Detail Specification.

Unless otherwise stated herein, references within the text of this specification to "the Detail Specification" shall mean the relevant ESCC Detail Specification.

2.2 OTHER (REFERENCE) DOCUMENTS

IEC Publication No. 410, Sampling Plans and Procedures for Inspection by Attributes.

MIL-STD-105, Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-202, Test Methods for Electronic and Electrical Component Parts.

MIL-STD-414, Sampling Procedures and Tables for Inspection by Variables for Percent Defective

ECSS-Q-70-02, A Thermal Vacuum Test for the Screening of Space Materials.

2.3 ORDER OF PRECEDENCE

For the purpose of interpretation and in case of conflict with regard to documentation, the following order of precedence shall apply:-

- (a) ESCC Detail Specification
- (b) ESCC Generic Specification
- (c) ESCC Basic Specification
- (d) Other documents, if referenced herein

3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

The terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. 21300 shall apply.

4. REQUIREMENTS

4.1 GENERAL

The test requirements for qualification approval of a component shall comprise final production tests (see Chart II), burn-in and electrical measurements to testing level B (see Chart III) and qualification testing (see Chart IV).

The test requirements for procurement of components shall comprise final production tests (Chart II), burn-in and electrical measurements to testing level B or C as required (Chart III) together with, when applicable, a level of lot acceptance testing (see Chart V) to be specified by the Orderer.

If a Manufacturer elects to eliminate a final production test by substituting an in-process control or statistical process control procedure, the Manufacturer is still responsible for delivering components that meet all of the performance, quality and reliability requirements defined in this specification and the Detail Specification.

4.1.1 Specifications

For qualification approval, procurement (including lot acceptance testing) and delivery of components in conformity with this specification, the specifications listed in Section 2 of this document shall apply in total unless otherwise specified herein or in the Detail Specification.

4.1.2 Conditions and Methods of Test

The conditions and methods of test shall be in accordance with this specification, the ESCC Basic Specifications referenced herein and the Detail Specification.

4.1.3 Manufacturer's Responsibility for Performance of Tests and Inspections

The Manufacturer shall be responsible for the performance of tests and inspections required by the applicable specifications. These tests and inspections shall be performed at the plant of the Manufacturer of the components unless it is agreed by the Qualifying Space Agency prior to commencing qualification testing, or procurement, to use an approved external facility.

4.1.4 Inspection Rights

The Qualifying Space Agency (for qualification approval or for a procurement) reserves the right to monitor any of the tests and inspections scheduled in the applicable specifications.

4.1.5 Pre-encapsulation Inspection

The Manufacturer shall notify the Orderer at least 2 working weeks before the commencement of pre-encapsulation inspection. The Orderer shall indicate immediately whether or not he intends to witness the inspection.

4.2 QUALIFICATION APPROVAL REQUIREMENTS ON A MANUFACTURER

To obtain and maintain the qualification approval of a component, or family of components, a Manufacturer shall satisfy the requirements of ESCC Basic Specification No. 20100.

4.3 DELIVERABLE COMPONENTS

Components delivered to this specification shall be processed and inspected in accordance with the relevant Process Identification Document (PID). Each delivered component shall be traceable to its production lot. Components delivered to this specification shall have completed satisfactorily all tests to the testing level and lot acceptance level specified in the Purchase Order (see Para. 4.3.2).

ESCC qualified components delivered to this specification shall be produced from lots that are capable of passing all tests, and sequences of tests, that are defined in Charts IV and V. The Manufacturer shall not knowingly supply components that cannot meet this requirement. In the event that, subsequent to delivery and prior to operational use, a component is found to be in a condition such that it could not have passed these tests at the time of manufacture, this shall be grounds for rejection of the delivered lot.

Components failing inspections and tests of the higher testing level (i.e. level B) shall not be supplied against any order for components of the lower testing level.

4.3.1 Lot Failure

Lot failure may occur during final production tests (Chart II), burn-in and electrical measurements (Chart III), qualification testing (Chart IV) or lot acceptance testing (Chart V).

Should such failure occur, the non-conformance procedure shall be initiated in accordance with ESCC Basic Specification No. 22800.

Should such failure occur during procurement, the Manufacturer shall notify the Orderer by any appropriate written means within 2 working days, giving details of the number and mode of failure and the suspected cause.

In the case where qualification approval has been granted to the component, he shall, at the same time by the same means, inform the Qualifying Space Agency in order that the latter may consider its implications.

No further testing shall be performed on the failed components except on instruction from the Orderer. The Orderer shall inform the Manufacturer and the Qualifying Space Agency within 2 working days of receipt of the communication, by the same means, what action shall be taken.

In the case when lot failure occurs during qualification testing, the Manufacturer shall immediately notify the appropriate Qualifying Space Agency who will define a course of action to be followed. No further testing shall be performed on the failed components.

4.3.2 Testing and Lot Acceptance Levels

This specification defines 2 levels of testing severity which are designated by the letters B and C (see Chart I) and 3 levels of lot acceptance testing (see Chart V).

The lot acceptance levels are designated 1, 2 and 3 and are comprised of tests as follows:-

Level 3 (LA3) -	Electrical Subgroup
Level 2 (LA2) -	Endurance Subgroup, plus Electrical Subgroup
Level 1 (LA1) -	Environmental and Mechanical Subgroup, plus Endurance Subgroup, plus Electrical Subgroup

The required testing level and lot acceptance level shall both be specified in a Purchase Order.

4.4 MARKING

All components procured and delivered to this specification from a source qualified according to ESCC Basic Specification No. 20100 shall be marked in accordance with ESCC Basic Specification No. 21700. Thus, they shall bear the ESA symbol to signify their conformance to the ESCC qualification approval requirements and full compliance with the requirements of this specification and the Detail Specification.

Components procured from sources which are not ESCC qualified, provided that they fully comply with the procurement requirements of this specification and the Detail Specification, may bear the ESCC marking **with the exception of the ESA symbol.**

4.5 MATERIALS AND FINISHES

All non-metallic materials and finishes that are not within a hermetically sealed enclosure, of the components specified herein shall meet the outgassing requirements as outlined in ECSS-Q-70-02.

Specific requirements for materials and finishes are specified in the Detail Specification.

5. PRODUCTION CONTROL


5.1 GENERAL

The minimum requirements for production control, which are equally applicable to procurement, are defined in ESCC Basic Specification No. 20100, Para's 5.1 and 5.2.

5.2 SPECIAL IN-PROCESS CONTROLS

Where applicable, special in-process controls shall apply as specified in the Detail Specification.

CHART I - TESTING LEVELS

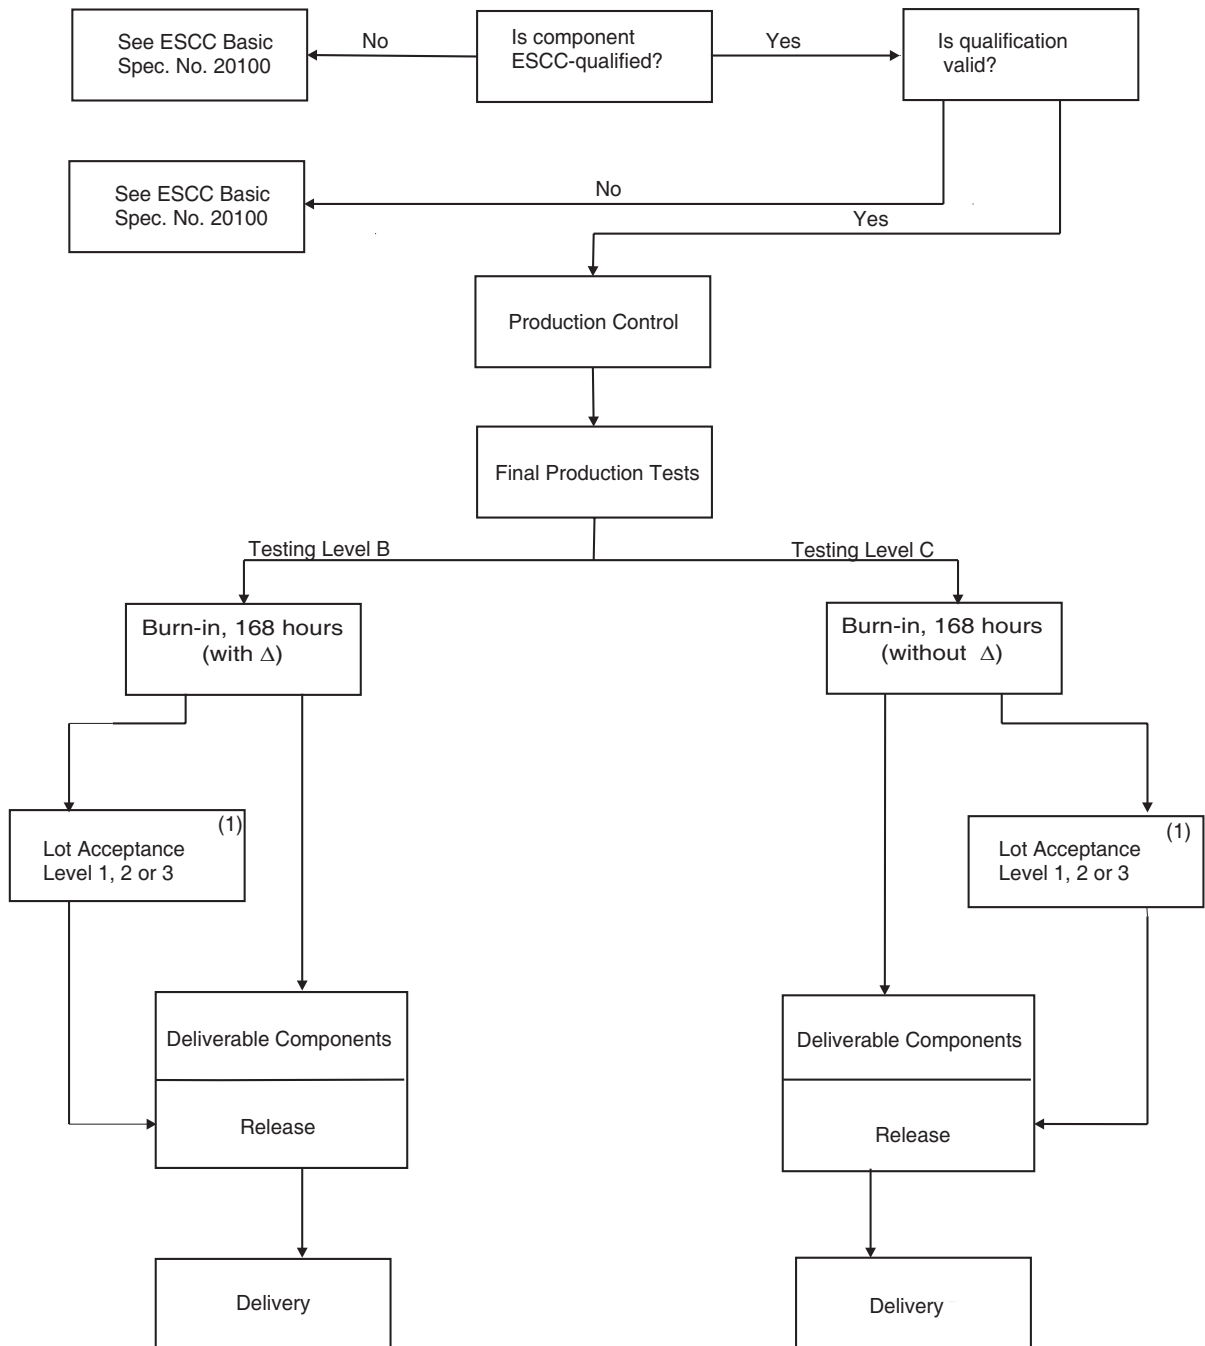

NOTES:

1. When applicable.

6. FINAL PRODUCTION CONTROL

6.1 GENERAL

Unless otherwise specified in the Detail Specification, all components used for qualification testing and all components for delivery, including those submitted to lot acceptance tests, shall be subjected to tests and inspections in accordance with Chart II.

Unless otherwise specified in the Detail Specification, the tests shall be performed in the order shown.

Any components that do not meet these requirements shall be removed from the lot and at no future time be re-submitted to the requirements of this specification.

6.2 TEST METHODS AND CONDITIONS

The applicable test methods and conditions are specified in the paragraphs referenced in Chart II of this specification.

6.3 DOCUMENTATION

Documentation of final production test data shall be in accordance with the requirements of Para. 10.6 of this specification.

7. BURN-IN AND ELECTRICAL MEASUREMENTS

7.1 GENERAL

Unless otherwise specified in the Detail Specification, all components used for qualification testing and all components for delivery, including those submitted to lot acceptance tests, shall be subjected to tests and inspections in accordance with Chart III.

Unless otherwise specified in the Detail Specification, the tests shall be performed in the order shown.

The applicable test methods and conditions are specified in the paragraphs referenced in Chart III.

Components of testing level B shall be serialised or defined by jig position prior to the tests and inspections.

7.1.1 Conditions of Test

The conditions for burn-in shall be as shown in Table 5 of the Detail Specification.

Unless otherwise specified in the Detail Specification, components of both Levels B and C shall be subjected to a total burn-in period of 168 hours.

7.1.2 Data Points

For components of testing level B, undergoing a total burn-in period of 168 hours, the data points for parameter drift measurement shall be 0 hours (initial) and 168 (+24-0) hours (final).

For components of testing level C, undergoing a total burn-in period of 168 hours, the data point for post burn-in electrical measurements shall be 168 (+24-0) hours.

7.2 FAILURE CRITERIA

7.2.1 Parameter Drift Failure

The acceptable delta limits are shown in Table 4 of the Detail Specification. A component of testing level B shall be counted as a parameter drift failure if the changes during burn-in are larger than the delta (Δ) values specified.

7.2.2 Parameter Limit Failure

A component shall be counted as a limit failure if one or more parameters exceed the limits shown in Tables 2 or 3 of the Detail Specification.

Any component which exhibits a limit failure prior to the burn-in sequence shall be rejected and not counted when determining lot rejection.

7.2.3 Other Failures

A component shall be counted as a failure in any of the following cases:

- Mechanical failure.
- Handling failure.
- Lost component.

7.3 FAILED COMPONENTS

A component shall be considered as a failed component if it exhibits one or more of the failure modes described in Para. 7.2 of this specification.

7.4 LOT FAILURE

In case of lot failure, the Manufacturer shall act in accordance with the requirements of Para. 4.3.1 of this specification.

7.4.1 Lot Failure during 100% Testing

If the number of components failed on the basis of the failure criteria described in Para. 7.2 exceeds 5% (rounded upwards to the nearest whole number) of the number of components submitted to burn-in and electrical measurements, the lot shall be considered as failed.

If a lot is composed of groups of components of one family defined in one ESCC Detail Specification, but separately identifiable for any reason, then the lot failure criteria shall apply separately to each identifiable group.

7.4.2 Lot Failure during Sample Testing

A lot shall be considered as failed if the number of allowable failures during sample testing, in accordance with General Inspection Level 2 of IEC Publication No. 410 or MIL-STD-105 and the applicable AQL as specified in the Detail Specification, is exceeded.

In the case where an LTPD to MIL-STD-414 is specified in the Detail Specification, a lot shall be considered as failed if the number of failures allowed is exceeded (see Appendix A for LTPD Sampling Plan).

If a lot failure occurs in either case, a 100% testing may be performed with the lot failure criteria given in Para. 7.4.1.

7.5 DOCUMENTATION

Data documentation of burn-in and electrical measurements shall be in accordance with Para. 10.7 of this specification.

8. QUALIFICATION APPROVAL AND LOT ACCEPTANCE TESTS

8.1 QUALIFICATION TESTING

8.1.1 General

Qualification testing shall be in accordance with the requirements of Chart IV of this specification. The tests to Chart IV shall be performed on the specified sample, chosen at random from components which have successfully passed the tests in Charts II and III for Testing Level B. This sample constitutes the qualification test lot.

The qualification test lot is divided into subgroups of tests and all components assigned to a subgroup shall be subjected to all of the tests in that subgroup, in the sequence shown.

The applicable test requirements are detailed in the paragraphs referenced in Chart IV.

The conditions governing qualification testing are given in ESCC Basic Specification No. 20100, Para. 5.3 and, for the extension or renewal of qualification approval, in Para's 6.3 and 6.4.

8.1.2 Distribution within the Qualification Test Lot

A minimum sample of 100 components shall be submitted to qualification testing (Chart IV). The distribution within the sample shall be as follows:

- 50% of the lot with the minimum nominal inductance value.
- 50% of the lot with the maximum nominal inductance value.

The sample shall consist of components representative of all magnetic materials used for the construction of the range of components

The selected distribution shall be agreed with the Qualifying Space Agency.

8.2 LOT ACCEPTANCE TESTING

8.2.1 General

The sample sizes of the 3 lot acceptance levels are specified in Chart V. All components assigned to a subgroup shall be subjected to all of the tests of that subgroup in the sequence shown.

The tests to Chart V shall be performed on the specified sample which shall have been chosen, whenever possible, at random from the proposed delivery lot (but see Para. 8.2.3(b)). The applicable test requirements are detailed in the paragraphs referenced in Chart V.

As a minimum for procurement of non-qualified components, lot acceptance level 3 tests shall apply. For procurement of qualified components, lot acceptance testing shall be performed if specified in a Purchase Order. Procurement lots ordered with a lot acceptance test level shall be delivered only after successful completion of lot acceptance testing.

8.2.2 Distribution within the Sample for Lot Acceptance Testing

Where a Detail Specification covers a range or series of components that are considered similar, then it may be necessary that the sample for lot acceptance testing be comprised of component types so selected that they adequately represent all of the various mechanical, structural and electrical peculiarities of the procured range or series.

The distribution of the component types will normally vary from procurement to procurement and shall be as specified by the Orderer, following as closely as possible the requirements prescribed in Para. 8.1.2 of this specification.

8.2.3 Lot Acceptance Level 3 Testing (LA3)

Lot acceptance level 3 tests are designated as the electrical subgroup and comprise electrical measurements of characteristics and tests to prove the assembly capability of the component. For LA3 testing, the following requirements and conditions shall apply:-

- (a) LA3 testing shall be performed by the Manufacturer's quality assurance personnel using dedicated quality assurance equipment whenever possible. LA3 testing shall not be a repetition of routine measurements made by production personnel during final production tests and burn-in and electrical measurements.
- (b) When tests to Tables 2 and 3 of the Detail Specification have been performed on a sample basis, then the components for LA3 testing shall be selected from this sample.
- (c) The electrical measurements for LA3 are considered to be non-destructive and therefore components so tested may form part of the delivery lot.
- (d) The solderability and terminal strength tests are considered to be destructive and therefore components so tested shall not form part of the delivery lot. Post burn-in electrical rejects may be used for these tests.
- (e) When required in the Purchase Order, the Manufacturer shall notify the Orderer at least 2 working weeks before the commencement of LA3 testing. The Orderer shall indicate immediately whether or not he intends to witness the tests.

8.2.4 Lot Acceptance Level 2 Testing (LA2)

Lot acceptance level 2 testing shall comprise the tests for LA3 (electrical subgroup) plus tests on an endurance subgroup. For the electrical subgroup, the requirements and conditions as for LA3 (see Para. 8.2.3) shall apply.

For the endurance subgroup, the following shall apply:-

- (a) Components of testing level C, selected for the endurance subgroup, shall be serialised or defined by jig position prior to the tests and inspections.
- (b) The tests in this subgroup are considered to be destructive and therefore components (of testing level B or C) so tested shall not form part of the delivery lot.

8.2.5 Lot Acceptance Level 1 Testing (LA1)

Lot acceptance level 1 testing shall comprise the tests for LA3 (electrical subgroup) and LA2 (endurance subgroup) plus tests on an environmental and mechanical subgroup.

For the electrical and endurance subgroups, the requirements and conditions for LA3 (see Para. 8.2.3) and LA2 (see Para. 8.2.4) respectively shall apply.

For the environmental subgroup, the following shall apply:-

- (a) Components of testing level C, selected for the environmental subgroup, shall be serialised or defined by jig position prior to the tests and inspections.
- (b) The tests in this subgroup are considered to be destructive and therefore components (of testing level B or C) so tested shall not form part of the delivery lot.

8.3 FAILURE CRITERIA

The following criteria shall apply to qualification testing and to lot acceptance testing.

8.3.1 Environmental and Mechanical Test Failures

The following shall be counted as component failures:

- Components which fail during tests for which the pass/fail criteria are inherent in the test method, e.g. solderability, terminal strength, etc.

8.3.2 Electrical Failures

The following shall be counted as component failures:-

- (a) Components which, when subjected to electrical measurements on completion of environmental tests, in accordance with either Table 2 or Table 6, as specified in the Detail Specification, fail one or more of the applicable limits.
- (b) Components which, when subjected to electrical measurements at intermediate and end-points during endurance testing, in accordance with Table 6 of the Detail Specification, fail one or more of the applicable limits.
- (c) Components which, when subjected to measurement of electrical characteristics, in accordance with Tables 2 and 3 of the Detail Specification, fail one or more of the applicable limits.

8.3.3 Other Failures

The following additional failures may also occur during qualification testing or lot acceptance testing:-

- (a) Components failing to comply with the requirements of ESCC Basic Specification No. 20500.
- (b) Lost components.

8.4 FAILED COMPONENTS

A component shall be considered as failed if it exhibits one or more of the failure modes detailed in Para. 8.3 of this specification.

The allowable number of failed components per subgroup, the aggregate failure constraints and the permitted distribution of such failures are shown at the foot of Charts IV and V of this specification.

When requested by the Qualifying Space Agency or the Orderer, failure analysis of failed components shall be performed by the Manufacturer and the results provided.

Failed components from successful lots shall be marked as such and be stored at the Manufacturer's plant for 24 months.

8.5 LOT FAILURE

A lot shall be considered as failed if the allowable number of failures according to Chart IV or V of this specification, as relevant, has been exceeded.

In the case of lot failure, the Manufacturer shall act in accordance with Para. 4.3.1 of this specification.

8.6 DOCUMENTATION

For qualification testing, the qualification test data shall be documented in accordance with the

requirements of Para. 10.8 of this specification. In the case of lot acceptance testing, the data shall be documented in accordance with the requirements of Para. 10.9.

CHART II - FINAL PRODUCTION TESTS


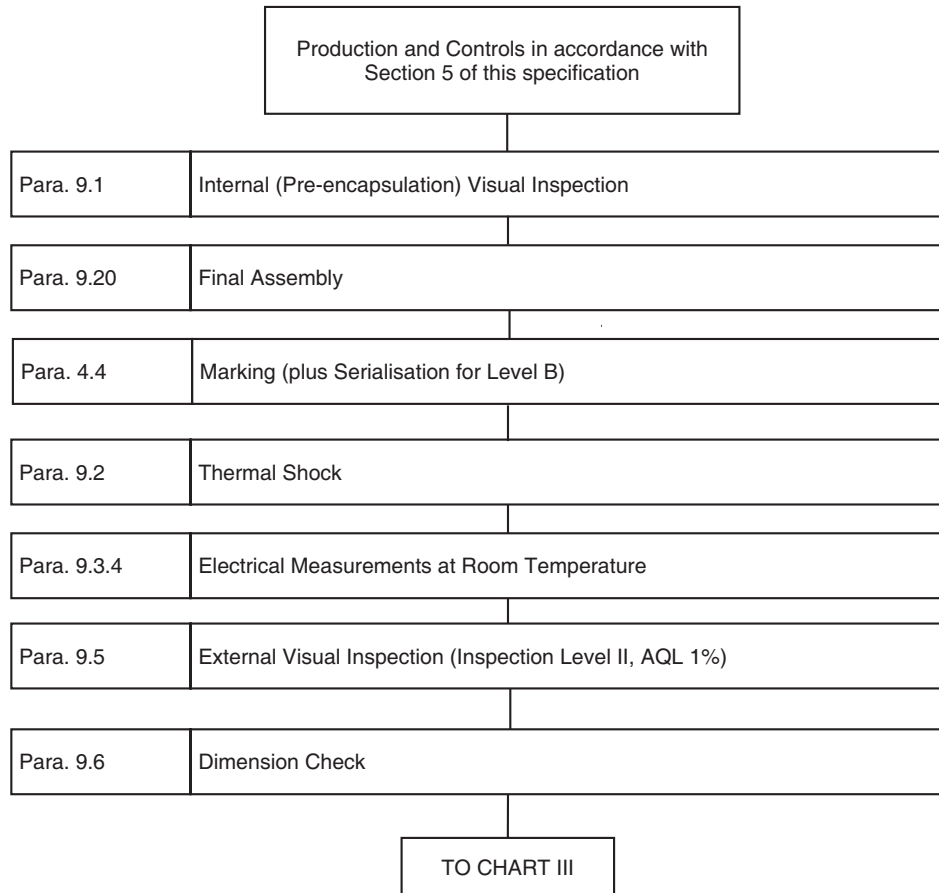



CHART III - BURN-IN AND ELECTRICAL MEASUREMENTS

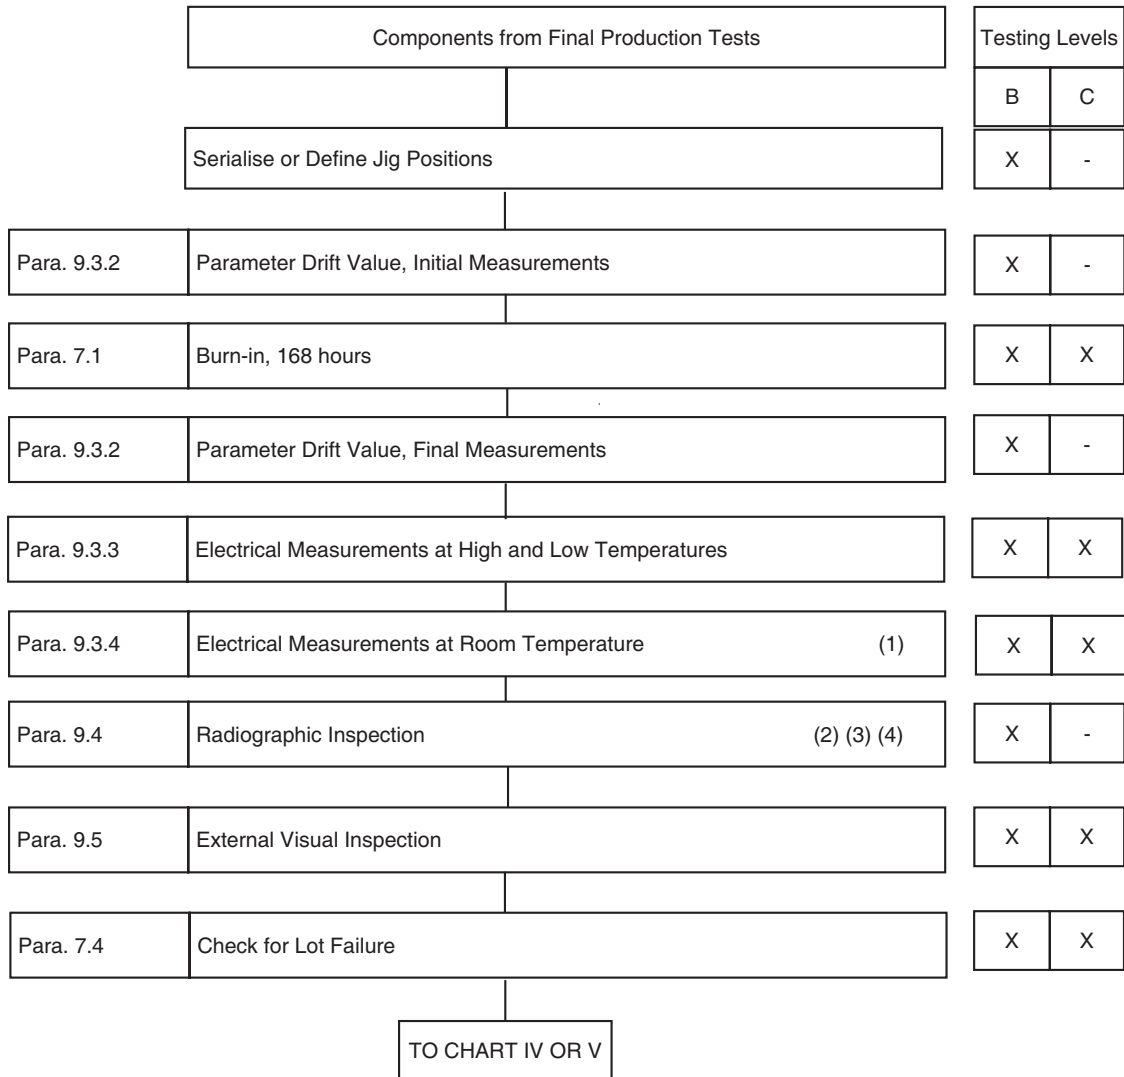

NOTES:

1. The measurement of parameters for the purpose of drift value measurements need not be repeated for electrical measurements at room temperature.
2. Radiographic Inspection may be performed at any point during the test sequence shown in this Chart.
3. Radiographic Inspection rejects are not to be counted for lot failure.
4. Unless otherwise specified in the Detail Specification.

CHART IV - QUALIFICATION TESTS

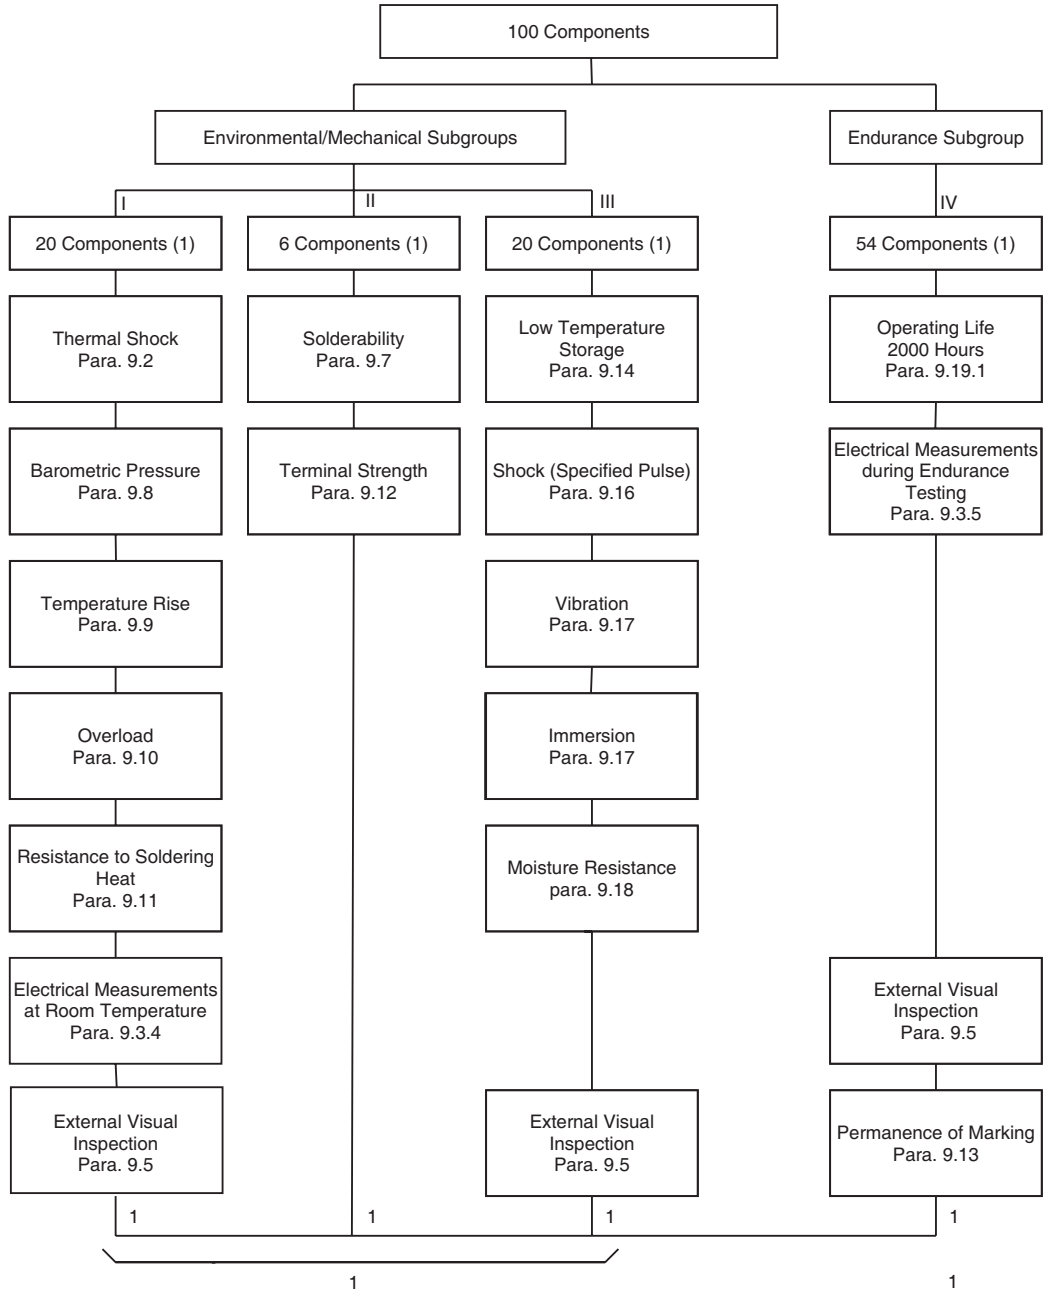


Total allowable number of failed components: 2.

NOTES:

1. For distribution within the subgroups, see Para. 8.1.2.

CHART V - LOT ACCEPTANCE TESTS

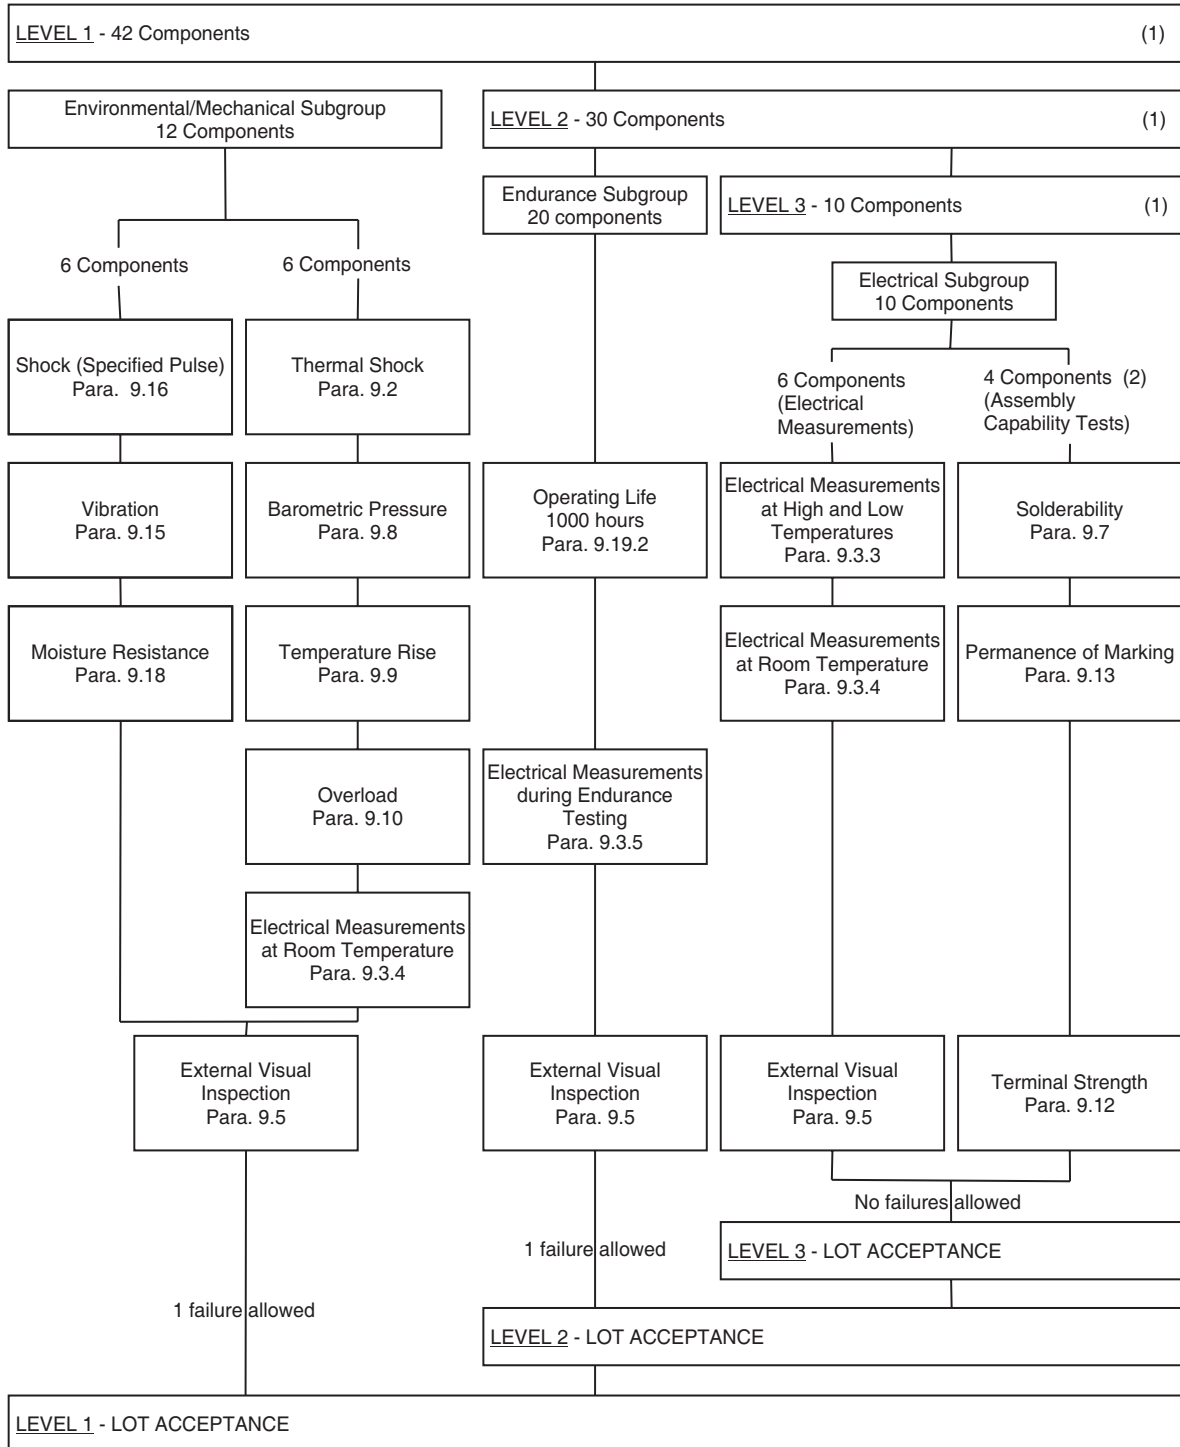

NOTES:

1. For distribution within the subgroups, see Para. 8.2.2.
2. Post burn-in electrical rejects may be used for this test.

9. **TEST METHODS AND PROCEDURES**

If a Manufacturer elects to eliminate or modify a test method or procedure, the Manufacturer is still responsible for delivering components that meet all of the performance, quality and reliability requirements defined in this specification and the Detail Specification.

Documentation supporting the change shall be approved by the Qualifying Space Agency and retained by the Manufacturer. It shall be copied, when requested, to the Qualifying Space Agency.

The change shall be specified in the Detail Specification and in the PID.

9.1 **INTERNAL VISUAL INSPECTION**

In accordance with ESCC Basic Specification No. 20400.

9.2 **THERMAL SHOCK**

The coils shall not be loaded and shall be tested in accordance with Method 107 of MIL-STD-202. The following details shall apply:-

During Chart II

- (a) Test condition:
 - 'A-1' (25 cycles) for cylindrical coils.
 - 'A' (5 cycles) for SMD coils.The elevated temperature shall be the maximum operating temperature specified in Table 1(b) of the Detail Specification.
- (b) Measurements before and after cycling: Not applicable.
- (c) Visual examination after test: The coils shall be visually examined and there shall be no evidence of damage or loosening of the terminals.

During Charts IV and V

- (a) Test condition:
 - 'A-1' (25 cycles) for cylindrical coils.
 - 'A-3' (100 cycles) for SMD coils.The elevated temperature shall be the maximum operating temperature specified in Table 1(b) of the Detail Specification.
- (b) Measurements before and after cycling: Not applicable.
- (c) Visual examination after test: The coils shall be visually examined and there shall be no evidence of damage or loosening of the terminals.

9.3 **ELECTRICAL MEASUREMENTS**

9.3.1 **General**

For all measurements, the coils shall be mounted by their normal mounting means on the applicable test fixtures. Electrical measurements and methods shall be as follows.

9.3.1.1 ***Inductance***

Inductance shall be measured with a suitable instrument (Impedance Analyser or equivalent). The measurement shall be performed at the test frequency with or without the DC Rated Current as specified in the Detail Specification.

The Test Frequency to be used for testing shall be as follows:

Inductance Range (μH)			Test Frequency (MHz)
Less than 0.018			150
0.022	to	0.082	100
0.1	to	0.39	50
0.47	to	1	25
1.2	to	10	7.9
12	to	100	2.5
120	to	1000	0.79
1200	to	10000	0.25
12000	to	100000	0.079

9.3.1.2 Q Factor

A suitable instrument shall be used for testing Q Factor. Frequencies to be used for testing the various ranges of inductance shall be as specified in Para. 9.3.1.1.

9.3.1.3 Self-resonant Frequency

The self-resonant frequency shall be determined as follows:

Starting at the lowest frequency within the specified frequency range, the frequency shall be increased and the impedance observed. The frequency at which the impedance is maximum shall be recorded as the self-resonant frequency.

9.3.1.4 DC Resistance

Direct current (DC) resistance of coils shall be measured in accordance with Method 303 of MIL-STD-202. The currents used in the measurements shall not exceed the rated values for the individual coils measured.

9.3.1.5 Dielectric Withstanding Voltage

Dielectric withstanding voltage shall be tested in accordance with Method 301 of MIL-STD-202. The following details and exceptions shall apply:-

(a) Special preparations or conditions

1. For Cylindrical Coils

Cylindrical insulated coils shall be clamped in the trough of a 90° metallic V-block, using a metallic strap.

A 1.9mm thick layer of conductive moisture-resistance resilient material, having a resistivity of less than 1000 Ohms per centimetre, shall be bonded to the surface of the strap next to the coils. The body of the coil shall not extend beyond the extremities of the block or resilient material.

The surface of the V-block shall be free from contamination. The coil leads shall be so positioned that the distance between the leads and any point of the V-block shall be not less than the radius of the coil minus the radius of the lead wire.

The metallic V-block shall be of non-corrosive material.

2. For SMD Coils

The contact arm shall be made of a resilient conducting material connected to ground and shall cover at least the entire surface opposite the terminals.


- (b) Magnitude of test voltage
Unless otherwise specified in Table 1(b) of the Detail Specification, the AC test voltage shall be a minimum of 500Vrms for encapsulated units and 200Vrms for conformally coated units.
The leakage current shall not exceed 100µA unless otherwise specified in the Detail Specification.
- (c) Nature of potential
An AC supply of commercial line frequency and waveform (but not more than 100 Hz).
- (d) Duration of application of test voltage: 60 seconds.
- (e) Rate of application of test voltage: 300V per second.
- (f) Points of application of test voltage
 - 1. For Cylindrical Coils
Between the coil terminals (shorted together) and the V-block, with block and metal strap grounded, unless otherwise specified in the Detail Specification.
 - 2. For SMD Coils
The measurements shall be made between the terminals of the device (shorted together) and the contact arm.
- (g) Visual examination after test
There shall be no sign of breakdown or flash-over during the test period and, after completion of the test, the coils shall be further visually examined for evidence of damage, arcing or breakdown.

9.3.1.6 *Insulation Resistance*

Insulation resistance shall be tested in accordance with Method 302 of MIL-STD-202. The following details and exceptions shall apply:-

- (a) Test condition: B
For coils with a dielectric withstanding voltage of less than 500Vrms (see Table 1(b) of the Detail Specification), the test condition letter shall be 'A'.
- (b) Points of measurement
Unless otherwise specified in the Detail Specification, measurements shall be made between insulated points.
For cylindrical coils, the measurements shall be made between the coil winding and the metal strap in the coil-connecting assembly specified in Figure 1 or between the coil terminals (shorted together) and the V-block (see Para. 9.3.1.5(f)).
For SMD coils, the, the measurements shall be made between the terminals of the device (shorted together) and the contact arm.

FIGURE 1 - COIL-CONTACTING ASSEMBLY FOR MOUNTING DURING POLARISATION

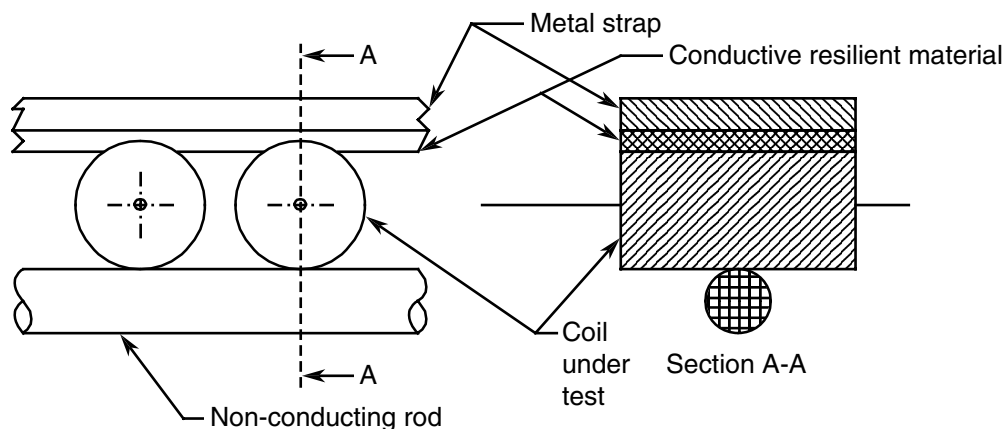

9.3.2 Parameter Drift Value Measurements

At each of the relevant data points for components of testing level B, measurements shall be made of all parameters listed in Table 4 of the Detail Specification. All values obtained shall be recorded against serial numbers or jig positions and the parameter drift calculated.

9.3.3 Electrical Measurements at High and Low Temperatures

For components of testing levels B and C, the electrical measurements at high and low temperatures shall be made in accordance with Table 3 of the Detail Specification. Where sample testing is applied, note the requirements of Para. 8.2.3(b). For testing level B, all values obtained shall be recorded against serial numbers or jig positions.

9.3.4 Electrical Measurements at Room Temperature

For components of testing levels B and C, the measurements of electrical characteristics shall be made in accordance with Table 2 of the Detail Specification. Where sample testing is applied, note the requirements of Para. 8.2.3(b). For testing level B, all values obtained shall be recorded against serial numbers or jig positions.

9.3.5 Electrical Measurements during Endurance Testing

At each of the relevant data points specified for endurance testing, measurements shall be made of all parameters listed in Table 6 of the Detail Specification. All values obtained shall be recorded against serial numbers or jig positions and the parameter drift calculated, if required.

9.4 RADIOGRAPHIC INSPECTION

In accordance with ESCC Basic Specification No. 20900.

9.5 EXTERNAL VISUAL INSPECTION

In accordance with ESCC Basic Specification No. 20500.

9.6 DIMENSION CHECK

In accordance with ESCC Basic Specification No. 20500 and the Detail Specification. To be performed on 5 samples only.

If 1 failure occurs, the complete lot shall be checked.

9.7 SOLDERABILITY

9.7.1 For Cylindrical Coils

The coils shall be tested in accordance with Method 208 of MIL-STD-202. The following details shall apply:-

- (a) Special preparation of specimens
Sample units shall not have been soldered in any previous tests.
- (b) Number of terminations to be tested of each coil: 2.
- (c) Depth of immersion in flux and solder
Both terminals shall be immersed to within 1.25 mm of the coil body.
When tested as specified, the dipped portion of the terminals shall conform to the solid wire

termination criteria of Method 208 of MIL-STD-202.

9.7.2 For SMD Coils

This test is not applicable to weldable terminations. The coils shall be tested in accordance with Method 208 per MIL-STD-202. The following details shall apply:

9.7.2.1 *Procedure*

Prior to the solderability test, components shall be aged with 4 hours dry heat at +125°C unless otherwise specified in the Detail Specification.

The terminals of coils shall be completely immersed. The temperature shall be +245±5°C and the duration of immersion 5±1 seconds unless otherwise specified in the Detail Specification.

9.7.2.2 *Final Examination*

At least 75% of the terminations shall be covered by a smooth solder coating. The remaining 25% may contain small pin-holes or rough spots, but these shall not be concentrated in one area. When the test procedures have been carried out, the coils shall be visually examined. There shall be no evidence of damage.

9.8 BAROMETRIC PRESSURE

The coils shall be tested in accordance with Method 105 of MIL-STD-202. The following details and exceptions shall apply:-

(a) Method of mounting

1. For Cylindrical Coils

Cylindrical insulated coils shall be clamped in the trough of a 90° metallic V-block, using a metallic strap.

A 1.9mm thick layer of conductive moisture-resistant resilient material, having a resistivity of less than 1000 Ohms per centimetre, shall be bonded to the surface of the strap next to the coils. The body of the coil shall not extend beyond the extremities of the block or resilient material. The surface of the V-block shall be free from contamination.

The coil leads shall be so positioned that the distance between the leads and any point of the V-block shall be not less than the radius of the coil minus the radius of the lead wire. The metallic V-block shall be of non-corrosive material.

2. For SMD Coils

The contact arm shall be made of resilient conducting material connected to ground and shall cover at least the entire surface opposite the terminals.

(b) Test condition: 'C' unless otherwise specified in the Detail Specification.

(c) Tests during subjection to reduced pressure

While the coils are still at the specified low pressure, they shall be subjected to a Dielectric Withstanding Voltage test at a minimum of 200Vrms for encapsulated units and 80Vrms for conformally coated units, unless otherwise specified in the Detail Specification.

(d) Visual examination after test

There shall be no sign of breakdown or flash-over during the test period and, after completion of the test, the coils shall be further visually examined for evidence of damage, flash-over, arcing or breakdown.

9.9 TEMPERATURE RISE

The temperature rise of coils shall be determined by any suitable method, but preferably by the resistance-change method. The temperature rise shall be determined by the following procedure.

(a) Method of mounting

The coils shall be suspended by their terminals during the test. They shall be separated from each other by a distance of not less than 25mm. During the test, radiant shields may be placed between units, so that overheating of one unit will not affect a nearby unit. The coils shall be placed in the test chamber. Lead wires shall be of copper, 150mm long, and of size specified hereunder:

Rated Current (A)	Wire Size	
	AWG	Diameter (mm)
Up to 3	24	0.64
>3 to ≤5	22	0.85
>5 to ≤11	20	1.04
>11 to ≤16	18	1.29
>16 to ≤22	16	1.53
>22 to ≤32	14	1.87

For leaded coils, the coil under test shall be connected to a test fixture conforming to Figure 2, with each wire lead wrapped 1 turn around the test fixture terminal and soldered to the terminal for uniform low contact resistance. The test fixture with the attached coil shall then be placed in a test chamber.

(b) Ambient test temperature

The test chamber shall be free of test area draughts and direct thermal radiation. A temperature indicating device with an accuracy of $\pm 0.5^{\circ}\text{C}$ shall be located in the area surrounding the coil under test, but not where it will be influenced by the temperature rise of the coil.

The test chamber shall then be stabilised at room temperature without forced-air ventilation or any means of component cooling.

(c) Initial measurements

The DC resistance (r) shall be measured with one-tenth rated direct current applied at the specified ambient temperature (t). When the resistance of the coil is stabilised, the resistance value shall be recorded.

The ammeter-voltmeter method may be used for determining this resistance, provided that the accuracy of these meters is $\pm 0.5\%$ or better and the resistance of the voltmeter is at least 20000 ohms per volt.

(d) Test conditions

The rated direct current specified in Table 1(b) of the Detail Specification shall then be applied to the coil under test, using a stable current source such as a storage battery. Forced-air circulation shall be shut off when rated current is applied.

(e) Final measurements

When the resistance of the winding, measured at 5 minute intervals, remains constant, the temperature of the winding shall be measured. If the power is removed, this temperature measurement shall be made within 30 seconds of the removal of power.

When the resistance of the coil is stabilised with rated current applied, the resistance (R) and the test chamber temperature (T) shall be recorded.

The temperature rise (ΔT) shall be calculated by the following formula:-

$$\Delta T = \frac{(R-r)}{r} (t + 234.5) - (T - t)$$

where

ΔT = Temperature rise in °C above the specified temperature of the coil under test.

R = Resistance of coil in ohms with rated direct current applied at temperature (T+ ΔT).

r = Resistance of coil in ohms at temperature (t), the specified ambient temperature.


t = Stabilised specified ambient temperature in °C of the coil under test with one-tenth current applied.

T = Ambient temperature in °C (at the time forced-air circulation is shut off) with rated DC current applied. T shall not differ from t by more than 5°C.


(f) Limit

Unless otherwise specified in the Detail Specification, the temperature rise shall not exceed 25°C.

FIGURE 2 - TEST FIXTURE FOR TEMPERATURE RISE TEST ON INSULATED COILS

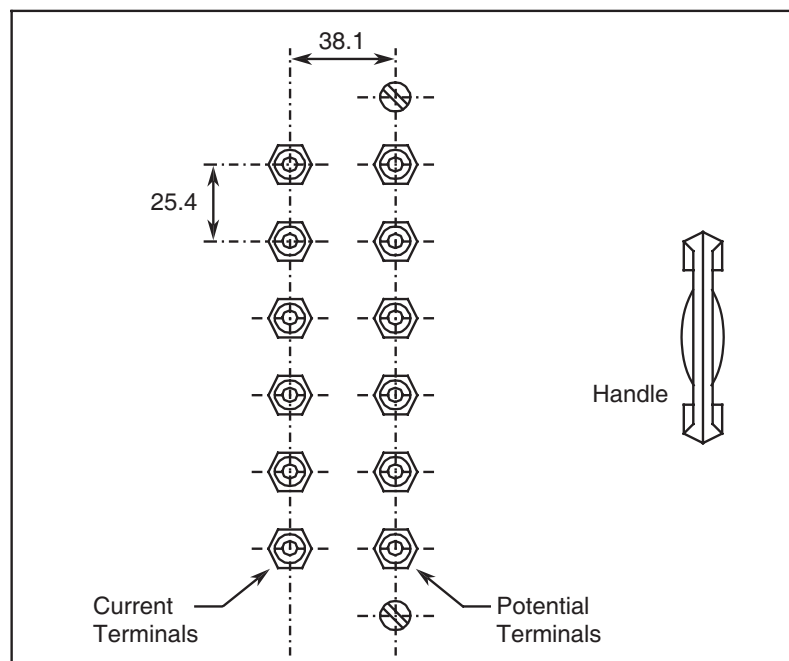

FRONT VIEW

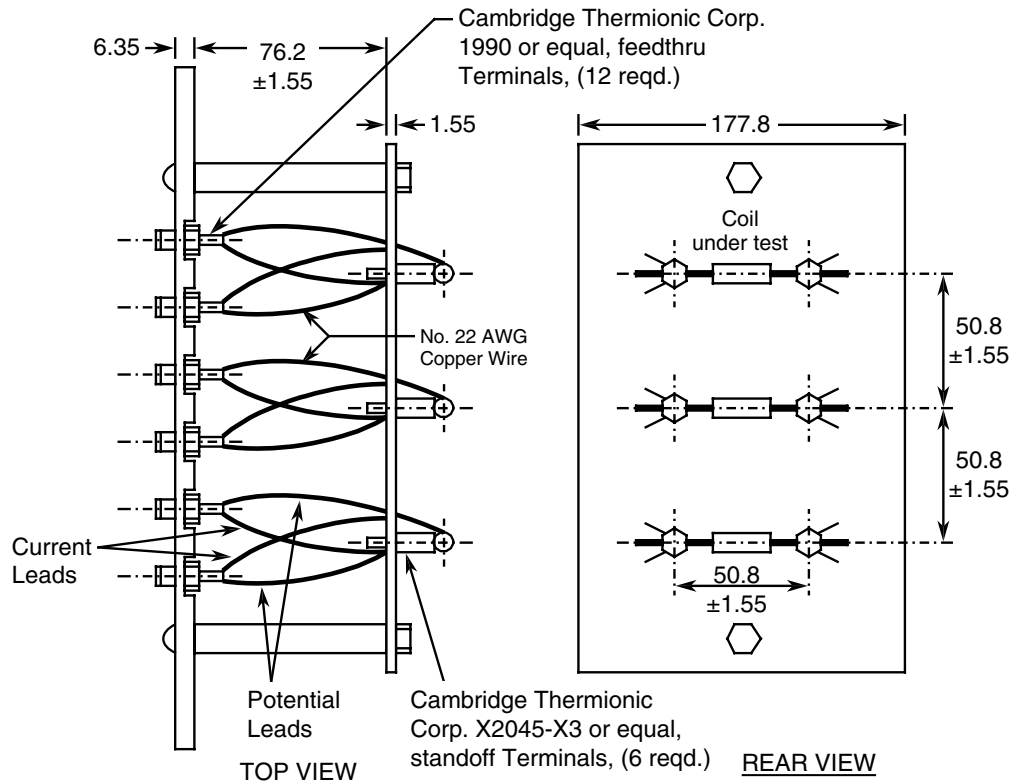

NOTES:

1. All dimensions are in millimetres.

9.10 OVERLOAD

A direct current equivalent to 1.5 times the rated current specified in the Detail Specification shall be applied to the windings for a period of 5 minutes.

After the test, the coils shall be examined and there shall be no evidence of cracked cases, charred windings, distorted or softened insulation or loose windings or terminals.

After a minimum of 24 hours, electrical measurements at room temperature shall be performed and shall meet the requirements to Table 6 of the Detail Specification.

9.11 RESISTANCE TO SOLDERING HEAT

Terminals to be used for soldered connections shall be tested in accordance with Method 210 of MILSTD-202. The following details and exceptions shall apply:-

- (a) Special preparation of specimens
Sample units shall not have been soldered in any previous tests.
- (b) Depth of immersion in molten solder
To a minimum of 6.35mm from the nearest insulating material or to one-half of the exposed length of the terminal, whichever point is closer to the insulating material. Terminals of SMD coils shall be completely immersed.
- (c) Test condition: 'A'
'D' for SMD coils (+260°C, 20s).
- (d) Cooling time prior to examination after test

Until the soldered terminals return to room ambient temperature.

- (e) Final measurements
The electrical characteristics shall be measured as specified in Para. 9.3.4. The values shall not exceed the limits prescribed in Table 6 of the Detail Specification.
- (f) Visual examination after test
The coils shall be visually examined and there shall be no evidence of damage or loosening of the terminals.

9.12 TERMINAL STRENGTH

9.12.1 For Cylindrical Coils

The coils shall be tested in accordance with Method 211 of MIL-STD-202. The following details and exceptions shall apply:-

- (a) Pull test (all terminals)
 - 1. Test condition: 'A'.
 - 2. Applied force: 22(+1 -0) Newtons for 5 ± 1 seconds in a direction perpendicular to the leads in the direction of the axes of the terminations.
- (b) Twist test (solid wire lead terminals)
This includes axial and radial lead terminals, but excludes printed circuit terminals.
 - 1. Test condition: 'D'
 - 2. Number of bends: 5.
- (c) Torque test (all other terminals)
This excludes solid wire axial and radial lead terminals and printed circuit terminals.
 - 1. Test condition: 'E'.
 - 2. Applied force: 2.7cm.N.
- (d) Examination after test
The coils shall be examined after test and there shall be no winding discontinuity, no loosening or rupturing of the terminals and no evidence of other damage.

9.12.2 For SMD Coils

- (a) Preparation of specimens
SMD coils shall be mounted on a suitable substrate. The test substrate shall be such that it shall not influence the results of any test. The metallised land areas shall be of proper spacing so that adjacent coils do not affect one another. During soldering, the period and the high temperature shall not exceed the maximum values specified in the Detail Specification.
- (b) Procedure
A force of 5.0N shall be applied normal to the line joining the terminations and in a plane parallel to the substrate. The force shall be applied progressively, without any shock, and shall be maintained for a period of 10 ± 1 seconds.
- (c) Final examination
The coils shall be visually examined and there shall be no evidence of damage.

9.13 PERMANENCE OF MARKING

In accordance with ESCC Basic Specification No. 24800.

9.14 LOW TEMPERATURE STORAGE

- (a) Mounting

Coils shall be mounted by their normal mounting means in such a manner that there is at least 25.4 mm of free air space around each coil and in such a position with relation to the airstream that the mounting offers substantially no obstruction to the airflow across and around the coil.

The SMD coils shall be mounted as specified in Para. 9.12.2(a).

(b) Procedure

Coils shall be placed in a cold chamber at $-65(+2-0)$ °C or at the minimum storage temperature specified in Table 1(b) of the Detail Specification.

1. For Cylindrical Coils

96 hours after the coils have reached this temperature, the temperature of the chamber shall be gradually increased to room temperature within a period of no more than 8 hours.

2. For SMD Coils

After 1 hour of stabilisation at this temperature, full rated DC current shall be applied for 45(+5-0) minutes. Then 15(+5-0) minutes after the removal of the current, the coils shall be removed from the chamber and maintained at room temperature for approximately 24 hours.

(c) Visual examination after test

The coils shall be visually examined and there shall be no evidence of cracks or other damage.

9.15

VIBRATION

The coils shall be tested in accordance with Method 204 of MIL-STD-202. The following details and exceptions shall apply:-

(a) Mounting

The coils shall be securely fastened by their normal mounting means. Units which are normally supported by their wire leads shall be mounted and soldered to rigidly supported terminals, so spaced that the length of each lead is 6.35mm from the coil body.

(b) Test condition: 'D'

(c) Measurement during vibration

During Vibration, measurements shall be made to determine electrical discontinuity. The accuracy of the detection equipment shall be sufficient to detect any electrical discontinuity of 0.1ms or longer duration.

(d) Examination after test

The coils shall be visually examined and there shall be no evidence of damage. Winding continuity shall be checked by any suitable means that will not introduce currents in excess of the rated value.

9.16

SHOCK (SPECIFIED PULSE)

The coils shall be tested in accordance with Method 213 of MIL-STD-202. The following details shall apply:-

(a) Mounting

Coils shall be mounted with relation to the test equipment in such a manner that the stress applied is in the direction which would be considered as most detrimental.

Cylindrical insulated coils shall be soldered to rigidly supported terminals at a point so spaced that the length of each lead is 6.35mm from the coil body.

(b) Test condition: 'I'

(c) Examination after test

The coils shall be visually examined and there shall be no evidence of damage. Winding continuity shall be checked by any suitable means that will not introduce currents in excess of the rated value.

9.17 IMMERSION

The coils shall be tested in accordance with Method 104 of MIL-STD-202. The following details shall apply:-

- (a) Test condition: 'B'.
- (b) Final measurements
Winding continuity shall be checked by any suitable means that will not introduce currents in excess of the rated value. The components shall be submitted to the dielectric withstanding voltage test specified in Para. 9.3.1.5 at 90% of the test voltage specified in the Detail Specification and also to the insulation resistance test specified in Para. 9.3.1.6. The values shall not exceed the limits prescribed in Table 6 of the Detail Specification.
- (c) Visual examination after test
The coils shall be visually examined and there shall be no evidence of flow of impregnating material from the case, corrosion or other damage.

9.18 MOISTURE RESISTANCE

The coils shall be tested in accordance with Method 106 of MIL-STD-202. The following details shall apply:-

- (a) Mounting
 - 1. For Cylindrical Coils
The coils shall be mounted on racks. Cylindrical insulated coils shall be soldered by their leads to rigid mounts or terminal lugs. The spacing of the mounts or terminal lugs shall be such that the length of each coil lead is approximately 6.35mm measured from the edge of the supporting terminal to the coil body.
For polarisation, the coils shall be covered with a flat, corrosion resistant metal strap with the width of the strap equal to the length of the coils and of sufficient thickness to be rigid. A 1.9mm thick layer of conductive moisture-resistant resilient material, having a resistivity of less than 1000 Ohms/cm, shall be bonded to the surface of the strap next to the coils. Sufficient contact pressure shall be maintained by applying a compressive non-conducting rod held beneath the coils as shown in Figure 1 of this specification. The mounting strap may be used to cover one or more coils at a time. All mounting straps shall be removed to perform steps 7a and 7b and shall be replaced prior to returning the coils to the humidity chamber.
 - 2. For SMD Coils
The SMD coils shall be mounted as specified in Para. 9.12.2(a).
- (b) Thermal shock
Before starting the moisture resistance test, a thermal shock test shall be performed in accordance with Method 107 of MIL-STD-202, Test condition 'A', except that: No measurements shall be performed before cycling. The elevated temperature shall be the maximum operating temperature as specified in Table 1(b) of the Detail Specification.
- (c) Polarisation
Unless otherwise specified in the Detail Specification, a polarising voltage of 100 Volts DC shall be applied during Steps 1 to 6 inclusive. The voltage shall be positive in respect to the mounting hardware or case.
For other type coils and units having no mounting hardware, the polarising voltage shall be applied as specified in the Detail Specification.
- (d) Final measurements
Unless otherwise specified in the Detail Specification, the units shall be removed to ambient room conditions after the 1.5 to 3.5-hour conditioning period. Within 30 minutes of removal, the dielectric withstanding voltage test and the insulation resistance test shall be performed in accordance with Para's 9.3.1.5 and 9.3.1.6 respectively.
The values shall not exceed the limits prescribed in Table 6 of the Detail Specification.

Within 1 hour of these measurements, the electrical characteristics shall be measured as specified in Para. 9.3.4. The values shall not exceed the limits prescribed in Table 6 of the Detail Specification.

(e) Visual examination after test

The coils shall be visually examined and there shall be no evidence of corrosion.

9.19 OPERATING LIFE

9.19.1 Operating Life during Qualification Testing

MIL-STD-202, Test Method 108.

(a) Duration: 2000 hours.

(b) Method of mounting

1. Wire-lead terminal coils

Supported by wire leads mounted by lightweight push-post terminals on each side of the body. The effective length of each terminal shall be 13mm minimum. The panel racks or breadboarding device shall be equipped with current-sensing terminals. Coils shall be so arranged that the temperature of any one coil does not appreciably influence the temperature of any other coil.

2. All other terminals

Supported as specified in the Detail Specification. Coils shall be so arranged that the temperature of any one coil does not appreciably influence the temperature of any other coil.

3. For SMD coils

The SMD coils shall be mounted as specified in Para. 9.12.2(a).

(c) Ambient test temperature

As specified in the Detail Specification.

(d) Operating conditions

100% rated cyclic loaded conditions, 90 minutes 'ON' and 30 minutes 'OFF' at the applicable ambient test temperature. 'ON' time shall be three-fourths of the total lapsed time.

(e) Data points

Measurements at intermediate and end-points in accordance with Table 6 of the Detail Specification at 0, 1000±48 and 2000±48 hours.

In the case where Table 6 specifies "changes", the drift shall always be related to the 0-hour measurement.

The coils shall be stabilised at room temperature for a minimum of 30 minutes after removal from the test chamber prior to the performance of measurements. Coils shall remain at room temperature for no longer than is necessary to perform the required measurements before return to the test chamber.

9.19.2 Operating Life during Acceptance Testing

MIL-STD-202, Test Method 108.

(a) Duration: 1000 hours.

(b) Method of mounting

1. Wire-lead terminal coils

Supported by wire leads mounted by lightweight push-post terminals on each side of the body. The effective length of each terminal shall be 13mm minimum. The panel racks or breadboarding device shall be equipped with current-sensing terminals. Coils shall be so arranged that the temperature of any one coil does not appreciably influence the temperature

- of any other coil.
2. All other terminals
Supported as specified in the Detail Specification. Coils shall be so arranged that the temperature of any one coil does not appreciably influence the temperature of any other coil.
 3. For SMD coils
The SMD coils shall be mounted as specified in Para. 9.12.2(a).
- (c) Ambient test temperature
As specified in the Detail Specification.
- (d) Operating conditions
100% rated cyclic loaded conditions, 90 minutes 'ON' and 30 minutes 'OFF' at the applicable ambient test temperature. 'ON' time shall be three-fourths of the total lapsed time.
- (e) Data points
Measurements at end-points in accordance with Table 6 of the Detail Specification at 0 and 1000±48 hours.
In the case where Table 6 specifies "changes", the drift shall always be related to the 0-hour measurement.
The coils shall be stabilised at room temperature for a minimum of 30 minutes after removal from the test chamber prior to the performance of measurements.

9.20 **FINAL ASSEMBLY**
Final Assembly shall be performed in accordance with the Process Identification Document (PID).

10. **DATA DOCUMENTATION**

10.1 **GENERAL**
For the qualification approval records and with each component delivery, a data documentation package is required. Depending on the testing level and lot acceptance level specified for the component, this package shall be compiled from:-

- (a) Cover sheet (or sheets).
- (b) List of equipment (testing and measuring).
- (c) List of test references.
- (d) Special in-process control test data (when required by the Detail Specification).
- (e) Final production test data (Chart II) (but see Para. 10.6).
- (f) Burn-in and electrical measurement data (Chart III).
- (g) Qualification test data (Chart IV).
- (h) Lot acceptance test data (Chart V) (when applicable).
- (i) Failed component list (see Paras. 7.3 and 8.4) and failure analysis report (see Para. 8.4).
- (j) Certificate of Conformity.
- (k) Radiographic inspection photographs.

Items (a) to (k) inclusive shall be grouped, preferably as subpackages and, for identification purposes, each page shall include the following information:

- ESCC Component Number
- Manufacturer's name.
- Lot identification.
- Date of establishment of the document.
- Page number.

10.1.1 Qualification Approval

In the case of qualification approval, the items listed in Para. 10.1 (a) to (k) less item (h) are required.

10.1.2 Testing Level B

10.1.2.1 *Qualified Components*

For deliveries of qualified components, the following documentation shall be supplied:-

- (a) Cover sheet (if all of the information is not included on the Certificate of Conformity).
- (b) Certificate of Conformity (including range of delivered serial numbers).
- (c) Attributes record of measurements, tests and inspections performed in Chart II, Chart III (including PDA figure) and Chart V (where applicable).
- (d) Failed components list.

10.1.2.2 *Unqualified Components*

For deliveries of unqualified components, the documentation to be supplied shall be in accordance with Para. 10.1.2.1 plus the following:-

- (a) Read and record data from Chart III
- (b) Special in-process control data (where applicable).
- (c) Failure analysis report on failed components.

10.1.3 Testing Level C

10.1.3.1 *Qualified Components*

For deliveries of qualified components, the following documentation shall be supplied:-

- (a) Certificate of Conformity.

10.1.3.2 *Unqualified Components*

For deliveries of unqualified components, the documentation to be supplied shall be in accordance with Para. 10.1.3.1 plus the following:-

- (a) Cover sheet (if all of the information is not included on the Certificate of Conformity).
- (b) Attributes record of all measurements, tests and inspections performed in Charts II, III and V (when applicable).
- (c) Failed components list (including Failure Analysis Report).
- (d) Special in-process control data (when applicable).

10.1.4 Data Retention/Data Access

If not delivered, all data shall be retained by the Manufacturer for a minimum of 5 years during which time it shall be available to the Qualifying Space Agency and the Orderer, if requested, for review. The Manufacturer shall deliver variables Data/Reports to the Orderer if required by the Purchase Order.

10.2 COVER SHEET(S)

The cover sheet(s) of the data documentation package shall include as a minimum:-

- (a) Reference to the Detail Specification, including issue and date.
- (b) Reference to the applicable ESCC Generic Specification, including issue and date.
- (c) Component type and number.
- (d) Lot identification.
- (e) Range of delivered serial numbers or jig positions (for components of testing level B).
- (f) Number of Purchase Order.
- (g) Information relative to any additions to this specification and/or the Detail Specification.
- (h) Manufacturer's name and address.
- (i) Location of the manufacturing plant.
- (j) Signature on behalf of Manufacturer.
- (k) Total number of pages of the data package.

10.3 LIST OF EQUIPMENT USED

A list of equipment used for tests and measurements shall be prepared, if not in accordance with the data given in the Process Identification Document (PID). Where applicable, this list shall contain inventory number, Manufacturer's type number, serial number, etc. This list shall indicate for which tests such equipment was used.

10.4 LIST OF TEST REFERENCES

This list shall include all Manufacturer's references or codes which are necessary to correlate the test data provided with the applicable tests specified in the tables of the Detail Specification.

10.5 SPECIAL IN-PROCESS CONTROL DATA

As specified in the Detail Specification.

10.6 FINAL PRODUCTION TEST DATA (CHART II)

A test result summary shall be compiled showing the total number of components submitted to, and the total number rejected after, each of the following tests:'

- Internal visual inspection (Para. 9.1)
- Thermal shock (Para. 9.2)
- Electrical measurements at room temperature (Para. 9.3.4).
- External visual inspection (Para. 9.5)
- Dimension check (Para. 9.6)

The final production test data shall form an integral part of the data documentation package, but it is not a mandatory requirement that it be delivered with the qualification lot or delivery lot. However, the data package to be delivered shall contain the information as detailed in Paras. 10.1.2 and 10.1.3 or at least shall contain a list of final production tests actually performed and a certification that the data is available for review.

10.7 BURN-IN AND ELECTRICAL MEASUREMENT DATA (CHART III)

10.7.1 Testing Level B

For components of testing level B, all data shall refer to the relevant serial numbers or jig positions.

Against these serial numbers or jig positions, data shall be recorded of the following:-

- (a) 0-hour measurement for burn-in.
- (b) 168-hour measurement for burn-in.
- (c) Delta values after burn-in.
- (d) Values obtained during measurements at high and low temperatures (Table 3 of the Detail Specification).
- (e) Values obtained during measurements of electrical characteristics (Table 2 of the Detail Specification).
- (f) Failures during external visual inspection.
- (g) Photographs from radiographic inspection, including those of reject components.

10.7.2 Testing Level C

For components of testing level C, a test result summary (i.e. the total number of components subjected to, and the total number rejected from, each of the tests and inspections) shall be prepared.

10.8 QUALIFICATION TEST DATA (CHART IV)

All data shall be referenced to the relevant serial numbers. Detailed records shall be provided of the components submitted to each test in each of the subgroups and of those rejected.

Detailed data shall be provided of all electrical measurements made in accordance with Tables 2 and 6 of the Detail Specification, as and where applicable.

10.9 LOT ACCEPTANCE TEST DATA (CHART V)

10.9.1 Testing Level B

All data shall be referenced to the relevant serial numbers. Detailed records shall be provided of the components submitted to each test in each of the subgroups (as relevant to the lot acceptance level) and of those rejected.

Detailed data shall be provided of all electrical measurements made in accordance with Table 6 of the Detail Specification, as and where applicable.

10.9.2 Testing Level C

A test result summary (i.e. the total number of components submitted to, and the total number rejected from, each of the tests and inspections) as relevant to the lot acceptance level shall be provided.

In the case of lot acceptance 2 testing, all data in respect of electrical measurements made in accordance with Table 6 of the Detail Specification shall be referenced to the relevant serial numbers (see Para. 8.2.4(a)).

In the case of lot acceptance 1 testing, all data in respect of electrical measurements made in accordance with Tables 2 and 6 of the Detail Specification shall be referenced to the relevant serial numbers (see Para. 8.2.5(a)).

10.10 FAILED COMPONENT LIST AND FAILURE ANALYSIS REPORT

The failed component list and failure analysis report shall provide full details of:-

- (a) The reference number and description of the test or measurement performed as defined in this specification and/or the Detail Specification.

- (b) The serial number or jig position (if applicable) of the failed component.
- (c) The failed parameter and the failure mode of the component.
- (d) Detailed failure analysis, if requested.

10.11 **CERTIFICATE OF CONFORMITY**

A Certificate of Conformity shall be established as defined in ESCC Basic Specification No. 20100.

11. **DELIVERY**

For qualification approval, the disposition of the qualification test lot and its related documentation shall be as specified in ESCC Basic Specification No. 20100 and the relevant paragraphs of Section 10 of this specification.

For procurement, for each order, the items forming the delivery are:-

- (a) The delivery lot.
- (b) The components used for lot acceptance testing, (when applicable), but not forming part of the delivery lot (see Para's 8.2.3(d), 8.2.4(b) and 8.2.5(b)).
- (c) The relevant documentation in accordance with the requirements of Section 10 of this specification.

In the case of a component for which a valid qualification approval is in force, all data of all components submitted to LA1 and LA2 testing shall also be copied, when requested, to the relevant Qualifying Space Agency.

12. **PACKAGING AND DESPATCH**

The packaging and despatch of components to this specification shall be in accordance with the requirements of ESCC Basic Specification No. 20600.

APPENDIX A

LTPD SAMPLING PLAN LOT SIZES GREATER THAN 200 DEVICES

Minimum size of sample to be tested to assure with a 90% confidence that a lot whose percent defective equals the specified LTPD is not accepted (single sample).

Max. Percent Defective (LTPD) or λ	50	30	20	15	10	7	5	3	2	1.5	1	0.7	0.5	0.3	0.2	0.15	0.1
Acceptance Number (c) (r=c+1)	MINIMUM SAMPLE SIZES (FOR DEVICE-HOURS REQUIRED FOR LIFE TEST, MULTIPLY BY 1000)																
0	5 (1.03)	8 (0.64)	11 (0.46)	15 (0.34)	22 (0.23)	32 (0.16)	45 (0.11)	76 (0.07)	116 (0.04)	153 (0.03)	231 (0.02)	328 (0.02)	461 (0.01)	767 (0.007)	1152 (0.005)	1534 (0.003)	2303 (0.002)
1	8 (4.4)	13 (2.7)	18 (2.0)	25 (1.4)	38 (0.94)	55 (0.65)	77 (0.46)	129 (0.28)	195 (0.18)	258 (0.14)	390 (0.09)	555 (0.06)	778 (0.045)	1296 (0.027)	1946 (0.018)	2592 (0.013)	3891 (0.009)
2	11 (7.4)	18 (4.5)	25 (3.4)	34 (2.24)	52 (1.6)	75 (1.1)	105 (0.78)	176 (0.47)	266 (0.31)	354 (0.23)	533 (0.15)	759 (0.11)	1065 (0.080)	1773 (0.045)	2662 (0.031)	3547 (0.022)	5323 (0.015)
3	13 (10.5)	22 (6.2)	32 (4.4)	43 (3.2)	65 (2.1)	94 (1.5)	132 (1.0)	221 (0.62)	333 (0.41)	444 (0.31)	668 (0.20)	953 (0.14)	1337 (0.10)	2226 (0.062)	3341 (0.041)	4452 (0.031)	6681 (0.018)
4	16 (12.3)	27 (7.3)	38 (5.3)	52 (3.9)	78 (2.6)	113 (1.8)	158 (1.3)	265 (0.75)	398 (0.50)	531 (0.37)	798 (0.25)	1140 (0.17)	1599 (0.12)	2663 (0.074)	3997 (0.049)	5327 (0.037)	7994 (0.025)
5	19 (13.8)	31 (8.4)	45 (6.0)	60 (4.4)	91 (2.9)	131 (2.0)	184 (1.4)	308 (0.85)	462 (0.57)	617 (0.42)	927 (0.28)	1323 (0.20)	1855 (0.14)	3090 (0.085)	4638 (0.056)	6181 (0.042)	9275 (0.028)
6	21 (15.6)	35 (9.4)	51 (6.6)	68 (4.9)	104 (3.2)	149 (2.2)	209 (1.6)	349 (0.94)	528 (0.62)	700 (0.47)	1054 (0.31)	1503 (0.22)	2107 (0.155)	3509 (0.093)	5267 (0.062)	7019 (0.047)	10533 (0.031)
7	24 (16.6)	39 (10.2)	57 (7.2)	77 (5.3)	116 (3.5)	166 (2.4)	234 (1.7)	390 (1.0)	589 (0.67)	783 (0.51)	1178 (0.34)	1680 (0.24)	2355 (0.17)	3922 (0.101)	5886 (0.067)	7845 (0.051)	11771 (0.034)
8	26 (18.1)	43 (10.9)	63 (7.7)	85 (5.6)	128 (3.7)	184 (2.6)	258 (1.8)	431 (1.1)	648 (0.72)	864 (0.54)	1300 (0.36)	1854 (0.25)	2599 (0.18)	4329 (0.108)	6498 (0.072)	8660 (0.054)	12995 (0.036)
9	28 (19.4)	47 (11.5)	69 (8.1)	93 (6.0)	140 (3.9)	201 (2.7)	282 (1.9)	471 (1.2)	709 (0.77)	945 (0.58)	1421 (0.38)	2027 (0.27)	2842 (0.19)	4733 (0.114)	7103 (0.077)	9468 (0.057)	14206 (0.038)
10	31 (19.9)	51 (12.1)	75 (8.4)	100 (6.3)	152 (4.1)	218 (2.9)	306 (2.0)	511 (1.2)	770 (0.80)	1025 (0.60)	1541 (0.40)	2199 (0.28)	3082 (0.20)	5133 (0.120)	7704 (0.080)	10268 (0.060)	15407 (0.040)
11	33 (21.0)	54 (12.8)	83 (8.3)	111 (6.2)	166 (4.2)	238 (2.9)	332 (2.1)	555 (1.2)	832 (0.83)	1109 (0.62)	1664 (0.42)	2378 (0.29)	3323 (0.21)	5546 (0.12)	8319 (0.083)	11092 (0.062)	16638 (0.042)
12	36 (21.4)	59 (13.0)	89 (8.6)	119 (6.5)	178 (4.3)	254 (3.0)	356 (2.2)	594 (1.3)	890 (0.86)	1187 (0.65)	1781 (0.43)	2544 (0.3)	3562 (0.22)	5936 (0.13)	8904 (0.086)	11872 (0.065)	17808 (0.043)
13	38 (22.3)	63 (13.4)	95 (8.9)	126 (6.7)	190 (4.5)	271 (3.1)	379 (2.26)	632 (1.3)	948 (0.89)	1264 (0.67)	1896 (0.44)	2709 (0.31)	3793 (0.22)	6321 (0.134)	9482 (0.089)	12643 (0.067)	18964 (0.045)
14	40 (23.1)	67 (13.8)	101 (9.2)	134 (6.9)	201 (4.6)	288 (3.2)	403 (2.3)	672 (1.4)	1007 (0.92)	1343 (0.69)	2015 (0.46)	2878 (0.32)	4029 (0.23)	6716 (0.138)	10073 (0.092)	13431 (0.069)	20146 (0.046)
15	43 (23.3)	71 (14.1)	107 (9.4)	142 (7.1)	213 (4.7)	305 (3.3)	426 (2.36)	711 (1.41)	1066 (0.94)	1422 (0.71)	2133 (0.47)	3046 (0.33)	4265 (0.235)	7108 (0.141)	10662 (0.094)	14216 (0.070)	21324 (0.047)
16	45 (24.1)	74 (14.0)	112 (9.7)	150 (7.2)	225 (4.8)	321 (3.37)	450 (2.41)	750 (1.44)	1124 (0.96)	1499 (0.72)	2249 (0.48)	3212 (0.337)	4497 (0.241)	7496 (0.144)	11244 (0.096)	14992 (0.072)	22487 (0.048)
17	47 (24.7)	79 (14.7)	118 (9.86)	158 (7.36)	236 (4.93)	338 (3.44)	473 (2.46)	788 (1.48)	1182 (0.98)	1576 (0.74)	2364 (0.49)	3377 (0.344)	4728 (0.246)	7880 (0.148)	11819 (0.098)	15759 (0.074)	23639 (0.049)
18	50 (24.9)	83 (15.0)	124 (10.0)	165 (7.54)	248 (5.02)	354 (3.51)	496 (2.51)	826 (1.51)	1239 (1.0)	1652 (0.75)	2478 (0.50)	3540 (0.351)	4956 (0.251)	8260 (0.151)	12390 (0.100)	16520 (0.075)	24780 (0.050)
19	52 (25.5)	86 (15.4)	130 (10.2)	173 (7.76)	259 (5.12)	370 (3.58)	518 (2.56)	864 (1.53)	1296 (1.02)	1728 (0.77)	2591 (0.52)	3702 (0.358)	5183 (0.256)	8638 (0.153)	12957 (0.102)	17276 (0.077)	25914 (0.051)
20	54 (26.1)	90 (15.6)	135 (10.4)	180 (7.82)	271 (5.19)	386 (3.65)	541 (2.60)	902 (1.56)	1353 (1.04)	1803 (0.78)	2705 (0.52)	3864 (0.364)	5410 (0.260)	9017 (0.156)	13526 (0.104)	18034 (0.078)	27051 (0.052)
26	65 (27.0)	109 (16.1)	163 (10.8)	217 (8.08)	326 (5.38)	466 (3.76)	652 (2.69)	1086 (1.61)	1629 (1.08)	2173 (0.807)	3259 (0.538)	4656 (0.376)	6518 (0.269)	10863 (0.161)	16295 (0.108)	21726 (0.081)	32589 (0.054)

1. Sample sizes are based upon the Poisson exponential binomial limit.
2. The minimum quality (approximate AQL) required to accept (on the average) 19 of 20 lots is shown in parentheses for information only.

LTPD SAMPLING PLAN LOT SIZES LESS THAN, OR EQUAL TO, 200 DEVICES

C=0												
N	10	20	30	40	50	60	80	100	120	150	160	200
n	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD
2	2.2 65	2.5 66	2.5 67	2.5 67	2.5 67	2.5 68	2.5 68	2.5 68	2.5 68	2.5 68	2.5 68	2.5 68
4	1.2 36	1.2 40	1.2 42	1.2 42	1.3 42	1.3 43	1.3 43	1.3 43	1.3 43	1.3 43	1.3 44	1.3 44
5	1.0 29	1.0 33	1.0 34	1.0 35	1.0 35	1.0 35	1.0 36	1.0 36	1.0 37	1.0 37	1.0 37	1.0 37
8	0.5 15	0.6 20	0.6 22	0.6 23	0.6 23	0.6 23	0.6 24	0.7 24	0.7 24	0.7 24	0.7 24	0.7 25
10		0.4 15	0.5 17	0.5 19	0.5 19	0.5 19	0.5 20	0.5 20	0.5 20	0.5 20	0.5 20	0.5 20
16		0.2 6.9	0.25 10	0.25 11	0.3 11	0.3 12	0.3 12	0.3 13	0.3 13	0.3 13	0.3 13	0.3 13
20			0.2 6.8	0.2 8.0	0.25 8.7	0.25 9.0	0.25 9.4	0.25 10	0.25 10	0.25 10	0.25 10	0.25 11
25			0.15 4.3	0.15 5.7	0.2 6.4	0.2 6.9	0.2 7.4	0.2 7.5	0.2 7.6	0.2 7.7	0.2 7.8	0.2 7.9
32				0.1 3.7	0.1 4.4	0.1 5.0	0.1 5.5	0.1 5.9	0.15 6.0	0.15 6.2	0.15 6.3	0.15 6.3
40					0.1 3.0	0.1 3.4	0.1 4.0	0.1 4.5	0.1 4.6	0.1 4.9	0.1 5.0	0.15 5.0
50						0.1 2.3	0.1 2.9	0.10 3.3	0.10 3.5	0.10 3.7	0.10 3.7	0.10 3.9
64							0.08 1.7	0.08 2.2	0.08 2.5	0.08 2.7	0.08 2.8	0.08 2.9
80								0.07 1.5	0.07 1.7	0.07 2.0	0.07 2.1	0.07 2.2
100									0.05 1.1	0.05 1.5	0.05 1.5	0.05 1.7
125									0.04 0.8	0.04 0.8	0.04 0.9	0.04 1.2
128										0.04 0.8	0.04 0.9	0.04 1.1
160												0.03 0.7
C=1												
N	10	20	30	40	50	60	80	100	120	150	160	200
n	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD
2	27 95	24 95	24 95	23 95	23 95	23 95	23 95	23 95	23 95	22 95	22 95	22 95
4	15 62	12 66	12 66	11 67	11 67	10 67	10 67	10 67	10 67	9.8 67	9.7 67	9.7 68
5	13 51	10 55	8.8 56	8.5 57	8.4 57	8.1 58	7.9 58	7.6 58	7.5 58	7.5 58	7.5 58	7.5 58
8	11 28	7.2 35	6.2 38	5.8 38	5.4 39	5.0 39	4.7 39	4.5 39	4.3 39	4.3 40	4.2 40	4.2 40
10		6.2 30	5.0 30	4.6 31	4.2 32	4.2 32	4.2 32	3.9 33	3.5 33	3.3 33	3.3 33	3.3 33
16		5.6 15	4.2 18	3.8 18	3.4 20	3.0 20	2.9 21	2.6 21	2.5 21	2.3 21	2.3 22	2.2 22
20			4.0 13	3.2 15	2.8 16	2.5 16	2.4 16	2.3 16	2.1 17	2.0 17	2.0 17	2.0 18
25			3.8 9.2	3.1 11	2.5 12	2.2 13	2.0 13	1.8 13	1.7 13	1.6 14	1.6 14	1.6 14
32				3.1 7.4	2.4 8.2	2.1 9.0	1.8 9.9	1.6 10	1.5 10.5	1.4 11	1.3 11	1.3 11
40					2.4 5.9	2.1 6.8	1.6 7.6	1.4 7.8	1.3 8.2	1.2 8.3	1.2 8.4	1.2 8.6
50						1.7 4.6	1.4 5.6	1.2 6.1	1.2 6.4	1.0 6.5	0.9 6.7	0.9 6.7
64							1.3 3.8	1.1 4.4	1.0 4.7	0.8 5.0	0.8 5.0	0.7 5.2
80								1.1 3.0	1.0 3.4	0.8 3.7	0.7 3.8	0.6 4.0
100									0.9 2.5	0.7 2.8	0.7 2.8	0.6 3.0
125										0.7 1.9	0.7 2.0	0.5 2.2
128										0.7 1.7	0.7 1.9	0.5 2.2
160												0.5 1.5
C=2												
N	10	20	30	40	50	60	80	100	120	150	160	200
n	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD	AQL LTPD
4	33 82	28 83	27 84	27 85	27 85	26 85	26 85	26 86	26 86	25 86	25 86	25 86
5	27 69	23 73	21 74	20 74	20 74	20 75	20 75	19 75	19 75	19 75	19 75	19 75
8	22 42	15 49	14 49	13 52	13 52	13 52	12 53	12 53	12 53	11 53	11 53	11 53
10		13 39	11 42	11 42	10 43	10 43	9.6 43	9.2 44	9.1 44	8.9 44	8.9 44	8.7 44
16		11 22	8.6 25	6.9 27	6.8 27	6.4 27	6.0 28	6.0 29	5.9 29	5.9 29	5.7 29	5.5 30
20			7.7 19	6.2 21	5.9 22	5.6 22	5.1 23	4.8 23	4.8 23	4.6 23	4.5 24	4.5 24
25			7.4 13	6.0 16	4.9 17	4.5 17	4.3 18	4.1 18	3.9 18	3.7 18	3.7 19	3.7 19
32				5.5 11	4.8 12	4.3 13	3.6 14	3.4 14	3.2 14	3.0 14.5	3.0 15	2.9 15
40					4.6 8.9	3.9 9.8	3.1 11	2.8 12	2.6 12	2.4 12	2.4 12	2.3 12
50						3.5 6.9	2.8 8.1	2.4 8.4	2.3 8.6	2.1 9.0	2.1 9.3	2.0 9.5
64							2.6 5.7	2.2 6.2	2.0 6.6	1.8 7.1	1.7 7.1	1.6 7.4
80								2.1 4.5	1.8 4.9	1.6 5.4	1.5 5.4	1.4 5.6
100									1.8 3.5	1.4 3.9	1.4 4.0	1.2 4.4
125										1.4 2.8	1.3 2.9	1.1 3.3
128										1.4 2.6	1.3 2.9	1.1 3.2
160												1.1 2.3

This table gives the AQL and LTPD values associated with certain single sampling plans (Acceptance Number 'C', Sample Size 'n' and Lot Size 'N'). the table has the following features:-

- (a) Calculations are based upon the hyper-geometric distribution (exact theory) for lot sizes of 200 devices or less.
- (b) The AQL of a sampling plan is defined as the interpolated Percent Defective for which there is a 0.95 probability of acceptance under the plan. The AQL so defined need not be a realisable Lot Percent Defective for the lot size involved (e.g., 12% is not a realisable Percent Defective for a lot size of 20 devices).
- (c) The LTPD of a sampling plan is defined as the interpolated Percent Defective for which there is a 0.10 probability of lot acceptance under the plan. The LTPD so defined need not be a realisable Lot Percent Defective for the lot size involved.
- (d) The sequence of sample sizes and lot sizes are generated by taking products of preceding numbers in the respective sequences and the numbers 2 and 5.