
ESCC
LSCC

Component Title: Relays, latching, Type EL415

Page 1

	JUC	Executive Member:	CNES	25.1 4950-9 C 1 731.0 D F	Date: 1	0/02/2016	Appl. No.		
Components (include	ding series and families) submitted for Exten	sion of Qualification	Approval:			98G		
ESCC COMPONENT NO.	VARIANTS	RANGE OF	COMPONENTS	BASE	500	TEST EHICLE / S	COMPONENT SIMILAR		
3602 004	04,05,06 and 0914,15, 16 and 19		Coil Voltage : 12 and 28 V Type EL415			04 04 B28V	All variants		
Component M REL-STPI	Manufacturer 2	22, rue des c	Manufacturing Plan haises de la Ruelle - Fr		1 appendix 1944 ov 00 v	al qualification appl 01/11/1982 No. 98	roval:		
ESCC Specifications Maintenance of qual Generic: 3602 Detail(s): 30602 0	ification testing:	Deviations to LV1 used: No ⊠ Yes Deviation from cu	No ⊠ Yes ☐ (supply details in Box 15) Deviation from current Specifications:			Qualification Extension Report reference and date: Rapport n° 3533 dated 23/12/2015			
Summary of procure Project Name See CD-ROM	ment or equivalent test Testing Level	results during current		ipport of this ap	plication (those to	DESCC listed first Quantity De	Trains and a sec		
PID changes since st None Minor* Major*	art of qualification *Provide details in box:	:	Ref No: F	PID EL415	De Verrei	CNES cutive Represental	tive 01/01/2016		
Current Manufacturing	g facilities surveyed by: Yes ⊠	(Na	ESA and CNE	S presentative)	on on he 22nd of Septe	04/06/ (Da mber 2009			
Report Reference:	Close-out report I 2009/21485, 28/09								

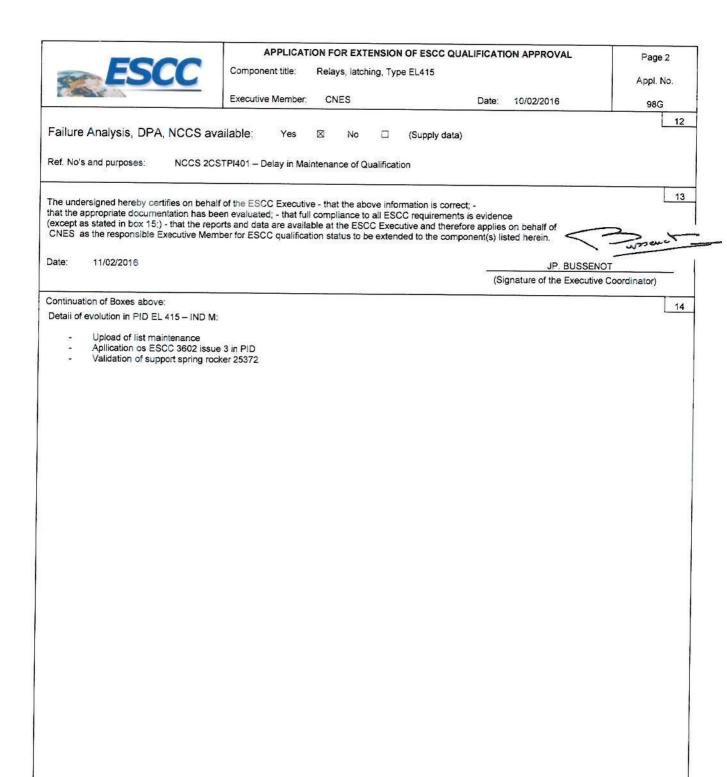

	ECCC
Carlon .	ESLL
The same of the sa	A CONTRACTOR

Component title: Relays, latching, Type EL415

Page 3

						Appl. No.
		Executive Member:	CNES	Date:	10/02/2016	98G
Non compl	liance to ESCC requirements:					_15
No.:	Specification		Paragraph		Non compliance	
Additional to	asks required to achieve full con	npliance for ESCC qual	ification or rationale for accep	ptability of		16
Executive M	lanager Disposition					17
Application / Action / Ren		• D			191	
Date:					e, ESA Representative	



Component Title: Relays, latching, Type EL415

Appl. No.

98G

18

Page 4

Executive Member: CNES

Date: 10/02/2016

ANNEX 1: LIST OF TESTS DONE TO SUPPORT EXTENSION OF QUALIFICATION

Tests conducted in compliance with:

ESCC 3602 generic specification; Chart F4 (for ESCC/QPL parts); Or PID-TFD (for ESCC/QML parts)

Tests vehicle identification/description:

Lot 338521 / DC : 15-06 : SCC 3602 004 04 B28V	

Detail Specification reference:

Chart F4	Test	Tick when done	Conditions	Date Code	Tested Qty	No. of Rejects	Comments if not performed. Comments on Rejection
a	Thermal Shock	⋈	MIL-STD-202, Test Method 107	15-06	6	0	
Environmental / Mechanical Subgroup (Column 1)	Low Level Sine Vibration		MIL-STD-202, Test Method 204	15-06	6	0	
nical S	Random Vibration		MIL-STD-202, Test Method 214				
/ Mechani (Column 1)	Low Level Mechanical Shock	×	MIL-STD-202, Test Method 213	15-06	6	0	
ental / (C	Resistance to Soldering Heat		MIL-STD-202, Test Method 210	15-06	6	0	
vironme	Seal (Fine and Gross Leak)	\boxtimes	MIL-STD-202, Test Method 112	15-06	6	0	
Ē	External Visual Inspection	×	ESCC Basic Specification No. 20500	15-06	6	0	
roup	High Level Sine Vibration	×	MIL-STD-202, Test Method 204	15-06	6	0	
anical Subgroup (Column 2)	High Level Mechanical Shock	×	MIL-STD-202, Test Method 213	15-06	6	0	
Environmental Mechanical Suby (Column 2)	Seal (Fine and Gross Leak)	×	MIL-STD-202, Test Method 112	15-06	6	0	
/ Mec	External Visual Inspection	Ø	ESCC Basic Specification No. 20500	15-06	6	0	
- d	Low Level Life		ESCC 3602 Para. 8.11.1				
Endurance Subgroup 1 (Column 1)	Inductive Life	⊠	ESCC 3602 Para. 8.11.2	15-06	3	0	
(Column 1)	Seal (Fine and Gross Leak)		MIL-STD-202, Test Method 112	15-06	3	0	
Endu	External Visual Inspection	\boxtimes	ESCC Basic Specification No. 20500	15-06	3	0	



Component title: Relays, latching, Type EL415

Page 5 Appl. No.

		E	xecutive Member: CNE	S		Date:	10/02/2016	98G
Chart F4	Test	Tick when done	Conditions	Date Code	Tested Qty	No. of Rejects	Comments if no Comments on	
0.7.0	Coil Life		ESCC 3602 Para. 8.12					
Endurance Subgroup 1 (Column 2)	Seal (Fine and Gross Leak)		MIL-STD-202, Test Method 112					
Sub Co Co	External Visual Inspection		ESCC Basic Specification No. 20500					
dno	Intermediate Current	\boxtimes	ESCC 3602 Para. 8.13	15-06	3	0		
Subgro	Mechanical Life	×	ESCC 3602 Para. 8.14	15-06	3	0		
Endurance Subgroup 1 (Column 3)	Seal (Fine and Gross Leak)	⊠	MIL-STD-202, Test Method 112	15-06	3	0		100
Endur 1	External Visual Inspection	⋈	ESCC Basic Specification No. 20500	15-06	3	0		
Endurance Subgroup 2	Resistive Life	×	ESCC 3602 Para. 8.11.3	15-06	6	0		
	Seal (Fine and Gross Leak)	×	MIL-STD-202, Test Method 112	15-06	6	0		
	External Visual Inspection	⊠	ESCC Basic Specification No. 20500	15-06	6	0		
	Solderability	⊠	MIL-STD-202, Test Method 208	15-06	3	0		
ability	Overload	×	ESCC 3602 Para. 8.16	15-06	3	0		
Assembly Capability Subgroup	Permanence of Marking	×	ESCC Basic Specification No. 24800					
Asser	Terminal Strength	×	MIL-STD-202, Test Method 211	15-06	3	0		
	Seal (Fine and Gross Leak)	\boxtimes	MIL-STD-202, Test Method 112	15-06	3	0		
s								
Additional								
A								



Box 17

Box 18

Box 19

Box 20

Box 21

Box 22

Fill in Table as requested.

Additional Comments.

shall be sequentially numbered. If relevant state 'None'

APPLICATION FOR EXTENSION OF ESCC QUALIFICATION APPROVAL

Component title:

Relays, latching, Type EL415

Page 7
Appl. No.

98G

Executive Member:

CNES

Date: 10/02/2016

NOTES ON THE COMPLETION OF THE APPLICATION FORM FOR ESCC QUALIFICATION EXTENSION APPROVAL

ENTRIES	
Form heading	shall indicate: - the title of the component as given in its detail specification or the name of the series, family; - the Executive Member; - the entering date; - the certificate number and its sequential suffix.
Box 1	shall provide details given in the table; in particular there shall be listed: - the variants or range of variants; - the range of components (the ESCC code is recommended to indicate the values or values range, the tolerance, the voltage, etc); the designation given in the detail specification as 'base on'; - under Test Vehicle enter either an ESCC code or the specific characteristic capable of identifying the component tested (e.g., voltage of coil for a relay); - under component similar enter a cross if relevant.
Box 2; 3 and 4	As per QPL entry; otherwise, an explanation of the changes must be supplied.
Box 5	Will show the ESCC Generic and Detail specifications, including issue number and revision letter, current at the time the tests reported were performed. If the specifications are different from those current on the date of the application, see Box 6.
Box 6	Will show the deviations from the Generic and Detail Specifications listed in Box 5, in particular deviations from testing. In case of deviations this must be listed in Box 15. In case the referenced specification in Box 5 have currently a different issue and/or revision indicate also whether the test data deviates or not from such current documents.
Box 7	Must reference the report(s) supplied in support of the application.
Box 8	Should provide the details of procurement to the full ESCC System, documentation of all of which should already have been delivered to the ESCC Executive under the terms of the relevant Generic Specification. An appropriate table has been drawn in this box.
Box 9	If the PID evolved after the Original Qualification or after the last Extension of Qualification, adequate details of such evolution shall be provided together with the reasons for the changes. Major changes shall be clearly marked.
Box 10	Identify the current PID issue status, date and actual date of verification. The date of verification of the current PID should be arranged as close as possible to the required date of extension.
Box 11	This box can be completed only after a physical visit to the plant to confirm that no unexplained changes occurred and that the practices, procedures, material, etc. used in manufacturing the components are as described in the PID. This survey shall be carried out in accordance with the requirements of ESCC Basic Specification No. 20200 and its findings shall be recorded.
Box 12	Provide details of, or reference to, any Destructive Physical Analysis (DPA) and Failure Analysis reports as well as any Nonconformance(s) (NCCS) occurred during the qualification validity period, stating if established corrective action have produced satisfactory results.
Box 13	Enter only the name of the Executive Member (i.e., CNES, DLR, ESTEC, etc.) and the signature of the responsible Executive Coordinator.
Box 14	To be used when there is a need to expand any of the boxes from 1 through 12. Identify box affected and reference the Box 14 in the relevant Box. Box 14 can be broken into 14a, 14b, etc. if several boxes have to be expanded.
Box 15	Fill in Table as requested.
Box 16	Any additional action deemed necessary by the Executive Member to bring the submitted data to a standard likely to be accepted by the ESCC Executive should be listed herein or the reason(s) to accept the noncompliance.

All Executive Manager recommendations on the application itself, special conditions or restrictions, modifications of the QPL or QML entry, letters to the manufacturer, etc. shall be entered clearly in Box 19, signed by the representative for ESA, and dated.

State noncompliance with reference to specification(s) and paragraph(s). To simplify reference in Box 16 each nonconformance

Any additional action deemed necessary by the Executive Member to bring the submitted data to a standard likely to be accepted by the ESCC Executive should be listed herein or the reason(s) to accept the noncompliance.

Confidential Details of PID changes including those of a confidential nature, shall be provided.