


		APPLICATION FOR EXTENSION OF ESCC QUALIFICATION APPROVAL			Page 1
Component Title: Fuses, Surface Mount, Thin Film, 0.14 to 3.5 A, Based on Type MGA-S		Executive Member: ESTEC			Date: 18/07/2016
Appl. No.		284D			1
Components (including series and families) submitted for Extension of Qualification Approval:					
ESCC COMPONENT NO.	VARIANTS	RANGE OF COMPONENTS	BASED ON	TEST VEHICLE / S	COMPONENT SIMILAR
4008/001	01 TO 12	AS PER SPECIFICATION	MGA-S TYPE	VARIANTS 01, 08, 12	REST OF VARIANTS
Component Manufacturer SCHURTER AG		Location of Manufacturing Plant(s) Werkhofstrasse 8-12 CH-6002 Lucerne SWITZERLAND	Date of original qualification approval: Date: 01/06/2008 Certificate Ref No. 284		
ESCC Specifications used for Maintenance of qualification testing: Generic: 4008 Issue: 4 Detail(s): 4008/001 Issue: 5		Deviations to LVT testing and Detail Specification used: No <input checked="" type="checkbox"/> Yes <input type="checkbox"/> (supply details in Box 15) Deviation from current Specifications: No <input checked="" type="checkbox"/> Yes <input type="checkbox"/> (Supply details)		Qualification Extension Report reference and date: SCHURTER No. D10-004-109 (20/05/2016)	
Summary of procurement or equivalent test results during current validity period in support of this application (those to ESCC listed first)					
Project Name	Testing Level	LAT	Date code	Quantity Delivered	
See sales file attached to the application					
PID changes since start of qualification None <input type="checkbox"/> Minor* <input checked="" type="checkbox"/> Major* <input type="checkbox"/>		g	Current PID Verified by:	ESA (L. Farhat/ D. Lacombe/ S. Hernandez) Name of Executive Representative	
*Provide details in box: Click here to enter text.			Ref No: 0109.0044 Issue: K Rev Date: 20/05/2016	Date: June 2016	
Current Manufacturing facilities surveyed by:					
Satisfactory: Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Explain			ESA on 19/05/2016 (Name of Executive Representative) (Date)		
Report Reference: SCHCH-AUD-2016 and E-Mail addressed to SCHURTER from 15/07/2016 - Corrective actions implemented.					



	APPLICATION FOR EXTENSION OF ESCC QUALIFICATION APPROVAL	Page 3	
	Component title: Fuses, Surface Mount, Thin Film, 0.14 to 3.5 A, Based on Type MGA-S Executive Member: ESTEC	Date: 18/07/2016 Appl. No. 284D	
Non compliance to ESCC requirements:		15	
No.:	Specification	Paragraph	Non compliance
Additional tasks required to achieve full compliance for ESCC qualification or rationale for acceptability of noncompliance:		16	
Executive Manager Disposition		17	
Application Approval: Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>			
Action / Remarks:			
Date:		 Signature, ESA Representative	

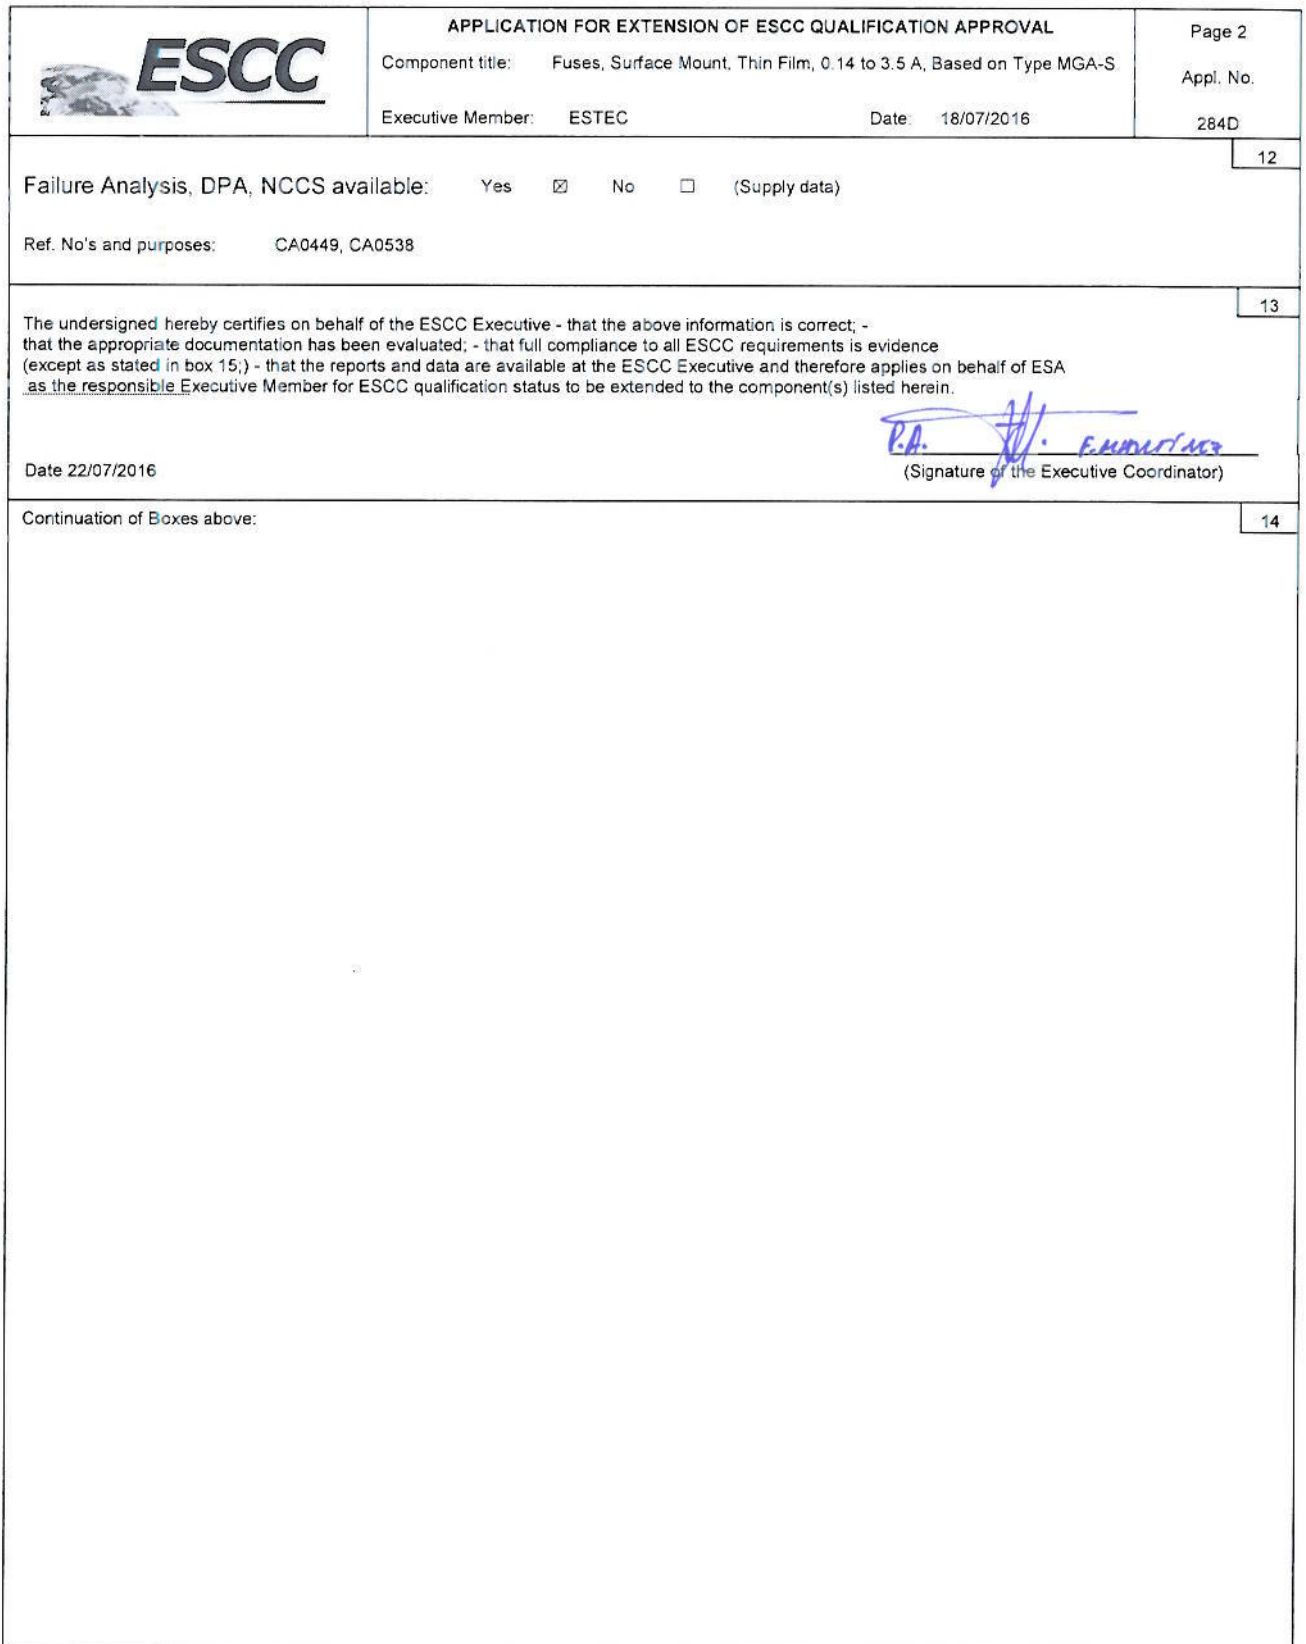

APPLICATION FOR EXTENSION OF ESCC QUALIFICATION APPROVAL

Component Title: Fuses, Surface Mount, Thin Film, 0.14 to 3.5 A, Based on Type MGA-S

Executive Member: ESTEC

Date: 18/07/2016

Page 4

Appl. No.

284D

ANNEX 1: LIST OF TESTS DONE TO SUPPORT EXTENSION OF QUALIFICATION

18

Tests conducted in compliance with:

- ESCC 4008 generic specification; Chart F4 (for ESCC/QPL parts);
- Or PID-TFD 0109.0044.k (for ESCC/QML parts)

Tests vehicle identification/description:

400800101, 400800108, 400800112	MGA-S 0.14 A, MGA-S 1.4 A, MGA-S 3.5 A

Detail Specification reference: 4008/001

Chart F4	Test	Tick when done	Conditions	Date Code	Tested Qty	No. of Rejects	Comments if not performed. Comments on Rejection
Environmental/Mechanical Subgroup	Resistance to Soldering Heat	<input checked="" type="checkbox"/>	ESCC 4008 Para. 8.13	2016	60	0	
	Rapid Change of Temperature	<input checked="" type="checkbox"/>	IEC 60068-2-14	2016	60	0	
	Vibration	<input type="checkbox"/>	MIL-STD-202, Test Method 204	-	-	-	Not applicable acc. to 4008/001
	Shock	<input checked="" type="checkbox"/>	IEC 60068-2-27	2016	60	0	
	Fusion Characterisation Tests	<input checked="" type="checkbox"/>	ESCC 4008 Para. 8.5	2016	60	0	
	Insulation Resistance	<input checked="" type="checkbox"/>	MIL-STD-202, Test Method 302	2016	45	0	
	External Visual Inspection	<input checked="" type="checkbox"/>	ESCC Basic Specification No. 20500	2016	60	0	
	Resistance to Soldering Heat	<input checked="" type="checkbox"/>	ESCC 4008 Para. 8.13	2016	60	0	
	Damp Heat, Steady State	<input checked="" type="checkbox"/>	IEC 60068-2-78	2016	60	0	
	Fusion Characterisation Tests	<input checked="" type="checkbox"/>	ESCC 4008 Para. 8.5	2016	60	0	
	Insulation Resistance	<input checked="" type="checkbox"/>	MIL-STD-202, Test Method 302	2016	45	0	
	External Visual Inspection	<input checked="" type="checkbox"/>	ESCC Basic Specification No. 20500	2016	60	0	
	Resistance to Soldering Heat	<input checked="" type="checkbox"/>	ESCC 4008 Para. 8.13	2016	18	0	
	Thermal Vacuum	<input checked="" type="checkbox"/>	ESCC 4008 Para. 8.15	2016	18	0	
	External Visual Inspection	<input checked="" type="checkbox"/>	ESCC Basic Specification No. 20500	2016	18	0	



APPLICATION FOR EXTENSION OF ESCC QUALIFICATION APPROVAL

Component title: Fuses, Surface Mount, Thin Film, 0.14 to 3.5 A, Based on Type MGA-S

Executive Member: ESTEC


Date: 18/07/2016

Page 5

Appl. No.

284D

Chart F4	Test	Tick when done	Conditions	Date Code	Tested Qty	No. of Rejects	Comments if not performed. Comments on Rejection
Endurance Subgroup	Resistance to Soldering Heat	<input checked="" type="checkbox"/>	ESCC 4008 Para. 8.13	2016	60	0	
	Operating Life	<input checked="" type="checkbox"/>	MIL-STD-202, Test Method 108	2016	60	0	
	Fusion Characterisation Tests	<input checked="" type="checkbox"/>	ESCC 4008 Para. 8.5	2016	60	0	
	Insulation Resistance	<input checked="" type="checkbox"/>	MIL-STD-202, Test Method 302	2016	45	0	
	External Visual Inspection	<input checked="" type="checkbox"/>	ESCC Basic Specification No. 20500	2016	60	0	
	Permanence of Marking	<input checked="" type="checkbox"/>	ESCC Basic Specification No. 24800	2016	60	0	
Assembly Capability Subgroup	Robustness of Terminations	<input checked="" type="checkbox"/>	IEC 60068-2-21	2016	15	0	
	Solderability	<input checked="" type="checkbox"/>	ESCC 4008 Para. 8.4	2016	60	0	
	Verification of Overload Operation at DC Rated Voltage (Room Temperature)	<input checked="" type="checkbox"/>	ESCC 4008 Para. 8.6	2016	60	0	
	Insulation Resistance	<input checked="" type="checkbox"/>	MIL-STD-202, Test Method 302	2016	60	0	
	Resistance to Soldering Heat	<input checked="" type="checkbox"/>	ESCC 4008 Para. 8.13	2016	60	0	
	Verification of Overload Operation at DC Rated Voltage (Low Temperature)	<input checked="" type="checkbox"/>	ESCC 4008 Para. 8.6	2016	60	0	
	Insulation Resistance	<input checked="" type="checkbox"/>	MIL-STD-202, Test Method 302	2016	60	0	
Additional Tests		<input type="checkbox"/>					
		<input type="checkbox"/>					
		<input type="checkbox"/>					

	<p align="center">APPLICATION FOR EXTENSION OF ESCC QUALIFICATION APPROVAL</p> <p>Component title: Fuses, Surface Mount, Thin Film, 0.14 to 3.5 A, Based on Type MGA-S</p> <p>Executive Member: ESTEC</p>	<p align="center">Page 7</p> <p>Appl. No. 284D</p>
<p align="center">NOTES ON THE COMPLETION OF THE APPLICATION FORM FOR ESCC QUALIFICATION EXTENSION APPROVAL</p>		
<p>ENTRIES Form heading</p>	<p>shall indicate: - the title of the component as given in its detail specification or the name of the series, family; - the Executive Member; - the entering date; - the certificate number and its sequential suffix.</p>	
<p>Box 1</p>	<p>shall provide details given in the table; in particular there shall be listed: - the variants or range of variants; - the range of components (the ESCC code is recommended to indicate the values or values range, the tolerance, the voltage, etc); the designation given in the detail specification as 'base on'; - under Test Vehicle enter either an ESCC code or the specific characteristic capable of identifying the component tested (e.g., voltage of coil for a relay); - under component similar enter a cross if relevant.</p>	
<p>Box 2; 3 and 4</p>	<p>As per QPL entry; otherwise, an explanation of the changes must be supplied.</p>	
<p>Box 5</p>	<p>Will show the ESCC Generic and Detail specifications, including issue number and revision letter, current at the time the tests reported were performed. If the specifications are different from those current on the date of the application, see Box 6.</p>	
<p>Box 6</p>	<p>Will show the deviations from the Generic and Detail Specifications listed in Box 5, in particular deviations from testing. In case of deviations this must be listed in Box 15. In case the referenced specification in Box 5 have currently a different issue and/or revision indicate also whether the test data deviates or not from such current documents.</p>	
<p>Box 7</p>	<p>Must reference the report(s) supplied in support of the application.</p>	
<p>Box 8</p>	<p>Should provide the details of procurement to the full ESCC System, documentation of all of which should already have been delivered to the ESCC Executive under the terms of the relevant Generic Specification. An appropriate table has been drawn in this box.</p>	
<p>Box 9</p>	<p>If the PID evolved after the Original Qualification or after the last Extension of Qualification, adequate details of such evolution shall be provided together with the reasons for the changes. Major changes shall be clearly marked.</p>	
<p>Box 10</p>	<p>Identify the current PID issue status, date and actual date of verification. The date of verification of the current PID should be arranged as close as possible to the required date of extension.</p>	
<p>Box 11</p>	<p>This box can be completed only after a physical visit to the plant to confirm that no unexplained changes occurred and that the practices, procedures, material, etc. used in manufacturing the components are as described in the PID. This survey shall be carried out in accordance with the requirements of ESCC Basic Specification No. 20200 and its findings shall be recorded.</p>	
<p>Box 12</p>	<p>Provide details of, or reference to, any Destructive Physical Analysis (DPA) and Failure Analysis reports as well as any Nonconformance(s) (NCCS) occurred during the qualification validity period, stating if established corrective action have produced satisfactory results.</p>	
<p>Box 13</p>	<p>Enter only the name of the Executive Member (i.e., CNES, DLR, ESTEC, etc.) and the signature of the responsible Executive Coordinator.</p>	
<p>Box 14</p>	<p>To be used when there is a need to expand any of the boxes from 1 through 12. Identify box affected and reference the Box 14 in the relevant Box. Box 14 can be broken into 14a, 14b, etc. if several boxes have to be expanded.</p>	
<p>Box 15</p>	<p>Fill in Table as requested.</p>	
<p>Box 16</p>	<p>Any additional action deemed necessary by the Executive Member to bring the submitted data to a standard likely to be accepted by the ESCC Executive should be listed herein or the reason(s) to accept the noncompliance.</p>	
<p>Box 17</p>	<p>All Executive Manager recommendations on the application itself, special conditions or restrictions, modifications of the QPL or QML entry, letters to the manufacturer, etc. shall be entered clearly in Box 19, signed by the representative for ESA, and dated.</p>	
<p>Box 18</p>	<p>Fill in Table as requested.</p>	
<p>Box 19</p>	<p>Confidential Details of PID changes including those of a confidential nature, shall be provided.</p>	
<p>Box 20</p>	<p>State noncompliance with reference to specification(s) and paragraph(s). To simplify reference in Box 16 each nonconformance shall be sequentially numbered. If relevant state 'None'.</p>	
<p>Box 21</p>	<p>Any additional action deemed necessary by the Executive Member to bring the submitted data to a standard likely to be accepted by the ESCC Executive should be listed herein or the reason(s) to accept the noncompliance.</p>	
<p>Box 22</p>	<p>Additional Comments.</p>	