



Page 1 of 15

**CAPACITORS, FIXED, CERAMIC DIELECTRIC,
TYPE II**

BASED ON TYPE TCN83E

ESCC Detail Specification No. 3001/027

Issue 3	November 2017
---------	---------------



Document Custodian: European Space Agency – see <https://escies.org>

LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2017. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
1076	Specification updated to incorporate changes per DCR.

TABLE OF CONTENTS

1	GENERAL	5
1.1	SCOPE	5
1.2	APPLICABLE DOCUMENTS	5
1.3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	5
1.4	THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS	5
1.4.1	The ESCC Component Number	5
1.4.2	Range of Components	6
1.5	MAXIMUM RATINGS	8
1.6	PHYSICAL DIMENSIONS	9
1.7	FUNCTIONAL DIAGRAM	10
1.8	MATERIALS AND FINISHES	10
1.8.1	Case	10
1.8.2	Terminals	10
2	REQUIREMENTS	10
2.1	GENERAL	10
2.1.1	Deviations from the Generic Specification	10
2.2	MARKING	10
2.3	ROBUSTNESS OF TERMINATIONS	11
2.4	ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES	11
2.4.1	Room Temperature Electrical Measurements	11
2.4.2	High and Low Temperatures Electrical Measurements	12
2.5	INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS	12
2.6	BURN-IN	14
	APPENDIX A	15

1 GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics, and test and inspection data for the component type variants and/or the range of components specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

1.2 APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. [3001](#).

1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. [21300](#) shall apply.

1.4 THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS

1.4.1 The ESCC Component Number

The ESCC Component Number shall be constituted as follows:

Example: 300102701476KC

- Detail Specification Reference: 3001027
- Component Type Variant Number: 01 (see Note 1)
- Characteristic code: Capacitance Value (47 μ F): 476 (as required)
- Characteristic code: Capacitance Tolerance ($\pm 10\%$): K (as required)
- Rating code: Rated Voltage (50V): C (as required)

NOTES:

1. Marking of the type variant number is mandatory. No further reference to type variant number is made in this specification.

1.4.1.2 *Characteristics and Ratings Codes*

Characteristics and ratings to be codified as part of the ESCC Component Number shall be as follows:

- (a) Rated Capacitance Value, C_n , expressed by means of the following codes in accordance with ESCC Basic Specification No. [21700](#). The unit quantity shall be picofarad (pF).

Capacitance Value C_n (pF)	Code
XX 10 ⁵	XX5
XX 10 ⁶	XX6

- (b) Capacitance Tolerance expressed by the following codes in accordance with ESCC Basic Specification No. 21700:

Tolerance (\pm %)	Code Letter
10	K
20	M

- (c) Rated Voltage, U_R , expressed by the following codes:

Rated Voltage U_R (V)	Code Letter
50	C
100	E
250	H
400	K

1.4.2 Range of Components

The range of components applicable to this specification is as follows:

Capacitance Value (μ F)	Capacitance Tolerance (\pm %)	Rated Voltage (U_R) (Vdc)	Case Size (Note 1)	Weight Max (g)
5.6	10	50	A	10
6.8	10, 20	50	A	10
8.2	10	50	A	10
10	10, 20	50	A	10
12	10	50	A	10
15	10, 20	50	A	10
18	10	50	B	12
22	10, 20	50	B	12
27	10	50	C	18
33	10, 20	50	C	18
39	10	50	D	35
47	10, 20	50	D	35
1.8	10	100	A	10
2.2	10, 20	100	A	10
2.7	10	100	A	10
3.3	10, 20	100	A	10
3.9	10	100	A	10
4.7	10, 20	100	A	10
5.6	10	100	B	12
6.8	10, 20	100	B	12

Capacitance Value (μ F)	Capacitance Tolerance (\pm %)	Rated Voltage (U_R) (Vdc)	Case Size (Note 1)	Weight Max (g)
8.2	10	100	B	12
10	10, 20	100	C	18
12	10	100	C	18
15	10, 20	100	C	18
18	10	100	D	35
22	10, 20	100	D	35
27	10	100	E	50
33	10, 20	100	E	50
1	10, 20	250	A	10
1.2	10	250	A	10
1.5	10, 20	250	A	10
1.8	10	250	B	12
2.2	10, 20	250	B	12
2.7	10	250	C	18
3.3	10, 20	250	C	18
3.9	10	250	D	35
4.7	10, 20	250	D	35
5.6	10	250	D	35
6.8	10, 20	250	D	35
8.2	10	250	E	50
10	10, 20	250	E	50
1	10, 20	400	A	10
1.2	10	400	B	12
1.5	10, 20	400	B	12
1.8	10	400	C	18
2.2	10, 20	400	C	18
2.7	10	400	D	35
3.3	10, 20	400	D	35
3.9	10	400	D	35
4.7	10, 20	400	E	50
5.6	10	400	E	50
6.8	10, 20	400	E	50

NOTES:

1. See Para. 1.6.

1.5 **MAXIMUM RATINGS**

The maximum ratings shall not be exceeded at any time during use or storage.


Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the ESCC Generic Specification.

Characteristics	Symbols	Maximum Ratings	Units	Remarks
Rated Voltage	U_R	50, 100, 250, 400	V	Note 1
Operating Temperature Range	T_{op}	-55 to +125	°C	Without derating. T_{amb}
Storage Temperature Range	T_{stg}	-55 to +125	°C	
Soldering Temperature	T_{sol}	+260	°C	Note 2

NOTES:


1. As required; See Para. 1.4.2.
2. Duration 5 seconds maximum at a distance of $\geq 1.5\text{mm}$ from the case and the same lead shall not be resoldered until 3 minutes have elapsed.

1.6

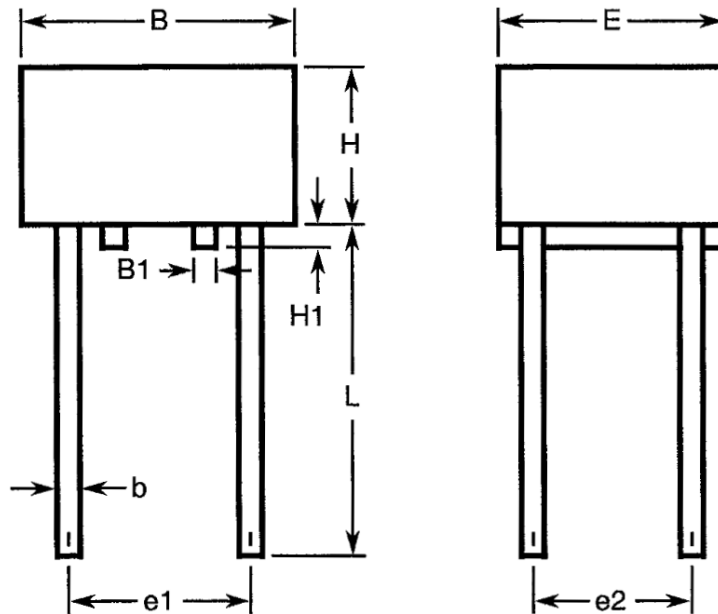PHYSICAL DIMENSIONS


Symbol	Dimensions (mm)		Notes
	Min	Max	
b	0.95	1.1	
B	21.5	22.5	
B1	1	3	
e1	17.3	18.3	
e2	9.66	10.66	
E	18.5	19.5	
H	-	6.5	Case size: A
	-	8	Case size: B
	-	12.5	Case size: C
	-	20	Case size: D
	-	30	Case size: E
H1	0.2	0.6	
L	30	-	

1.7 FUNCTIONAL DIAGRAM

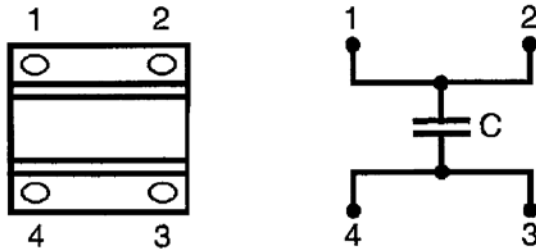

NOTES:

1. These capacitors have 4 terminals connected 2 by 2.

1.8 MATERIALS AND FINISHES

1.8.1 Case

As a minimum, a thermo-setting resin moulding shall ensure the protection of the capacitors.

1.8.2 Terminals

The lead material and finish shall be in accordance with type A3 or A4 in accordance with the requirements of ESCC Basic Specification No. [23500](#).

2 REQUIREMENTS

2.1 GENERAL

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component's reliability, are listed in the appendices attached to this specification.

2.1.1 Deviations from the Generic Specification

None.

2.2 MARKING

The marking shall be in accordance with the requirements of ESCC Basic Specification No. [21700](#) and as follows.

The information to be marked on the component shall be:

- (a) The ESCC qualified components symbol (for ESCC qualified components only).
- (b) The ESCC Component Number.
- (c) Traceability information.

2.3 ROBUSTNESS OF TERMINATIONS

The test conditions for Robustness of Terminations shall be as specified in the ESCC Generic Specification and as follows:

- Applicable tests: Ua1 (tensile) and Ub Method 1 (bending) only.
- Applied force:
 - Ua1: 20N
 - Ub: 10N
- Duration: 10s
- After each test, the capacitors shall be examined for evidence of breaking or loosening of terminals.

2.4 ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES

Electrical measurements shall be performed at room, high and low temperatures.

2.4.1 Room Temperature Electrical Measurements

The measurements shall be performed at $T_{amb} = +22 \pm 3^{\circ}\text{C}$.

Characteristics	Symbols	Test Method and Conditions	Tolerance (\pm %)	Limits		Units
				Min	Max	
Capacitance (Note 1)	C_A	ESCC No. 3001	10 20	$0.9C_n$ $0.8C_n$	$1.1C_n$ $1.2C_n$	μF
Tangent of Loss Angle	$\text{tg}\delta$	ESCC No. 3001	All	-	250×10^{-4}	-
Insulation Resistance (Dielectric)	R_{ID}	ESCC No. 3001	All	1000	-	$\text{G}\Omega.\text{nF}$
Insulation Resistance (Body Insulation)	R_{IB}	ESCC No. 3001 Note 2	All	1000	-	$\text{G}\Omega.\text{nF}$
Voltage Proof (Dielectric)	VP_D	ESCC No. 3001	All	$2.5U_R$	-	V

NOTES:

1. Capacitance limits may be adjusted to take into account capacitance ageing, as specified in the Generic Specification.
2. The measurements shall be performed on a sample of 5 components from each manufacturing lot with 0 failures allowed. In the event of any failure a 100% inspection may be performed. In the case of a 100% inspection, a 1% total percent defective is allowed.

2.4.2 High and Low Temperatures Electrical Measurements

Characteristics	Symbols	Test Method and Conditions (Note 1)	Limits		Units
			Min	Max	
Temperature Characteristic	TC	ESCC No. 3001 $T_{amb} = -55 \pm 2^{\circ}\text{C}, +20 \pm 2^{\circ}\text{C}, +125 \pm 2^{\circ}\text{C}$ Note 2 For $V_T =$ no voltage applied: -20 +20 For $V_T = U_R = 50\text{V}$: -30 +20 For $V_T = U_R = 100\text{V}$: -30 +20 For $V_T = U_R = 250\text{V}$: -40 +20 For $V_T = U_R = 400\text{V}$: -50 +20			%

NOTES:

- The measurements shall be performed on a sample of 5 components from each manufacturing lot with 0 failures allowed. In the event of any failure a 100% inspection may be performed.
- In the case of a 100% inspection, a 1% total percent defective is allowed.

2.5 INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3^{\circ}\text{C}$.

Unless otherwise specified the test methods and test conditions shall be as per the corresponding test defined in Para. 2.4.1 Room Temperature Electrical Measurements.

Test Reference per ESCC No. 3001	Characteristics	Symbols	Limits		Units
			Min	Max	
Rapid Change of Temperature	Capacitance	C_A	Note 1		
Initial Measurements	Capacitance	C_A	Note 1		
Final Measurements	Change in Capacitance	$\Delta C_A / C_A$	-10	+10	%
	Tangent of Loss Angle	$\text{tg}\delta$	-	250×10^{-4}	-
Steady State Humidity	Capacitance	C_A	Note 1		
Initial Measurements	Capacitance	C_A	Note 1		
Final Measurements	Change in Capacitance	$\Delta C_A / C_A$	-10	+10	%
	Tangent of Loss Angle	$\text{tg}\delta$	-	250×10^{-4}	-
	Insulation Resistance (Dielectric) (Note 2)	R_{ID}	50	-	$\text{G}\Omega.\text{nF}$
	Insulation Resistance (Body Insulation) (Note 2)	R_{IB}	50	-	$\text{G}\Omega.\text{nF}$

Test Reference per ESCC No. 3001	Characteristics	Symbols	Limits		Units
			Min	Max	
Operating Life					
Initial Measurements	Capacitance	C_A	Note 1		
Intermediate Measurements (1000 hours) (Note 3)	Capacitance	C_A	Note 1		
	Change in Capacitance	$\Delta C_A/C_A$	-15	+15	%
	Insulation Resistance (Dielectric)	R_{ID}	250	-	GΩ.nF
	Insulation Resistance (Body Insulation)	R_{IB}	250	-	GΩ.nF
Final Measurements (1000 or 2000 hours) (Note 4)	Capacitance	C_A	Note 1		
	Change in Capacitance	$\Delta C_A/C_A$	-20	+20	%
	Tangent of Loss Angle	$\tan \delta$	-	250×10^{-4}	-
	Insulation Resistance (Dielectric)	R_{ID}	100	-	GΩ.nF
	Insulation Resistance (Body Insulation)	R_{IB}	100	-	GΩ.nF
	Voltage Proof (Dielectric)	VP_D	$2.5U_R$	-	V
Capacitance-Temperature Characteristics	Temperature Characteristic	TC	Note 5		
Resistance to Soldering Heat					
Initial Measurements	Capacitance	C_A	Note 1		
Final Measurements	Capacitance	C_A	Note 1		
	Change in Capacitance	$\Delta C_A/C_A$	-10	+20	%
	Insulation Resistance (Dielectric)	R_{ID}	1000	-	GΩ.nF
	Insulation Resistance (Body Insulation)	R_{IB}	1000	-	GΩ.nF

NOTES:

- As specified in Para. 2.4.1 Room Temperature Electrical Measurements.
- Test conditions for Insulation Resistance shall be as specified in Steady State Humidity in the ESCC Generic Specification.
- Intermediate measurements are optional at the Manufacturer's discretion.
- 1000 hours is applicable to Periodic Testing for extension of qualification. 2000 hours is applicable to Qualification Testing, and to Periodic Testing for renewal of qualification after lapse.
- As specified in Para. 2.4.2 High and Low Temperatures Electrical Measurements.

2.6 BURN-IN

The requirements for Burn-in are specified in the ESCC Generic Specification. The following conditions shall also apply:

- After Burn-in, the components shall be removed from the chamber and allowed to cool under normal atmospheric conditions for recovery for 24 hours minimum.

APPENDIX A

AGREED DEVIATIONS FOR EXXELIA TECHNOLOGIES (F)

Items Affected	Description of Deviations					
Para. 2.4.2 High and Low Temperatures Electrical Measurements	Temperature Characteristic measurement with voltage applied may be performed with applied voltages and limits as follows:					
	Characteristics	Symbols	Test Method and Conditions	Limits		Units
				Min	Max	
	Temperature Characteristic	TC	ESCC No. 3001			%
			For U _R = 50V: V _T = 50V	-30	+20	
			For U _R = 100V: V _T = 100V	-30	+20	
			For U _R = 250V: V _T = 200V	-35	+20	
	For U _R = 400V: V _T = 200V	-30	+20			