



**CAPACITORS, FIXED, RECONSTITUTED MICA,  
HIGH VOLTAGE**

**BASED ON TYPE HT86PS**

**ESCC Detail Specification No. 3006/022**

Issue 7	February 2024
---------	---------------



**LEGAL DISCLAIMER AND COPYRIGHT**

European Space Agency, Copyright © 2024. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

**DOCUMENTATION CHANGE NOTICE**

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
1608	Specification updated to incorporate changes per DCR.

**TABLE OF CONTENTS**

1	GENERAL	5
1.1	SCOPE	5
1.2	APPLICABLE DOCUMENTS	5
1.3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	5
1.4	THE ESCC COMPONENT NUMBER AND RANGE OF COMPONENTS	5
1.4.1	The ESCC Component Number	5
1.4.1.1	Characteristics and Ratings Codes	6
1.4.2	Range of Components	7
1.5	MAXIMUM RATINGS	15
1.6	PHYSICAL DIMENSIONS AND TERMINAL IDENTIFICATION	16
1.7	FUNCTIONAL DIAGRAM	16
2	REQUIREMENTS	16
2.1	GENERAL	16
2.1.1	Deviations from the Generic Specification	16
2.1.1.1	Deviations from Screening Tests – Chart F3	16
2.1.1.2	Deviations from Qualification and Periodic Tests – Chart F4	17
2.2	MARKING	17
2.3	ROBUSTNESS OF TERMINATIONS	17
2.4	ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES	18
2.4.1	Room Temperature Electrical Measurements	18
2.4.2	High and Low Temperatures Electrical Measurements	19
2.5	INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS	19
2.6	BURN-IN CONDITIONS	21
	APPENDIX 'A'	22

## 1 GENERAL

### 1.1 SCOPE

This specification details the ratings, physical and electrical characteristics, and test and inspection data for the component type variants and/or the range of components specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

### 1.2 APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. [3006](#).
- (b) IEC Publication No. 60270, High-voltage test techniques – Partial discharge measurements

### 1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. [21300](#) shall apply.

### 1.4 THE ESCC COMPONENT NUMBER AND RANGE OF COMPONENTS

#### 1.4.1 The ESCC Component Number

The ESCC Component Number shall be constituted as follows:

Example: 300602201472MHA

- Detail Specification Reference: 3006022
- Component Type Variant Number: 01 (See Note 1)
- Characteristic code: Capacitance Value (4700pF): 472 (as required)
- Characteristic code: Capacitance Tolerance ( $\pm 20\%$ ): M (as required)
- Rating code: Rated Voltage (10000V): H (as required)
- Characteristic code: Case Size: A (as required) (See Note 2)

#### NOTES:

1. Marking of the Component Type Variant Number is mandatory. No further reference to type variant number is made in this specification.
2. The case size code letter shall be omitted for components which have no case size options with respect to the value.

1.4.1.1 *Characteristics and Ratings Codes*

Characteristics and ratings to be codified as part of the ESCC Component Number shall be as follows:

- (a) Capacitance Value, C, expressed by means of the following codes in accordance with ESCC Basic Specification No. 21700. The unit quantity shall be picofarads (pF).

Capacitance Value C (pF)	Code
XX10 <sup>1</sup>	XX1
XX10 <sup>2</sup>	XX2
XX10 <sup>3</sup>	XX3
XX10 <sup>4</sup>	XX4
XX10 <sup>5</sup>	XX5

- (b) Capacitance Tolerance expressed by the following codes in accordance with ESCC Basic Specification No. 21700:

Tolerance (± %)	Code Letter
10	K
20	M

- (c) Rated Voltage, U<sub>R</sub>, expressed by the following codes:

Rated Voltage U <sub>R</sub> (V)	Code Letter
1500	C
2500	D
3500	E
5000	F
7500	G
10000	H
12500	J
15000	K
20000	L

- (d) Case Size, when required, expressed by the following codes:

Case Description (Size) (See Para. 1.4.2)	Code Letter
Short and wide	A
Long and narrow	B

1.4.2 Range of Components

The range of components applicable to this specification are as follows:

Capacitance Value (C) (pF) (Note 1)	Capacitance Tolerance (± %)	Rated Voltage (U <sub>R</sub> ) Max (V) (Note 1)	Dimensions (mm) (See Para. 1.6) (Note 1)				Lead Material & Finish (Note 2)	Weight Max (g)
			L (±1)	h (±1)	e (±1)	ØW (+10%, -0.05)		
22000	10, 20	1500	25	12	4	1	A3 or A4	4
27000	10	1500	35	10	4	1	A3 or A4	4
33000	10, 20	1500	35	10	4	1	A3 or A4	4
39000	10	1500	35	12	6	1	A3 or A4	6.5
47000	10, 20	1500	35	12	6	1	A3 or A4	6.5
56000	10	1500	35	16	6	1	A3 or A4	8.5
68000	10, 20	1500	35	16	6	1	A3 or A4	8.5
82000	10	1500	35	24	6	1	A3 or A4	12.5
100000	10, 20	1500	35	24	6	1	A3 or A4	12.5
120000	10	1500	35	30	8	1	A3 or A4	20
<b>150000</b>	10, 20	<b>1500</b>	35	30	8	1	A3 or A4	20
<b>150000</b>	10, 20	<b>1500</b>	61	20	4	1	A3 or A4	14
180000	10	1500	35	40	8	1	A3 or A4	26.5
<b>220000</b>	10, 20	<b>1500</b>	35	40	8	1	A3 or A4	26.5
<b>220000</b>	10, 20	<b>1500</b>	61	22	6	1	A3 or A4	21
270000	10	1500	61	24	8	1	A3 or A4	28
330000	10, 20	1500	61	24	8	1	A3 or A4	28
390000	10	1500	61	38	8	1	A3 or A4	44
470000	10, 20	1500	61	38	8	1	A3 or A4	44
560000	10	1500	79	45	8	1.2	A3 or A4	67
680000	10, 20	1500	79	45	8	1.2	A3 or A4	67
820000	10	1500	79	47	10	1.2	A3 or A4	85
1000000	10, 20	1500	79	47	10	1.2	A3 or A4	85
1200000	10	1500	105	47	10	1.2	A3 or A4	115
1500000	10, 20	1500	105	47	10	1.2	A3 or A4	115
1800000	10	1500	105	50	14	1.2	A3 or A4	175
2200000	10, 20	1500	105	50	14	1.2	A3 or A4	175
15000	10, 20	2500	25	12	4	1	A3 or A4	4
18000	10	2500	35	10	4	1	A3 or A4	4
22000	10, 20	2500	35	10	4	1	A3 or A4	4
27000	10	2500	35	12	6	1	A3 or A4	6.5
33000	10, 20	2500	35	12	6	1	A3 or A4	6.5

Capacitance Value (C) (pF) (Note 1)	Capacitance Tolerance (± %)	Rated Voltage (U <sub>R</sub> ) Max (V) (Note 1)	Dimensions (mm) (See Para. 1.6) (Note 1)				Lead Material & Finish (Note 2)	Weight Max (g)
			L (±1)	h (±1)	e (±1)	ØW (+10%, -0.05)		
39000	10	2500	35	16	6	1	A3 or A4	8.5
47000	10, 20	2500	35	16	6	1	A3 or A4	8.5
56000	10	2500	35	24	6	1	A3 or A4	12.5
68000	10, 20	2500	35	24	6	1	A3 or A4	12.5
82000	10	2500	35	30	8	1	A3 or A4	20
<b>100000</b>	10, 20	<b>2500</b>	35	30	8	1	A3 or A4	20
<b>100000</b>	10, 20	<b>2500</b>	61	20	4	1	A3 or A4	14
120000	10	2500	35	40	8	1	A3 or A4	26.5
<b>150000</b>	10, 20	<b>2500</b>	35	40	8	1	A3 or A4	26.5
<b>150000</b>	10, 20	<b>2500</b>	61	22	6	1	A3 or A4	21
180000	10	2500	61	38	8	1	A3 or A4	28
220000	10, 20	2500	61	38	8	1	A3 or A4	28
270000	10	2500	61	45	8	1	A3 or A4	44
330000	10, 20	2500	61	45	8	1	A3 or A4	44
390000	10	2500	79	45	8	1.2	A3 or A4	67
470000	10, 20	2500	79	45	8	1.2	A3 or A4	67
560000	10	2500	79	47	10	1.2	A3 or A4	85
680000	10, 20	2500	79	47	10	1.2	A3 or A4	85
820000	10	2500	105	47	10	1.2	A3 or A4	115
1000000	10, 20	2500	105	47	10	1.2	A3 or A4	115
1200000	10	2500	105	50	14	1.2	A3 or A4	175
1500000	10, 20	2500	105	50	14	1.2	A3 or A4	175
10000	10, 20	3500	25	12	4	1	A3 or A4	4
12000	10	3500	35	10	4	1	A3 or A4	4
15000	10, 20	3500	35	10	4	1	A3 or A4	4
18000	10	3500	35	12	6	1	A3 or A4	6.5
22000	10, 20	3500	35	12	6	1	A3 or A4	6.5
27000	10	3500	35	16	6	1	A3 or A4	8.5
33000	10, 20	3500	35	16	6	1	A3 or A4	8.5
39000	10	3500	35	24	6	1	A3 or A4	12.5
47000	10, 20	3500	35	24	6	1	A3 or A4	12.5
56000	10	3500	35	30	8	1	A3 or A4	20
<b>68000</b>	10, 20	<b>3500</b>	35	30	8	1	A3 or A4	20
<b>68000</b>	10, 20	<b>3500</b>	61	20	4	1	A3 or A4	14



Capacitance Value (C) (pF) (Note 1)	Capacitance Tolerance (± %)	Rated Voltage (U <sub>R</sub> ) Max (V) (Note 1)	Dimensions (mm) (See Para. 1.6) (Note 1)				Lead Material & Finish (Note 2)	Weight Max (g)
			L (±1)	h (±1)	e (±1)	ØW (+10%, -0.05)		
82000	10	3500	35	40	8	1	A3 or A4	26.5
<b>100000</b>	10, 20	<b>3500</b>	35	40	8	1	A3 or A4	26.5
<b>100000</b>	10, 20	<b>3500</b>	61	22	6	1	A3 or A4	21
120000	10	3500	61	24	8	1	A3 or A4	28
150000	10, 20	3500	61	24	8	1	A3 or A4	28
180000	10	3500	61	45	8	1	A3 or A4	44
220000	10, 20	3500	61	45	8	1	A3 or A4	44
270000	10	3500	79	45	8	1.2	A3 or A4	67
330000	10, 20	3500	79	45	8	1.2	A3 or A4	67
390000	10	3500	79	47	10	1.2	A3 or A4	85
470000	10, 20	3500	79	47	10	1.2	A3 or A4	85
560000	10	3500	105	47	10	1.2	A3 or A4	115
680000	10, 20	3500	105	47	10	1.2	A3 or A4	115
820000	10	3500	105	50	14	1.2	A3 or A4	175
1000000	10, 20	3500	105	50	14	1.2	A3 or A4	175
4700	10, 20	5000	25	12	4	1	A3 or A4	4
5600	10	5000	35	10	4	1	A3 or A4	4
6800	10, 20	5000	35	10	4	1	A3 or A4	4
8200	10	5000	35	12	6	1	A3 or A4	6.5
10000	10, 20	5000	35	12	6	1	A3 or A4	6.5
12000	10	5000	35	16	6	1	A3 or A4	8.5
15000	10, 20	5000	35	16	6	1	A3 or A4	8.5
18000	10	5000	35	24	6	1	A3 or A4	12.5
22000	10, 20	5000	35	24	6	1	A3 or A4	12.5
27000	10	5000	35	30	8	1	A3 or A4	20
<b>33000</b>	10, 20	<b>5000</b>	35	30	8	1	A3 or A4	20
<b>33000</b>	10, 20	<b>5000</b>	61	20	4	1	A3 or A4	14
39000	10	5000	35	40	8	1	A3 or A4	26.5
<b>47000</b>	10, 20	<b>5000</b>	35	40	8	1	A3 or A4	26.5
<b>47000</b>	10, 20	<b>5000</b>	61	22	6	1	A3 or A4	21
56000	10	5000	61	24	8	1	A3 or A4	28
68000	10, 20	5000	61	24	8	1	A3 or A4	28
82000	10	5000	61	38	8	1	A3 or A4	44
100000	10, 20	5000	61	38	8	1	A3 or A4	44

Capacitance Value (C) (pF) (Note 1)	Capacitance Tolerance (± %)	Rated Voltage (U <sub>R</sub> ) Max (V) (Note 1)	Dimensions (mm) (See Para. 1.6) (Note 1)				Lead Material & Finish (Note 2)	Weight Max (g)
			L (±1)	h (±1)	e (±1)	ØW (+10%, -0.05)		
120000	10	5000	79	45	8	1.2	A3 or A4	67
150000	10, 20	5000	79	45	8	1.2	A3 or A4	67
180000	10	5000	79	47	10	1.2	A3 or A4	85
220000	10, 20	5000	79	47	10	1.2	A3 or A4	85
270000	10	5000	105	47	10	1.2	A3 or A4	115
330000	10, 20	5000	105	47	10	1.2	A3 or A4	115
390000	10	5000	105	50	14	1.2	A3 or A4	175
470000	10, 20	5000	105	50	14	1.2	A3 or A4	175
2200	10, 20	7500	35	10	4	1	A3 or A4	4
2700	10	7500	35	12	6	1	A3 or A4	6.5
3000	10	7500	35	12	6	1	A3 or A4	6.5
3300	10, 20	7500	35	12	6	1	A3 or A4	6.5
3900	10	7500	35	16	6	1	A3 or A4	8.5
4700	10, 20	7500	35	16	6	1	A3 or A4	8.5
5600	10	7500	35	24	6	1	A3 or A4	12.5
6800	10, 20	7500	35	24	6	1	A3 or A4	12.5
8200	10	7500	35	30	8	1	A3 or A4	20
<b>10000</b>	10, 20	<b>7500</b>	35	30	8	1	A3 or A4	20
<b>10000</b>	10, 20	<b>7500</b>	61	20	4	1	A3 or A4	14
12000	10	7500	35	40	8	1	A3 or A4	26.5
<b>15000</b>	10, 20	<b>7500</b>	35	40	8	1	A3 or A4	26.5
<b>15000</b>	10, 20	<b>7500</b>	61	22	6	1	A3 or A4	21
18000	10	7500	61	24	8	1	A3 or A4	28
22000	10, 20	7500	61	24	8	1	A3 or A4	28
27000	10	7500	61	38	8	1	A3 or A4	44
33000	10, 20	7500	61	38	8	1	A3 or A4	44
39000	10	7500	61	45	8	1	A3 or A4	52
47000	10, 20	7500	61	45	8	1	A3 or A4	52
56000	10	7500	79	45	8	1.2	A3 or A4	67
68000	10, 20	7500	79	45	8	1.2	A3 or A4	67
82000	10	7500	79	47	10	1.2	A3 or A4	85
100000	10, 20	7500	79	47	10	1.2	A3 or A4	85
120000	10	7500	105	47	10	1.2	A3 or A4	115
150000	10, 20	7500	105	47	10	1.2	A3 or A4	115

Capacitance Value (C) (pF) (Note 1)	Capacitance Tolerance (± %)	Rated Voltage (U <sub>R</sub> ) Max (V) (Note 1)	Dimensions (mm) (See Para. 1.6) (Note 1)				Lead Material & Finish (Note 2)	Weight Max (g)
			L (±1)	h (±1)	e (±1)	ØW (+10%, -0.05)		
180000	10	7500	105	50	14	1.2	A3 or A4	175
220000	10, 20	7500	105	50	14	1.2	A3 or A4	175
100	10, 20	10000	25	12	4	1	A3 or A4	4
150	10, 20	10000	25	12	4	1	A3 or A4	4
220	10, 20	10000	25	12	4	1	A3 or A4	4
330	10, 20	10000	25	12	4	1	A3 or A4	4
470	10, 20	10000	35	10	4	1	A3 or A4	4
560	10, 20	10000	35	10	4	1	A3 or A4	4
680	10, 20	10000	35	10	4	1	A3 or A4	4
820	10, 20	10000	35	10	4	1	A3 or A4	4
1000	10, 20	10000	35	10	4	1	A3 or A4	4
1200	10	10000	35	12	6	1	A3 or A4	6.5
1500	10, 20	10000	35	12	6	1	A3 or A4	6.5
1800	10	10000	35	16	6	1	A3 or A4	8.5
2200	10, 20	10000	35	16	6	1	A3 or A4	8.5
2700	10	10000	35	24	6	1	A3 or A4	12.5
3000	10	10000	35	24	6	1	A3 or A4	12.5
3300	10, 20	10000	35	24	6	1	A3 or A4	12.5
3900	10	10000	35	30	8	1	A3 or A4	20
<b>4700</b>	10, 20	<b>10000</b>	35	30	8	1	A3 or A4	20
<b>4700</b>	10, 20	<b>10000</b>	61	20	4	1	A3 or A4	14
5600	10	10000	35	40	8	1	A3 or A4	26.5
<b>6800</b>	10, 20	<b>10000</b>	35	40	8	1	A3 or A4	26.5
<b>6800</b>	10, 20	<b>10000</b>	61	22	6	1	A3 or A4	21
8200	10	10000	61	24	8	1	A3 or A4	28
10000	10, 20	10000	61	24	8	1	A3 or A4	28
12000	10	10000	61	38	8	1	A3 or A4	44
15000	10, 20	10000	61	38	8	1	A3 or A4	44
18000	10	10000	61	45	8	1	A3 or A4	52
22000	10, 20	10000	61	45	8	1	A3 or A4	52
27000	10	10000	79	45	8	1.2	A3 or A4	67
33000	10, 20	10000	79	45	8	1.2	A3 or A4	67
39000	10	10000	79	47	10	1.2	A3 or A4	85
47000	10, 20	10000	79	47	10	1.2	A3 or A4	85

Capacitance Value (C) (pF) (Note 1)	Capacitance Tolerance (± %)	Rated Voltage (U <sub>R</sub> ) Max (V) (Note 1)	Dimensions (mm) (See Para. 1.6) (Note 1)				Lead Material & Finish (Note 2)	Weight Max (g)
			L (±1)	h (±1)	e (±1)	ØW (+10%, -0.05)		
56000	10	10000	105	47	10	1.2	A3 or A4	115
68000	10, 20	10000	105	47	10	1.2	A3 or A4	115
82000	10	10000	105	50	14	1.2	A3 or A4	175
100000	10, 20	10000	105	50	14	1.2	A3 or A4	175
100	10, 20	12500	25	12	4	1	A3 or A4	4
150	10	12500	25	12	4	1	A3 or A4	4
220	10, 20	12500	25	12	4	1	A3 or A4	4
330	10, 20	12500	35	10	4	1	A3 or A4	4
470	10, 20	12500	35	10	4	1	A3 or A4	4
560	10, 20	12500	35	10	4	1	A3 or A4	4
680	10, 20	12500	35	10	4	1	A3 or A4	4
820	10	12500	35	12	6	1	A3 or A4	6.5
1000	10, 20	12500	35	12	6	1	A3 or A4	6.5
1200	10	12500	35	16	6	1	A3 or A4	8.5
1500	10, 20	12500	35	16	6	1	A3 or A4	8.5
1800	10	12500	35	24	6	1	A3 or A4	12.5
2200	10, 20	12500	35	24	6	1	A3 or A4	12.5
2700	10	12500	61	20	4	1	A3 or A4	14
3000	10	12500	61	20	4	1	A3 or A4	14
<b>3300</b>	10, 20	<b>12500</b>	35	30	8	1	A3 or A4	20
<b>3300</b>	10, 20	<b>12500</b>	61	20	4	1	A3 or A4	14
3900	10	12500	61	22	6	1	A3 or A4	21
<b>4700</b>	10, 20	<b>12500</b>	35	40	8	1	A3 or A4	26.5
<b>4700</b>	10, 20	<b>12500</b>	61	22	6	1	A3 or A4	21
5600	10	12500	61	24	8	1	A3 or A4	28
6800	10, 20	12500	61	24	8	1	A3 or A4	28
8200	10	12500	61	38	8	1	A3 or A4	44
10000	10, 20	12500	61	38	8	1	A3 or A4	44
12000	10	12500	61	45	8	1	A3 or A4	52
15000	10, 20	12500	61	45	8	1	A3 or A4	52
18000	10	12500	79	45	8	1.2	A3 or A4	67
22000	10, 20	12500	79	45	8	1.2	A3 or A4	67
27000	10	12500	79	47	10	1.2	A3 or A4	85
33000	10, 20	12500	79	47	10	1.2	A3 or A4	85

Capacitance Value (C) (pF) (Note 1)	Capacitance Tolerance (± %)	Rated Voltage (U <sub>R</sub> ) Max (V) (Note 1)	Dimensions (mm) (See Para. 1.6) (Note 1)				Lead Material & Finish (Note 2)	Weight Max (g)
			L (±1)	h (±1)	e (±1)	ØW (+10%, -0.05)		
39000	10	12500	105	47	10	1.2	A3 or A4	115
47000	10, 20	12500	105	47	10	1.2	A3 or A4	115
56000	10	12500	105	50	14	1.2	A3 or A4	175
68000	10, 20	12500	105	50	14	1.2	A3 or A4	175
100	10, 20	15000	25	12	4	1	A3 or A4	4
150	10, 20	15000	35	12	6	1	A3 or A4	6.5
220	10, 20	15000	35	12	6	1	A3 or A4	6.5
330	10, 20	15000	35	12	6	1	A3 or A4	6.5
470	10, 20	15000	35	12	6	1	A3 or A4	6.5
560	10, 20	15000	35	16	6	1	A3 or A4	8.5
680	10, 20	15000	35	16	6	1	A3 or A4	8.5
820	10, 20	15000	35	24	6	1	A3 or A4	12.5
1000	10, 20	15000	35	24	6	1	A3 or A4	12.5
1200	10	15000	61	20	4	1	A3 or A4	14
<b>1500</b>	10, 20	<b>15000</b>	35	30	8	1	A3 or A4	20
<b>1500</b>	10, 20	<b>15000</b>	61	20	4	1	A3 or A4	14
1800	10	15000	61	22	6	1	A3 or A4	21
<b>2200</b>	10, 20	<b>15000</b>	35	40	8	1	A3 or A4	26.5
<b>2200</b>	10, 20	<b>15000</b>	61	22	6	1	A3 or A4	21
2700	10	15000	61	24	8	1	A3 or A4	28
3000	10	15000	61	24	8	1	A3 or A4	28
3300	10, 20	15000	61	24	8	1	A3 or A4	28
3900	10	15000	61	38	8	1	A3 or A4	44
4700	10, 20	15000	61	38	8	1	A3 or A4	44
5600	10	15000	61	45	8	1	A3 or A4	52
6800	10, 20	15000	61	45	8	1	A3 or A4	52
8200	10	15000	79	45	8	1.2	A3 or A4	67
10000	10, 20	15000	79	45	8	1.2	A3 or A4	67
12000	10	15000	79	47	10	1.2	A3 or A4	85
15000	10, 20	15000	79	47	10	1.2	A3 or A4	85
18000	10	15000	105	47	10	1.2	A3 or A4	115
22000	10, 20	15000	105	47	10	1.2	A3 or A4	115
27000	10	15000	105	50	14	1.2	A3 or A4	175
33000	10, 20	15000	105	50	14	1.2	A3 or A4	175

Capacitance Value (C) (pF) (Note 1)	Capacitance Tolerance (± %)	Rated Voltage (U <sub>R</sub> ) Max (V) (Note 1)	Dimensions (mm) (See Para. 1.6) (Note 1)				Lead Material & Finish (Note 2)	Weight Max (g)
			L (±1)	h (±1)	e (±1)	ØW (+10%, -0.05)		
100	10, 20	20000	61	20	4	1	A3 or A4	14
150	10, 20	20000	61	20	4	1	A3 or A4	14
220	10, 20	20000	61	20	4	1	A3 or A4	14
330	10, 20	20000	61	20	4	1	A3 or A4	14
470	10, 20	20000	61	20	4	1	A3 or A4	14
560	10, 20	20000	61	20	4	1	A3 or A4	14
680	10, 20	20000	61	20	4	1	A3 or A4	14
820	10	20000	61	22	6	1	A3 or A4	21
1000	10, 20	20000	61	22	6	1	A3 or A4	21
1200	10	20000	61	24	8	1	A3 or A4	28
1500	10, 20	20000	61	24	8	1	A3 or A4	28
1800	10	20000	61	38	8	1	A3 or A4	44
2200	10, 20	20000	61	38	8	1	A3 or A4	44
2700	10	20000	61	45	8	1	A3 or A4	52
3000	10	20000	61	45	8	1	A3 or A4	52
3300	10, 20	20000	61	45	8	1	A3 or A4	52
3900	10	20000	79	45	8	1.2	A3 or A4	67
4700	10, 20	20000	79	45	8	1.2	A3 or A4	67
5600	10	20000	79	47	10	1.2	A3 or A4	85
6800	10, 20	20000	79	47	10	1.2	A3 or A4	85
8200	10	20000	105	47	10	1.2	A3 or A4	115
10000	10, 20	20000	105	47	10	1.2	A3 or A4	115
12000	10	20000	105	50	14	1.2	A3 or A4	175
15000	10, 20	20000	105	50	14	1.2	A3 or A4	175

**NOTES:**

- Components with capacitance value and rated voltage in bold type shall be specified with either a “short and wide” case or a “long and narrow” case, where dimensions L, h and e differ as shown.
- Lead material and finishes shall be in accordance with the requirements of ESCC Basic Specification No. [23500](#).

1.5 **MAXIMUM RATINGS**

The maximum ratings shall not be exceeded at any time during use or storage.


Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the ESCC Generic Specification.

Characteristics	Symbols	Maximum Ratings	Units	Remarks
Rated Voltage	$U_R$	1500, 2500, 3500, 5000, 7500, 10000, 12500, 15000, 20000	V	Note 1
Ripple Voltage, peak-to-peak (Note 2)	$U_{Rip}$	$0.2 \times U_R$ $0.15 \times U_R$ $0.04 \times U_R$ $0.01 \times U_R$	Vpp	At 50Hz At 100Hz At 1000Hz At 10000Hz
Operating Air Pressure Range	$P_{op}$	Less than 0.1 or greater than 75000	Pa	Note 3
Operating Temperature Range	$T_{op}$	-55 to +125	°C	Without derating. $T_{amb}$
Storage Temperature Range	$T_{stg}$	-55 to +125	°C	
Soldering Temperature	$T_{sol}$	+235	°C	Note 4

**NOTES:**

1. As required; See Para. 1.4.2.
2. Ripple voltage plus applied DC voltage shall never exceed  $U_R$ .
3. Components are designed for dielectric fluid use or encapsulation.
4. Duration 5 seconds maximum at 4mm from the device body and the same terminal shall not be resoldered until 3 minutes have elapsed.


1.6 PHYSICAL DIMENSIONS AND TERMINAL IDENTIFICATION

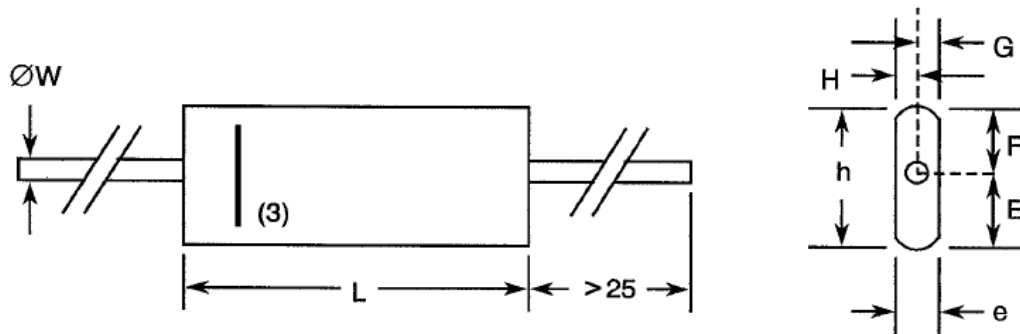

**NOTES:**

1. The limits of Dimensions L, h, e and ØW are defined in Para. 1.4.2.
2. The difference between dimensions E and F shall be < 2mm. The difference between dimensions G and H shall be < 1mm.
3. Terminal identification: A voltage polarity “-” symbol shall be marked on the body to indicate the lead which should be connected to the lowest potential.

1.7 FUNCTIONAL DIAGRAM



**2 REQUIREMENTS**

2.1 GENERAL

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component’s reliability, are listed in the appendices attached to this specification.

2.1.1 Deviations from the Generic Specification

2.1.1.1 *Deviations from Screening Tests – Chart F3*

(a) Rapid Change of Temperature:

- Test Condition (d), Exposure time (each cycle, each temperature): 3 hours minimum.
- Test Condition (e), Transition time: 1 hour ±5 minutes.



### 2.1.1.2 Deviations from Qualification and Periodic Tests – Chart F4

- (a) Rapid Change of Temperature:
  - Test Condition (d), Exposure time (each cycle, each temperature): 3 hours minimum.
  - Test Condition (e), Transition time: 1 hour  $\pm$ 5 minutes.
- (b) Vibration:
  - Test Condition (c), Applied voltage: no voltage shall be applied.
  - Data Points: no monitoring during the last cycle.
- (c) Shock:
  - Test Condition (d), Applied voltage: no voltage shall be applied.
  - Data Points: no monitoring during the last cycle.
- (d) Climatic Sequence (Damp Heat, Accelerated, First Cycle and Damp Heat, Accelerated, Remaining Cycles): the applied voltage shall be 100V.
- (e) Climatic Sequence (Low Air Pressure): For Qualification Testing only, Low Air Pressure shall be performed under the following conditions:
  - 1 hour minimum at  $1 \times 10^{-5}$  mbar maximum.
  - Temperature: +50 (+5 -0) $^{\circ}$ C
  - Applied voltage:  $1.25 \times U_R$  applied for the last 5 minutes of the period of low pressure.
- (f) Operating Life:
  - Test Condition (c), Applied voltage:  $1.15 \times U_R$ .

## 2.2 MARKING

The marking shall be in accordance with the requirements of ESCC Basic Specification No. [21700](#) and as follows.

The information to be marked on the component shall be:

- (a) Terminal Identification (see Para. 1.6).
- (b) The ESCC qualified components symbol (for ESCC qualified components only).
- (c) The ESCC Component Number (see Para. 1.4.1).
- (d) Traceability information.

## 2.3 ROBUSTNESS OF TERMINATIONS

The test conditions for Robustness of Terminations shall be as specified in the ESCC Generic Specification and as follows:

- Test Ua1 (tensile):
  - Applied force: 20N
  - Duration: 10  $\pm$ 1s
- Test Uc Method 1, Severity 2 (torsion, 2 successive rotations of 180 $^{\circ}$ )
- Test Ub Method 1 (bending, 2 consecutive bends):
  - Applied force: 10N

The number of terminals to be tested is as follows: All terminals for test Ua1; one-half of the terminals for test Uc Method 1, Severity 2; the remaining terminals for test Ub Method 1.

2.4 ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES

Electrical measurements shall be performed at room, high and low temperatures.

2.4.1 Room Temperature Electrical Measurements

The measurements shall be performed at  $T_{amb} = +22 \pm 3^{\circ}\text{C}$ .

Characteristics	Symbols	Test Method and Conditions	Limits		Units
			Min	Max	
Capacitance	C	ESCC No. 3006	Note 1	Note 2	pF
Tangent of Loss Angle	$\text{tg}\delta$	ESCC No. 3006 $V_T = 1\text{V}$ Test Frequency = 1kHz	-	$50 \times 10^{-4}$	-
Insulation Resistance, Dielectric	$R_I$	ESCC No. 3006 For $C \leq 220000\text{pF}$ For $C > 220000\text{pF}$	25 5000	- -	$\text{G}\Omega$ $\text{G}\Omega.\text{nF}$
Insulation Resistance, Body Insulation	$R_{IB}$	ESCC No. 3006	25	-	$\text{G}\Omega$
Voltage Proof, Terminal-to-Terminal	VP	ESCC No. 3006 (Note 3)	$1.6 \times U_R$ (Note 4)	-	V
Voltage Proof, Terminal-to-Case	$VP_B$	ESCC No. 3006 (Note 3)	$1.6 \times U_R$ (Note 4)	-	V
Partial Discharge (AC)	QAC	IEC 60270  $V_{rms} = 5\%U_R$ $V_{rms} = 10\%U_R$ (Note 5)	- -	0 1000	pC pC

**NOTES:**

1. Capacitance Value of the component minus the applicable Tolerance (see Para. 1.4.2).
2. Capacitance Value of the component plus the applicable Tolerance (see Para. 1.4.2).
3. Voltage application time: 5s.
4. For the applicable Rated Voltage ( $U_R$ ) see Para. 1.4.2.
5. Partial Discharge shall be measured at two different levels of voltage. For the applicable Rated Voltage ( $U_R$ ) see Para. 1.4.2.

2.4.2 High and Low Temperatures Electrical Measurements

Characteristics	Symbols	Test Method and Conditions (Note 1)	Limits		Units
			Min	Max	
Temperature Coefficient	$\Delta C/C$	ESCC No. <a href="#">3006</a> $T_{amb} = -55 (+3 -0)^{\circ}C$	-3 (Note 2)	-	%
		$T_{amb} = +125 (+0 -5)^{\circ}C$	-	+10 (Note 2)	%
Insulation Resistance, Dielectric	$R_i$	ESCC No. <a href="#">3006</a> $T_{amb} = +125 (+0 -5)^{\circ}C$			
		For $C \leq 220000pF$ For $C > 220000pF$	250 50	- -	$M\Omega$ $G\Omega.nF$
Leakage Current	$I_L$	$T_{amb} = +125 (+0 -5)^{\circ}C$ $V_T = 1 \times U_R$ (Note 3)	-	Note 4	nA

**NOTES:**

- The measurements shall be performed on a sample of 6 components from each manufacturing lot with 0 failures allowed. In the event of any failure a 100% inspection may be performed.
- The Temperature Coefficient limits are with respect to the capacitance at  $+22 \pm 2^{\circ}C$  (reference point temperature).
- For the applicable Rated Voltage ( $U_R$ ) see Para. 1.4.2.
- The maximum Leakage Current limit, in nA, is:  $U_R$  (in V)  $\times$  C (in pF) / 100000.

2.5 INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at  $T_{amb} = +22 \pm 3^{\circ}C$ .

Unless otherwise specified the test methods and test conditions shall be as per the corresponding test defined in Para. 2.4.1, Room Temperature Electrical Measurements.

Test Reference per ESCC No. <a href="#">3006</a>	Characteristics	Symbols	Limits		Units
			Min	Max	
Resistance to Soldering Heat Initial Measurements Final Measurements	Capacitance	C	Note 1		pF
	Capacitance	C	Note 1		pF
	Change in Capacitance	$\Delta C/C$	-1	+1	%
	Insulation Resistance (Terminal-to-Terminal)	$R_i$			
	For $C \leq 220000pF$ For $C > 220000pF$		Note 1 Note 1	- -	$G\Omega$ $G\Omega.nF$
	Tangent of Loss Angle	$tg\delta$	-	Note 1	-

Test Reference per ESCC No. 3006	Characteristics	Symbols	Limits		Units
			Min	Max	
Temperature Coefficient	Temperature Coefficient (Note 2)	$\Delta C/C$	Note 3		%
Rapid Change of Temperature					
Initial Measurements	Capacitance	C	Note 1		pF
Final Measurements	Capacitance	C	Note 1		pF
	Change in Capacitance	$\Delta C/C$	-1	+1	%
	Tangent of Loss Angle	$tg\delta$	-	$60 \times 10^{-4}$	-
Climatic Sequence					
Initial Measurements	Capacitance	C	Note 1		pF
Final Measurements	Capacitance	C	Note 1		pF
	Change in Capacitance	$\Delta C/C$	-3	+3	%
	Tangent of Loss Angle	$tg\delta$	-	$60 \times 10^{-4}$	-
	Voltage Proof, Terminal-to-Terminal	VP	$1 \times U_R$ (Note 4)	-	V
	Voltage Proof, Terminal-to-Case	VP <sub>B</sub>	$1 \times U_R$ (Note 4)	-	V
	Insulation Resistance, Dielectric	R <sub>i</sub>	Note 5	-	GΩ
			Note 5	-	GΩ.nF
			5	-	GΩ
	Insulation Resistance, Body Insulation	R <sub>IB</sub>	5	-	GΩ
	Partial Discharge (AC) $V_{rms} = 10\%U_R$	QAC	-	2000	pC
Operating Life					
Initial Measurements	Capacitance	C	Note 1		pF
Intermediate Measurements (1000 hours)	Capacitance	C	Note 1		pF
	Change in Capacitance	$\Delta C/C$	-5	+5	%
Final Measurements (1000 or 2000 hours) (Note 6)	Capacitance	C	Note 1		pF
	Change in Capacitance	$\Delta C/C$	-5	+5	%
	Tangent of Loss Angle	$tg\delta$	-	$60 \times 10^{-4}$	-
	Insulation Resistance, Dielectric	R <sub>i</sub>	Note 5	-	GΩ
			Note 5	-	GΩ.nF
			5	-	GΩ
	Insulation Resistance, Body Insulation	R <sub>IB</sub>	5	-	GΩ
	Partial Discharge (AC) $V_{rms} = 5\%U_R$ $V_{rms} = 10\%U_R$	QAC	-	0 2000	pC

**NOTES:**

1. As specified in Para. 2.4.1.
2. The test method and test conditions shall be as specified in Para. 2.4.2.
3. As specified in Para. 2.4.2.
4. For the applicable Rated Voltage ( $U_R$ ) see Para. 1.4.2.
5. 50% of the limit specified in Para. 2.4.1.
6. 1000 hours is applicable to Periodic Testing for extension of qualification. 2000 hours is applicable to Qualification Testing, and to Periodic Testing for renewal of qualification after lapse.

## 2.6

**BURN-IN CONDITIONS**

Characteristics	Symbols	Conditions (Note 1)	Units
Ambient Temperature	$T_{amb}$	+125 (+0 -5)	°C
Test Voltage	$V_T$	$1.15 \times U_R$ (Note 2)	V

**NOTES:**

1. 1M $\Omega$  resistors shall be connected in series with the components subjected to Burn-in. On completion of Burn-in the components shall be removed from the burn-in chamber and allowed to cool, under normal atmospheric conditions, for recovery for 24  $\pm$ 2 hours.
2. For the applicable Rated Voltage ( $U_R$ ) see Para. 1.4.2.

**APPENDIX 'A'**  
**AGREED DEVIATIONS FOR EXXELIA TECHNOLOGIES (F)**

Items Affected	Description of Deviations
Para. 2.1.1.1, Deviations from Screening Tests – Chart F3	The optional Room Temperature Electrical Measurements prior to Burn-in shall be performed as specified in Para. 2.4.1 except that, for the Voltage Proof tests (VP, VP <sub>B</sub> ), the voltage application time shall be 60 (+0 -1)s.
	If a particular lot is required to undergo testing in accordance with Chart F4 then the results of the Temperature Coefficient measurements, made during High and Low Temperatures Electrical Measurements on a sample of 6 randomly-selected capacitors, shall be recorded.
Para. 2.1.1.2, Deviations from Qualification and Periodic Tests – Chart F4	The Temperature Coefficient measurements recorded during Screening Tests may be used in lieu of the performance of the Temperature Coefficient test as specified in Subgroup 2B of Chart F4.