



Page i

**INTEGRATED CIRCUITS, SILICON MONOLITHIC,
BIPOLAR, ADVANCED LOW POWER SCHOTTKY,
SYNCHRONOUS 4-BIT,
BINARY COUNTERS WITH DIRECT CLEAR,
BASED ON TYPES 54ALS161A AND 54ALS161B
ESCC Detail Specification No. 9204/055**

**ISSUE 1
October 2002**



Document Custodian: European Space Agency - see <https://escies.org>

	ESCC Detail Specification		PAGE ii ISSUE 1
---	---------------------------	--	--------------------------

LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2002. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole in any medium without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.









european space agency
agence spatiale européenne



Pages 1 to 30

**INTEGRATED CIRCUITS, SILICON MONOLITHIC,
BIPOLEAR, ADVANCED LOW POWER SCHOTTKY,
SYNCHRONOUS 4-BIT,
BINARY COUNTERS WITH DIRECT CLEAR,
BASED ON TYPES 54ALS161A AND 54ALS161B
ESA/SCC Detail Specification No. 9204/055**



**space components
coordination group**

Issue/Rev.	Date	Approved by	
		SCCG Chairman	ESA Director General or his Deputy
Issue 2	August 1991		
Revision 'A'	February 1992		
Revision 'B'	June 1994		

		<p>ESA/SCC Detail Specification No. 9204/055</p>	<p>Rev. 'B'</p>	<p>PAGE 2 ISSUE 2</p>
--	--	--	-----------------	---------------------------


DOCUMENTATION CHANGE NOTICE

Rev. Letter	Rev. Date	Reference	CHANGE Item	Approved DCR No.
		This Issue supersedes Issue 1 and incorporates all modifications defined in Revision 'A' to Issue 1 and the following DCR's:- Cover Page : Title amended to incorporate Type 54ALS161B DCN Para. 1.1 : Amended to incorporate Type 54ALS161B Table 1(a) : Expanded to incorporate Type 54ALS161B : Lead material and/or finish amended Figures 2 : Imperial dimensions and references deleted Figure 2(c) : In drawing, Note 6 corrected to "10" Notes to Figures : Title amended : Note 1, amended to read "...Figure 2(b)" Figure 3(a) : Comparison Table added Para. 4.2.2 : Deviation deleted, "None." added Para. 4.4.2 : Paragraph amended Para. 4.5.2 : Amended to read "...Figure 2(b)" Para. 4.5.3 : "Type Variant, as applicable" amended to refer to Table 1(a) Para. 4.6.3 : Reference to functional test sequence deleted Para. 4.7.1 : Expanded to identify the stated temperature as T _{amb} Tables 2, 3 : Nos. 8 to 13, in Conditions Pins C3 and 4 corrected to read "4" and "5" : No. 57, amended to incorporate test limits for Type 54ALS161B Variants Figure 4(h) : In Note 3, gate corrected to "counter" Figure 5 : Type 54ALS161B added to drawing Para. 4.8 : Title expanded	22868 None 22868 22868 22881 22881 23456 22881 22881 22881 21048 22881 22881 23455 23455 23455 23456 22868 23456 22868 23455	
'A'	Feb.'92	Cover Page DCN P14. Para. 4.2.4 : Deviation deleted, "None" added P15. Para. 4.2.5 : Deviation deleted, "None" added	None None 22919 22919	
'B'	June '94	P1. Cover Page P2. DCN P15. Para. 4.3.2 : Weights amended	None None 221047	



TABLE OF CONTENTS

	<u>Page</u>
1. <u>GENERAL</u>	5
1.1 Scope	5
1.2 Component Type Variants	5
1.3 Maximum Ratings	5
1.4 Parameter Derating Information	5
1.5 Physical Dimensions	5
1.6 Pin Assignment	5
1.7 Function Sequences	5
1.8 Circuit Schematic	5
1.9 Functional Diagram	5
2. <u>APPLICABLE DOCUMENTS</u>	14
3. <u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u>	14
4. <u>REQUIREMENTS</u>	14
4.1 General	14
4.2 Deviations from Generic Specification	14
4.2.1 Deviations from Special In-process Controls	14
4.2.2 Deviations from Final Production Tests	14
4.2.3 Deviations from Burn-in Tests	14
4.2.4 Deviations from Qualification Tests	14
4.2.5 Deviations from Lot Acceptance Tests	15
4.3 Mechanical Requirements	15
4.3.1 Dimension Check	15
4.3.2 Weight	15
4.4 Materials and Finishes	15
4.4.1 Case	15
4.4.2 Lead Material and Finish	15
4.5 Marking	15
4.5.1 General	15
4.5.2 Lead Identification	15
4.5.3 The SCC Component Number	16
4.5.4 Traceability Information	16
4.6 Electrical Measurements	16
4.6.1 Electrical Measurements at Room Temperature	16
4.6.2 Electrical Measurements at High and Low Temperatures	16
4.6.3 Circuits for Electrical Measurements	16
4.7 Burn-in Tests	16
4.7.1 Parameter Drift Values	16
4.7.2 Conditions for Power Burn-in	16
4.7.3 Electrical Circuits for Power Burn-in	16
4.8 Environmental and Endurance Tests	28
4.8.1 Electrical Measurements on Completion of Environmental Tests	28
4.8.2 Electrical Measurements at Intermediate Points during Endurance Tests	28
4.8.3 Electrical Measurements on Completion of Endurance Tests	28
4.8.4 Conditions for Operating Life Tests	28
4.8.5 Electrical Circuits for Operating Life Tests	28
4.8.6 Conditions for High Temperature Storage Test	28

	<p>ESA/SCC Detail Specification No. 9204/055</p>	<p>PAGE 4 ISSUE 2</p>
--	--	---------------------------

TABLES


	<u>Page</u>
1(a) Type Variants	6
1(b) Maximum Ratings	6
2 Electrical Measurements at Room Temperature, d.c. Parameters	17
Electrical Measurements at Room Temperature, a.c. Parameters	19
3 Electrical Measurements at High and Low Temperatures	20
4 Parameter Drift Values	26
5 Conditions for Power Burn-in and Operating Life Test	26
6 Electrical Measurements on Completion of Environmental Tests and at Intermediate Points and on Completion of Endurance Tests	29

FIGURES

1 Not applicable	
2 Physical Dimensions	7
3(a) Pin Assignment	11
3(b) Function Sequences	12
3(c) Circuit Schematic	13
3(d) Functional Diagram	13
4 Circuits for Electrical Measurements	22
5 Electrical Circuit for Power Burn-in and Operating Life Test	27

APPENDICES (Applicable to specific Manufacturers only)

'A' Agreed Deviations for Texas Instruments (F)	30
---	----

	<p>ESA/SCC Detail Specification No. 9204/055</p>	<p>PAGE 5 ISSUE 2</p>
---	--	---------------------------

1. GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics, test and inspection data for a silicon monolithic, bipolar, advanced low power Schottky, Synchronous, 4-Bit, Binary Counter with Direct Clear, based on Types 54ALS161A and 54ALS161B. It shall be read in conjunction with ESA/SCC Generic Specification No. 9000, the requirements of which are supplemented herein.

1.2 COMPONENT TYPE VARIANTS

Variants of the basic type integrated circuits specified herein, which are also covered by this specification, are given in Table 1(a).

1.3 MAXIMUM RATINGS

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the integrated circuits specified herein, are as scheduled in Table 1(b).

1.4 PARAMETER DERATING INFORMATION (FIGURE 1)

Not applicable.

1.5 PHYSICAL DIMENSIONS

The physical dimensions of the integrated circuits specified herein are shown in Figure 2.

1.6 PIN ASSIGNMENT

As per Figure 3(a).

1.7 FUNCTION SEQUENCES

As per Figure 3(b).

1.8 CIRCUIT SCHEMATIC

As per Figure 3(c).

1.9 FUNCTIONAL DIAGRAM

As per Figure 3(d).



 	<p>ESA/SCC Detail Specification No. 9204/055</p>	<p>PAGE 6 ISSUE 2</p>
---	--	---------------------------

TABLE 1(a) - TYPE VARIANTS

VARIANT	BASED ON TYPE	CASE	FIGURE	LEAD MATERIAL AND/OR FINISH
01	54ALS161A	FLAT	2(a)	D7
02	54ALS161A	FLAT	2(a)	G4
03	54ALS161A	CCP	2(b)	7
04	54ALS161A	CCP	2(b)	4
05	54ALS161A	DIL	2(c)	D7
06	54ALS161A	DIL	2(c)	G4
08	54ALS161B	FLAT	2(a)	G4
09	54ALS161B	CCP	2(b)	7
10	54ALS161B	CCP	2(b)	4
12	54ALS161B	DIL	2(c)	G4

TABLE 1(b) - MAXIMUM RATINGS


NO.	CHARACTERISTICS	SYMBOL	MAXIMUM RATINGS	UNIT	REMARKS
1	Supply Voltage	V_{CC}	- 0.5 to 7.0	V	-
2	Input Voltage	V_{IN}	- 0.5 to 7.0	V	Note 1
3	Device Dissipation	P_D	115.5	mWdc	Note 2
4	Operating Temperature Range	T_{op}	- 55 to + 125	°C	-
5	Storage Temperature Range	T_{stg}	- 65 to + 150	°C	-
6	Soldering Temperature For FP and DIP For CCP	T_{sol}	+ 265 + 245	°C	Note 3 Note 4

NOTES

1. Input Current limited to - 18mA.
2. Must withstand added P_D due to short circuit conditions (i.e. I_{OS}) at 1 output for 5 seconds.
3. Duration 10 seconds maximum at a distance of not less than 1.5mm from the package and the same lead shall not be resoldered until 3 minutes have elapsed.
4. Duration 5 seconds maximum and the same terminal shall not be resoldered until 3 minutes have elapsed.

FIGURE 2 - PHYSICAL DIMENSIONS

FIGURE 2(a) - FLAT PACKAGE

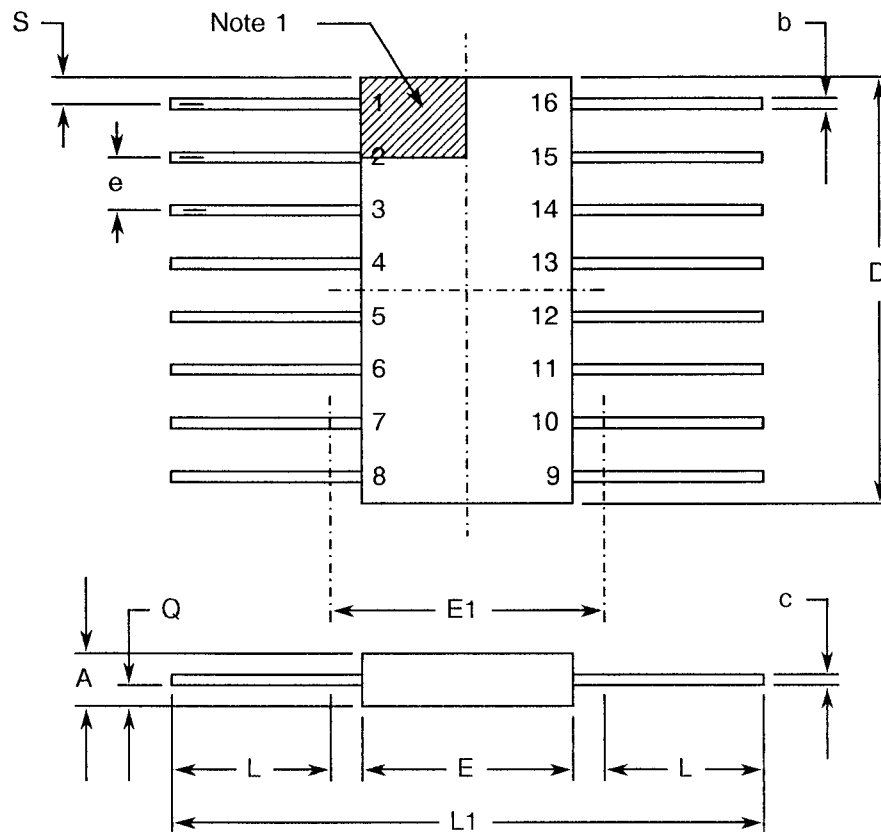


SYMBOL	MILLIMETRES		NOTES
	MIN	MAX	
A	1.24	2.03	
b	0.38	0.48	8
c	0.08	0.15	8
D	9.65	11.02	
E	6.10	6.60	
E1	-	7.11	4
e	1.27 TYPICAL		5, 9
L	6.35	9.40	
L1	19.05	-	
Q	0.25	0.89	2
S	0.25	0.76	7


NOTES: See Page 10.

FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2(b) - SQUARE CHIP CARRIER PACKAGE (3 LAYER BASE)

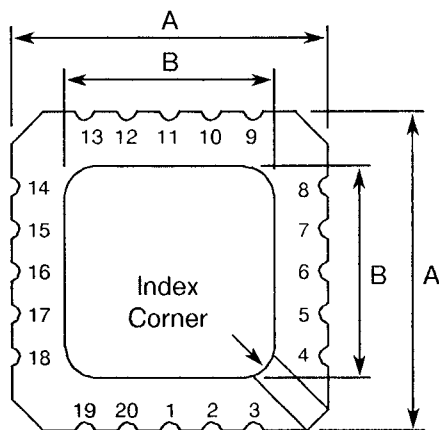

20 Terminal

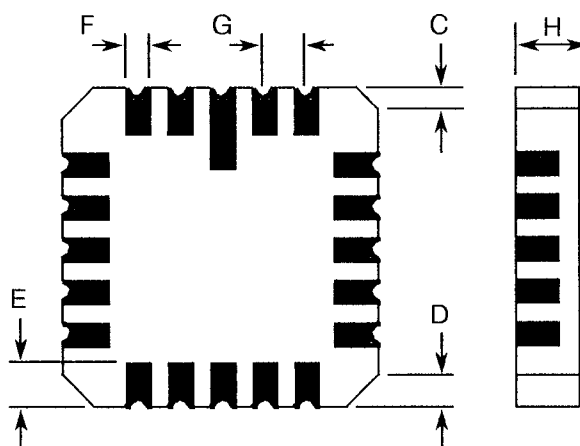


SYMBOL	MILLIMETRES		NOTES
	MIN	MAX	
A	8.687	9.093	
B	7.798	9.093	
C	0.250	0.510	11
D	0.889	1.143	12
E	1.140	1.400	8
F	0.559	0.712	8
G	1.27 TYPICAL		5, 9
H	1.630	2.540	

NOTES: See Page 10.

FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

FIGURE 2(c) - DUAL-IN-LINE PACKAGE

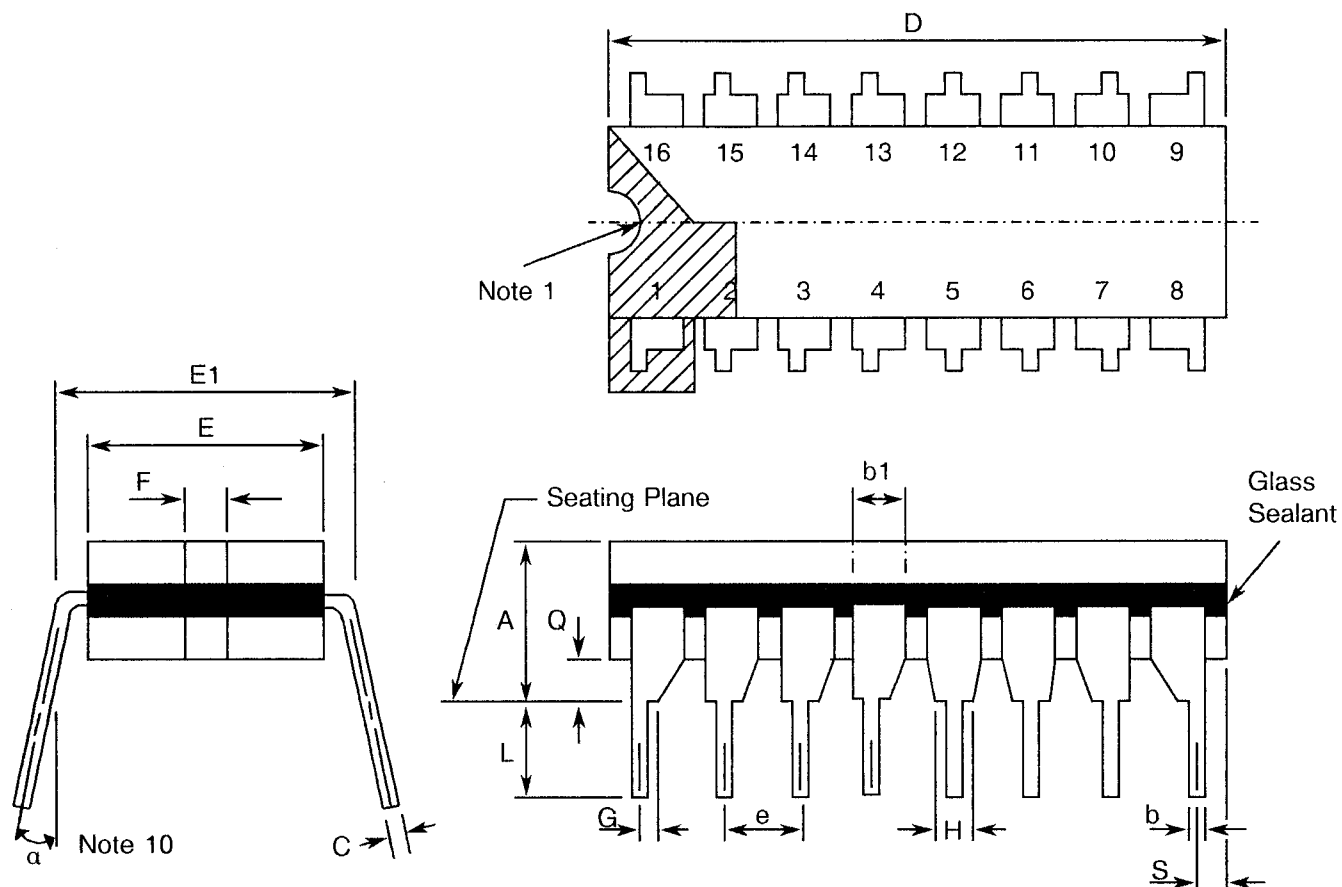

SYMBOL	MILLIMETRES		NOTES
	MIN	MAX	
A	-	5.08	
b	0.38	0.58	8
b1	-	1.78	8
c	0.203	0.356	8
D	19.18	19.94	
E	6.22	7.11	
E1	7.37	7.87	4
e	2.54 TYPICAL		6, 9
G	0.305	-	13
H	0.76	-	14
L	3.30	5.08	
Q	0.51	2.03	3
S	0.38	1.27	7
α	0°	15°	10

NOTES: See Page 10.


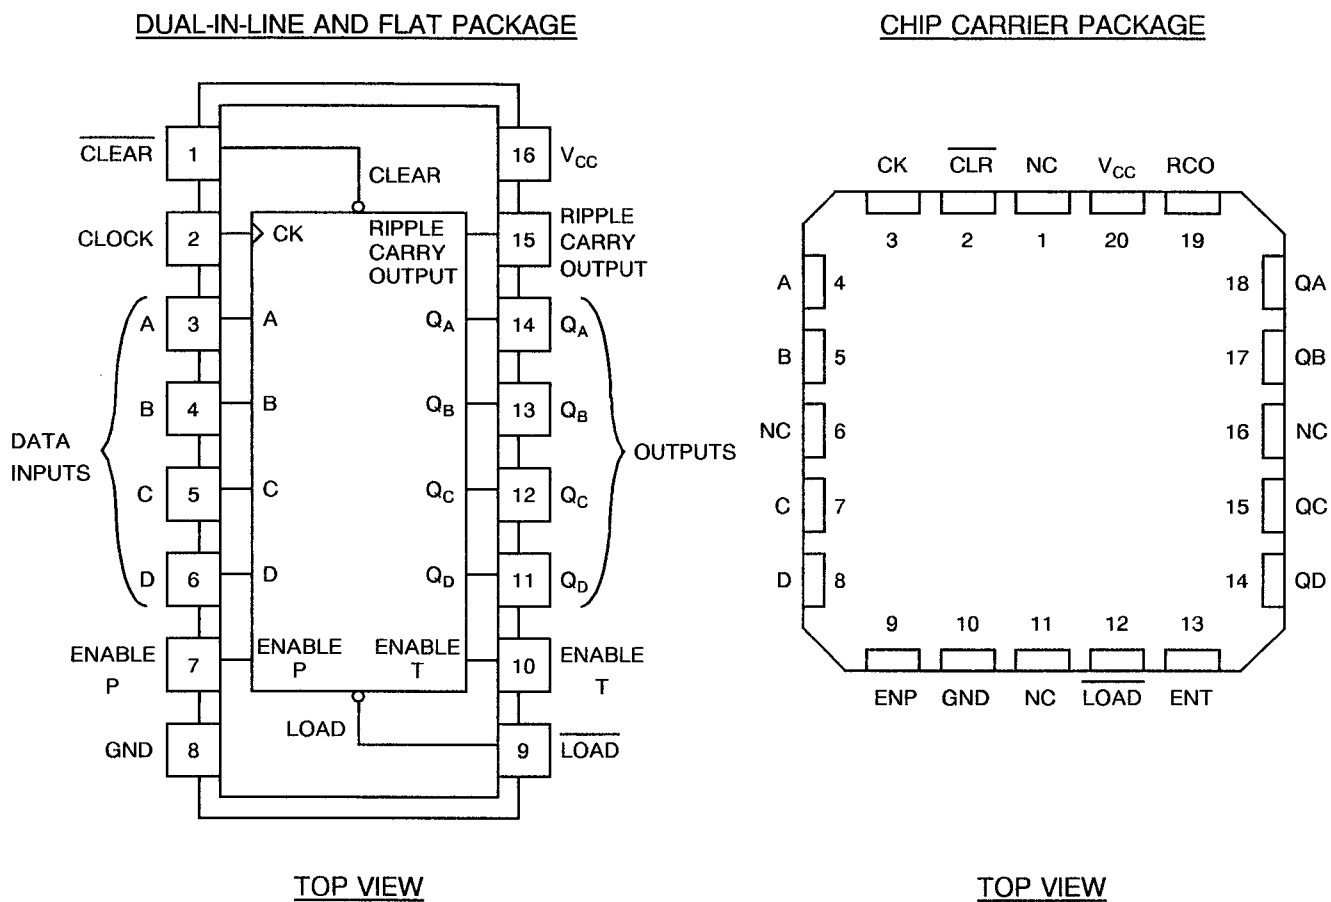
	<p>ESASCC Detail Specification No. 9204/055</p>	<p>PAGE 10 ISSUE 2</p>
--	---	----------------------------

FIGURE 2 - PHYSICAL DIMENSIONS (CONTINUED)

NOTES TO FIGURES 2(a) TO 2(c) INCLUSIVE

1. Index area; a notch or dot shall be located adjacent to Pin 1 and shall be within the shaded area shown. For chip carrier packages the index shall be as defined in Figure 2(b).
2. Dimension Q shall be measured at the point of exit of the lead from the body.
3. Dimension Q shall be measured from the seating plane to the base plane.
4. This dimension allows for off-centre lids, meniscus and glass overrun.
5. The true position pin or terminal spacing is 1.27mm between centrelines. Each pin or terminal centreline shall be located within $\pm 0.13\text{mm}$ of its true longitudinal position relative to Pins 1 and the highest pin number.
6. The true position pin spacing is 2.54mm between centrelines. Each pin centreline shall be located within $\pm 0.25\text{mm}$ of its true longitudinal position relative to Pins 1 and the highest pin number.
7. Applies to all 4 corners.
8. All leads or terminals.
9. 14 spaces for flat and dual-in-line packages.
16 spaces for chip carrier packages.
10. Lead centre when α is 0° .
11. Index corner only - 2 dimensions.
12. 3 non-index corners - 6 dimensions.
13. 4 Terminals.
14. 12 Terminals.

**FIGURE 3(a) - PIN ASSIGNMENT****FLAT PACKAGE AND DUAL-IN-LINE TO CHIP CARRIER PIN ASSIGNMENT**

FLAT PACKAGE AND DUAL-IN-LINE PIN OUTS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
CHIP CARRIER PIN OUTS	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20

FIGURE 3(b) - FUNCTION SEQUENCES

(Typical clear, preset, count and inhibit sequence)

Illustrated below is the following sequence:-

1. Clear outputs to 0 (Asynchronous).
2. Preset to binary 12.
3. Count to 13, 14, 15, 0, 1 and 2
4. Inhibit.

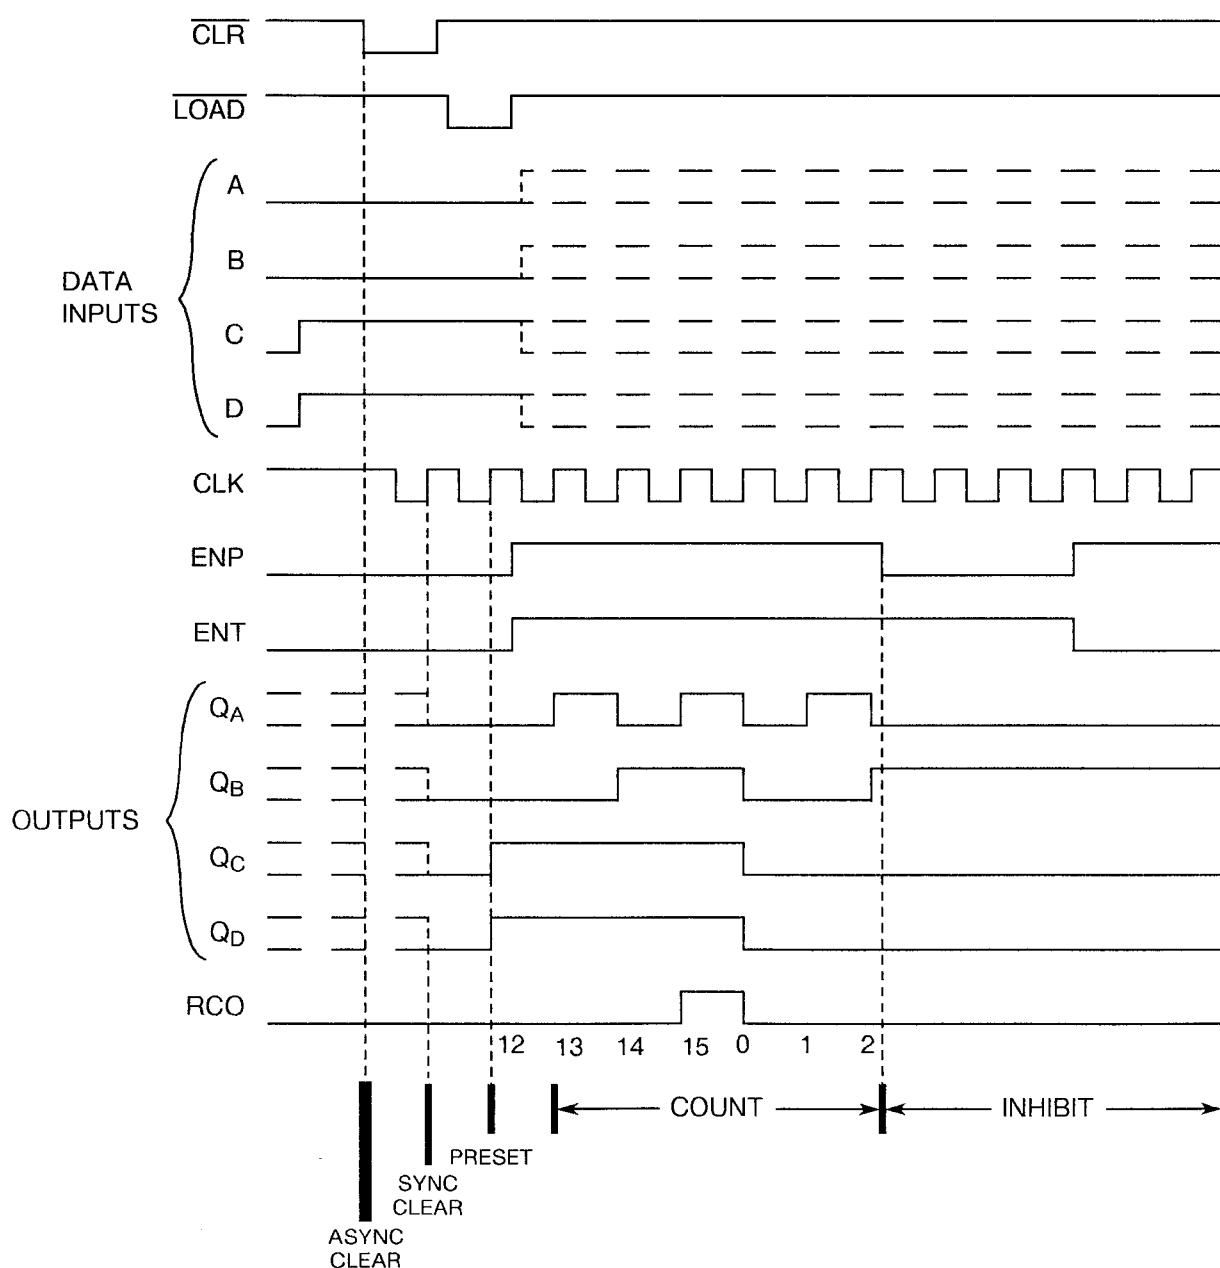


FIGURE 3(c) - CIRCUIT SCHEMATIC


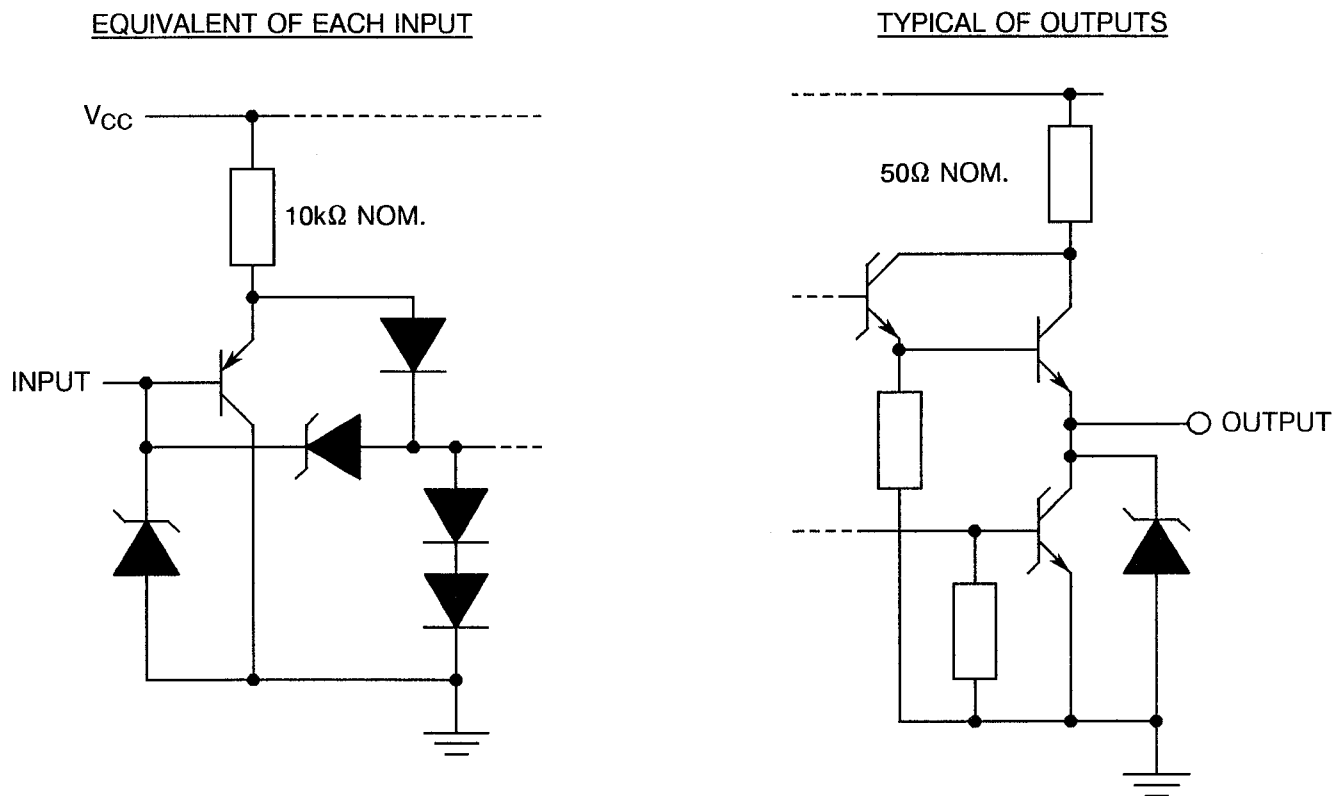




FIGURE 3(d) - FUNCTIONAL DIAGRAM

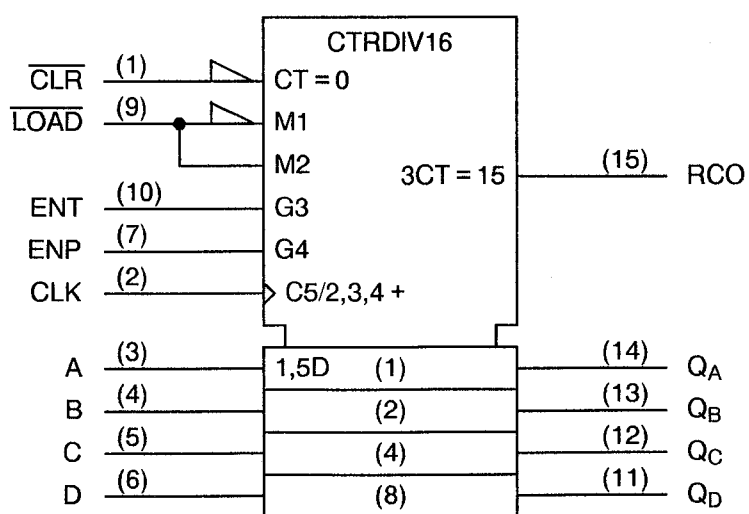

NOTES

1. Pin numbers shown are for flat and dual-in-line packages; for chip carrier pins, see Figure 3(a).

		<p>ESA/SCC Detail Specification No. 9204/055</p>	<p>Rev. 'A'</p>	<p>PAGE 14 ISSUE 2</p>
--	--	--	-----------------	----------------------------

2. APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESA/SCC Generic Specification No. 9000 for Integrated Circuits.
- (b) MIL-STD-883, Test Methods and Procedures for Micro-electronics.

3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESA/SCC Basic Specification No. 21300 shall apply. In addition, the following abbreviation is used:-

$I_{OS/2}$ - One half of the true output short circuit current.

4. REQUIREMENTS

4.1 GENERAL

The complete requirements for procurement of the integrated circuits specified herein shall be as stated in this specification and ESA/SCC Generic Specification No. 9000 for Integrated Circuits. Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESA/SCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION

4.2.1 Deviations from Special In-process Controls

None.

4.2.2 Deviations from Final Production Tests (Chart II)


None.

4.2.3 Deviations from Burn-in Tests (Chart III)

- (a) Para. 7.1.1(a), "High Temperature Reverse Bias" tests and subsequent electrical measurements related to this test shall be omitted.
- (b) Para. 9.9.2, "Electrical Measurements at High and Low Temperatures": Only a test result summary, based on go-no-go tests and presented in histogram form is required.

4.2.4 Deviations from Qualification Tests (Chart IV)

None.

 SCC	<p>ESA/SCC Detail Specification No. 9204/055</p>	<p>Rev. 'B'</p>	<p>PAGE 15 ISSUE 2</p>
--	--	-----------------	----------------------------

4.2.5 Deviations from Lot Acceptance Tests (Chart V)

None.

4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the integrated circuits specified herein shall be checked. They shall conform to those shown in Figure 2.

4.3.2 Weight

The maximum weight of the integrated circuits specified herein shall be 0.7 grammes for the flat package, 0.6 grammes for the chip carrier package and 2.2 grammes for the dual-in-line package.

4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the integrated circuits specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

4.4.1 Case

The case shall be hermetically sealed and have a metal body with hard glass seals or a ceramic body and the lids shall be welded, brazed, preform-soldered or glass frit-sealed.

4.4.2 Lead Material and Finish

For dual-in-line and flat packages, the material shall be either Type 'D' or Type 'G' with either Type '4' or Type '7' finish in accordance with the requirements of ESA/SCC Basic Specification No. 23500. For chip carrier packages, the finish shall be either Type '4' or Type '7' in accordance with the requirements of ESA/SCC Basic Specification No. 23500. (See Table 1(a) for Type Variants).

4.5 MARKING



4.5.1 General

The marking of all components delivered to this specification shall be in accordance with the requirements of ESA/SCC Basic Specification No. 21700. Each component shall be marked in respect of:-

- (a) Lead Identification.
- (b) The SCC Component Number.
- (c) Traceability Information.

4.5.2 Lead Identification

For dual-in-line and flat packages, an index shall be located at the top of the package in the position defined in Note 1 to Figure 2 or, alternatively, a tab may be used to identify Pin No. 1. The pin numbering must be read with the index or tab on the left-hand side. For chip carrier packages, the index shall be as defined by Figure 2(b).

 	<p>ESA/SCC Detail Specification No. 9204/055</p>		<p>PAGE 16 ISSUE 2</p>
---	--	--	----------------------------

4.5.3 The SCC Component Number

Each component shall bear the SCC Component Number which shall be constituted and marked as follows:

920405502B

Detail Specification Number _____

Type Variant (see Table 1(a)) _____

Testing Level (B or C, as applicable) _____

4.5.4 Traceability Information

Each component shall be marked in respect of traceability information in accordance with the requirements of ESA/SCC Basic Specification No. 21700.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured in respect of electrical characteristics are scheduled in Table 2. Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.6.2 Electrical Measurements at High and Low Temperatures

The parameters to be measured at high and low temperatures are scheduled in Table 3. The measurements shall be performed at $T_{amb} = +125(+0 - 5)$ °C and $-55(+5 - 0)$ °C respectively.

4.6.3 Circuits for Electrical Measurements

Circuits for use in performing electrical measurements listed in Tables 2 and 3 of this specification are shown in Figure 4.

4.7 BURN-IN TESTS

4.7.1 Parameter Drift Values

The parameter drift values applicable to burn-in are specified in Table 4 of this specification. Unless otherwise stated, measurements shall be performed at $T_{amb} = +22 \pm 3$ °C. The parameter drift values (Δ) applicable to the parameters scheduled, shall not be exceeded. In addition to these drift value requirements, the appropriate limit value specified for a given parameter in Table 2 shall not be exceeded.

4.7.2 Conditions for Power Burn-in

The requirements for power burn-in are specified in Section 7 of ESA/SCC Generic Specification No. 9000. The conditions for power burn-in shall be as specified in Table 5 of this specification.

4.7.3 Electrical Circuits for Power Burn-in

Circuits for use in performing the power burn-in tests are shown in Figure 5 of this specification.



 	<p>ESA/SCC Detail Specification No. 9204/055</p>	<p>PAGE 17 ISSUE 2</p>
---	--	----------------------------

TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE - d.c. PARAMETERS

NO.	CHARACTERISTICS	SYMBOL	TEST METHOD MIL-STD 883	TEST FIG.	TEST CONDITIONS (PINS UNDER TEST D/F = DIP AND FP C = CCP)	LIMITS		UNIT
						MIN	MAX	
1	Functional Test	-	-	3(b)	Verify Truth Table with Load. Note 1	-	-	-
2 to 7	Input Current High Level at Data Inputs, Enable P and $\overline{\text{Clear}}$	I_{IH1}	3010	4(a)	$V_{CC} = 5.5V$, $V_{IN} = 2.7V$ (Pins D/F 1-3-4-5-6-7) (Pins C 2-4-5-7-8-9)	-	20	μA
8 to 13	Input Current High Level at Data Inputs, Enable P and $\overline{\text{Clear}}$ (Max. Input Voltage)	I_{IH2}	3010	4(a)	$V_{CC} = 5.5V$, $V_{IN} = 7.0V$ (Pins D/F 1-3-4-5-6-7) (Pins C 2-4-5-7-8-9)	-	100	μA
14 to 16	Input Current High Level at Load, Clock and ENT	I_{IH3}	3010	4(a)	$V_{CC} = 5.5V$, $V_{IN} = 2.7V$ (Pins D/F 2-9-10) (Pins C 3-12-13)	-	40	μA
17 to 19	Input Current High Level at Load, Clock and ENT (Max. Input Voltage)	I_{IH4}	3010	4(a)	$V_{CC} = 5.5V$, $V_{IN} = 7.0V$ (Pins D/F 2-9-10) (Pins C 3-12-13)	-	200	μA
20 to 28	Input Clamp Voltage	V_{IC}	3008	4(b)	$V_{CC} = 4.5V$, $I_{IN} = -18mA$ Note 2 (Pins D/F 1-2-3-4-5-6-7-9-10) (Pins C 2-3-4-5-7-8-9-12-13)	-	-1.5	V
29 to 37	Input Current Low Level	I_{IL1}	3009	4(c)	$V_{CC} = 5.5V$, $V_{IL} = 0.4V$ (Pins D/F 1-2-3-4-5-6-7-9-10) (Pins C 2-3-4-5-7-8-9-12-13)	-	-200	μA
38 to 42	Output Voltage Low Level	V_{OL}	3007	4(d)	$V_{CC} = 4.5V$, $V_{IH} = 2.0V$ $I_{OL} = 4mA$, $V_{IL} = 0.7V$ (Pins D/F 11-12-13-14-15) (Pins C 14-15-17-18-19)	-	0.4	V

NOTES: See Page 18.



 	<p>ESA/SCC Detail Specification No. 9204/055</p>		<p>PAGE 18 ISSUE 2</p>
--	--	--	----------------------------

TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE - d.c. PARAMETERS (CONT'D)

NO.	CHARACTERISTICS	SYMBOL	TEST METHOD MIL-STD 883	TEST FIG.	TEST CONDITIONS (PINS UNDER TEST D/F = DIP AND FP C = CCP)	LIMITS		UNIT
						MIN	MAX	
43 to 47	Output Voltage High Level 1	V _{OH1}	3006	4(e)	V _{CC} = 4.5V, V _{IH} = 2.0V V _{IL} = 0.7V, I _{OH} = - 400μA (Pins D/F 11-12-13-14-15) (Pins C 14-15-17-18-19)	2.5	-	V
48 to 52	Output Voltage High Level 2	V _{OH2}	3006	4(e)	V _{CC} = 5.5V, V _{IH} = 2.0V V _{IL} = 0.7V, I _{OH} = - 400μA (Pins D/F 11-12-13-14-15) (Pins C 14-15-17-18-19)	3.5	-	V
53 to 56	One Half of the True Output Short Circuit Current for All Q Outputs	I _{OS1/2}	3011	4(f)	V _{CC} = 5.5V, V _{OUT} = 2.25V Note 3 (Pins D/F 11-12-13-14) (Pins C 14-15-17-18)	- 30	- 112	mA
57	One Half of the True Output Short Circuit Current for RCO	I _{OS2/2}	3011	4(f)	V _{CC} = 5.5V, V _{OUT} = 2.25V Note 3 Variants 01 to 06 Variants 08 to 12 (Pin D/F 15) (Pin C 19)	- 15 - 30	- 70 - 112	mA
58	Supply Current	I _{CC}	3005	4(g)	V _{CC} = 5.5V Note 4 (Pin D/F 16) (Pin C 20)	-	21	mA

NOTES

1. Go-no-go test with V_{IL} = 0.3V, V_{IH} = 3.0V, trip point 1.5V.
2. All inputs and outputs not under test shall be open.
3. No more than 1 output should be tested at a time.
4. I_{CC} is measured with all inputs Grounded and all outputs open.
5. Propagation delay measurements shall be performed as a go-no-go test on a 100% basis. Read-and-record measurements shall be performed on an LTPD7 sample basis following the Chart III burn-in test.
6. This parameter shall be tested as go-no-go on a 100% basis.



TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE - a.c. PARAMETERS

NO.	CHARACTERISTICS	SYMBOL	TEST METHOD MIL-STD 883	TEST FIG.	TEST CONDITIONS (PINS UNDER TEST D/F = DIP AND FP C = CCP) (NOTE 5)	LIMITS		UNIT
						MIN	MAX	
59 to 60	Propagation Delay Low to High Level Clock to RCO	t_{PLH1}	3003	4(h)	$V_{CC} = 4.5 \text{ and } 5.5V$ $C_L = 50pF$ $R_L = 500\Omega$ <div> <div>Pins D/F</div> <div>2 to 15</div> </div> <div> <div>Pins C</div> <div>3 to 19</div> </div>	8	30	ns
61 to 62	Propagation Delay High to Low Level Clock to RCO	t_{PHL1}				7	25	
63 to 70	Propagation Delay Low to High Level Clock to any Q	t_{PLH2}	3003	4(h)	$V_{CC} = 4.5 \text{ and } 5.5V$ $C_L = 50pF$ $R_L = 500\Omega$ <div> <div>Pins D/F</div> <div>2 to 11</div> </div> <div> <div>Pins C</div> <div>3 to 14</div> </div> <div> <div></div> <div>2 to 12</div> </div> <div> <div></div> <div>3 to 15</div> </div> <div> <div></div> <div>2 to 13</div> </div> <div> <div></div> <div>3 to 17</div> </div> <div> <div></div> <div>2 to 14</div> </div> <div> <div></div> <div>3 to 18</div> </div>	4	18	ns
71 to 78	Propagation Delay High to Low Level Clock to any Q	t_{PHL2}				6	20	
79 to 80	Propagation Delay Low to High Level ENT to RCO	t_{PLH3}	3003	4(h)	$V_{CC} = 4.5 \text{ and } 5.5V$ $C_L = 50pF$ $R_L = 500\Omega$ <div> <div>Pins D/F</div> <div>10 to 15</div> </div> <div> <div>Pins C</div> <div>13 to 19</div> </div>	3	16	ns
81 to 82	Propagation Delay High to Low Level ENT to RCO	t_{PHL3}				3	16	
83 to 90	Propagation Delay High to Low Level CLR to any Q	t_{PHL4}	3003	4(h)	$V_{CC} = 4.5 \text{ and } 5.5V$ $C_L = 50pF$ $R_L = 500\Omega$ <div> <div>Pins D/F</div> <div>1 to 11</div> </div> <div> <div>Pins C</div> <div>2 to 14</div> </div> <div> <div></div> <div>1 to 12</div> </div> <div> <div></div> <div>2 to 15</div> </div> <div> <div></div> <div>1 to 13</div> </div> <div> <div></div> <div>2 to 17</div> </div> <div> <div></div> <div>1 to 14</div> </div> <div> <div></div> <div>2 to 18</div> </div>	8	27	ns
91 to 92	Propagation Delay High to Low Level CLR to RCO	t_{PHL5}	3003	4(h)	$V_{CC} = 4.5 \text{ and } 5.5V$ $C_L = 50pF$ $R_L = 500\Omega$ <div> <div>Pins D/F</div> <div>1 to 15</div> </div> <div> <div>Pins C</div> <div>2 to 19</div> </div>	11	31	ns
93 to 94	Maximum Clock Frequency	f_{max}	-	4(h)	$V_{CC} = 4.5 \text{ and } 5.5V$ $C_L = 50pF$ $R_L = 500\Omega$ Note 6 (Pin D/F 2) (Pin C 3)	25	-	MHz



NOTES: See Page 18.



**TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES,
+ 125(+ 0 – 5) °C AND – 55(+ 5 – 0) °C**

NO.	CHARACTERISTICS	SYMBOL	TEST METHOD MIL-STD 883	TEST FIG.	TEST CONDITIONS (PINS UNDER TEST D/F = DIP AND FP C = CCP)	LIMITS		UNIT
						MIN	MAX	
1	Functional Test	-	-	3(b)	Verify Truth Table with Load. Note 1	-	-	-
2 to 7	Input Current High Level at Data Inputs, Enable P and Clear	I _{IH1}	3010	4(a)	V _{CC} = 5.5V, V _{IN} = 2.7V (Pins D/F 1-3-4-5-6-7) (Pins C 2-4-5-7-8-9)	-	20	μA
8 to 13	Input Current High Level at Data Inputs, Enable P and Clear (Max. Input Voltage)	I _{IH2}	3010	4(a)	V _{CC} = 5.5V, V _{IN} = 7.0V (Pins D/F 1-3-4-5-6-7) (Pins C 2-4-5-7-8-9)	-	100	μA
14 to 16	Input Current High Level at Load, Clock and ENT	I _{IH3}	3010	4(a)	V _{CC} = 5.5V, V _{IN} = 2.7V (Pins D/F 2-9-10) (Pins C 3-12-13)	-	40	μA
17 to 19	Input Current High Level at Load, Clock and ENT (Max. Input Voltage)	I _{IH4}	3010	4(a)	V _{CC} = 5.5V, V _{IN} = 7.0V (Pins D/F 2-9-10) (Pins C 3-12-13)	-	200	μA
20 to 28	Input Clamp Voltage	V _{IC}	3008	4(b)	V _{CC} = 4.5V, I _{IN} = – 18mA Note 2 (Pins D/F 1-2-3-4-5-6-7-9-10) (Pins C 2-3-4-5-7-8-9-12-13)	-	– 1.5	V
29 to 37	Input Current Low Level	I _{IL}	3009	4(c)	V _{CC} = 5.5V, V _{IL} = 0.4V (Pins D/F 1-2-3-4-5-6-7-9-10) (Pins C 2-3-4-5-7-8-9-12-13)	-	– 200	μA
38 to 42	Output Voltage Low Level	V _{OL}	3007	4(d)	V _{CC} = 4.5V, V _{IH} = 2.0V I _{OL} = 4mA, V _{IL} = 0.7V (Pins D/F 11-12-13-14-15) (Pins C 14-15-17-18-19)	-	0.4	V

NOTES: See Page 18.

 	<p>ESA/SCC Detail Specification</p> <p>No. 9204/055</p>	<p>PAGE 21</p> <p>ISSUE 2</p>
---	---	-------------------------------


**TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES,
+ 125(+ 0 – 5) °C AND – 55(+ 5 – 0) °C (CONT'D)**

NO.	CHARACTERISTICS	SYMBOL	TEST METHOD MIL-STD 883	TEST FIG.	TEST CONDITIONS (PINS UNDER TEST D/F = DIP AND FP C = CCP)	LIMITS		UNIT
						MIN	MAX	
43 to 47	Output Voltage High Level 1	V _{OH1}	3006	4(e)	V _{CC} = 4.5V, V _{IH} = 2.0V V _{IL} = 0.7V, I _{OH} = – 400µA (Pins D/F 11-12-13-14-15) (Pins C 14-15-17-18-19)	2.5	-	V
48 to 52	Output Voltage High Level 2	V _{OH2}	3006	4(e)	V _{CC} = 5.5V, V _{IH} = 2.0V V _{IL} = 0.7V, I _{OH} = – 400µA (Pins D/F 11-12-13-14-15) (Pins C 14-15-17-18-19)	3.5	-	V
53 to 56	One Half of the True Output Short Circuit Current for All Q Outputs	I _{OS1/2}	3011	4(f)	V _{CC} = 5.5V, V _{OUT} = 2.25V Note 3 (Pins D/F 11-12-13-14) (Pins C 14-15-17-18)	– 30	– 112	mA
57	One Half of the True Output Short Circuit Current for RCO	I _{OS2/2}	3011	4(f)	V _{CC} = 5.5V, V _{OUT} = 2.25V Note 3 Variants 01 to 06 Variants 08 to 12 (Pin D/F 15) (Pin C 19)	– 15 – 30	– 70 – 112	mA
58	Supply Current	I _{CC}	3005	4(g)	V _{CC} = 5.5V Note 4 (Pin D/F 16) (Pin C 20)	-	21	mA

NOTES: See Page 18.

FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS


FIGURE 4(a) - INPUT CURRENT HIGH LEVEL

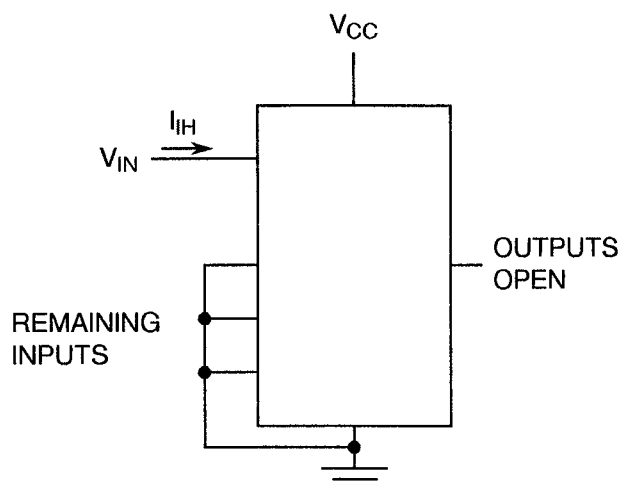

NOTES

1. Each input to be tested separately.


FIGURE 4(b) - INPUT CLAMP VOLTAGE

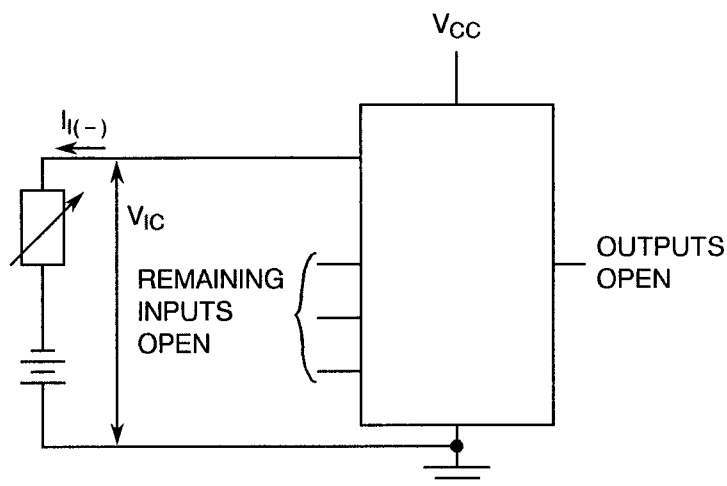

NOTES

1. Each input to be tested separately.


FIGURE 4(c) - LOW LEVEL INPUT CURRENT

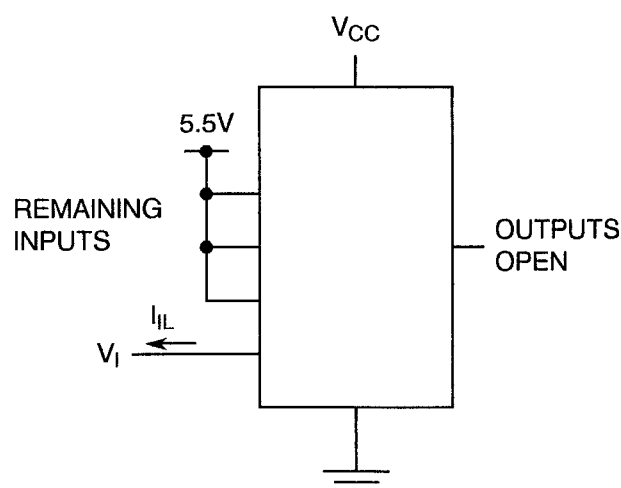

NOTES

1. Each input to be tested separately.

FIGURE 4(d) - LOW LEVEL OUTPUT VOLTAGE

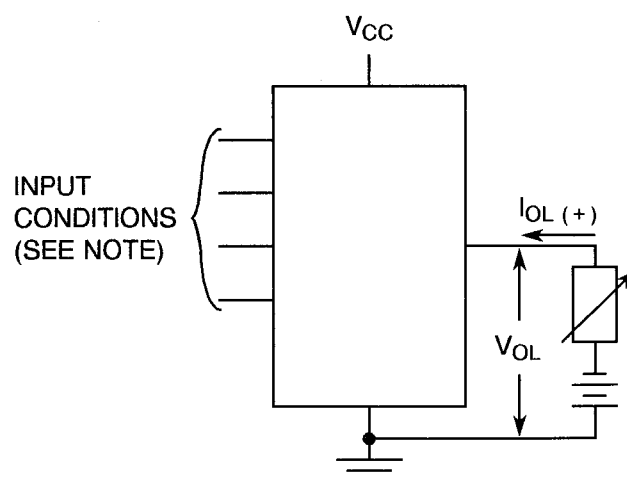


NOTES

1. Test per Figure 3(b)

FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS (CONTINUED)


FIGURE 4(e) - HIGH LEVEL OUTPUT VOLTAGE

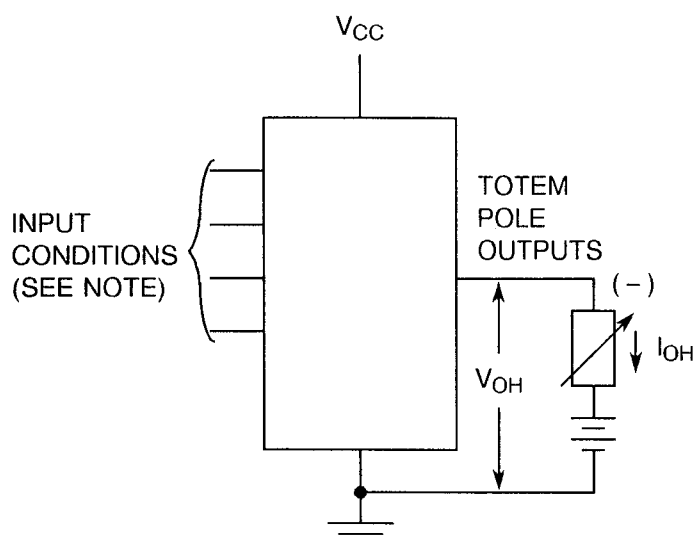

NOTES

1. Test per Figure 3(b).


FIGURE 4(f) - ONE HALF SHORT CIRCUIT OUTPUT CURRENT

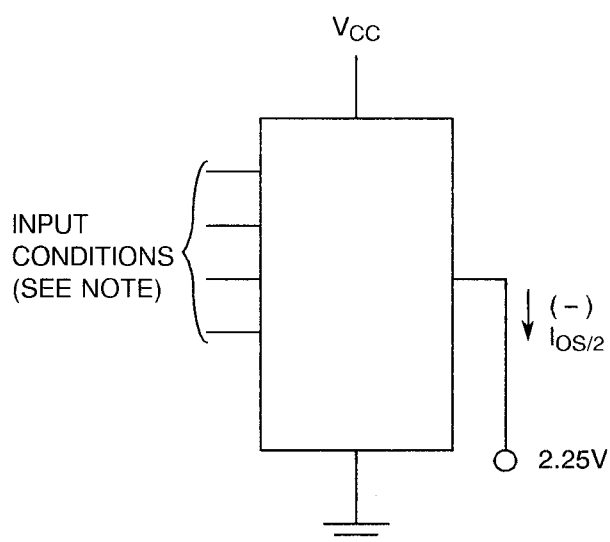

NOTES

1. V_{IN} Clock: apply one pulse prior to measurement with:-
 $V_{IH} \overline{Clear} = 4.5V$.
 $V_{IL} \overline{Load} = 0V$.
2. For Q measurement: $V_{IH} = 4.5V$ at corresponding input.
3. For RCO measurement: $V_{IH} = 4.5V$ at A, B, C, D and ENT.

FIGURE 4(g) - SUPPLY CURRENT

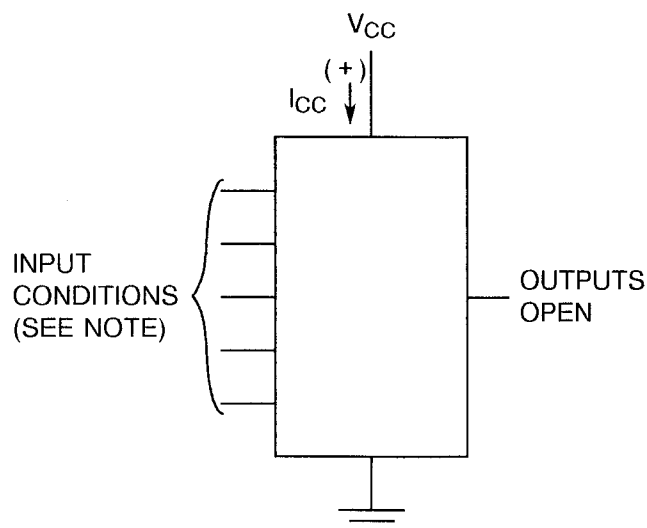


NOTES

1. See Note 4 on Page 18.


FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS (CONTINUED)



FIGURE 4(h) - DYNAMIC TEST AND SWITCHING WAVEFORMS

VOLTAGE WAVEFORMS - SET-UP AND HOLD TIMES

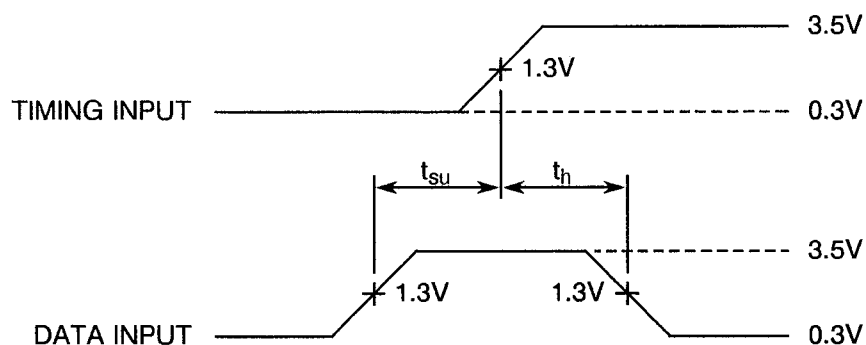

VOLTAGE WAVEFORMS - PULSE WIDTHS

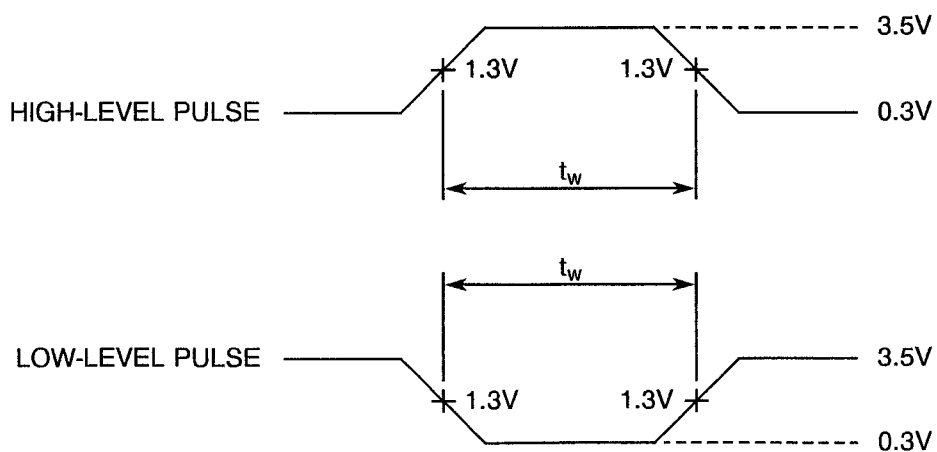

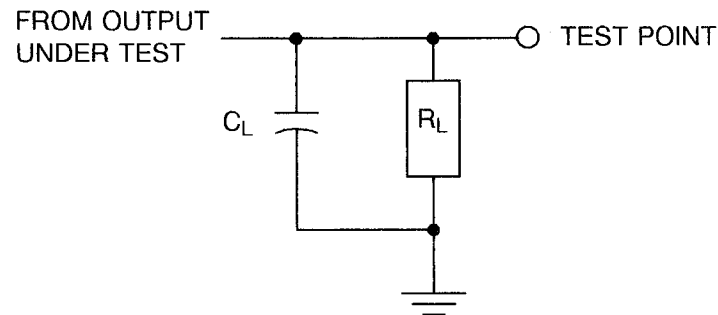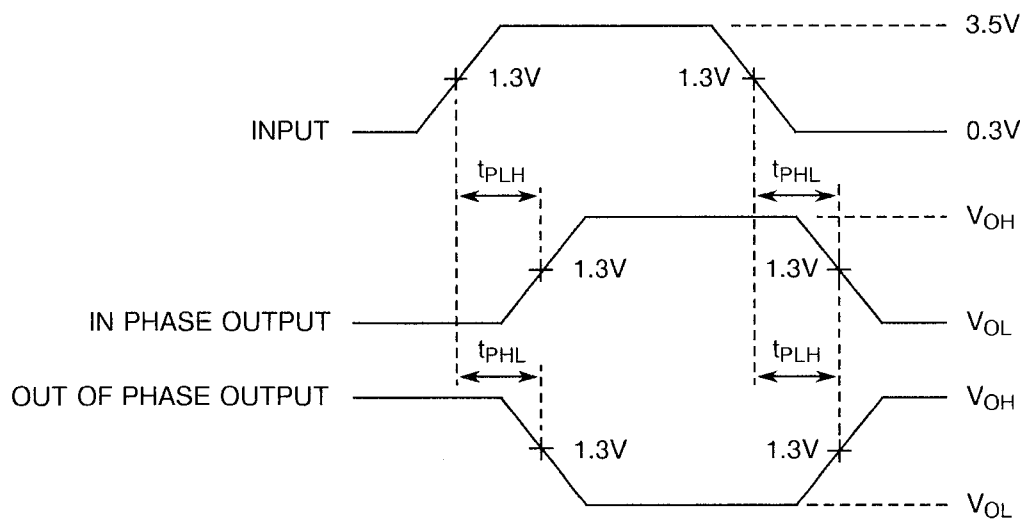**FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS (CONTINUED)****FIGURE 4(h) - DYNAMIC TEST AND SWITCHING WAVEFORMS (CONTINUED)****VOLTAGE WAVEFORMS - PROPAGATION DELAY TIMES****NOTES**

1. The generator has the following characteristics: $t_r = t_f = 2\text{ns}$, $\text{PRR} = 1\text{MHz}$, $Z_{\text{out}} = 50\Omega$, Duty Cycle = 50%.
2. $C_L = 50\text{pF} \pm 5\%$ including scope probe, wiring and stray capacitance without package in test fixture.
3. Each counter tested separately.
4. $R_L = 500\Omega \pm 5\%$.


 ESASCC	ESA/SCC Detail Specification No. 9204/055	PAGE 26 ISSUE 2
---	---	------------------------

TABLE 4 - PARAMETER DRIFT VALUES

NO.	CHARACTERISTICS	SYMBOL	SPEC. AND/OR TEST METHOD	TEST CONDITIONS	CHANGE LIMITS (Δ)	UNIT
2 to 7	Input Current High Level at Data Inputs Enable P and Clear	I_{IH1}	As per Table 2	As per Table 2	± 20 or (1) ± 0.5	% μA
14 to 16	Input Current High Level at Load, Clock and ENT	I_{IH3}	As per Table 2	As per Table 2	± 20 or (1) ± 0.5	% μA
29 to 37	Input Current Low Level	I_{IL}	As per Table 2	As per Table 2	± 10	μA
38 to 42	Output Voltage Low Level	V_{OL}	As per Table 2	As per Table 2	± 60	mV
43 to 47	Output Voltage High Level 1	V_{OH1}	As per Table 2	As per Table 2	± 200	mV
48 to 52	Output Voltage High Level 2	V_{OH2}	As per Table 2	As per Table 2	± 200	mV

NOTES

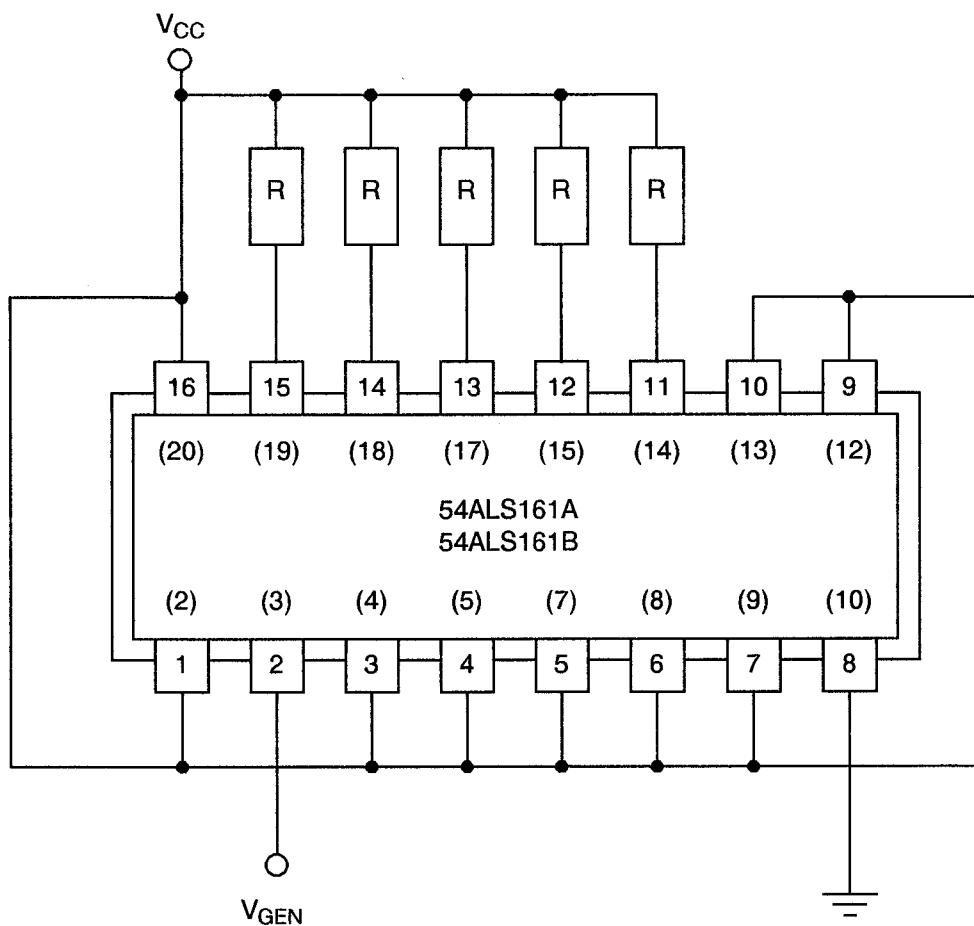
1. Whichever is greater referred to the initial value.

TABLE 5 - CONDITIONS FOR POWER BURN-IN AND OPERATING LIFE TEST


NO.	CHARACTERISTICS	SYMBOL	CONDITION	UNIT
1	Ambient Temperature	T_{amb}	+ 125(+ 0 – 5)	$^{\circ}C$
2	Power Supply Voltage	V_{CC}	+ 5(+ 0.5 – 0)	Vdc
3	Pulse Voltage	V_{GEN}	0.5 max. to 3.0 min.	Vac
4	Frequency	f	100 (See Note 1)	Hz
5	Fan-out	-	10	-
6	Rise Time	t_r	50 max.	μs
7	Fall Time	t_f	50 max.	μs
8	Duty Cycle	-	20 min.	%

NOTES

1. Tolerance $\pm 10\%$.

**FIGURE 5 - ELECTRICAL CIRCUIT FOR POWER BURN-IN AND OPERATING LIFE TEST****NOTES**

1. Pin numbers in parenthesis are for the chip carrier package.
2. $R = 1.2k\Omega$.

	<p>ESA/SCC Detail Specification No. 9204/055</p>	<p>PAGE 28 ISSUE 2</p>
--	--	----------------------------

4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESA/SCC GENERIC SPECIFICATION NO. 9000)

4.8.1 Electrical Measurements on Completion of Environmental Tests

The parameters to be measured on completion of environmental tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.8.2 Electrical Measurements at Intermediate Points during Endurance Tests

The parameters to be measured at intermediate points during endurance tests are as scheduled in Table 6 of this specification. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.8.3 Electrical Measurements on Completion of Endurance Tests

The parameters to be measured on completion of endurance testing are as scheduled in Table 6 of this specification. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.8.4 Conditions for Operating Life Tests

The requirements for operating life testing are specified in Section 9 of ESA/SCC Generic Specification No. 9000. The conditions for operating life testing shall be as specified in Table 5 of this specification.

4.8.5 Electrical Circuits for Operating Life Tests

Circuits for use in performing the operating life tests are shown in Figure 5.


4.8.6 Conditions for High Temperature Storage Test

The requirements for the high temperature storage test are specified in ESA/SCC Generic Specification No. 9000. The conditions for high temperature storage shall be $T_{amb} = +150(+0-5)$ °C.



TABLE 6 - ELECTRICAL MEASUREMENTS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTS

NO.	CHARACTERISTICS	SYMBOL	SPEC. AND/OR TEST METHOD	TEST CONDITIONS	CHANGE LIMITS		UNIT
					(Δ)	ABSOLUTE	
2 to 7	Input Current High Level at Data Inputs, Enable P and Clear	I_{IH1}	As per Table 2	As per Table 2	± 1.0	-	μA
8 to 13	Input Current High Level at Data Inputs Enable P and Clear (Max. Input Voltage)	I_{IH2}	As per Table 2	As per Table 2	-	100	μA
14 to 16	Input Current High Level at Load, Clock and ENT	I_{IH3}	As per Table 2	As per Table 2	± 1.0	-	μA
17 to 19	Input Current High Level at Load, Clock and ENT (Max. Input Voltage)	I_{IH4}	As per Table 2	As per Table 2	-	100	μA
29 to 37	Input Current Low Level	I_{IL}	As per Table 2	As per Table 2	± 10	-	μA
38 to 42	Output Voltage Low Level	V_{OL}	As per Table 2	As per Table 2	± 60	-	mV
43 to 47	Output Voltage High Level 1	V_{OH1}	As per Table 2	As per Table 2	± 200	-	mV
48 to 52	Output Voltage High Level 2	V_{OH2}	As per Table 2	As per Table 2	± 200	-	mV
58	Supply Current	I_{CC}	As per Table 2	As per Table 2	± 20	-	%

	<p>ESA/SCC Detail Specification No. 9204/055</p>	<p>PAGE 30 ISSUE 2</p>
---	--	----------------------------

APPENDIX 'A'

Page 1 of 1

AGREED DEVIATIONS FOR TEXAS INSTRUMENTS (F)

ITEMS AFFECTED	DESCRIPTION OF DEVIATIONS
Para. 4.2.1	Scanning Electron Microscope (SEM) Inspection may be performed using TIF document TIF 3.61.610.001.
Para. 4.2.2	Prior to Die Shear Test TIF may perform a Radiographic Inspection on the randomly chosen samples to be subjected to this test, using TIF document TIF 50.42-3002.
Para. 4.2.3	Radiographic Inspection may be performed using TIF document TIF 50.42-3002.